

## CERTIFICADO PATRON DE CND


**TEND** 

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

1C1317

Datos del Producto Product Information									
Diametro [mm]	114,3	Cliente Client	SNAMPROG ETTI	Ciclo Product	50831				
Espesor [mm] Wall Thickness	17,1	Tratamiento Termico Heat Treatment	SI	Colada <sub>Heat</sub>	46833				
Trazabilidad Traceability	0			Expediente Manufacturing Order					

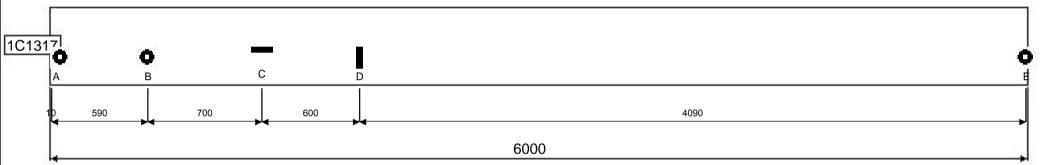

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Agujero Pasante Drilled hole	2,20	-	-	-	-	-	-	-	-	-	2,20	Default Default	09/06/10
В	Agujero Pasante Drilled hole	2,20	-	-	-	-	-	-	-	-	-	2,20	Default Default	09/06/10
С	Longitudinal Externo longitudinal OD	1,00	7	±15	1,377	1,017	1,197	50,00	48,00	1,302	1,321	0,99	Default Default	09/06/10
D	Transversal Externo Transverse OD	1,00	7	±15	1,377	1,017	1,197	50,00	42,00	1,291	1,232	0,98	Default Default	09/06/10
Е	Agujero Pasante Drilled hole	-	-	-	-	-	-	-	-	-	-	2,20	Default Default	09/06/10

## Instrumentos de Medicion Utilizados:

## Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA SI

## Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA YES