

CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate



2u76

Datos del Producto Product Information								
Diametro [mm] Diameter	165,4	Cliente Client		Ciclo Product	0			
Espesor [mm] Wall Thickness	19,05	Tratamiento Termico Heat Treatment	NO	Colada _{Heat}	0			
Trazabilidad Traceability	0			Expediente Manufacturing Order				

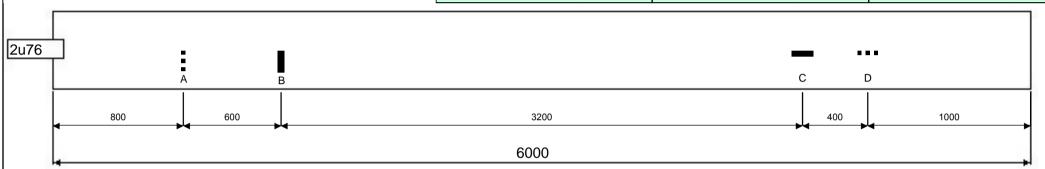

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	[mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Transversal Interno Transverse ID	1,00	10	±15	2,191	1,619	1,905	38,10	38,10	10,000	10,000	1,00	Sebastian Monteros	08/07/04
В	Transversal Externo Transverse OD	1,00	10	±15	2,191	1,619	1,905	38,10	38,10	10,000	10,000	1,00	Sebastian Monteros	08/07/04
С	Longitudinal Externo longitudinal OD	1,00	10	±15	2,191	1,619	1,905	38,10	38,10	10,000	10,000	1,00	Sebastian Monteros	08/07/04
D	Longitudinal Interno Longitudinal ID	1,00	10	±15	2,191	1,619	1,905	38,10	38,10	10,000	10,000	1,00	Sebastian Monteros	08/07/04

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

1/2

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO