

CERTIFICADO PATRON DE CND

TEND

TAND-001-05


17/04/2006

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

2u190

Datos del Producto Product Information							
Diametro [mm]	249,64	Cliente Client	Ciclo Product	27516			
Espesor [mm] Wall Thickness	29	Tratamiento Termico Heat Treatment	Colada _{Heat}	0			
Trazabilidad Traceability	0		Expediente Manufacturing Order				

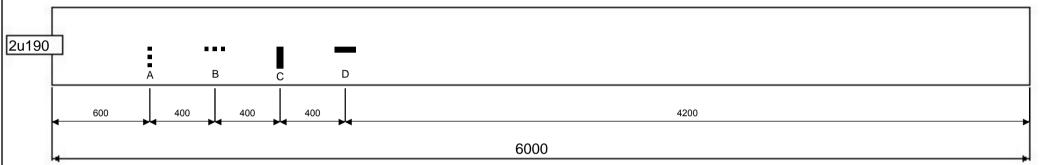

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Transversal Interno Transverse ID	1,00	5	±15	1,668	1,233	1,450	50,80	45,00	1,650	1,500	1,00	Sebastian Monteros	22/06/04
В	Longitudinal Interno Longitudinal ID	1,00	5	±15	1,668	1,233	1,450	50,80	46,00	1,410	1,300	1,00	Sebastian Monteros	22/06/04
С	Transversal Externo Transverse OD	1,00	5	±15	1,668	1,233	1,450	50,80	44,00	1,530	1,525	1,00	Sebastian Monteros	22/06/04
D	Longitudinal Externo longitudinal OD	1,00	5	±15	1,668	1,233	1,450	50,80	45,00	1,462	1,475	0,95	Sebastian Monteros	22/06/04

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO