

CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate



1U0803

Datos del Producto Product Information									
Diametro [mm] Diameter	48,3	Cliente Client	DISTRIBUID ORES	Ciclo Product	50503				
Espesor [mm] Wall Thickness	2,9	Tratamiento Termico	NO	Colada _{Heat}	63813				
Trazabilidad Traceability	0			Expediente Manufacturing Order	83/091.03				

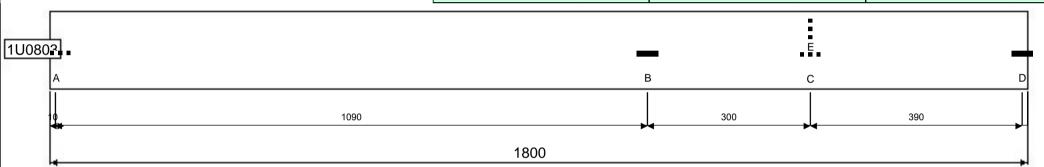

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Longitudinal Interno Longitudinal ID	1,00	10	±15	0,345	0,255	0,300	50,80	50,00	0,338	0,334	0,84	Carlos Aguilar	09/11/20
В	Longitudinal Externo longitudinal OD	1,00	10	±15	0,345	0,255	0,300	50,80	50,00	0,326	0,327	0,81	Carlos Aguilar	10/11/20
С	Longitudinal Interno Longitudinal ID	1,00	10	±15	0,345	0,255	0,300	50,80	50,00	0,335	0,310	0,83	Carlos Aguilar	09/11/20
D	Longitudinal Externo longitudinal OD	1,00	10	±15	0,345	0,255	0,300	50,80	50,00	0,334	0,322	0,83	Carlos Aguilar	10/11/20
Е	Transversal Interno Transverse ID	1,00	10	±15	0,345	0,255	0,300	50,80	21,50	0,334	0,320	0,85	Carlos Aguilar	10/11/20

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO