

CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate



2c14



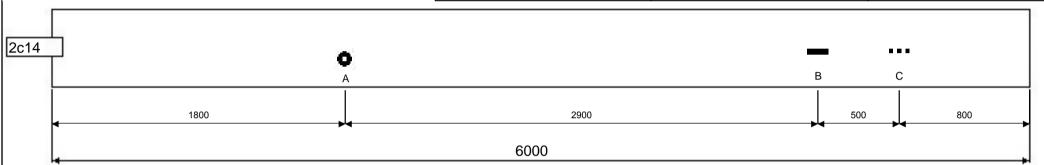

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%]			Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm]		[mm]	d A [mm]	d B [mm]	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
		iviax vviutii / Diami	Depth	Tolerance	Max Depth	wiiii Depth		[mm] Max Length	Length	Depth A	Depth B	widin/ Diam		
Α	Agujero Pasante Drilled hole	1,50	-	-	-	-	-	-	-	-	-	1,50	Sebastian Monteros	27/08/04
В	Longitudinal Externo longitudinal OD	1,00	5	±15	1,150	0,850	1,000	38,10	38,10	1,020	1,002	1,00	Sebastian Monteros	27/08/04
1 (:	Longitudinal Interno Longitudinal ID	1,00	5	±15	1,150	0,850	1,000	38,10	38,10	1,010	1,013	1,00	Sebastian Monteros	27/08/04

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

1/2

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO