

## CERTIFICADO PATRON DE CND


**TEND** 

NDT Reference Standard Certificate



1U0479

Datos del Producto Product Information									
Diametro [mm]	88,9	Cliente Client	CINTOLO HNOS.	Ciclo Product	84887				
Espesor [mm] Wall Thickness	6,35	Tratamiento Termico	NO	Colada <sub>Heat</sub>	40866				
Trazabilidad Traceability	0			Expediente Manufacturing Order	5/4690.05				

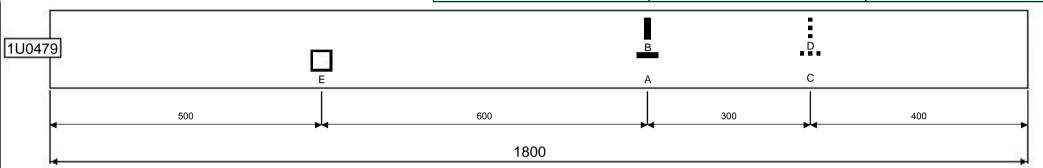

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Longitudinal Externo longitudinal OD	1,00	5	±15	0,365	0,270	0,318	38,00	36,00	0,348	0,352	0,92	Daniel Carcacha	02/08/10
В	Transversal Externo Transverse OD	1,00	5	±15	0,365	0,270	0,318	38,00	35,00	0,319	0,322	0,92	Daniel Carcacha	02/08/10
С	Longitudinal Interno Longitudinal ID	1,00	10	±15	0,730	0,540	0,635	38,00	33,00	0,721	0,719	0,92	Daniel Carcacha	02/08/10
D	Transversal Interno Transverse ID	1,00	10	±15	0,730	0,540	0,635	38,00	32,00	0,722	0,728	0,92	Daniel Carcacha	02/08/10
Е	Reduccion de Espesor Externo	25,00	13	±0	0,794	0,794	0,794	50,00	50,00	-	-	25,00	Daniel Carcacha	02/08/10

## Instrumentos de Medicion Utilizados:

## Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA SI

## Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA YES