

Fig. 5. SDR Synthetic IQ Pipeline (Dry-Run) — Hardware Validation Pending

Fig. 5a. EVM vs SNR

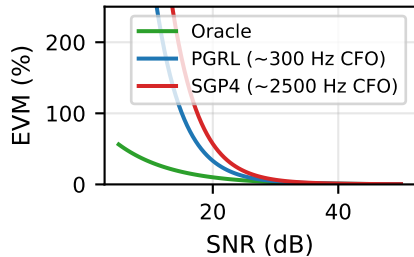


Fig. 5b. QPSK, PGRL, SNR=40 dB (300 Hz residual CFO)

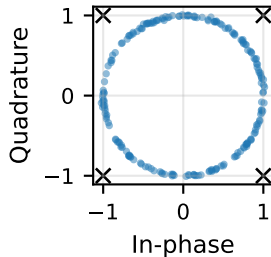


Fig. 5c. CFO Estimation Convergence (Synthetic IQ, SDR dry-run)

