



ULTRIX

Premium Cement

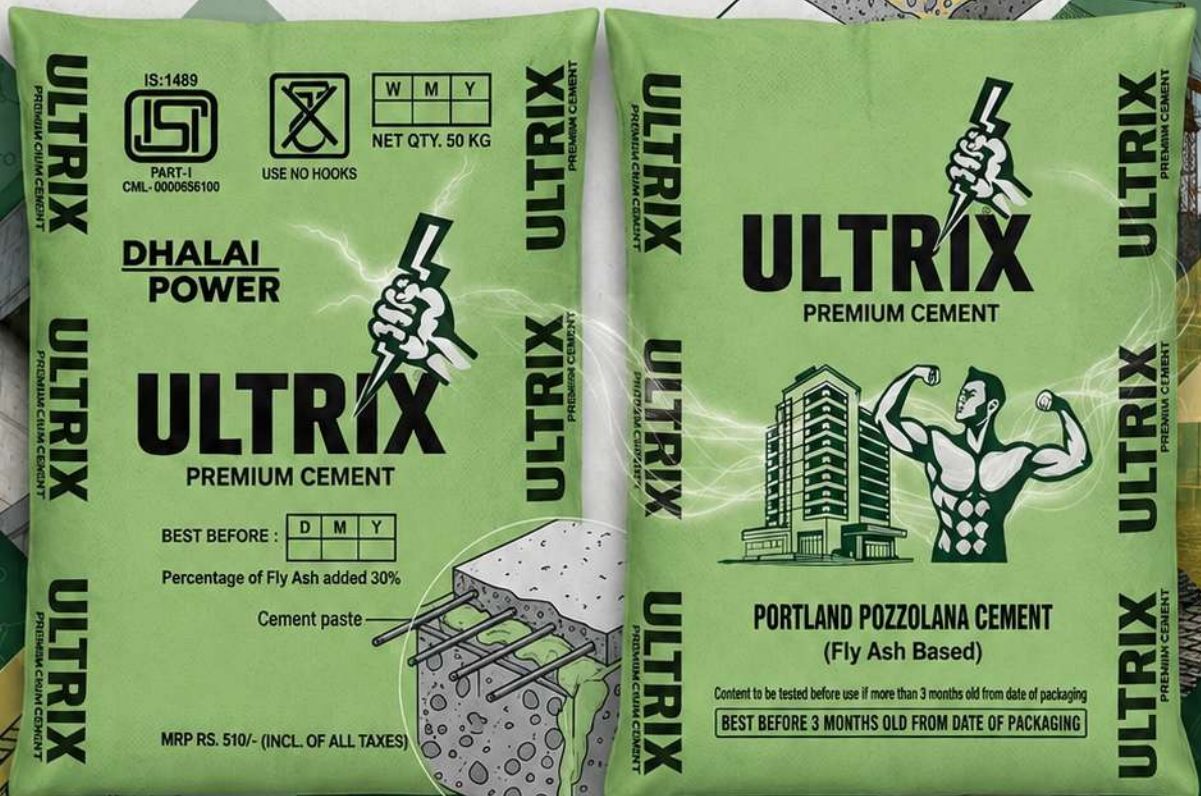

STRENGTH &
INNOVATION
UNLEASHED



IS:1489



Part-I



ISO 9001:2015

YOUR TRUSTED CONSTRUCTION PARTNER

The Ultimate Choice for Uncompromising Strength and Durability

ULTRIX

Premium Cement

30%
FLY ASH ADDED
PPC Cement

The Ultimate Choice for
Uncompromising Strength
and
Durability

30%
FLY ASH
Certified



**YOUR TRUSTED
CONSTRUCTION PARTNER**

30% FLY ASH ADDED
PPC Cement

OUR COMMITMENT TO QUALITY

IS:1489



PART-1
CML-0008555180



USE NO HOOKS

W	M	Y

NET QTY. 50 KG

- IS-1489 (Part 1) PPC Certified
- Reduced Environmental Impact (30% Fly Ash) Performance
- Consistent Performance
- Expert Field Support



ULTRIX PREMIUM CEMENT: THE ADVANTAGE


- High Strength Concrete
- Superior Durability
- Reduced Permeability for Water Resistance
- Reduced Permeability for Water Resistance
- Enhanced Workability
- Optimal for Large Infrastructure & High-Rise Constructions



Small Residential
Projects



Home Dhalai
Works

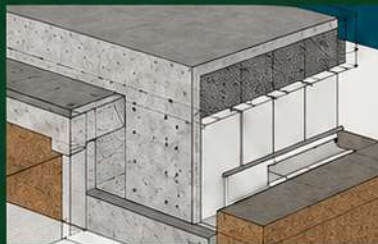

Precast Elemente



Small Building Foundation



Domestic Concrete Slab

APPLICATION IDEAS



Small Residential
House Constraction



Simple Side Dhalai
(Concrete Pathway)

MAXIMUM RETAIL PRICE

MRP Rs. 510/-
(INCL. OF ALL TAXES)

CEMENT STORAGE GUIDELINES



STORE OFF GROUND

Keep bags on raised pallets (min. 6" above floor) to prevent moisture wicking.



WATERPROOF COVERING

Cover bags completely with durable, leak-proof waterproof sheets.



DRY ENVIRONMENT

Ensure the storage area is weatherproof, dry, and well-ventilated.



LIMIT STACK HEIGHT

Limit piles to a maximum of 10 bags to prevent compaction and damage.

ULTRIX CEMENT

Strength with Sustainability - Your Trusted PPC Solution.



CRITICAL USAGE:
BEST BEFORE 3
MONTHS OLD FROM
DATE OF PACKAGING.

Cement to be tested
before use if more
than 3 months old.

ULTRIX PPC (Fly Ash Based) - THE SUPERIOR ECONOMY CHOICE.

FEATURES & BENEFITS



Eco-Friendly Solution
(Using Fly Ash),
Reduced Carbon
Footprint



Enhanced
Long-Term
Durability &
Strength



Improved
Workability &
Finishing



Lower Heat of
Hydration - Ideal
for Massive
Structures



High Resistance to
Chemical Attacks
(Chlorides,
Sulphates)



Economical &
Cost-Effective for
Durable General
Construction

APPLICATIONS



General
Construction



Residential
&
Commercial
Buildings



Foundations
& Massive
Concrete
Structures



Coastal
and
Chemical
Zones

TECHNICAL SPECIFICATIONS (Standard PPC Specs)

Initial Setting Time	>30 mins
Final Setting Time	<600 mins
Compressive Strength	28 days
Fineness	Specific Surface Area

QUALITY ASSURANCE



STORAGE GUIDELINES



Store on raised
pallets



Cover with
waterproof sheets



Keep in a
dry place