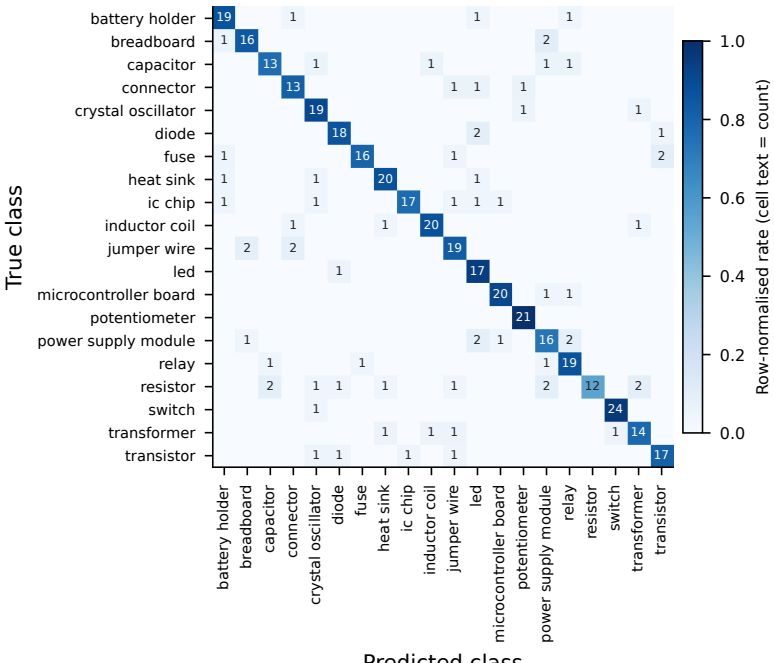
a Sealed test (n=418): errors are diffuse, not systematic
True class
Predicted class
Row-normalised rate (cell text = count)
1.0
0.8
0.6
0.4
0.2
0.0
battery holder
breadboard
capacitor
connector
crystal oscillator
diode
fuse
heat sink
ic chip
inductor coil
jumper wire
led
microcontroller board
potentiometer
power supply module
relay
resistor
switch
transformer
transistor

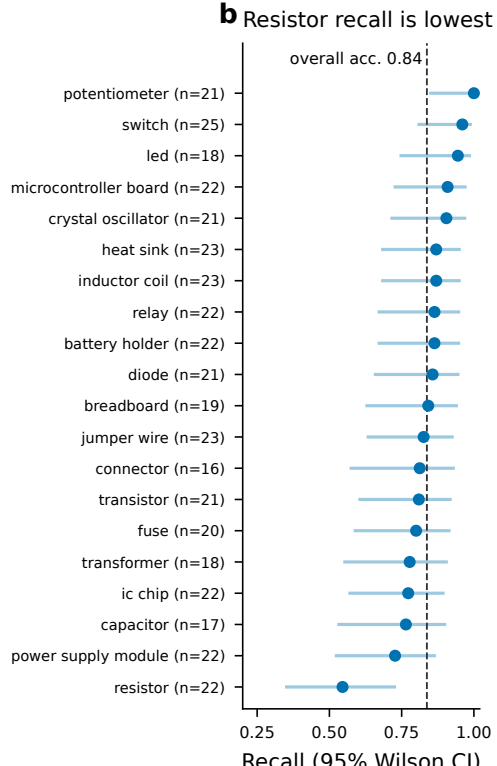
b Resistor recall is lowest
overall acc. 0.84
potentiometer (n=21)
switch (n=25)
led (n=18)
microcontroller board (n=22)
crystal oscillator (n=21)
heat sink (n=23)
inductor coil (n=23)
relay (n=22)
battery holder (n=22)
diode (n=21)
breadboard (n=19)
jumper wire (n=23)
connector (n=16)
transistor (n=21)
fuse (n=20)
transformer (n=18)
ic chip (n=22)
capacitor (n=17)
power supply module (n=22)
resistor (n=22)
0.25
0.50
0.75
1.00
Recall (95% Wilson CI)