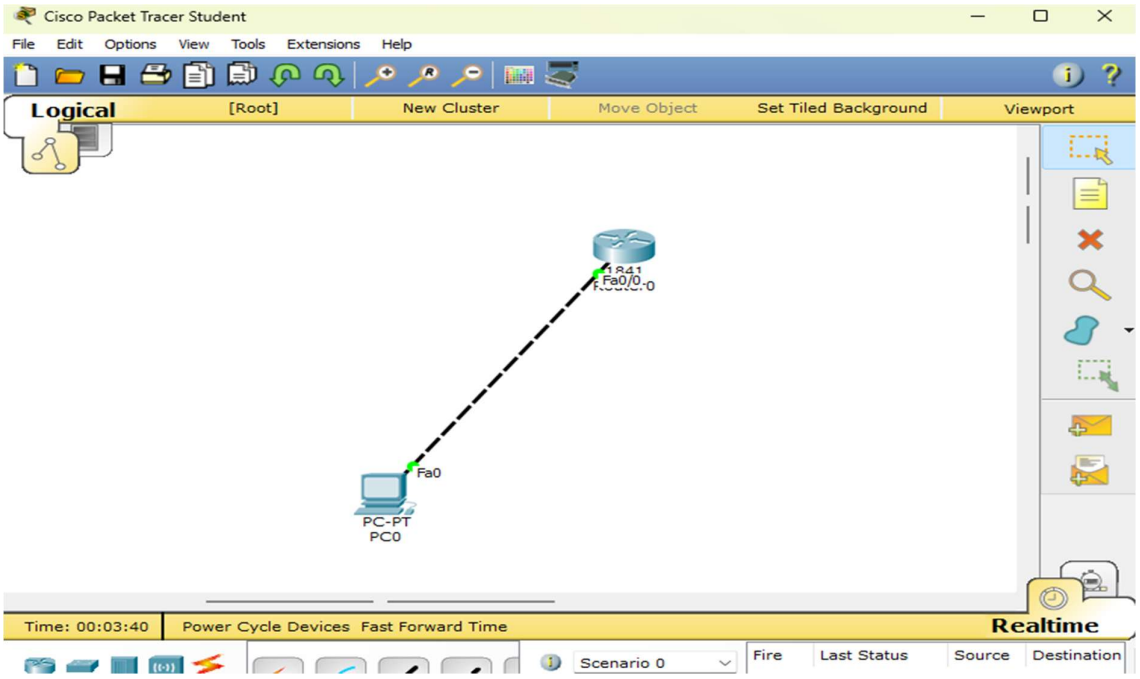
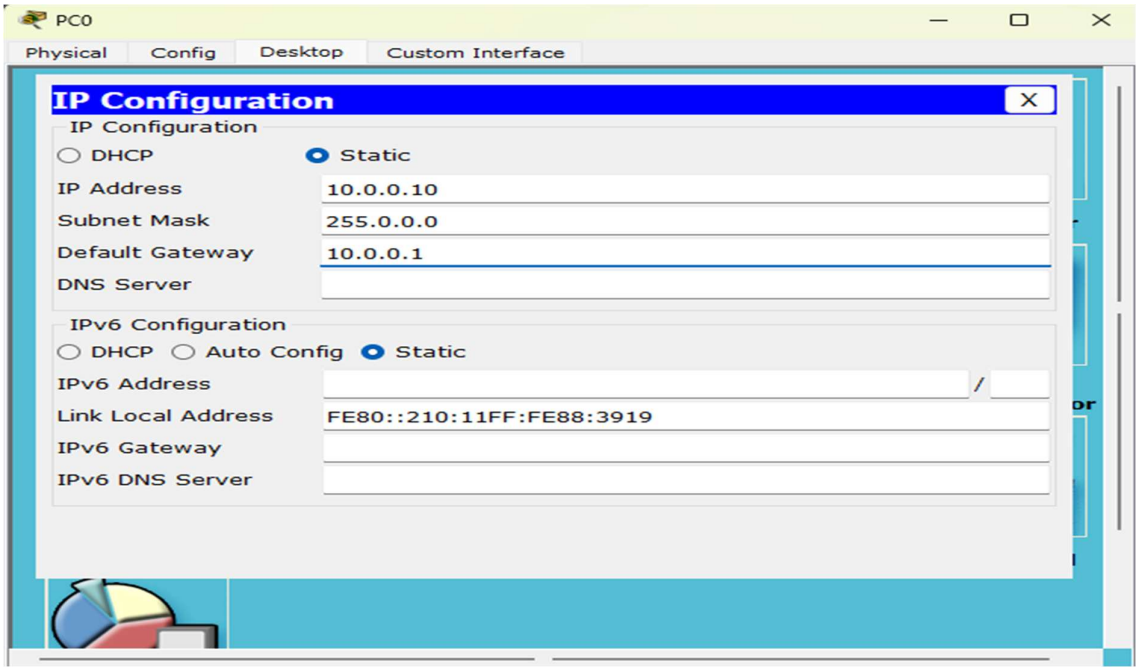
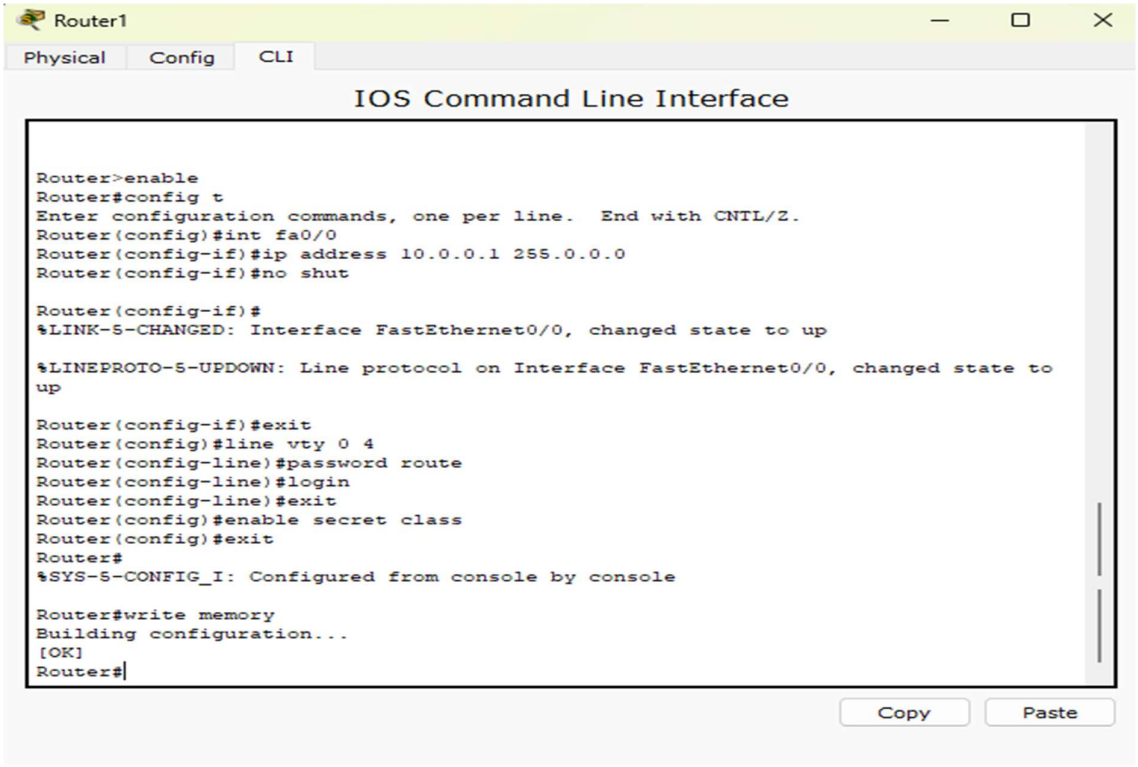
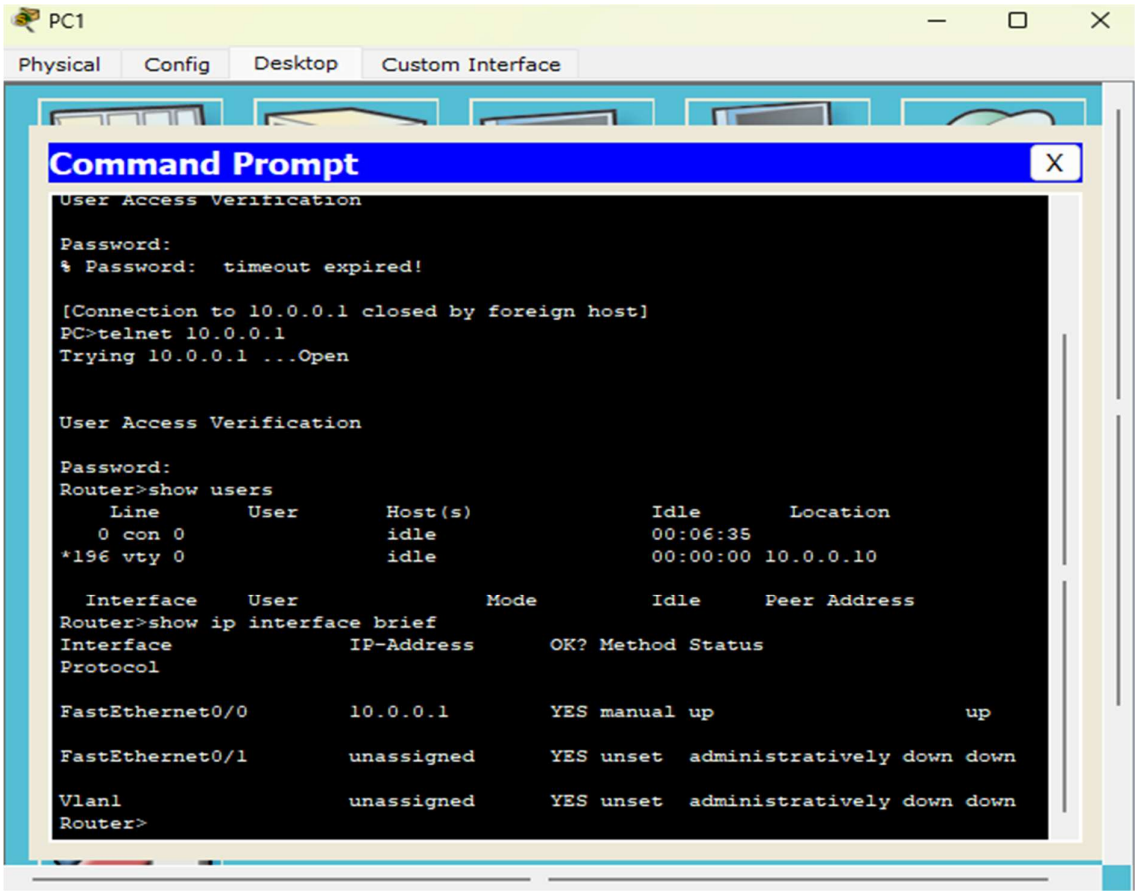
Lab program 06

6. To understand the operation of TELNET by accessing the router in server room from a PC in IT office.





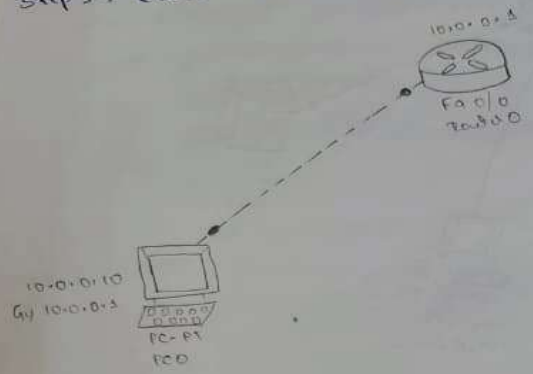

Router1
Physical
Config
CLI
IOS Command Line Interface
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#line vty 0 4
Router(config-line)#password route
Router(config-line)#login
Router(config-line)#exit
Router(config)#enable secret class
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#write memory
Building configuration...
[OK]
Router#
Copy
Paste


PC1
Physical
Config
Desktop
Custom Interface
Command Prompt
X
User Access Verification
Password:
% Password: timeout expired!
[Connection to 10.0.0.1 closed by foreign host]
PC>telnet 10.0.0.1
Trying 10.0.0.1 ...Open
User Access Verification
Password:
Router>show users
Line User Host(s) Idle Location
0 con 0 idle 00:06:35
*196 vty 0 idle 00:00:00 10.0.0.10
Interface User Mode Idle Peer Address
Router>show ip interface brief
Interface IP-Address OK? Method Status
Protocol
FastEthernet0/0 10.0.0.1 YES manual up up
FastEthernet0/1 unassigned YES unset administratively down down
Vlan1 unassigned YES unset administratively down down
Router>

Observation:

6] To understand the operation of TELNET by accessing the router in server room from a PC in IT office

Step 1: Create the topology like this.



Step 2: Configure the host with IP and Gateway.

Step 3: Configure the router interface with IP address. Now configure the router for Telnet access.

Note: Command line vty 0 4 means configuring virtual terminal (VTY) lines 0 through 4, providing 5 simultaneous remote-access sessions (Telnet/SSH).
password sets the remote-access password.
login requires authentication.
enable secret class - it will enable a password and password encryption that based on the md5 hashing algorithm.

Step 5:- Enable Telnet Session by choosing end of PC0. ping the router first. Then start telnet session like below with commands.

Run the command telnet 10.0.0.1. and then enter password and run the below commands
show vlan and show ip interface brief.

Output :-

```
PC >telnet 10.0.0.1
Trying 10.0.0.1 ... open

User Access Verification

Password :
Router > show users
    Line       User       Host(s)          Idle       Location
  0 con 0                 idle             00:06:35
* 194 vty 0               idle             00:00:00   10.0.0.10

  Interface    User         Mode         Idle     Peer Address
Router > show ip interface brief
Interface              IP-Address      OK?  Method Status
Protocol
FastEthernet 0/0       10.0.0.1        YES manual up                    up
FastEthernet 0/1       unassigned      YES unset  administratively
                                                  down                  down

Vlan1                  unassigned      YES unset  administratively
                                                  down                  down

Router>
```

Sachin
02/11/26