



Lab program 02


2.Configure IP address to routers in packet tracer. Explore the following messages: Ping responses, destination unreachable, request timed out, reply

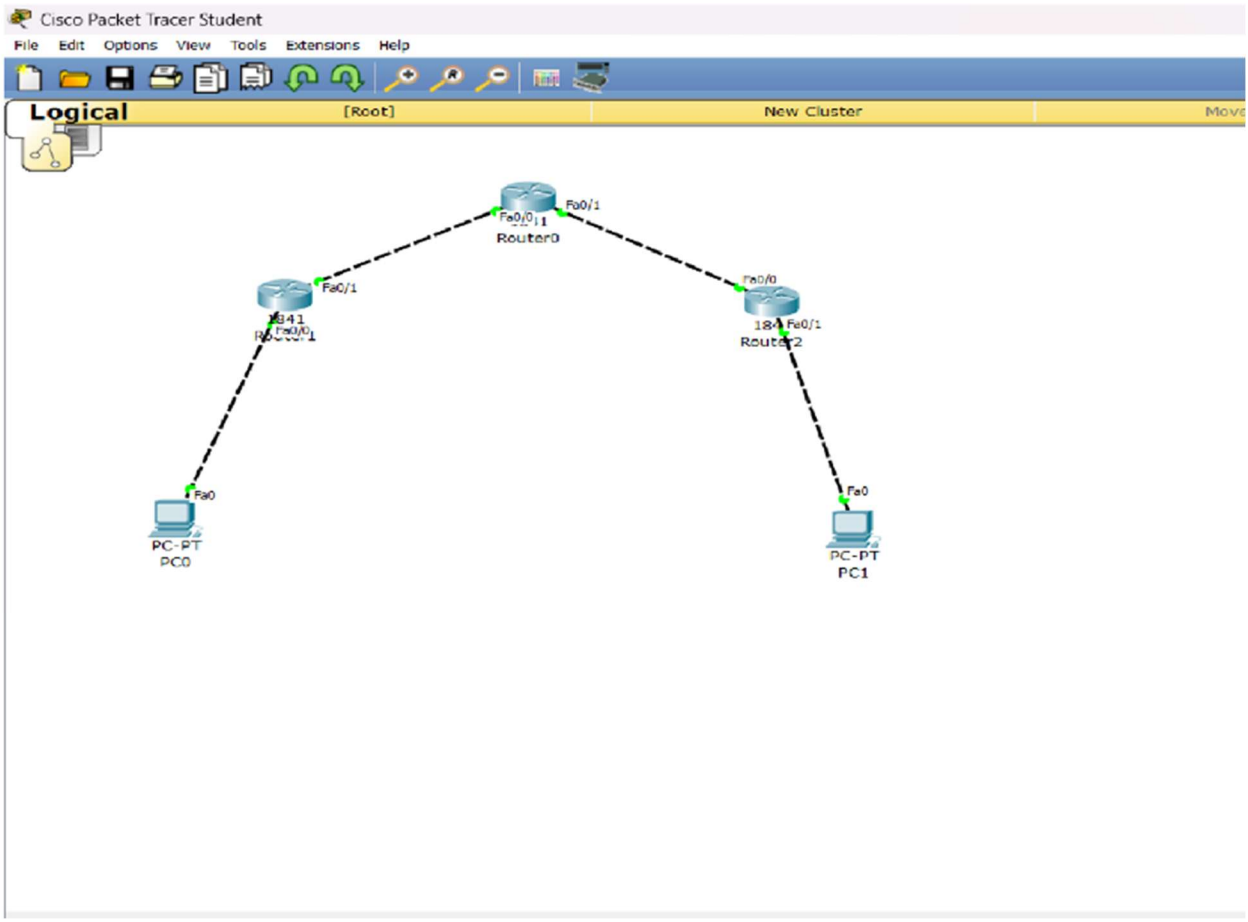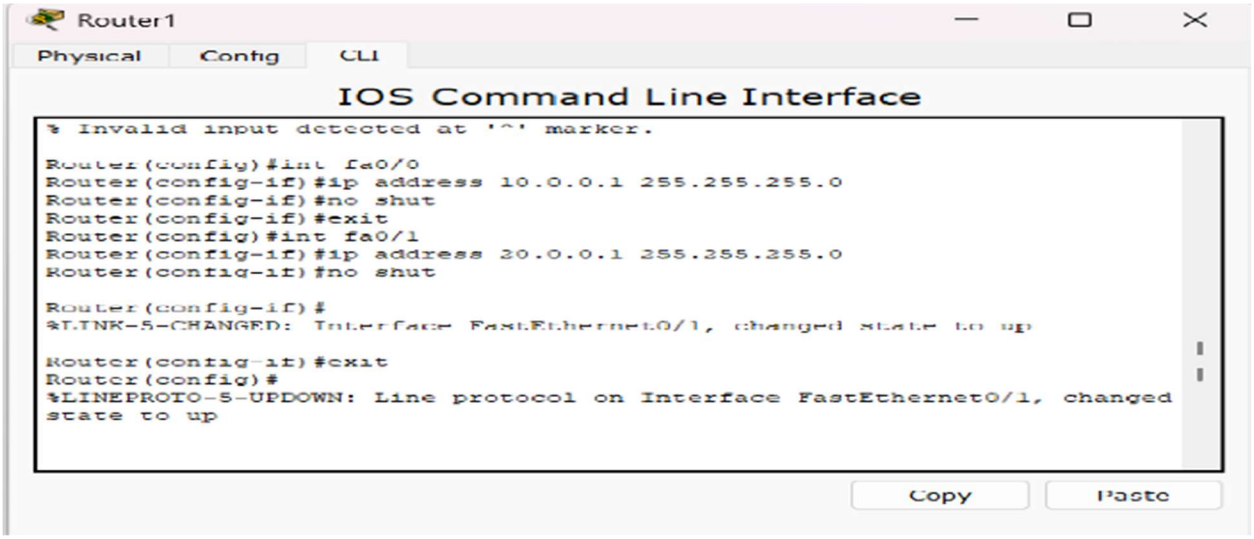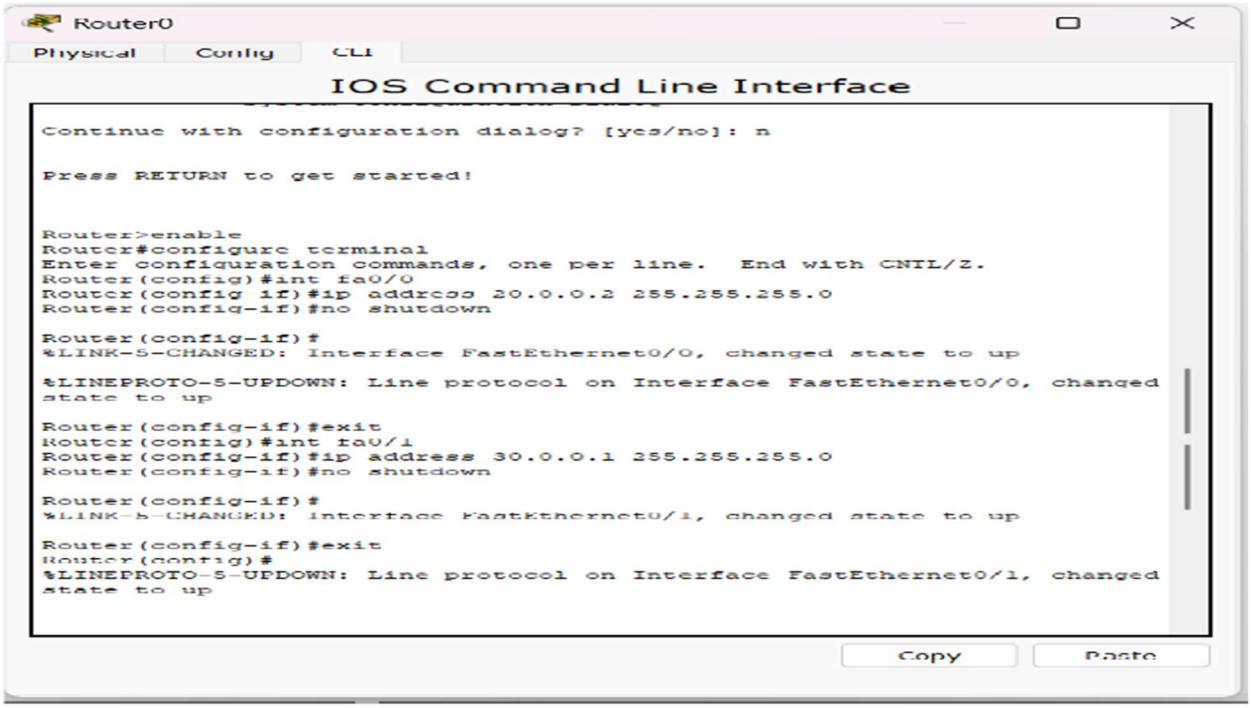

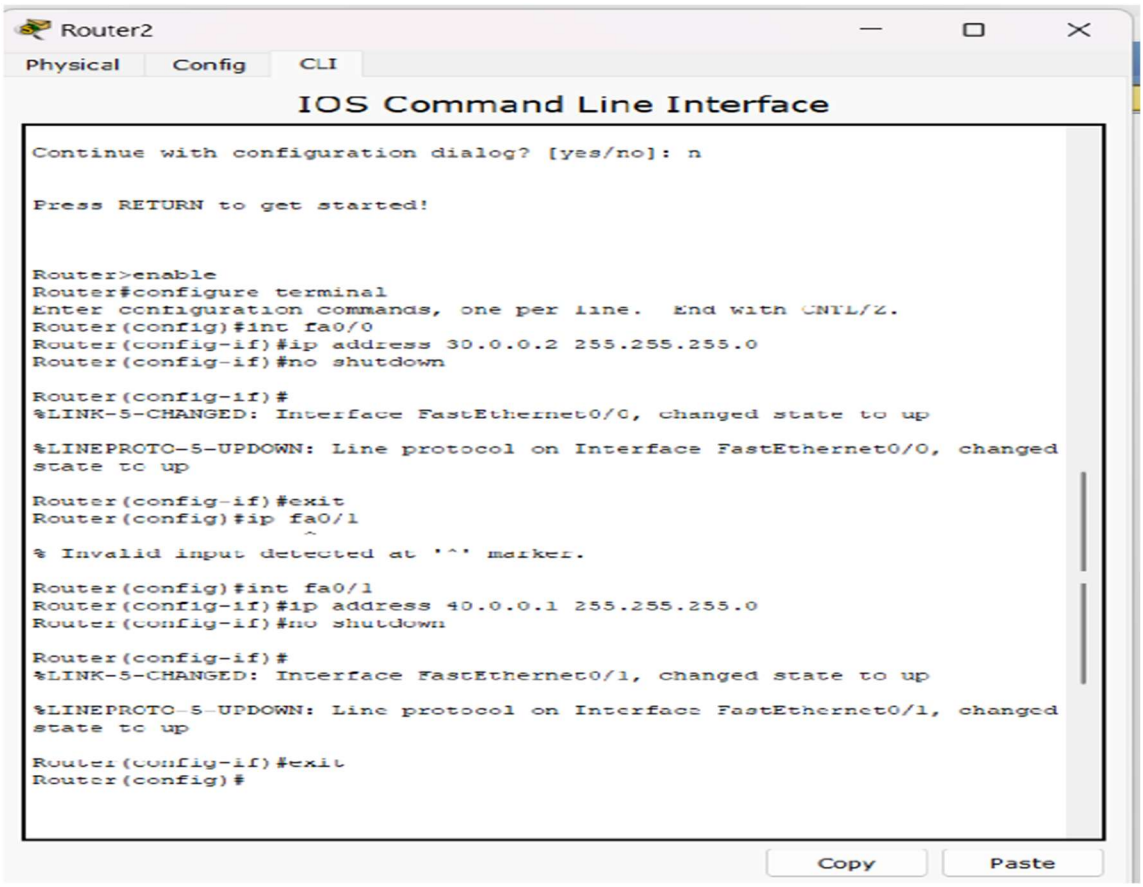


Router0
Physical
Config
CLI
IOS Command Line Interface
Continue with configuration dialog? [yes/no]: n
Press RETURN to get started!
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 20.0.0.2 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#int fa0/1
Router(config-if)#ip address 30.0.0.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
Router(config-if)#exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
Copy
Paste


Router2
Physical
Config
CLI
IOS Command Line Interface
Continue with configuration dialog? [yes/no]: n
Press RETURN to get started!
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 30.0.0.2 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#ip fa0/1
^
% Invalid input detected at '^' marker.
Router(config)#int fa0/1
Router(config-if)#ip address 40.0.0.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
Router(config-if)#exit
Router(config)#
Copy
Paste

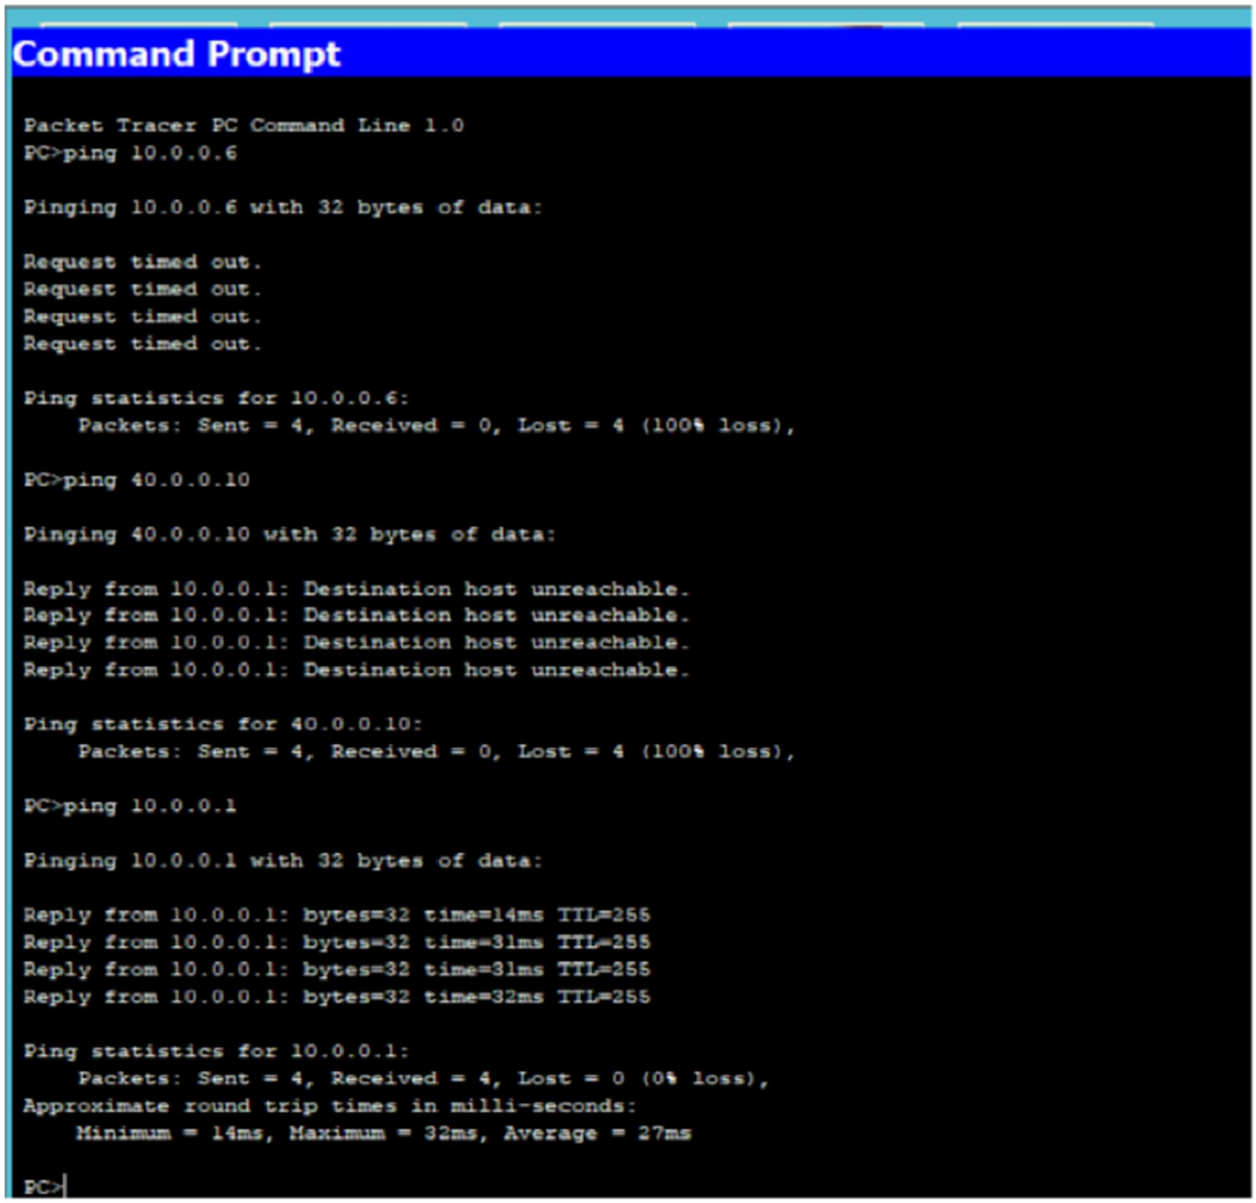
Command Prompt
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.6
Pinging 10.0.0.6 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 10.0.0.6:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>ping 10.0.0.1
Pinging 10.0.0.1 with 32 bytes of data:
Reply from 10.0.0.1: bytes=32 time=14ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=32ms TTL=255
Ping statistics for 10.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 14ms, Maximum = 32ms, Average = 27ms
PC>

Observation:

