

Lab program 01:

1. Create a topology and simulate sending a simple PDU from source to destination using hub and switch as connecting devices and demonstrate ping message.

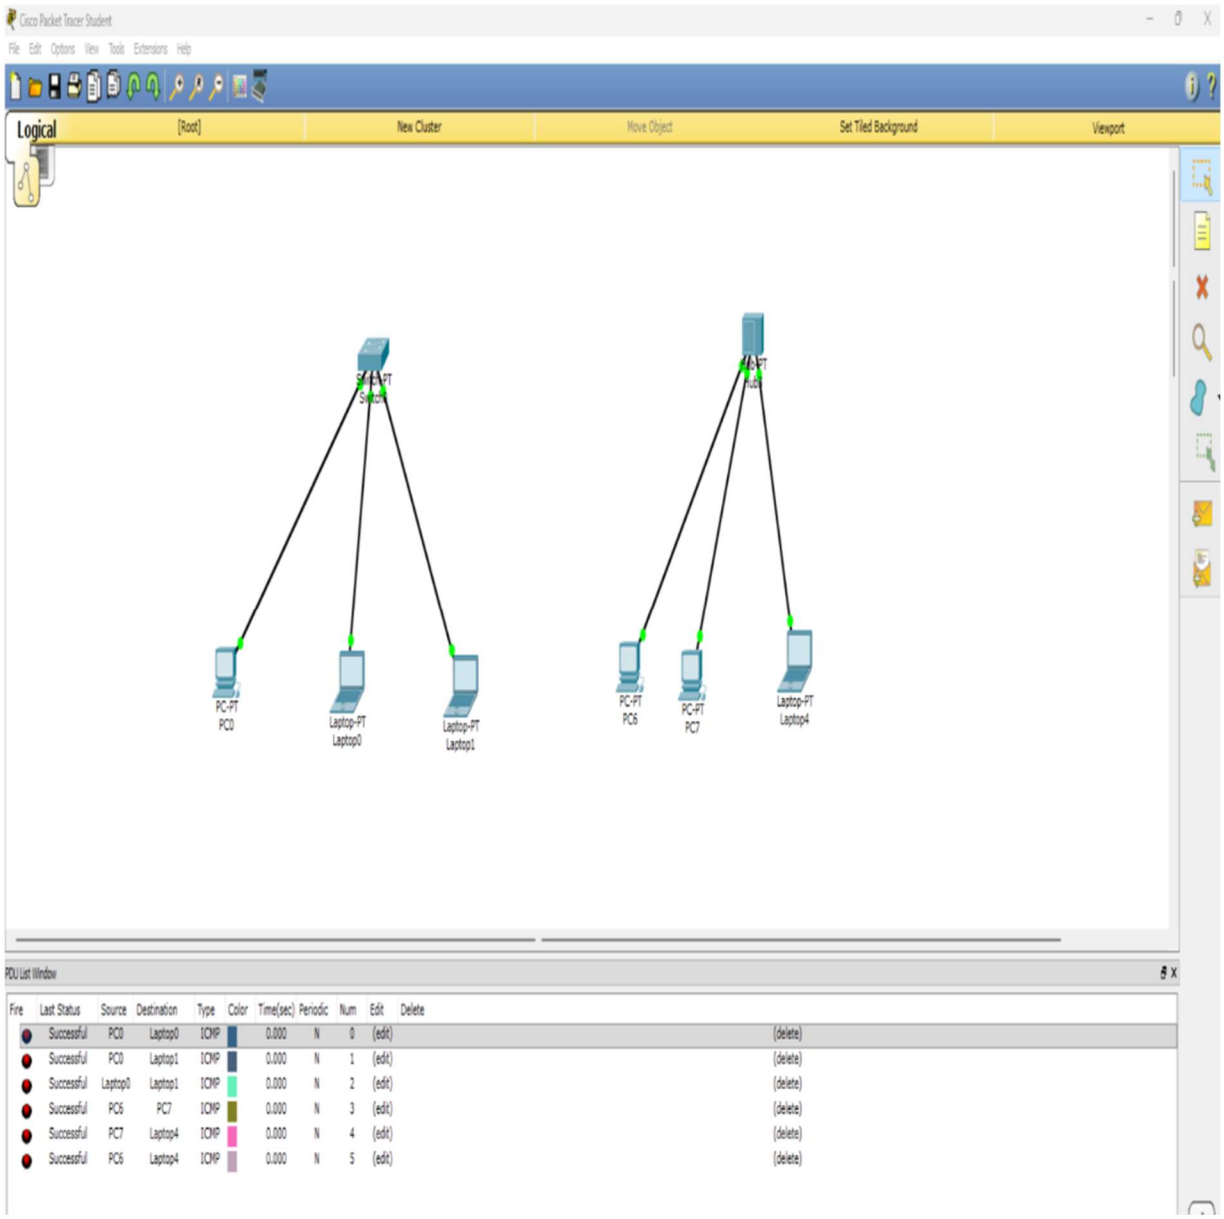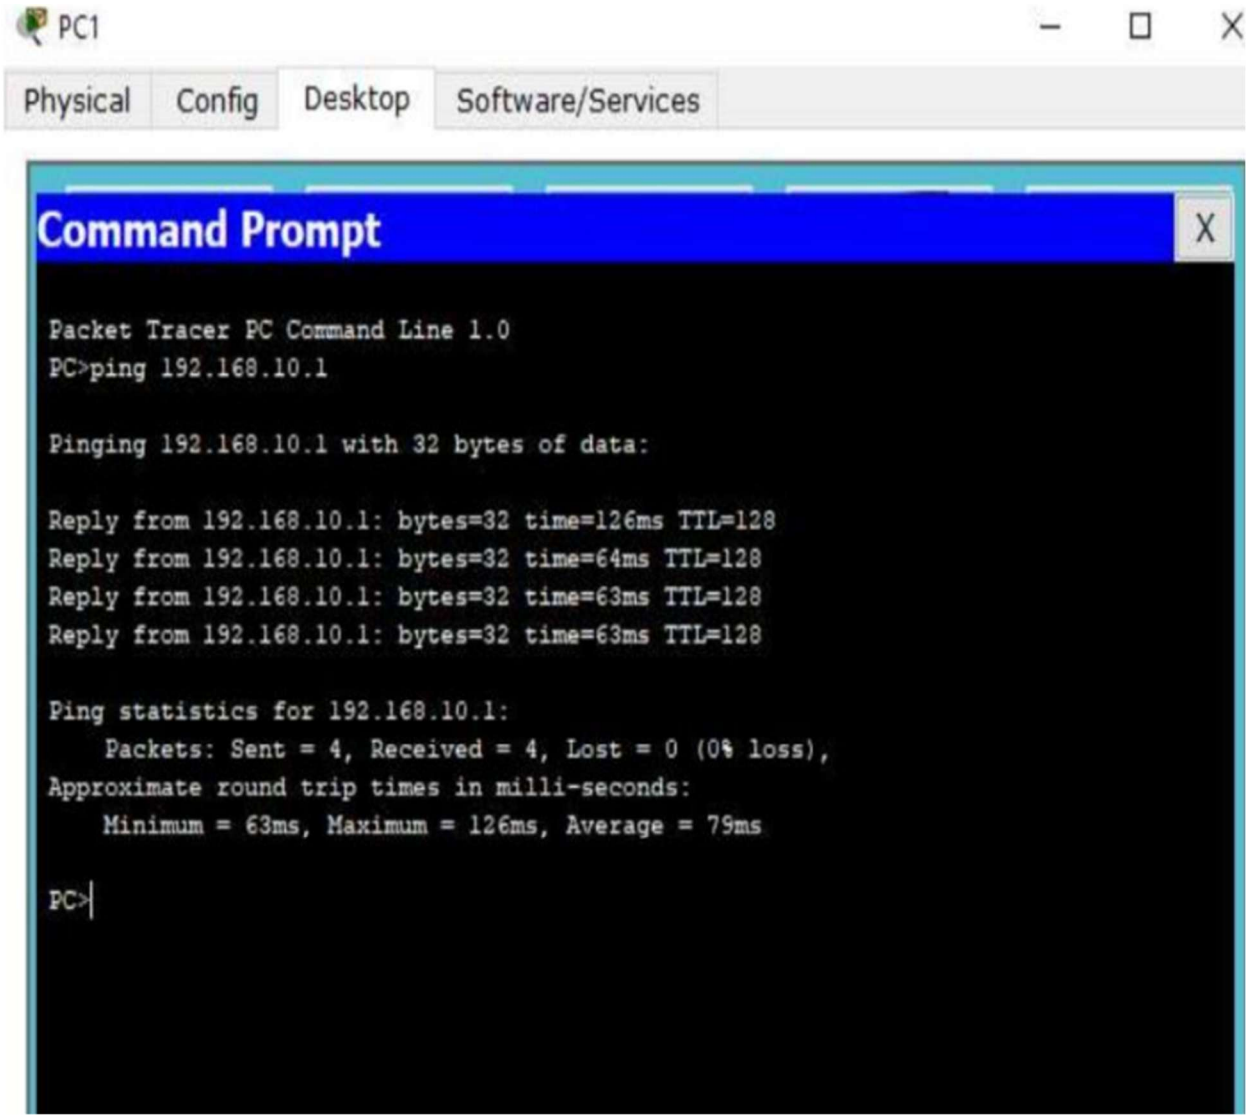


PC1
Physical
Config
Desktop
Software/Services
Command Prompt
X
Packet Tracer PC Command Line 1.0
PC>ping 192.168.10.1
Pinging 192.168.10.1 with 32 bytes of data:
Reply from 192.168.10.1: bytes=32 time=126ms TTL=128
Reply from 192.168.10.1: bytes=32 time=64ms TTL=128
Reply from 192.168.10.1: bytes=32 time=63ms TTL=128
Reply from 192.168.10.1: bytes=32 time=63ms TTL=128
Ping statistics for 192.168.10.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 63ms, Maximum = 126ms, Average = 79ms
PC>


Observation :

Week - 01

Cycle 1:

1) Create a topology and simulate sending a simple PDU from source to destination using hub and switch as connecting devices and demonstrate ping message.

Step 1 : Create a simple topology like this

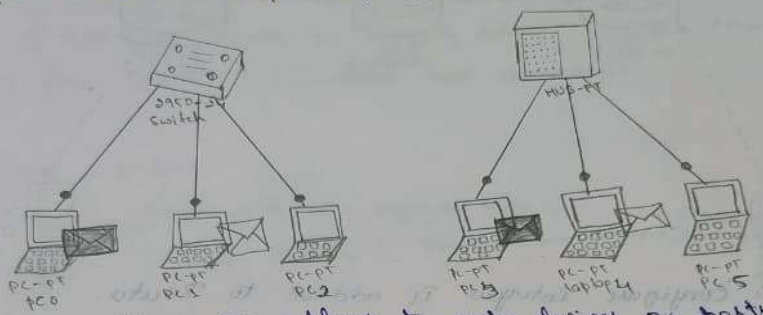

Step 2 : Configure Ip address to each devices or hosts as shown below. Click on the device

Step 3 : Click on Ip configuration. Assign the any class of Ip address (class A, class B, class C) to

Step 4 : Repeat the same process to assign Ip address for all hosts in the topology

Step 5 : For checking connectivity, select "Simple PDU packet" from right side of packet tracer and select source PC and destination PC. You will get response at right bottom of the packet tracer window.

Step 6 : To get the ping response, open Desktop of host and select command prompt. Run the command

PC> ping 192.160.10.1.

Output :-

Source	Destination	Last Status
PC0	PC1	Successful
PC3	Laptop 4	Successful.