

Assembly Instructions

Model:	KLE500 (2026MY -)
Description:	Radiator Screen
Part Number:	99994-2293
Flat Rate Time(Hr):	0.1


Before you begin, read through these instructions and check that all parts are present.
Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.
Kawasaki recommends that all genuine accessories should be fitted by an authorized Kawasaki dealer.

The following symbols indicate the information for proper installation and operation in this instruction.

NOTE : NOTE indicates information that may help or guide you in the operation or service of the vehicle.

- Indicates a procedural step or work to be done.
- Indicates a procedural sub-step or how to do the work of the procedural step it follows. It also precedes the text of a NOTE.


Parts List				
No.	Component Name	Part No.	Qty	Remark
1	Screen	14037-0844	1	
2	Bolt	186BB0616	4	M6 × 16 mm
3	Nut	92210-0867	4	

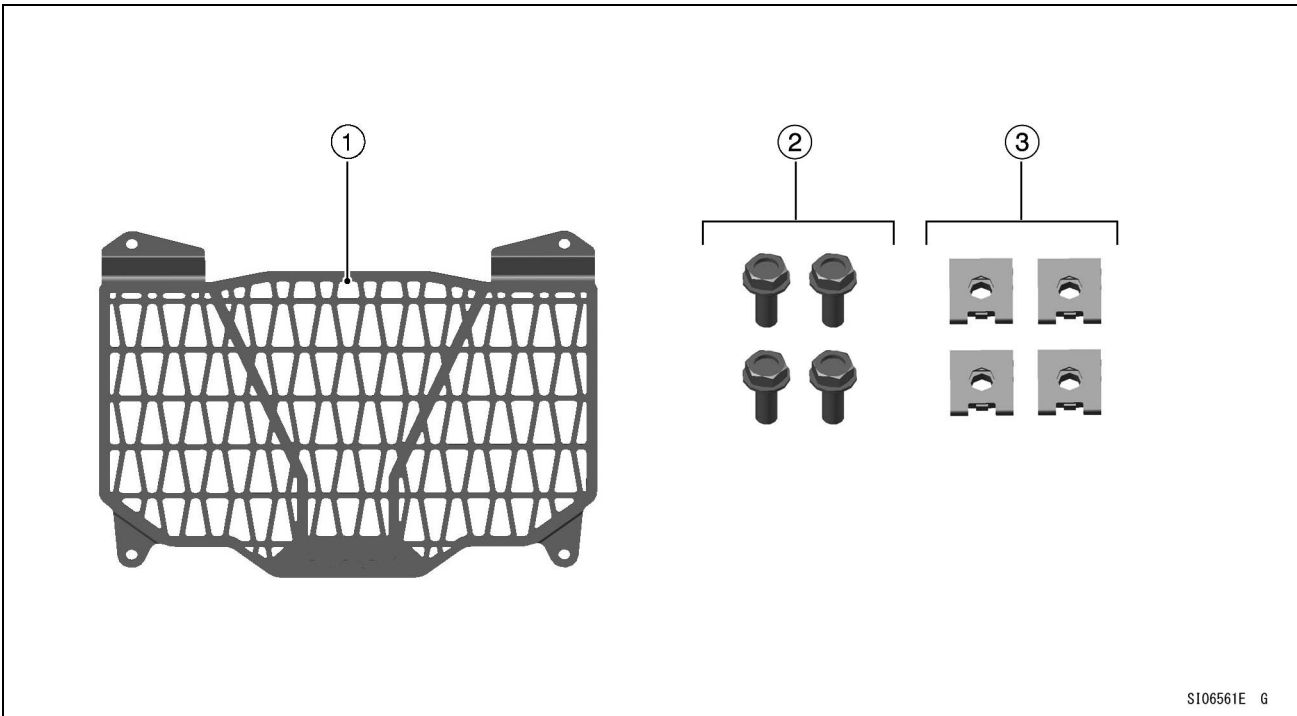


Installation Instructions

NOTE

- The radiator can become extremely hot and cause burns. Waiting for the engine to cool down enough, installing this kit.
- Install the radiator screen so that the radiator is not damaged.
- Safely installing the radiator screen with wearing protective gloves.
- Install the nuts [3] to the radiator.

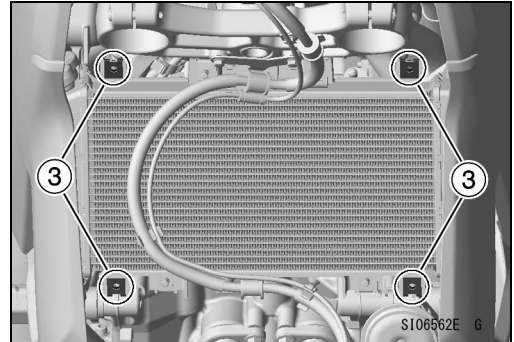

- Install the following parts to the radiator.
 - Screen [1]
 - Bolts [2]
- Face the “Kawasaki” mark [A] on the screen to the front.

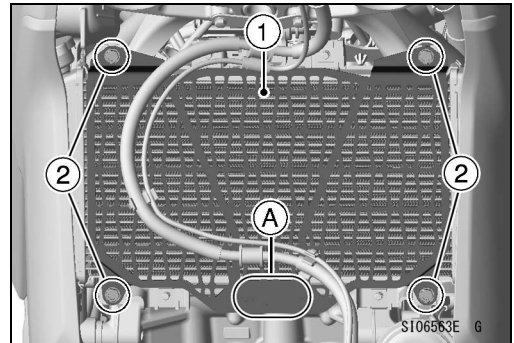

Basic Torque for General Fasteners

The table below, relating tightening torque to thread diameter, lists the basic torque for the bolts and nuts. Use this table for only the bolts and nuts which do not require a specific torque value. All of the values are for use with dry solvent-cleaned threads.

Threads dia. (mm)	Torque		
	N·m	kgf·m	ft·lb
5	3.4 ~ 4.9	0.35 ~ 0.50	30 ~ 43 in·lb
6	5.9 ~ 7.8	0.60 ~ 0.80	52 ~ 69 in·lb
8	14 ~ 19	1.4 ~ 1.9	10 ~ 13.5
10	25 ~ 34	2.6 ~ 3.5	19 ~ 25
12	44 ~ 61	4.5 ~ 6.2	33 ~ 45
14	73 ~ 98	7.4 ~ 10.0	54 ~ 72
16	115 ~ 155	11.5 ~ 16.0	83 ~ 115
18	165 ~ 225	17.0 ~ 23.0	125 ~ 165
20	225 ~ 325	23.0 ~ 33.0	165 ~ 240

Check tightness of all fasteners in regular interval. Retighten loose fasteners.