

Operation Manual

Model:	KLE500 (2026MY -)
Description:	Top Case
Part Number:	99994-2546

Thank you for your purchase. This manual contains information for proper operation of the accessory parts and precautions. Read through this manual before operation for proper use of the accessory parts.

The following symbols indicate the information for proper installation and operation in this instruction.

 **WARNING** : WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

NOTICE : NOTICE is used to address practices not related to personal injury.

NOTE : *NOTE indicates information that may help or guide you in the operation or service of the vehicle.*

● Indicates a procedural step or work to be done.


○ Indicates a procedural sub-step or how to do the work of the procedural step it follows. It also precedes the text of a NOTE.

 WARNING
● Do not carry loads of more than 5 kg (11 lb) in top case. ● Do not exceed the maximum vehicle load. Review your vehicle owner's manual for information regarding proper loading. ● Do not exceed the vehicle speed of 120 km/h (74 mph) when carrying a passenger and/or cargo. Also reduce speed according to road or weather condition, etc. Failure to adjust the speed to compensate for added weight and other conditions may result in a loss of control and subsequent accident. ● Wrong installation of the top case could affect handling and running stability of the motorcycle, and cause top case falling, which may result in serious injury or death. ● Before riding, make sure top case is securely attached and the lid is closed.


NOTICE
● The top case is not perfect waterproof. ● When cleaning the top case, avoid all harsh chemicals such as benzine, paint thinner, and gasoline. Always use a mild neutral detergent and water. ● Do not sit on the top case. ● Do not put load on the lid.

Opening the Top Case Lid

- Insert the ignition key [A] into the key cylinder.
- Turn the ignition key to the unlock position.
- Pull up the handle [B].

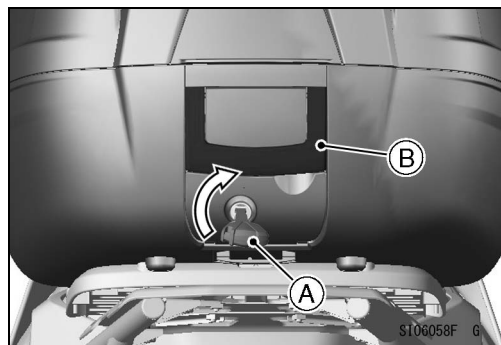

- Open the top case lid [A] while pulling the release lever [B].

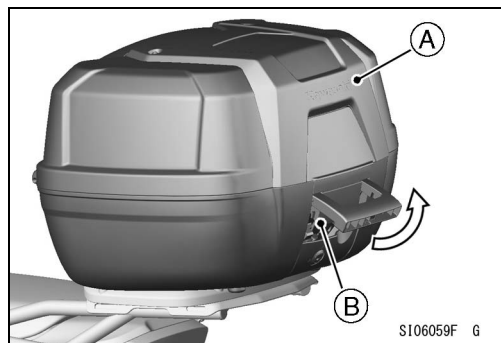


Closing the Top Case Lid


- Close the top case lid, and push it down to lock it.
- Pull down the handle.
- Turn the ignition key to the lock position, and remove it.
- Make sure that the top case lid is securely locked.

Removing the Top Case

- Insert the ignition key [A] into the key cylinder.
- Turn the ignition key to the unlock position.
- Pull up the handle [B].

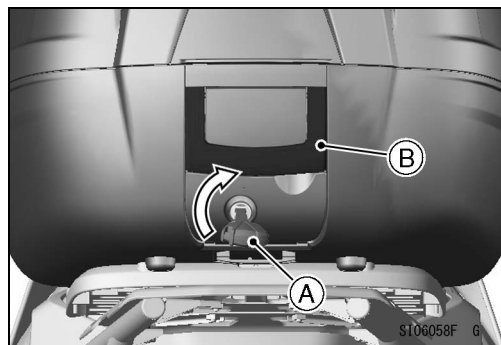

- While pulling the lock lever [A] on the top case [B], pull up the rear part of the top case to clear the hook [C].
- Remove the top case backward to clear the hooks [D].

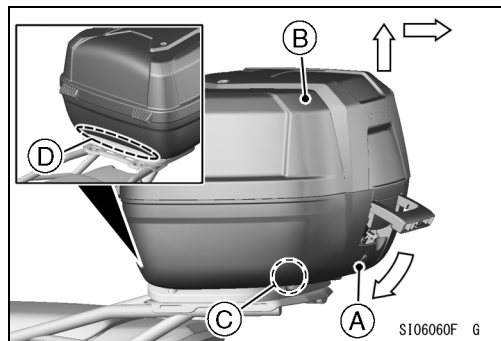

Installing the Top Case

- Insert the hooks [A] of the top case [B] into the holes [C] of the plate [D].
- While pulling the lock lever [E] on the top case, insert the hook [F] of the plate into the lock portion [G] of the top case.
- Release the lock lever.
- Make sure that the top case is securely locked.
- Pull down the handle [H].
- Turn the ignition key to the lock position, and remove it.

