


AIM: Configure web server, DNS within a LAN

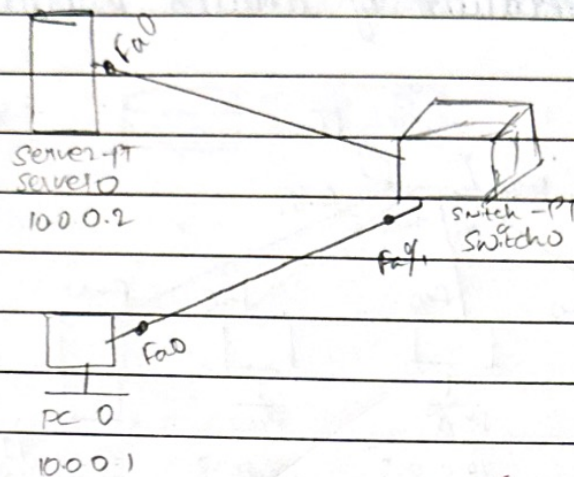

PROCEDURE :

- Place an end device, a server and a switch, and connect using copper straight wire.
- Assign the IP addresses as demonstrated in the topology.
- To set the IP of the server.
 - go to config
 - select HTTP
 - Turn the services to on
 - Amend the content of the code as needed and click on it
 - Select the PC0 → desktop → web browser
 - Enter the URL specified in the DNS resources.

* OBSERVATION :

- The server's web page could be successfully accessed from the PC by entering the resource URL.
- The DNS server could hence be configured within a LAN by enabling the DNS.