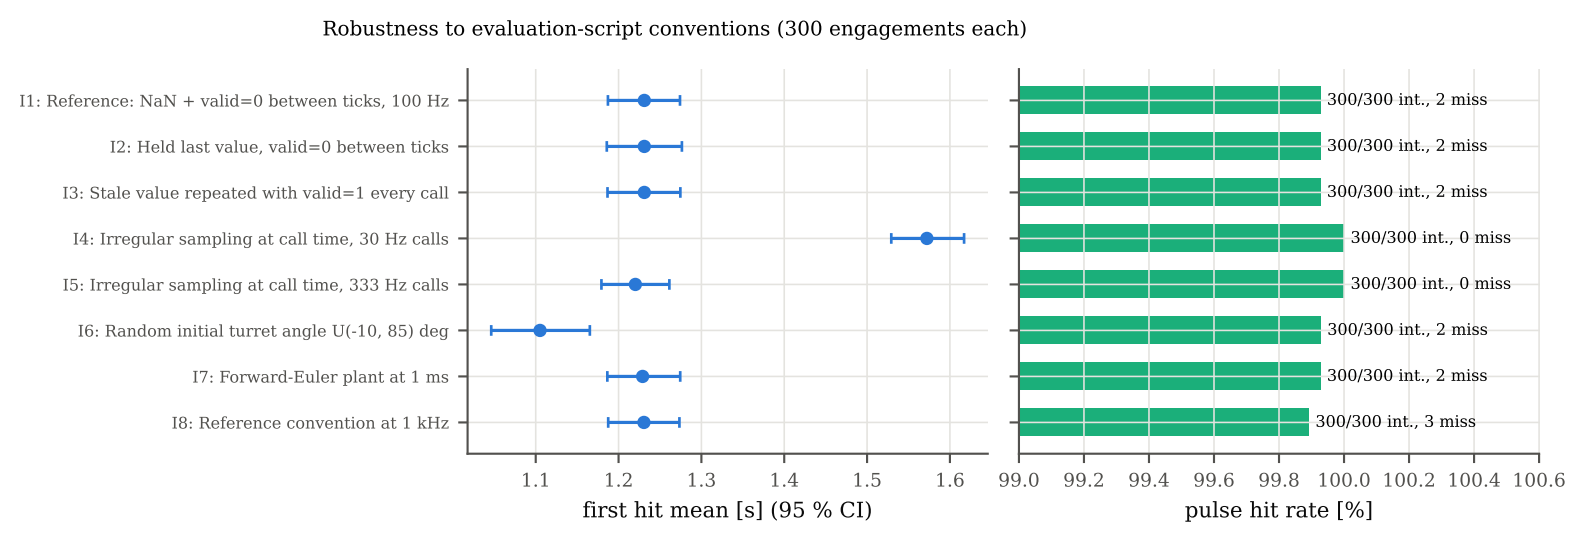
Robustness to evaluation-script conventions (300 engagements each)
I1: Reference: NaN + valid=0 between ticks, 100 Hz
I2: Held last value, valid=0 between ticks
I3: Stale value repeated with valid=1 every call
I4: Irregular sampling at call time, 30 Hz calls
I5: Irregular sampling at call time, 333 Hz calls
I6: Random initial turret angle U(-10, 85) deg
I7: Forward-Euler plant at 1 ms
I8: Reference convention at 1 kHz
1.1
1.2
1.3
1.4
1.5
1.6
first hit mean [s] (95 % CI)
300/300 int., 2 miss
300/300 int., 2 miss
300/300 int., 2 miss
300/300 int., 0 miss
300/300 int., 0 miss
300/300 int., 2 miss
300/300 int., 2 miss
300/300 int., 3 miss
99.0
99.2
99.4
99.6
99.8
100.0
100.2
100.4
100.6
pulse hit rate [%]