


RECOMMENDED FOOTPRINT

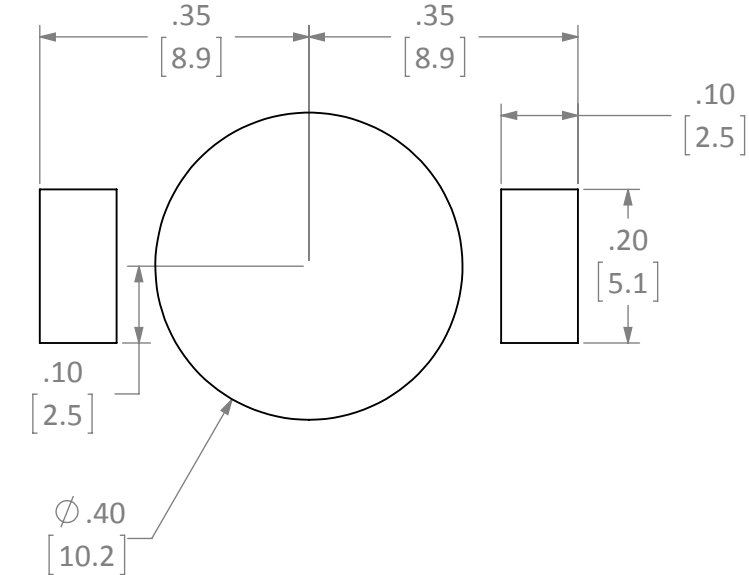

- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES [mm].
 2. DIMENSIONS APPLY AFTER FINISHING.
 3. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE.
 4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.			Linx 159 ORT LANE MERLIN, OR 97532	
MATERIAL:			TITLE: CR1216,1225 HOLDER OUTLINE SURFACE MOUNT	
FINISH:			SIZE B	REV A
DRAWN: B.MURPHY			DWG. NO. BAT-HLD-012-SMT-OTL	
ENGR: S.HOGAN			SHEET 1 OF 1	
DT: 2-FEB-12			SCALE: 4:1	
DT: 2-FEB-12			DO NOT SCALE DRAWING	
TOLERANCES: .X ±.1 .XX ±.01 .XXX ±.005			SHEET 1 OF 1	
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5.			LDCDFB_C	
SURFACE FINISH: $\sqrt{32}$ ANGLES: ±1°				
PROJECTION:				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Linx Technologies:](#)

[BAT-HLD-012-SMT](#) [BAT-HLD-012-SMT-TR](#)