30/07/2026


Practical 3

Aim: To study the packet tracer tool installation and user interface.

Analyze the behaviour of network devices using CISCO PACKET TRACER simulator.

1. From the network component box, click and drag-and-drop the below components:
   a. 4 Generic PCs and One HUB
   b. 4 Generic PCs and One switch

2. Click on Connections:
a. Click on Copper Straight-Through cable
b. Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating that the link is up. Similarly connect remaining 3 PCs to the HUB.
c. Similarly connect 4 PCs to the switch using copper straight-through cable.

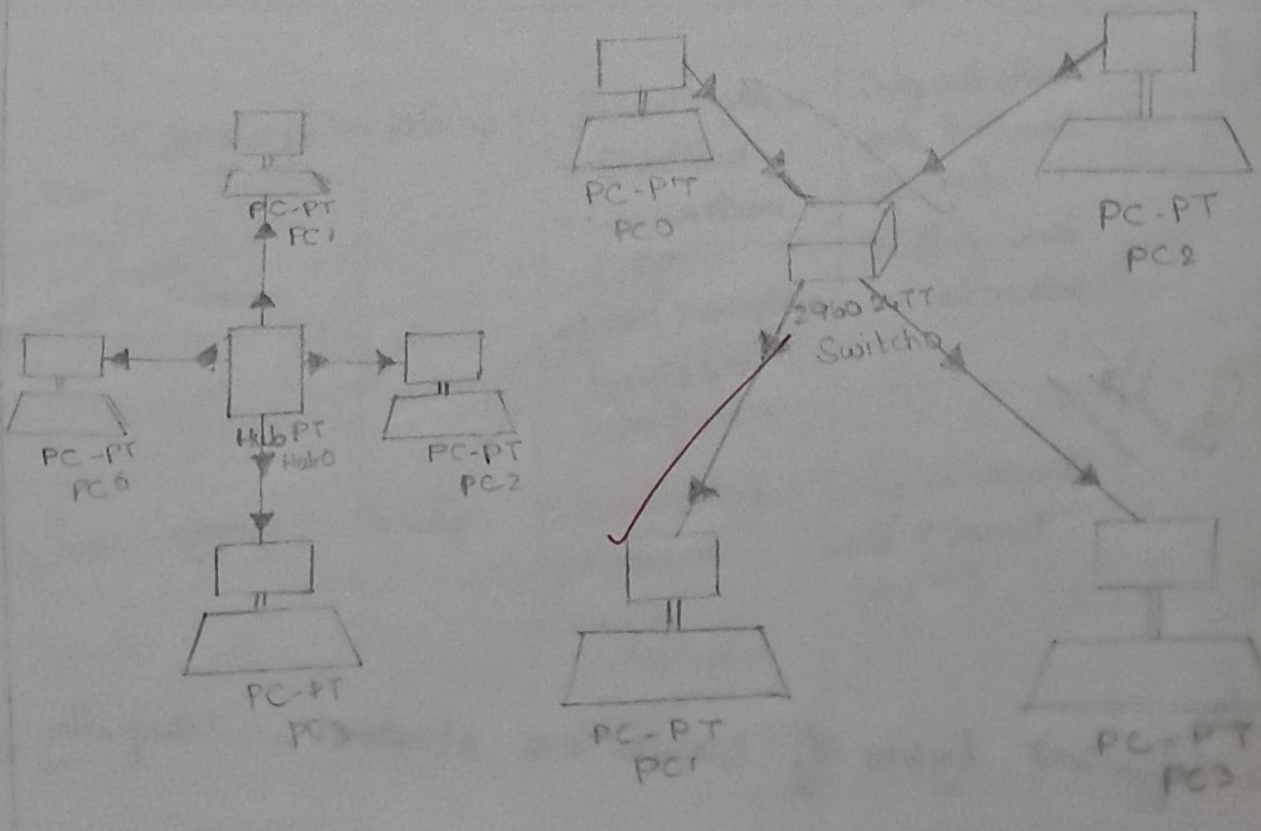

3. Click on the PCs connected to hub, go to the desktop tab. Click on IP configuration and enter an IP address and subnet mask. Here the default gateway and DNS server information is not needed as there are only two end devices in the network.


Click on the PDU (message icon) from the common tool bar,

a. Drag and drop it on one of PC (source machine) and then drop it on another PC (destination machine) connected to the HUB.


4. Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation

5. Repeat step #3 to step #5 for the PC's connected to the network

6. Observe the HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviors of switch and HUB.

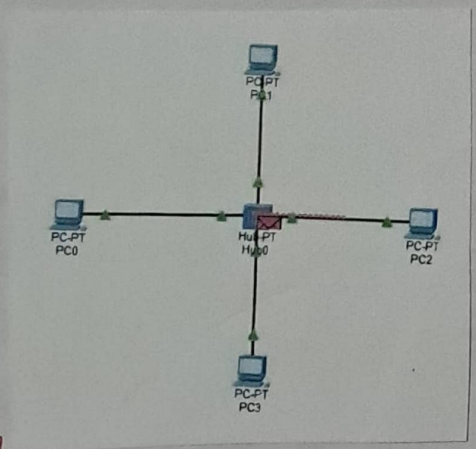

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC2	ICMP		0.000	N	0	(ed...	(delete)

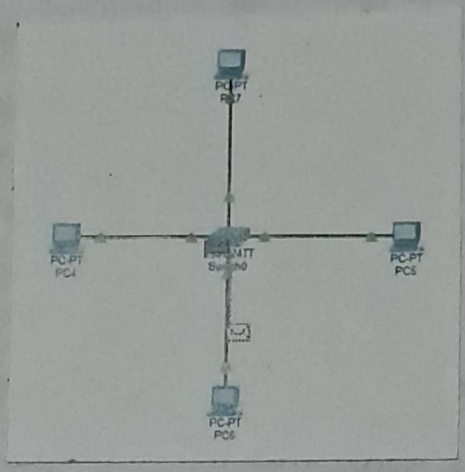

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC7	PC6	ICMP		0.000	N	0	(ed...	(delete)

Result:
The behavior of hub and switch was successfully analyzed using Cisco Packet Tracer.