

D'WALL ARCHITECTURAL SYSTEMS · SERVICE WALL PLATFORM

The wall that opens.

Every cable, conduit, optical fiber, and MEP connection behind the surface stays reachable for the life of the building. Toolless access in under 3 minutes.

PRODUCT SPECIFICATION BROCHURE · MACR MAYR INDIA PVT LTD · MUMBAI A4 PORTRAIT EDITION · 2026

1.0 Buildings change. Walls don't.

A conventional drywall partition is a one-way decision. Everything placed behind it is permanently sealed in.

0	<3 min	>500	100%
WET TRADES NEEDED	CAVITY ACCESS SPEED	TEST REMOUNT CYCLES	MODULAR GRID REUSE

Add a workstation, move a rack, pull a new data run, chase an electrical fault, or upgrade IT cabling — and conventional drywall must be cut open, contained, rebuilt, skimmed, sanded, and repainted. Dust, noise, fumes, drying time, and rooms out of service for days.

In an occupied corporate headquarters or hospital, that cost lands twice: once in the works order, and again in the billable hours the space cannot be used.

The Modular Platform Principle

D'WALL transforms static wall elevations into active, serviceable infrastructure assets that open and close in seconds without tools or surface damage.



Zero Disruption

Technicians access cabling and services while adjacent desks remain fully occupied.

Universal 500mm Grid

Panels swap between solid, acoustic, living-bio, and illuminated tiles effortlessly.

Full EMI Segregation

Physical aluminum dividers isolate high-voltage mains from sensitive Cat6A data.

2.0 The same job, two ways

Adding a data outlet or repairing services in an existing wall elevation.

CONVENTIONAL DRYWALL 1. Isolate area & erect dust containment tent 2. Cut open the gypsum board with saw 3. Pull new cabling / chase electrical fault 4. Patch backing board, tape and skim plaster 5. Wait 24–48 hours curing and drying time 6. Sand smooth — generates airborne silica dust 7. Repaint entire wall elevation for color match 8. Clean down and reinstate space 3 to 5 Days Disruption · Room Out of Service	D'WALL SERVICE WALL 1. Toolless unclip of targeted 500×500 mm cassette 2. Route new cabling through segregated raceway 3. Clip cassette firmly back onto concealed node Under 3 Minutes · Zero Dust · Zero Trades · Zero Downtime
--	---



Schedule Agility

Facilities managers execute alterations immediately during working hours without contractor lead time.

Clean Environment Safety

No airborne gypsum or silica dust. Fully compliant for sterile healthcare suites and cleanrooms.

Capex Amortization

Eliminates recurring wall demolition, skim plastering, and repainting costs over a 15+ year lifecycle.

3.0 Access in three moves

Repeatable toolless engagement that leaves zero trace of maintenance works.

STEP 01 – RELEASE

Press & Disengage

Technician applies calibrated inward pressure to release concealed spring clips without face tools.

STEP 02 – OPEN

Lift Straight Off

Panel lifts off parallel to the elevation, exposing the full cavity width with segregated raceways.

STEP 03 – CLOSE

Snap & Self-Index


Panel snaps flush into the grid. Sub-millimeter alignment is retained by conical indexing nodes.

Key Mechanical Attributes

- 100% Toolless:** No suction lifters, allen keys, or pry bars needed.
- Isolated Removal:** Surrounding panels remain fully undisturbed.
- Integrated Face Outlets:** Sockets & AV ports stay attached to tile.
- Zero Play Retention:** Tested to >500 removal cycles without looseness.
- Seismic Restraint:** Captive secondary latch satisfies seismic drift codes.

Vibration Dampened Interface

EPDM elastomeric isolation rings on all nodes eliminate acoustic transmission and panel rattle.

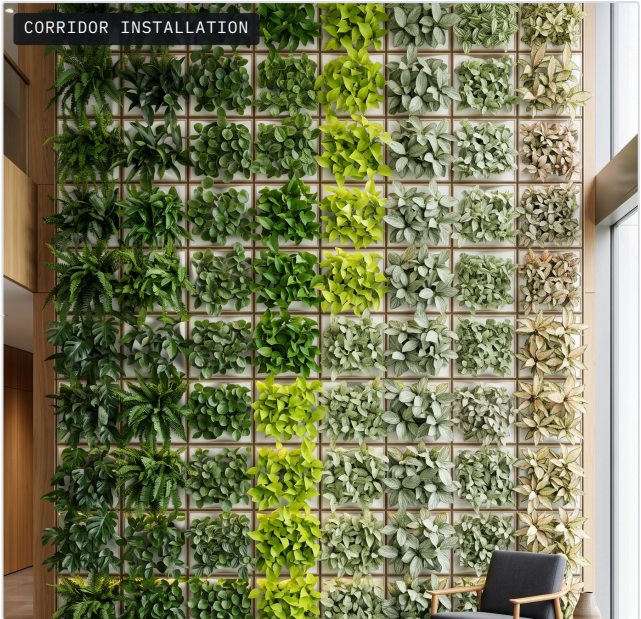

CONTINUOUS GRID ALIGNMENT MUMBAI COMMERCIAL CORRIDOR

NODE RETENTION

180 N Calibrated Pull-Off

Prevents accidental dislodgement while allowing deliberate one-handed release.

MATERIAL COMPOSITION

Die-Cast Zinc & SS304

Corrosion-proof alloy designed for internal humidity and marine coastal air.

ALIGNMENT TOLERANCE

±0.25 mm True Position

Conical indexing pins lock shadow-gaps into razor-sharp collinear lines.

4.0 Anatomy of the cavity

Panels stand clear of the substrate on adjustable standoffs, creating a continuous, ventilated raceway behind the finished elevation.


This cavity organizes power, high-speed data, HVAC distribution, and acoustic absorption into isolated rails rather than burying them haphazardly inside studs.

Zone-Configured Cavity Depth

Standoff depth is specified per architectural zone: 50 mm for power/data lines, 100–180 mm for deep acoustic Helmholtz resonators, ventilation ducts, and irrigation manifolds.

Universal Sub-frame Grid

The identical aluminum rail mounts acoustic fluted tiles, living bio-cassettes, and illuminated panels interchangeably.

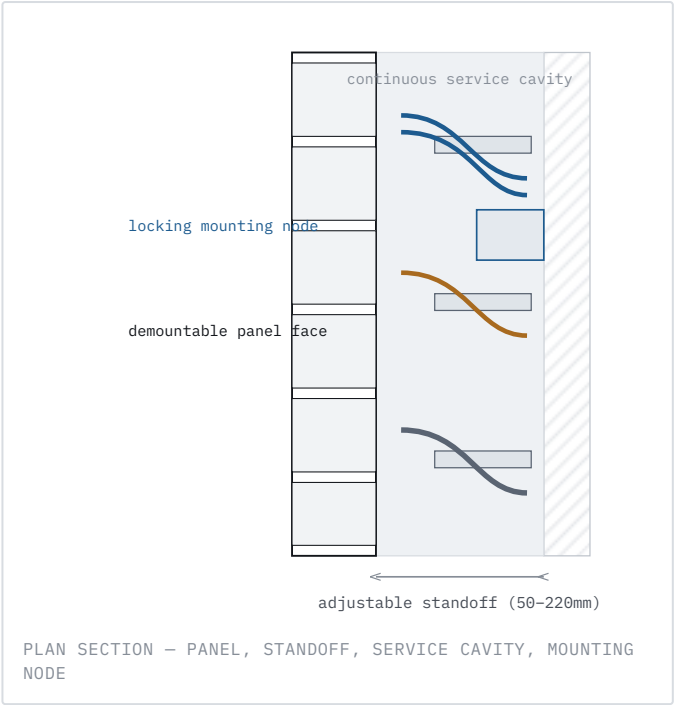

MULTI-TIER RACEWAY SEGREGATION ARCHITECTURE

TIER 01 • POWER 230V Mains & UPS Grounded metallic raceway isolating high-voltage lines from data interference.	TIER 02 • DATA Cat6A / Fiber Trunking Dedicated optical conduits with 50mm bend radii for high-speed IT networks.	TIER 03 • ACOUSTICS 45 kg/m³ Infill High-density mineral wool batts dampen reverberation and sound transmission.	TIER 04 • AIRFLOW Negative Pressure Continuous cavity ventilation draws ambient air through living bio-cassettes.
--	--	---	--

5.0 D'WALL Service Wall Specification

PARAMETER	STANDARD SPECIFICATION	PROJECT OPTIONS
Module Dimensions	500 × 500 mm precision cassette (30 mm profile)	Custom dimensions up to 1200×600 mm
Mounting Sub-frame	Concealed extruded aluminum rail with zinc locking node	Marine-grade SS316 coastal bracketry
Standoff Range	50 mm to 220 mm adjustable depth from substrate	Custom offsets up to 350 mm for deep MEP
Raceway Capacity	Dual-rail power/data segregation with EMI barrier	Triple-chamber optical & medical gas trunking
Face Typologies	Solid matte, fluted ribbed, slotted acoustic, perforated	Natural wood veneer / Anodised architectural metal
Healthcare Variant	Seamless antimicrobial wipeable finish (ISO Class 5)	Hermetically gasketed shadow lines
Hardware Integration	Flush switch plates, Cat6A RJ45, USB-C PD, HDMI AV	Factory CNC precision openings
Cycle Durability	Rated >500 toolless demount cycles without mechanical play	Lifetime structural platform warranty
Fire Classification	Class 1 / Class A flame spread rated (ASTM E84 / EN 13501)	BS 476 Part 6 & 7 Compliant

Primary Commercial Service Wall

Designed for high-frequency infrastructure reconfiguration in corporate HQs, tech campuses, broadcast control rooms, and server corridors.

High-Hygiene Healthcare Wall

Non-porous solid antimicrobial face with sealed shadow-gap gaskets for operating suites, diagnostic labs, and sterile pharmaceutical environments.

SPECIFICATION SUPPORT & CONSULTATION

MACR MAYR India Pvt Ltd · Mumbai, Maharashtra · contact@macrmayr.com

BIM / DWG Ready