Sprawozdanie
MibBrowser x.2020
SSiZ
prowadzący: Remigiusz Rajewski

8)
Obiekty z TEXTUAL CONVENTIONS nie posiadają OID i opisu, np.: OwnerString, InterfaceIndex, InterfaceIndexOrZero.

9)
Polecenie SNMPWALK pobiera wartości obiektu, a GETBULK SNMP pobiera wartości kilku obiektów.

Wynik SNMPWALK:

Sent GET request to localhost : 161

ifDescr.1	Software Loopback Interface 1
ifDescr.2	Realtek PCIe GBE Family Controller
ifDescr.3	TP-Link Wireless USB Adapter
ifDescr.4	Microsoft 6to4 Adapter
ifDescr.5	Microsoft IP-HTTPS Platform Adapter
ifDescr.6	WAN Miniport (IKEv2)
ifDescr.7	WAN Miniport (SSTP)
ifDescr.8	WAN Miniport (IPv6)
ifDescr.9	WAN Miniport (Network Monitor)
ifDescr.10	WAN Miniport (PPPOE)
ifDescr.11	WAN Miniport (L2TP)
ifDescr.12	Microsoft Teredo Tunneling Adapter
ifDescr.13	WAN Miniport (PPTP)
ifDescr.14	Microsoft Wi-Fi Direct Virtual Adapter
ifDescr.15	Microsoft Wi-Fi Direct Virtual Adapter #2
ifDescr.16	Microsoft Kernel Debug Network Adapter
ifDescr.17	WAN Miniport (IP)
ifDescr.18	Realtek PCIe GBE Family Controller-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.19	Realtek PCIe GBE Family Controller-QoS Packet Scheduler-0000
ifDescr.20	Realtek PCIe GBE Family Controller-WFP 802.3 MAC Layer LightWeight Filter-0000
ifDescr.21	TP-Link Wireless USB Adapter-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.22	TP-Link Wireless USB Adapter-Virtual WiFi Filter Driver-0000
ifDescr.23	TP-Link Wireless USB Adapter-Native WiFi Filter Driver-0000
ifDescr.24	TP-Link Wireless USB Adapter-QoS Packet Scheduler-0000

ifDescr.24	TP-Link Wireless USB Adapter-QoS Packet Scheduler-0000
ifDescr.25	TP-Link Wireless USB Adapter-WFP 802.3 MAC Layer LightWeight Filter-0000
ifDescr.26	WAN Miniport (IP)-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.27	WAN Miniport (Network Monitor)-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.28	WAN Miniport (Network Monitor)-QoS Packet Scheduler-0000
ifDescr.29	WAN Miniport (IP)-QoS Packet Scheduler-0000
ifDescr.30	Microsoft Wi-Fi Direct Virtual Adapter-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.31	Microsoft Wi-Fi Direct Virtual Adapter-Native WiFi Filter Driver-0000
ifDescr.32	WAN Miniport (IPv6)-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.33	WAN Miniport (IPv6)-QoS Packet Scheduler-0000
ifDescr.34	Microsoft Wi-Fi Direct Virtual Adapter-QoS Packet Scheduler-0000
ifDescr.35	Microsoft Wi-Fi Direct Virtual Adapter-WFP 802.3 MAC Layer LightWeight Filter-0000
ifDescr.36	Microsoft Wi-Fi Direct Virtual Adapter #2-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.37	Microsoft Wi-Fi Direct Virtual Adapter #2-Native WiFi Filter Driver-0000
ifDescr.38	Microsoft Wi-Fi Direct Virtual Adapter #2-QoS Packet Scheduler-0000
ifDescr.39	Microsoft Wi-Fi Direct Virtual Adapter #2-WFP 802.3 MAC Layer LightWeight Filter-0000

Sent GETBULK request to localhost : 161

Wynik GETBULK:

Sent GETBULK request to localhost : 161

ifDescr.1	Software Loopback Interface 1
ifDescr.2	Realtek PCIe GBE Family Controller
ifDescr.3	TP-Link Wireless USB Adapter
ifDescr.4	Microsoft 6to4 Adapter
ifDescr.5	Microsoft IP-HTTPS Platform Adapter
ifDescr.6	WAN Miniport (IKEv2)
ifDescr.7	WAN Miniport (SSTP)
ifDescr.8	WAN Miniport (IPv6)
ifDescr.9	WAN Miniport (Network Monitor)
ifDescr.10	WAN Miniport (PPPOE)
ifDescr.11	WAN Miniport (L2TP)
ifDescr.12	Microsoft Teredo Tunneling Adapter
ifDescr.13	WAN Miniport (PPTP)
ifDescr.14	Microsoft Wi-Fi Direct Virtual Adapter
ifDescr.15	Microsoft Wi-Fi Direct Virtual Adapter #2
ifDescr.16	Microsoft Kernel Debug Network Adapter
ifDescr.17	WAN Miniport (IP)
ifDescr.18	Realtek PCIe GBE Family Controller-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.19	Realtek PCIe GBE Family Controller-QoS Packet Scheduler-0000
ifDescr.20	Realtek PCIe GBE Family Controller-WFP 802.3 MAC Layer LightWeight Filter-0000
ifDescr.21	TP-Link Wireless USB Adapter-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.22	TP-Link Wireless USB Adapter-Virtual WiFi Filter Driver-0000
ifDescr.23	TP-Link Wireless USB Adapter-Native WiFi Filter Driver-0000
ifDescr.24	TP-Link Wireless USB Adapter-QoS Packet Scheduler-0000

ifDescr.24	TP-Link Wireless USB Adapter-QoS Packet Scheduler-0000
ifDescr.25	TP-Link Wireless USB Adapter-WFP 802.3 MAC Layer LightWeight Filter-0000
ifDescr.26	WAN Miniport (IP)-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.27	WAN Miniport (Network Monitor)-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.28	WAN Miniport (Network Monitor)-QoS Packet Scheduler-0000
ifDescr.29	WAN Miniport (IP)-QoS Packet Scheduler-0000

ifDescr.29	WAN Miniport (IP)-QoS Packet Scheduler-0000
ifDescr.30	Microsoft Wi-Fi Direct Virtual Adapter-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.31	Microsoft Wi-Fi Direct Virtual Adapter-Native WiFi Filter Driver-0000
ifDescr.32	WAN Miniport (IPv6)-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.33	WAN Miniport (IPv6)-QoS Packet Scheduler-0000
ifDescr.34	Microsoft Wi-Fi Direct Virtual Adapter-QoS Packet Scheduler-0000
ifDescr.35	Microsoft Wi-Fi Direct Virtual Adapter-WFP 802.3 MAC Layer LightWeight Filter-0000
ifDescr.36	Microsoft Wi-Fi Direct Virtual Adapter #2-WFP Native MAC Layer LightWeight Filter-0000
ifDescr.37	Microsoft Wi-Fi Direct Virtual Adapter #2-Native WiFi Filter Driver-0000
ifDescr.38	Microsoft Wi-Fi Direct Virtual Adapter #2-QoS Packet Scheduler-0000
ifDescr.39	Microsoft Wi-Fi Direct Virtual Adapter #2-WFP 802.3 MAC Layer LightWeight Filter-0000
ifType.1	softwareLoopback(24)
ifType.2	ethernetCsmacd(6)
ifType.3	71
ifType.4	131
ifType.5	131
ifType.6	131
ifType.7	131
ifType.8	ethernetCsmacd(6)
ifType.9	ethernetCsmacd(6)
ifType.10	ppp(23)
ifType.11	131

10)
Zmienna ipDefaultTTL przyjmuje wartość 128

Sent GET request to localhost : 161

ipDefaultTTL.0	128

Jest to domyślna wartość Time-To-Live pola w nagłówku IP.

Aby zmienić wartość należy wpisać 64 w pole SET, kliknąć prawym przyciskiem myszy na ipDefaultTTL i kliknąć SET.

Sent SET request to localhost : 161

ipDefaultTTL.0	64

Wartość zmiennej ipInRecivers oznacza ilość datagramów odebranych z interfejsów, włączając te błędnie odebrane.

11)
127.0.0.1 to adres komputera lokalnego - localhost

12)
Ilość interfejsów to 39


Sent GET request to localhost : 161

ifNumber.0	39

13)
Tabela ifxTable:


W tabeli znajdują się takie dane jak:
- opis (nazwa),
- typ,
- wielkość największego datagramu który może być wysłany lub odebrany na interfejsie,
- przepływność w bitach.

Tabela ma 39 wierszy

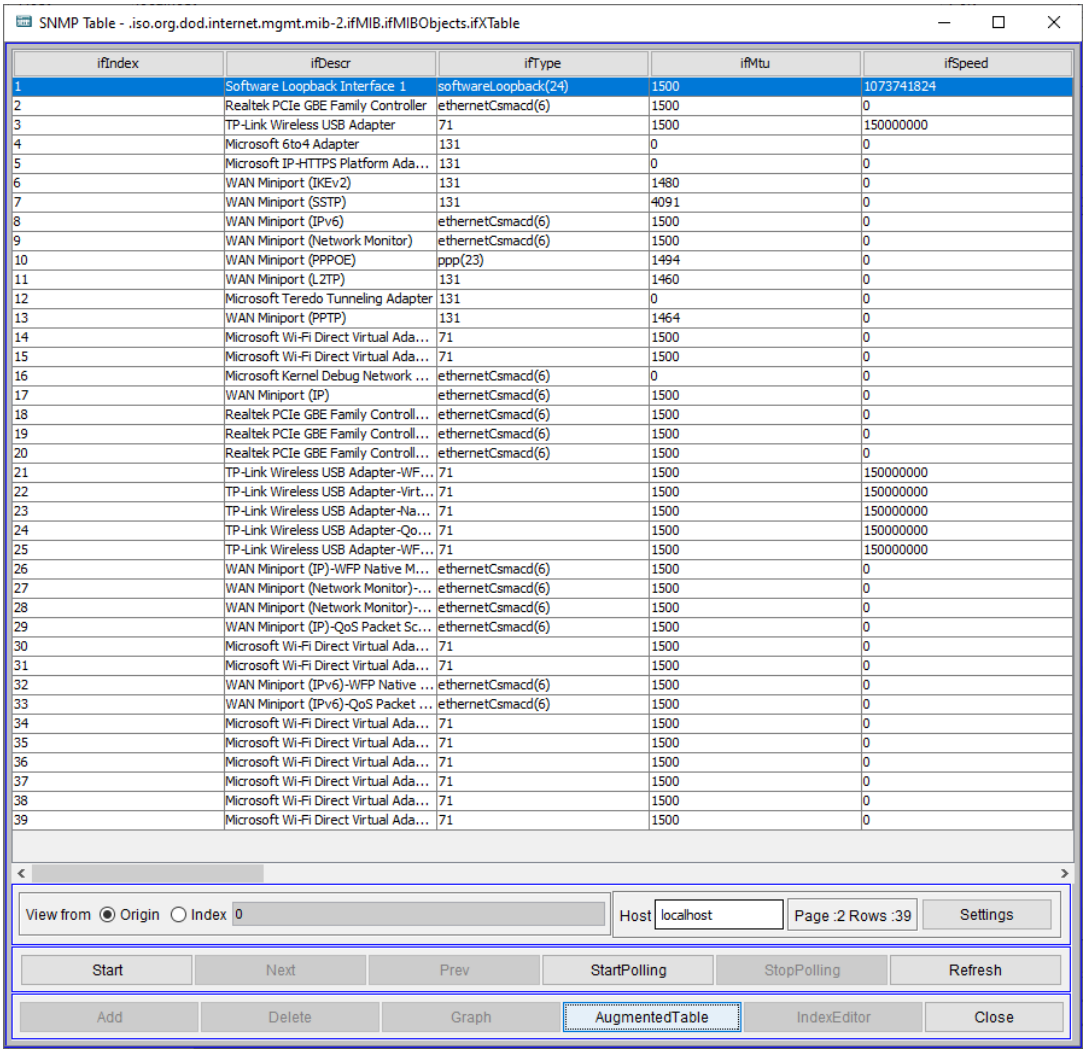

ifIndex	ifDescr	ifType	ifMtu	ifSpeed
1	Software Loopback Interface 1	softwareLoopback(24)	1500	1073741824
2	Realtek PCIe GBE Family Controller	ethernetCsmacd(6)	1500	0
3	TP-Link Wireless USB Adapter	71	1500	150000000
4	Microsoft 6to4 Adapter	131	0	0
5	Microsoft IP-HTTPS Platform Ada…	131	0	0
6	WAN Miniport (IKEv2)	131	1480	0
7	WAN Miniport (SSTP)	131	4091	0
8	WAN Miniport (IPv6)	ethernetCsmacd(6)	1500	0
9	WAN Miniport (Network Monitor)	ethernetCsmacd(6)	1500	0
10	WAN Miniport (PPPOE)	ppp(23)	1494	0
11	WAN Miniport (L2TP)	131	1460	0
12	Microsoft Teredo Tunneling Adapter	131	0	0
13	WAN Miniport (PPTP)	131	1464	0
14	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
15	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
16	Microsoft Kernel Debug Network …	ethernetCsmacd(6)	0	0
17	WAN Miniport (IP)	ethernetCsmacd(6)	1500	0
18	Realtek PCIe GBE Family Controll…	ethernetCsmacd(6)	1500	0
19	Realtek PCIe GBE Family Controll…	ethernetCsmacd(6)	1500	0
20	Realtek PCIe GBE Family Controll…	ethernetCsmacd(6)	1500	0
21	TP-Link Wireless USB Adapter-WF…	71	1500	150000000
22	TP-Link Wireless USB Adapter-Virt…	71	1500	150000000
23	TP-Link Wireless USB Adapter-Na…	71	1500	150000000
24	TP-Link Wireless USB Adapter-Qo…	71	1500	150000000
25	TP-Link Wireless USB Adapter-WF…	71	1500	150000000
26	WAN Miniport (IP)-WFP Native M…	ethernetCsmacd(6)	1500	0
27	WAN Miniport (Network Monitor)-…	ethernetCsmacd(6)	1500	0
28	WAN Miniport (Network Monitor)-…	ethernetCsmacd(6)	1500	0
29	WAN Miniport (IP)-QoS Packet Sc…	ethernetCsmacd(6)	1500	0
30	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
31	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
32	WAN Miniport (IPv6)-WFP Native …	ethernetCsmacd(6)	1500	0
33	WAN Miniport (IPv6)-QoS Packet …	ethernetCsmacd(6)	1500	0
34	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
35	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
36	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
37	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
38	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0
39	Microsoft Wi-Fi Direct Virtual Ada…	71	1500	0

14)
Okno:

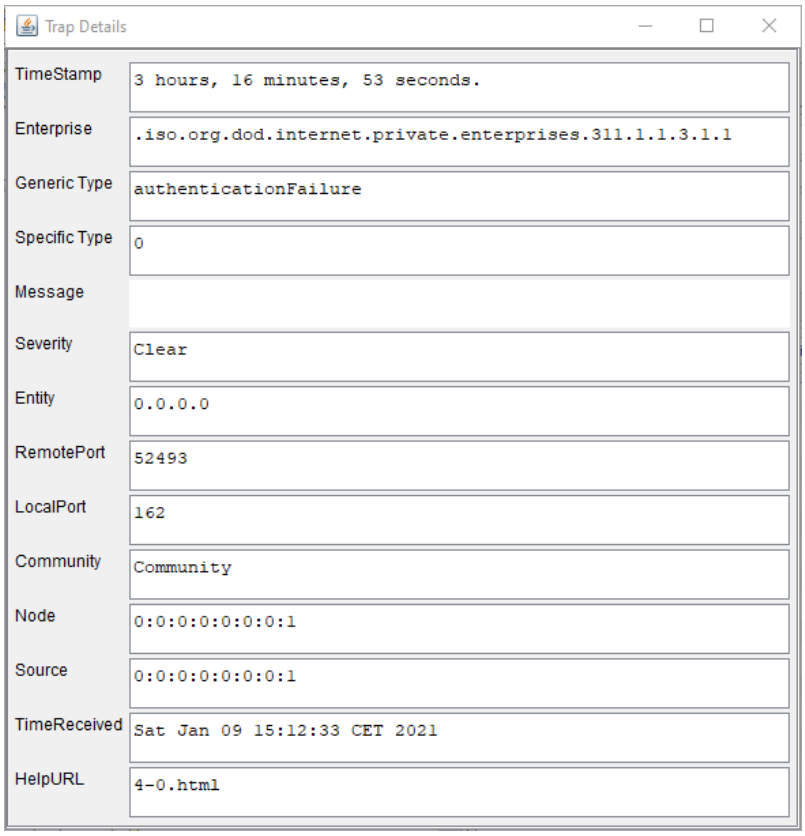

Pojawiła się wiadmość typu authenticationFailure na porcie lokalnym 162 (port zdalny to 52493). Wiadomość Trap została wygenerowana ponieważ pojawiło się zapytanie z nieautoryzowanego źródła.

16)

Sent GET request to snmp.netfpga.pl : 10161


sysDescr.0	Cisco IOS Software, 3800 Software (C3825-ADVENTERPRISEK9-M), Version 12.4(11)XJ4, RELEASE SOFTWARE (fc2) Technical Support: http://www.cisco.com/techsupport Copyright (c) 1986-2007 by Cisco Systems, Inc. Compiled Sat 14-Jul-07 01:12 by prod_rel_team
sysObjectID.0	.iso.org.dod.internet.private.enterprises.9.1.543
sysUpTime.0	12 days, 7 hours, 17 minutes, 52 seconds.
sysContact.0	
sysName.0	C38251.et.put.poznan.pl
sysLocation.0	
sysServices.0	78

Urządzenie to CISCO 3800
sysUpTime = 12 days 7 hours 17 minutes 52 seconds
sysName = C38251.et.put.poznan.pl
sysServices = 78

17)

Tabela zawiera informacje o możliwościach lokalnej aplikacji SNMP


Tabela sysORTable:

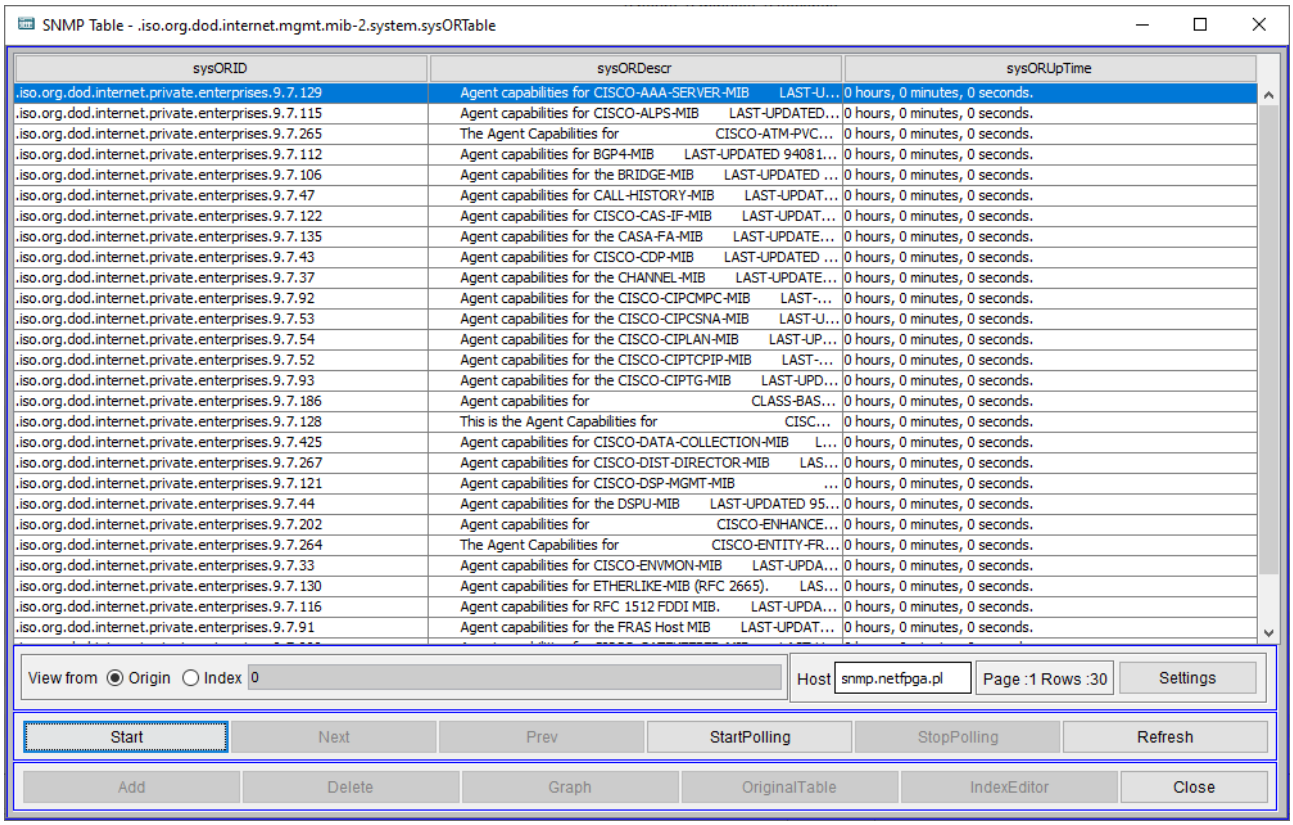

18)
Grupy w bazie CISCO_MIB: products, local, temporary

19)
Urządzenie ma 67 interfejsów.
Typy interfejsów to głownie ethernetCsmacd oraz 135
Dane o interfejsach:
- opis (nazwa)
- typ
- wielkość największego datagramu który może być wysłany lub odebrany na interfejsie,
- przepływność w bitach
Tabela:

ifIndex	ifDescr	ifType	ifMtu	ifSpeed
1	ATM1/0	sonet(39)	4470	149760000
2	GigabitEthernet2/0	ethernetCsmacd(6)	1500	1000000000
3	GigabitEthernet0/0	ethernetCsmacd(6)	1500	1000000000
4	GigabitEthernet0/1	ethernetCsmacd(6)	1500	1000000000
5	FastEthernet0/1/0	ethernetCsmacd(6)	1500	100000000
6	FastEthernet0/1/1	ethernetCsmacd(6)	1500	100000000
7	FastEthernet0/1/2	ethernetCsmacd(6)	1500	100000000
8	FastEthernet0/1/3	ethernetCsmacd(6)	1500	100000000
9	FastEthernet0/1/4	ethernetCsmacd(6)	1500	100000000
10	FastEthernet0/1/5	ethernetCsmacd(6)	1500	100000000
11	FastEthernet0/1/6	ethernetCsmacd(6)	1500	100000000
12	FastEthernet0/1/7	ethernetCsmacd(6)	1500	100000000
13	FastEthernet0/1/8	ethernetCsmacd(6)	1500	10000000
14	GigabitEthernet0/2/0	ethernetCsmacd(6)	1500	1000000000
15	FastEthernet0/3/0	ethernetCsmacd(6)	1500	100000000
16	FastEthernet0/3/1	ethernetCsmacd(6)	1500	100000000
18	Null0	other(1)	1500	4294967295

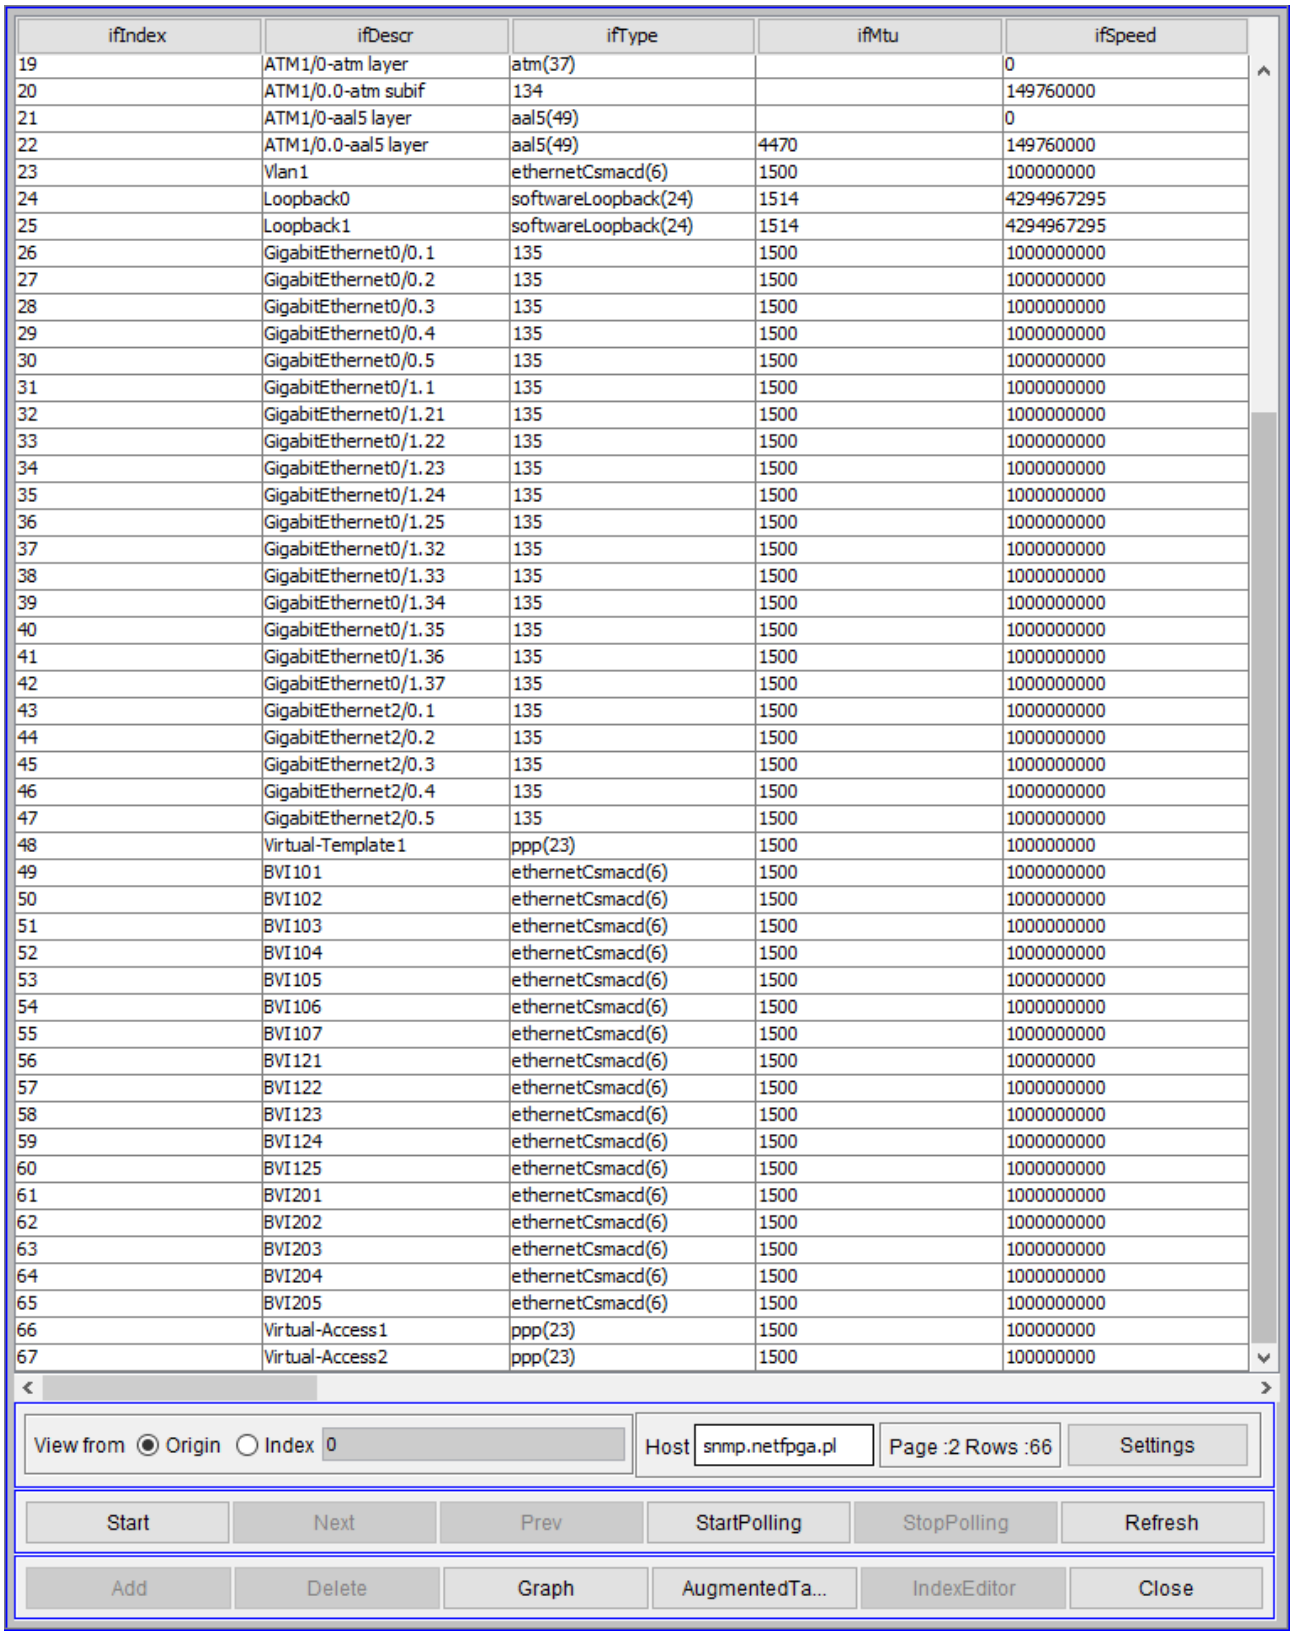

ifIndex	ifDescr	ifType	ifMtu	ifSpeed
19	ATM1/0-atm layer	atm(37)		0
20	ATM1/0.0-atm subif	134		149760000
21	ATM1/0-aal5 layer	aal5(49)		0
22	ATM1/0.0-aal5 layer	aal5(49)	4470	149760000
23	Vlan1	ethernetCsmacd(6)	1500	100000000
24	Loopback0	softwareLoopback(24)	1514	4294967295
25	Loopback1	softwareLoopback(24)	1514	4294967295
26	GigabitEthernet0/0.1	135	1500	1000000000
27	GigabitEthernet0/0.2	135	1500	1000000000
28	GigabitEthernet0/0.3	135	1500	1000000000
29	GigabitEthernet0/0.4	135	1500	1000000000
30	GigabitEthernet0/0.5	135	1500	1000000000
31	GigabitEthernet0/1.1	135	1500	1000000000
32	GigabitEthernet0/1.21	135	1500	1000000000
33	GigabitEthernet0/1.22	135	1500	1000000000
34	GigabitEthernet0/1.23	135	1500	1000000000
35	GigabitEthernet0/1.24	135	1500	1000000000
36	GigabitEthernet0/1.25	135	1500	1000000000
37	GigabitEthernet0/1.32	135	1500	1000000000
38	GigabitEthernet0/1.33	135	1500	1000000000
39	GigabitEthernet0/1.34	135	1500	1000000000
40	GigabitEthernet0/1.35	135	1500	1000000000
41	GigabitEthernet0/1.36	135	1500	1000000000
42	GigabitEthernet0/1.37	135	1500	1000000000
43	GigabitEthernet2/0.1	135	1500	1000000000
44	GigabitEthernet2/0.2	135	1500	1000000000
45	GigabitEthernet2/0.3	135	1500	1000000000
46	GigabitEthernet2/0.4	135	1500	1000000000
47	GigabitEthernet2/0.5	135	1500	1000000000
48	Virtual-Template1	ppp(23)	1500	100000000
49	BVI101	ethernetCsmacd(6)	1500	1000000000
50	BVI102	ethernetCsmacd(6)	1500	1000000000
51	BVI103	ethernetCsmacd(6)	1500	1000000000
52	BVI104	ethernetCsmacd(6)	1500	1000000000
53	BVI105	ethernetCsmacd(6)	1500	1000000000
54	BVI106	ethernetCsmacd(6)	1500	1000000000
55	BVI107	ethernetCsmacd(6)	1500	1000000000
56	BVI121	ethernetCsmacd(6)	1500	100000000
57	BVI122	ethernetCsmacd(6)	1500	1000000000
58	BVI123	ethernetCsmacd(6)	1500	1000000000
59	BVI124	ethernetCsmacd(6)	1500	1000000000
60	BVI125	ethernetCsmacd(6)	1500	1000000000
61	BVI201	ethernetCsmacd(6)	1500	1000000000
62	BVI202	ethernetCsmacd(6)	1500	1000000000
63	BVI203	ethernetCsmacd(6)	1500	1000000000
64	BVI204	ethernetCsmacd(6)	1500	1000000000
65	BVI205	ethernetCsmacd(6)	1500	1000000000
66	Virtual-Access1	ppp(23)	1500	100000000
67	Virtual-Access2	ppp(23)	1500	100000000

20)
Tabela ma 18 wpisów i 5 kolumn
Tabela lipAddrTable:

SNMP Table - .iso.org.dod.internet.private.enterprises.cisco.local.lip.lipAddrTable

ipAdEntAddr	ipAdEntIfIndex	ipAdEntNetMask	ipAdEntBcastAddr	ipAdEntReasmMa...
10.11.16.19	57	255.255.255.240	1	18024
10.11.16.28	57	255.255.255.240	1	18024
77.65.54.124	59	255.255.255.248	1	18024
100.101.144.254	51	255.255.255.0	1	18024
150.254.11.134	50	255.255.255.248	1	18024
150.254.11.142	63	255.255.255.248	1	18024
150.254.11.150	51	255.255.255.248	1	18024
150.254.11.157	56	255.255.255.248	1	18024
150.254.11.166	64	255.255.255.248	1	18024
150.254.11.174	52	255.255.255.248	1	18024
150.254.11.190	65	255.255.255.240	1	18024
150.254.11.254	53	255.255.255.224	1	18024
150.254.223.102	54	255.255.255.248	1	18024
150.254.223.110	55	255.255.255.248	1	18024
198.18.11.1	14	255.255.255.252	1	18024
198.18.11.9	61	255.255.255.248	1	18024
198.18.11.201	24	255.255.255.255	1	18024
198.18.29.94	25	255.255.255.224	1	18024

21)
Tabela ma 92 wiersze i 5 kolumn
Tabela liproutingTable:

SNMP Table - .iso.org.dod.internet.private.enterprises.cisco.local.lip.lipRoutingTable

ipRouteDest	ipRouteIfIndex	ipRouteMetric1	ipRouteMetric2	ipRouteMetric3
0.0.0.0	0	0	-1	-1
10.11.16.16	57	0	-1	-1
10.11.16.18	14	1	-1	-1
10.11.16.20	14	1	-1	-1
77.65.54.120	59	0	-1	-1
100.64.0.0	14	1	-1	-1
100.101.144.0	51	0	-1	-1
100.103.64.0	14	1	-1	-1
100.103.120.0	14	1	-1	-1
100.103.128.0	14	1	-1	-1
100.103.144.0	14	1	-1	-1
150.254.2.0	14	1	-1	-1
150.254.2.16	14	1	-1	-1
150.254.2.32	14	1	-1	-1
150.254.2.64	14	1	-1	-1
150.254.2.96	14	1	-1	-1
150.254.2.128	14	1	-1	-1
150.254.11.0	14	1	-1	-1
150.254.11.64	14	1	-1	-1
150.254.11.128	50	0	-1	-1
150.254.11.136	63	0	-1	-1
150.254.11.144	51	0	-1	-1
150.254.11.152	56	0	-1	-1
150.254.11.160	64	0	-1	-1

150.254.11.168	52	0	-1	-1
150.254.11.176	65	0	-1	-1
150.254.11.192	14	1	-1	-1
150.254.11.224	53	0	-1	-1
150.254.29.0	14	1	-1	-1
150.254.29.32	14	20	-1	-1
150.254.29.64	14	1	-1	-1
150.254.29.120	14	1	-1	-1
150.254.29.128	14	1	-1	-1
150.254.29.144	14	20	-1	-1
150.254.29.160	14	1	-1	-1
150.254.29.192	14	1	-1	-1
150.254.162.200	14	20	-1	-1
150.254.223.0	14	3	-1	-1
150.254.223.8	14	1	-1	-1
150.254.223.16	14	1	-1	-1
150.254.223.32	14	1	-1	-1
150.254.223.48	14	1	-1	-1
150.254.223.64	14	1	-1	-1
150.254.223.96	54	0	-1	-1
150.254.223.104	55	0	-1	-1
150.254.223.112	14	1	-1	-1
172.16.0.0	14	1	-1	-1
192.168.0.0	14	1	-1	-1
192.168.24.248	14	20	-1	-1
192.168.24.251	14	20	-1	-1
192.168.255.248	14	20	-1	-1
198.18.0.0	14	1	-1	-1
198.18.2.0	14	3	-1	-1
198.18.2.4	14	65	-1	-1
198.18.2.8	14	52	-1	-1
198.18.2.10	14	1	-1	-1
198.18.2.12	14	1	-1	-1
198.18.2.16	14	1787	-1	-1
198.18.2.18	14	20	-1	-1
198.18.2.64	14	8	-1	-1
198.18.2.96	14	2	-1	-1
198.18.11.0	14	0	-1	-1
198.18.11.8	61	0	-1	-1
198.18.11.128	14	3	-1	-1
198.18.11.200	61	20	-1	-1
198.18.11.201	24	0	-1	-1
198.18.11.202	14	3	-1	-1
198.18.11.203	14	3	-1	-1
198.18.11.204	14	20	-1	-1
198.18.11.205	14	20	-1	-1
198.18.11.206	14	9	-1	-1
198.18.11.207	14	20	-1	-1
198.18.11.208	14	4	-1	-1
198.18.29.0	14	20	-1	-1
198.18.29.32	14	20	-1	-1
198.18.29.47	14	20	-1	-1
198.18.29.64	25	0	-1	-1
198.18.29.128	14	1	-1	-1
198.19.2.16	14	1	-1	-1
198.19.2.32	14	1	-1	-1
198.19.2.64	14	1	-1	-1
198.19.2.96	14	1	-1	-1
198.19.11.64	14	1	-1	-1
198.19.11.192	14	1	-1	-1
198.19.29.128	14	1	-1	-1
198.19.29.144	14	20	-1	-1
198.19.29.160	14	1	-1	-1
198.19.29.192	14	1	-1	-1
198.19.223.16	14	1	-1	-1
198.19.223.48	14	1	-1	-1
198.19.223.112	14	1	-1	-1
198.19.255.252	14	1	-1	-1

22)

1.
Nazwa: ciscoContactInfo.0
Wartość: cisco Systems, Inc. 170 West Tasman Dr. San Jose, CA 951 34-1706 U.S.A. Ph +1-408-526-4000 Customer service 1-800- 553-6387 or +1-408-526-7208 24HR Emergency 1-800-553-2447 or +1-408-526-7209 Email Address tac@cisco.com World Wid e Web http://www.cisco.com
Znaczenie: Zawiera informacje kontaktowe i adresy firmy CISCO

2.
Nazwa: romId.0
Wartość: System Bootstrap, Version 12.4(13r)T10, RELEASE SOFTWAR E (fc1) Technical Support: http://www.cisco.com/techsupp ort Copyright (c) 2008 by cisco Systems, Inc.
Znaczenie: Zawiera informacje o wersji oprogramowania.

3.
Nazwa: whyReload.0
Wartość: power-on
Znaczenie: Zawiera informację z jakiego powodu system był restartowany ostatnio.

4.
Nazwa: freeMem.0
Wartość: 67122876
Znaczenie: Zawiera informację o ilości wolnej pamięci w bitach.

5.
Nazwa: hostName.0
Wartość: C38251
Znaczenie: Zawiera informację o nazwie hosta.