




2. Star Topology using Hub

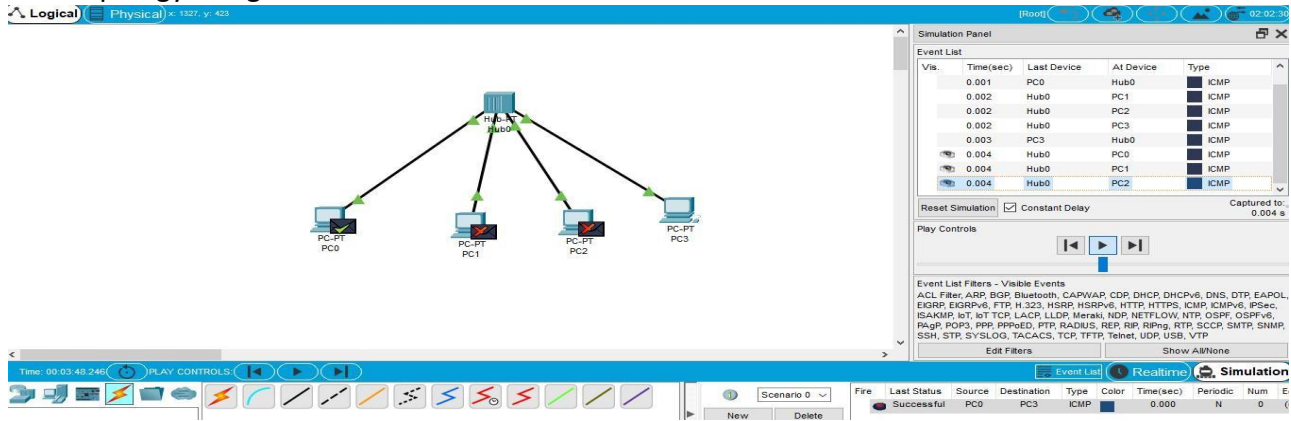


Star Topology using Switch

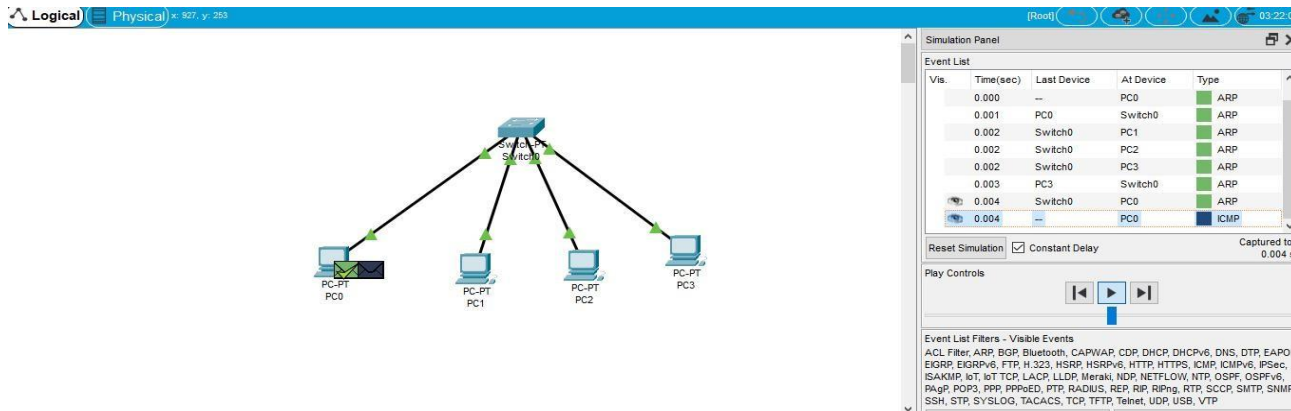


Mesh Topology using Hub

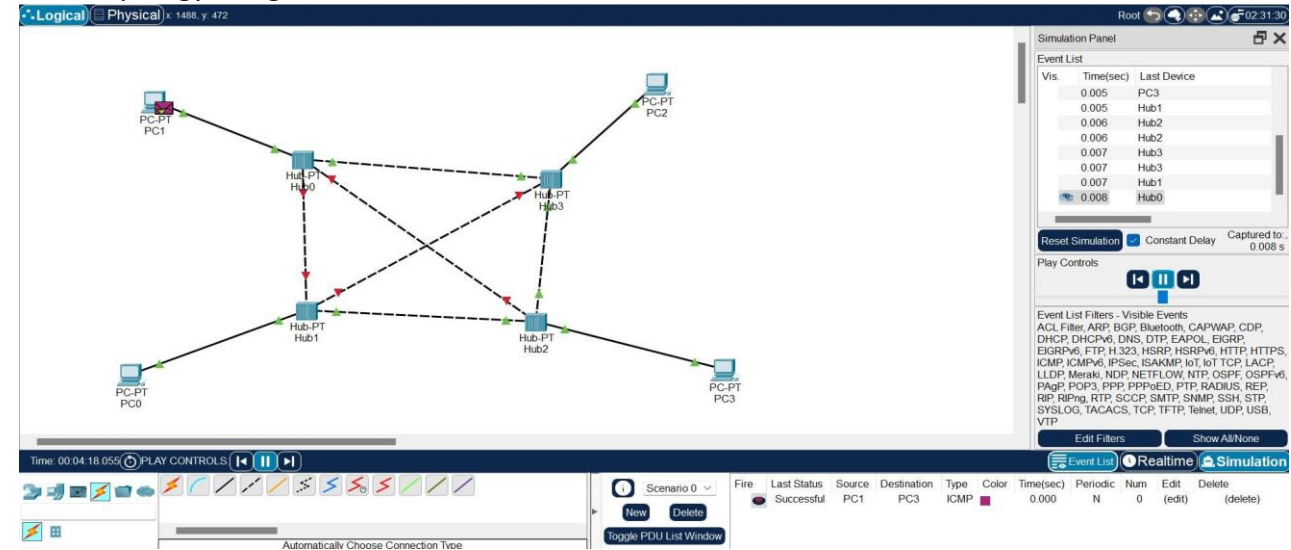


Mesh Topology using Switch

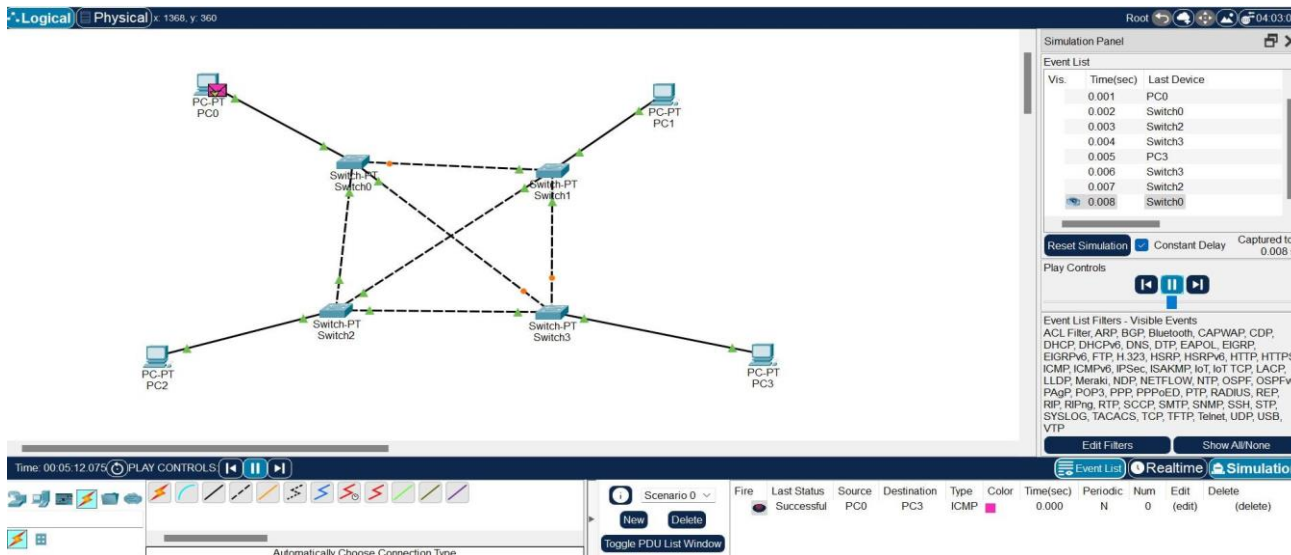


Tree Topology using Hub

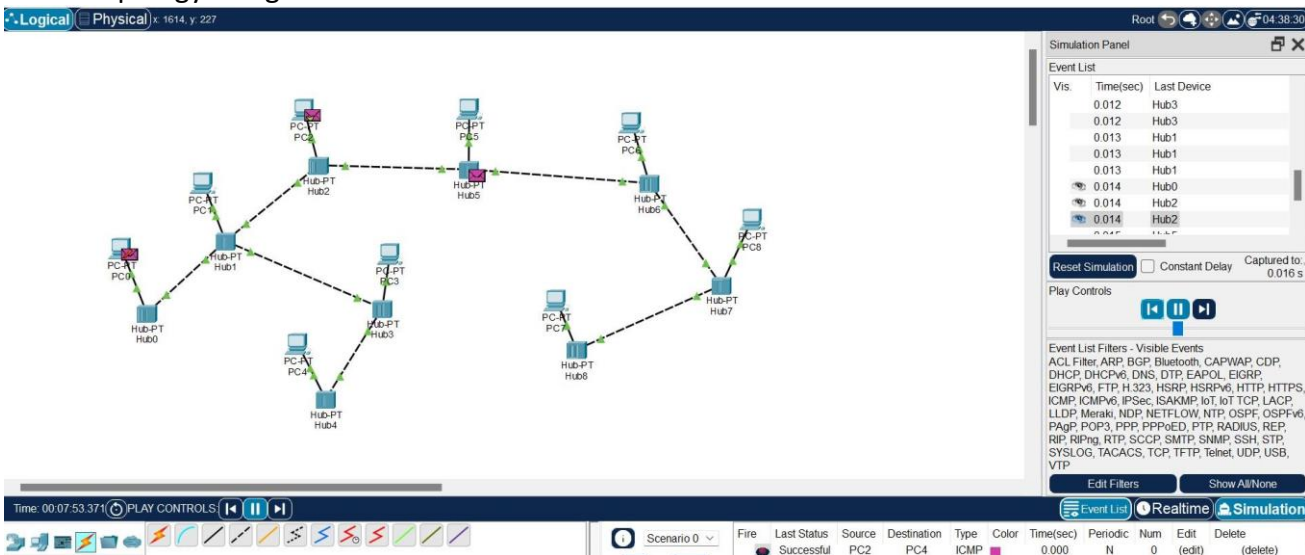


Tree Topology using Switch

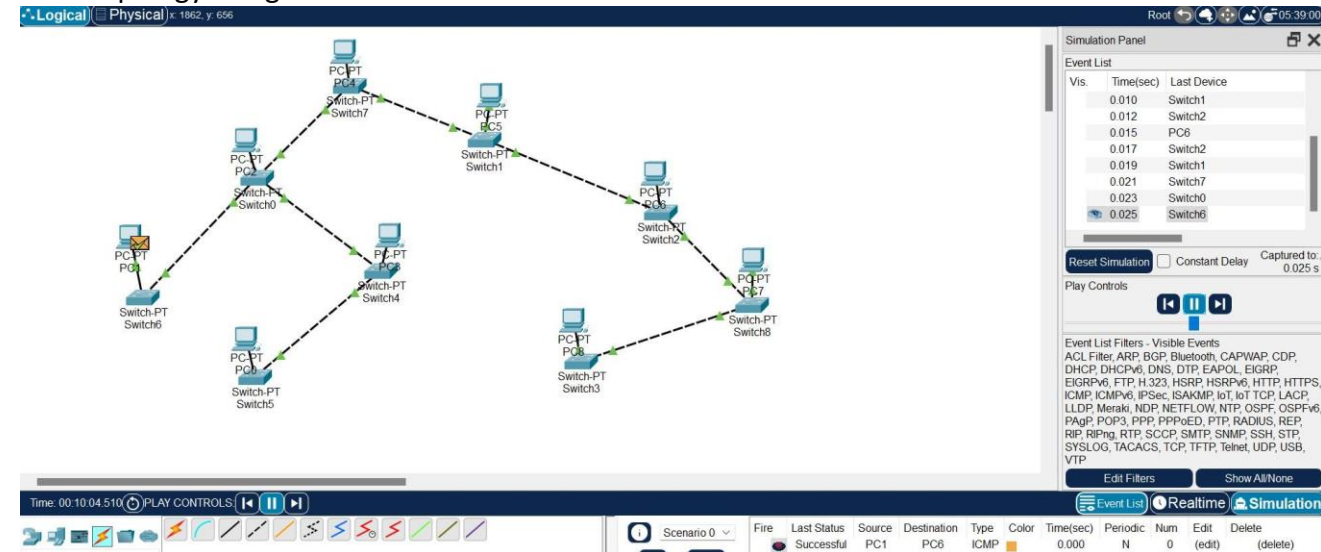


Bus Topology using Hub

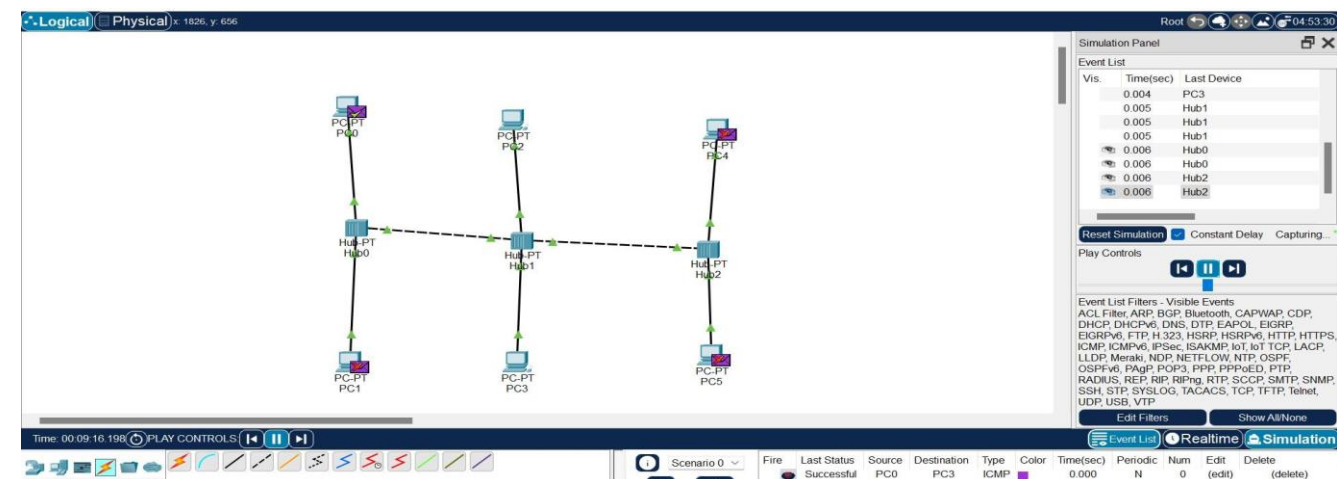


Bus Topology Using Switch

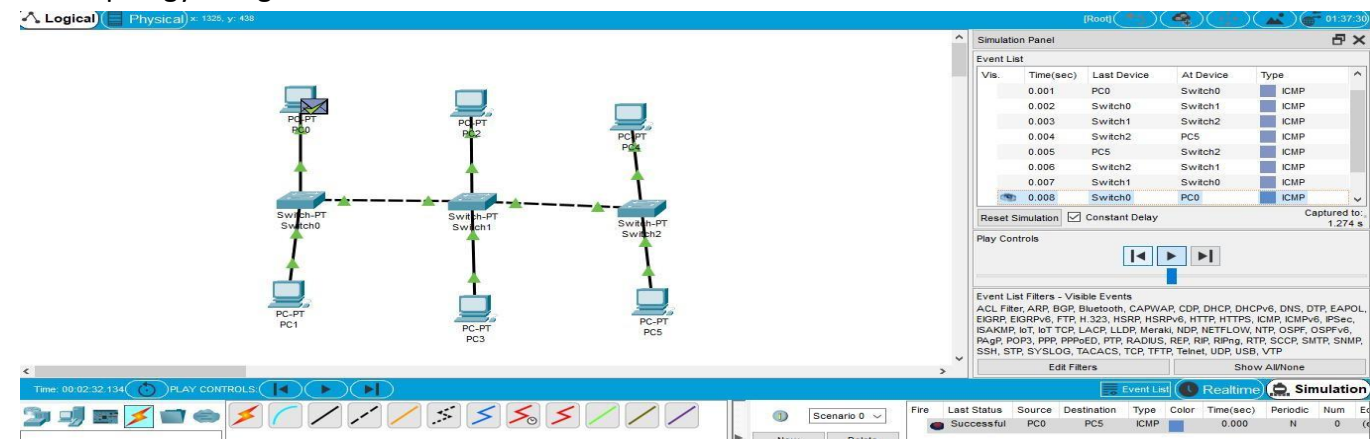


Ring Topology using Hub

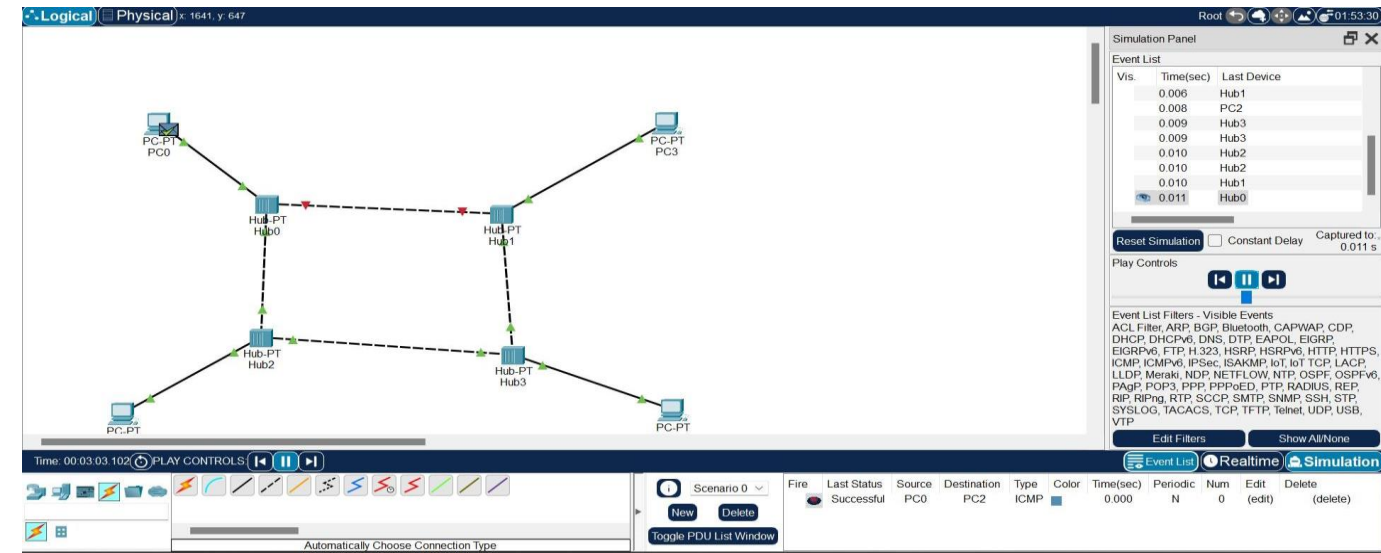


Ring Topology using Switch

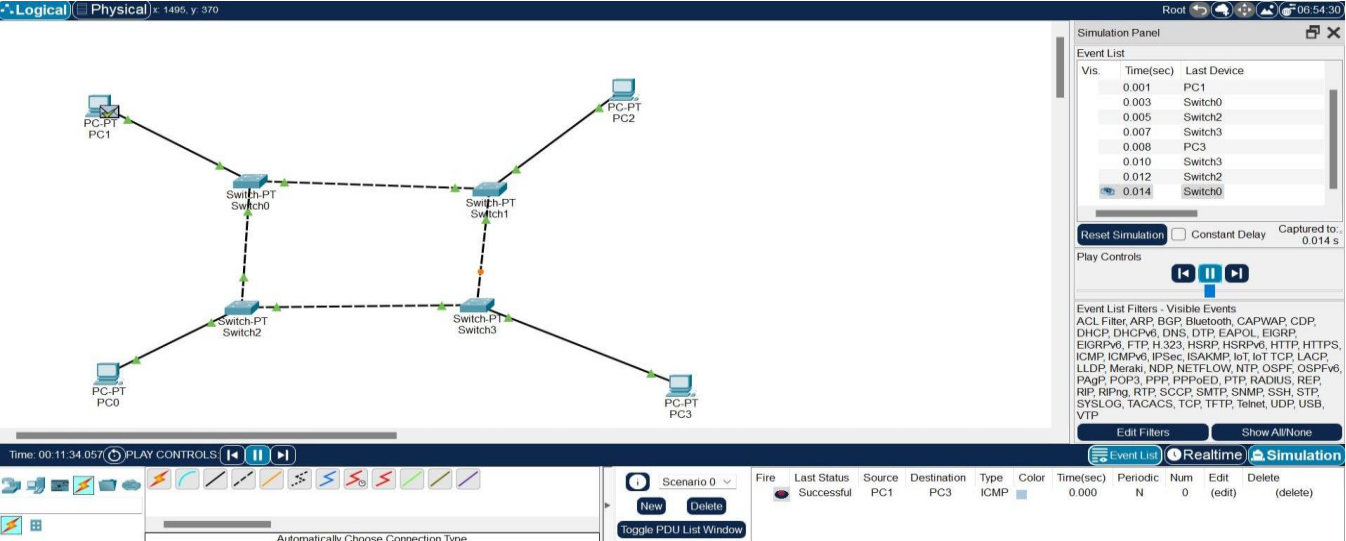


Hybrid Topology using Hub

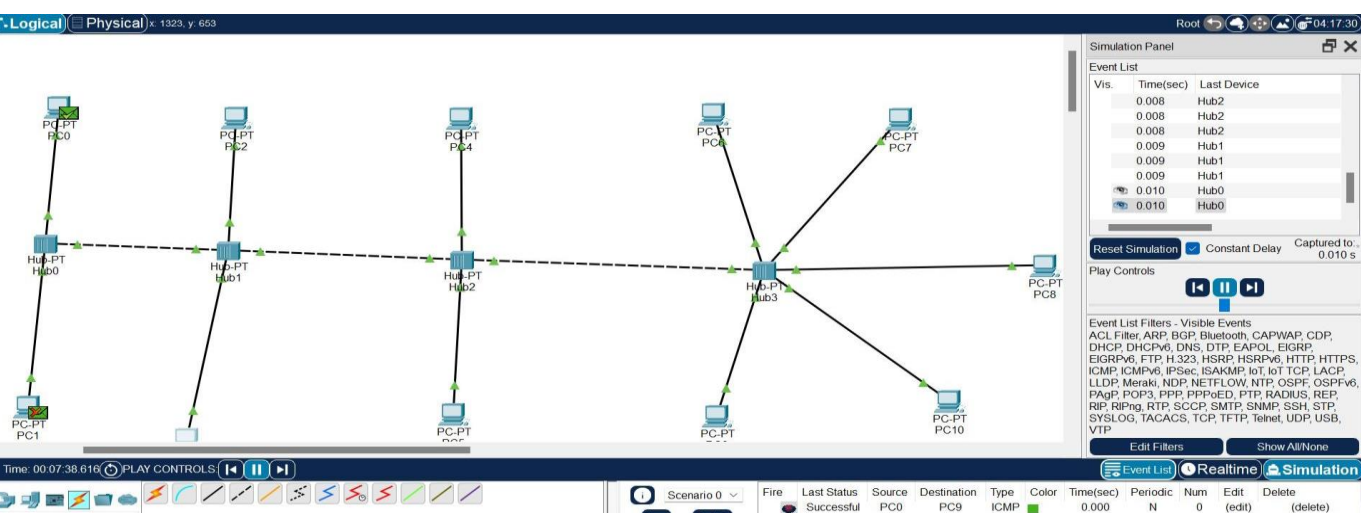


Hybrid Topology Using Switch

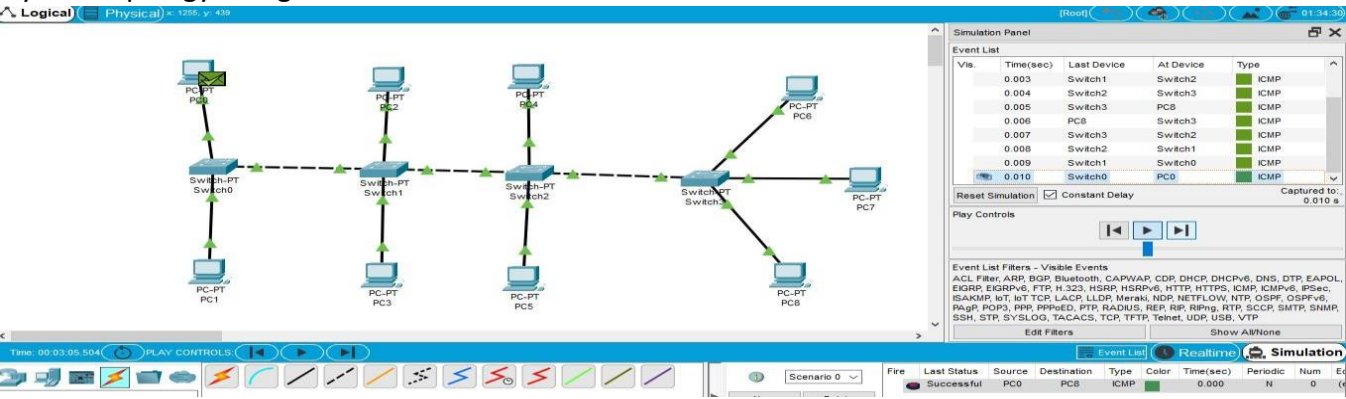


3. CSMA/CD & CSMA/CA

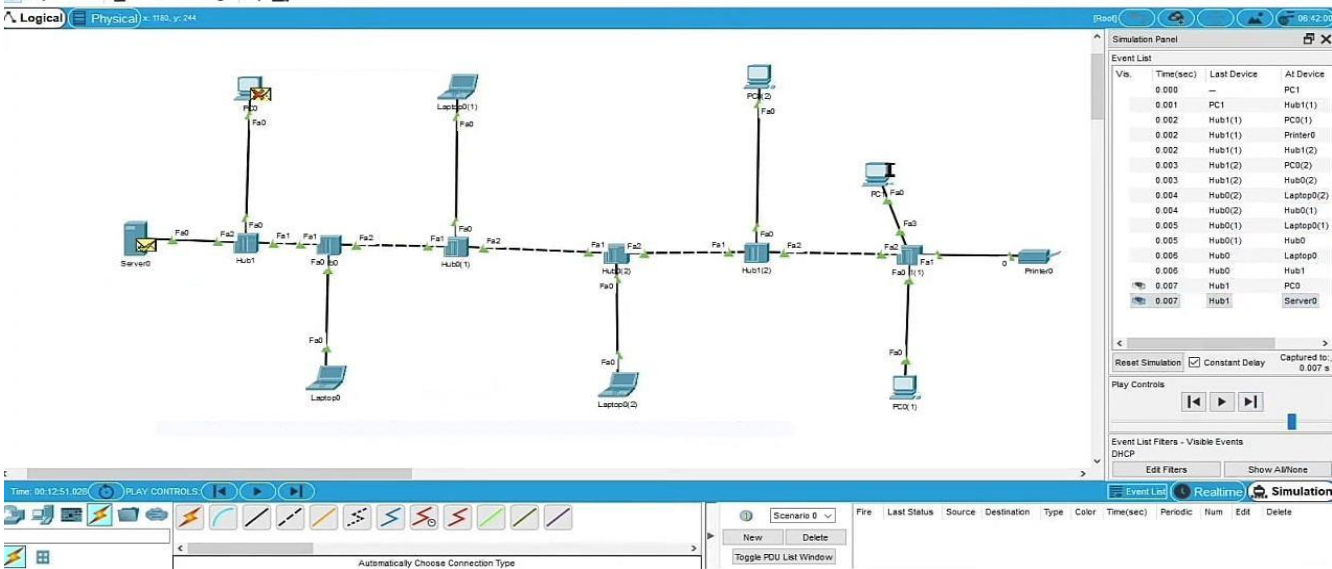


4 ARP

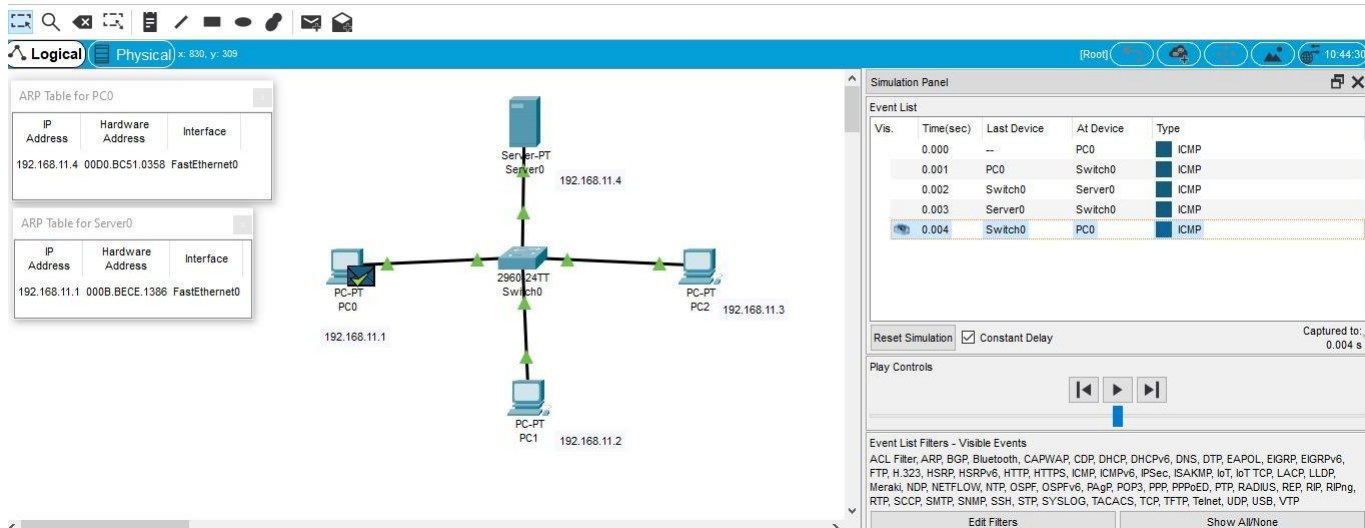


5 LLDP

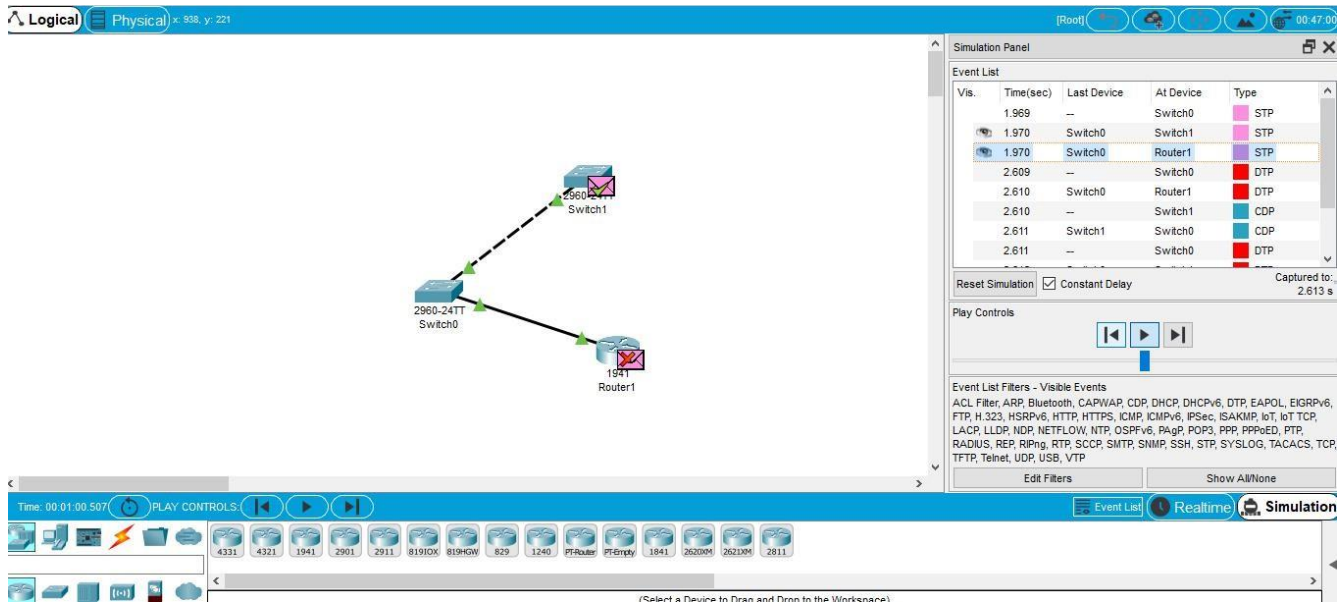


6. Static Routing

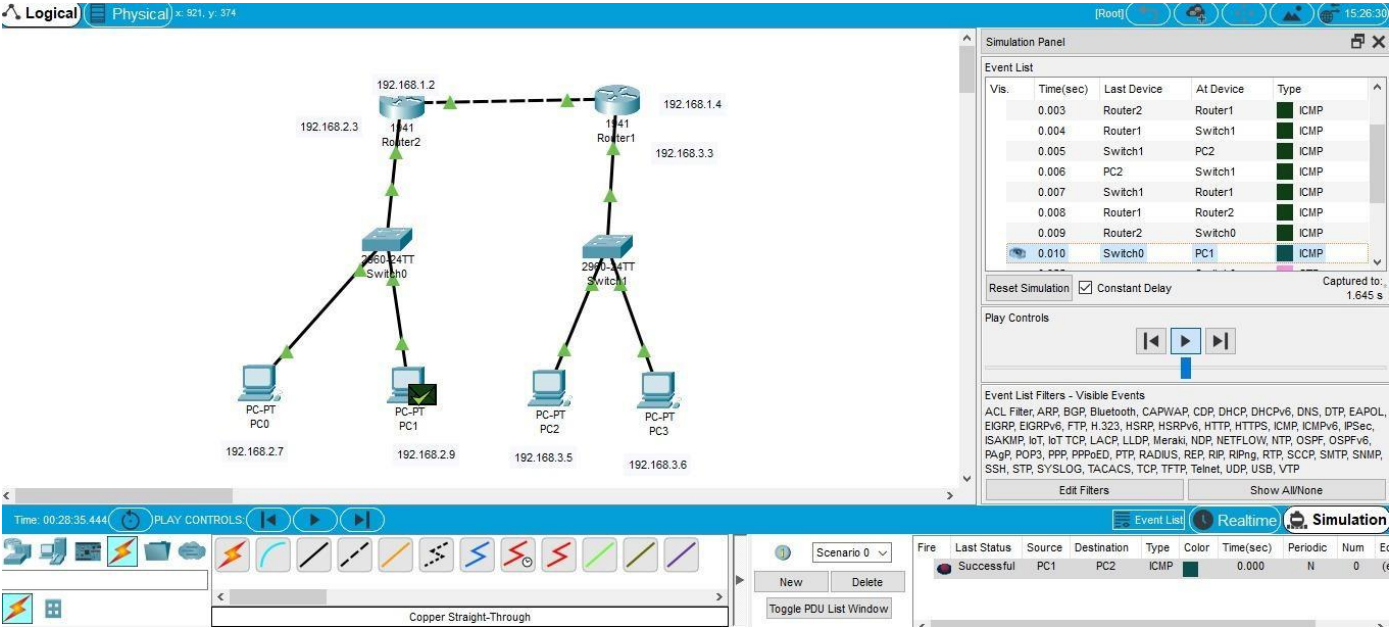

7. Dynamic routing (Distance Vector & OSPF)

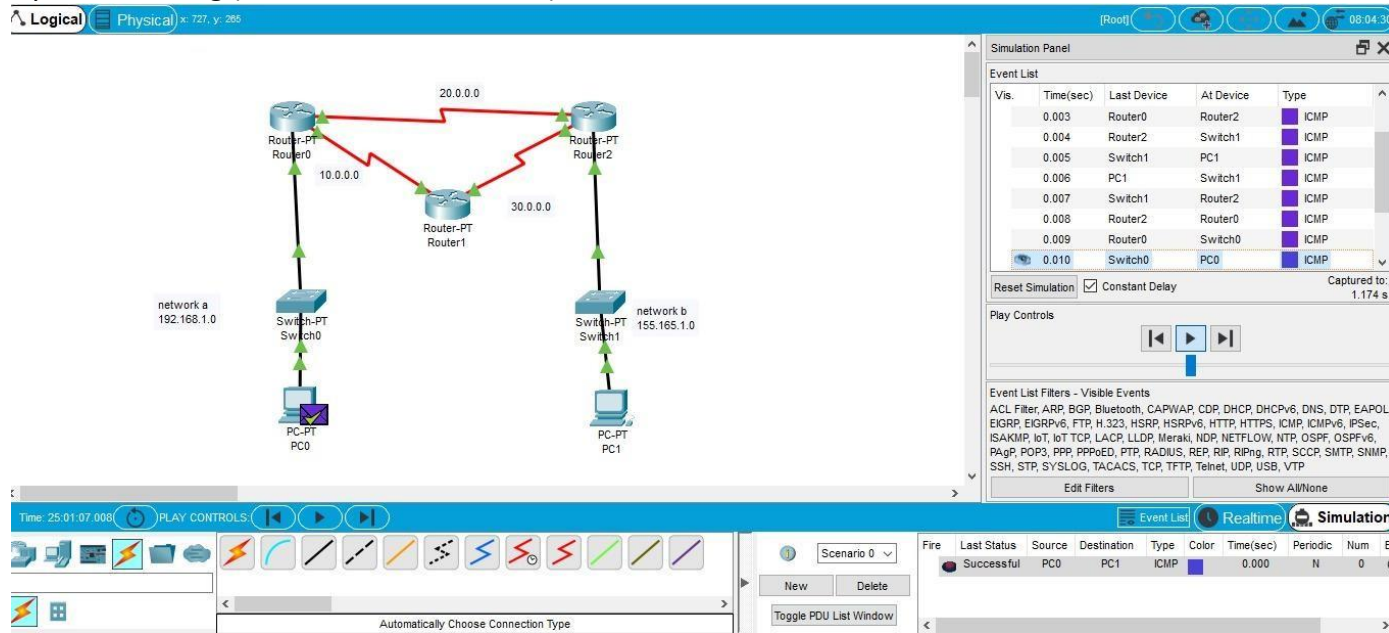


8. Subnetting - Class C

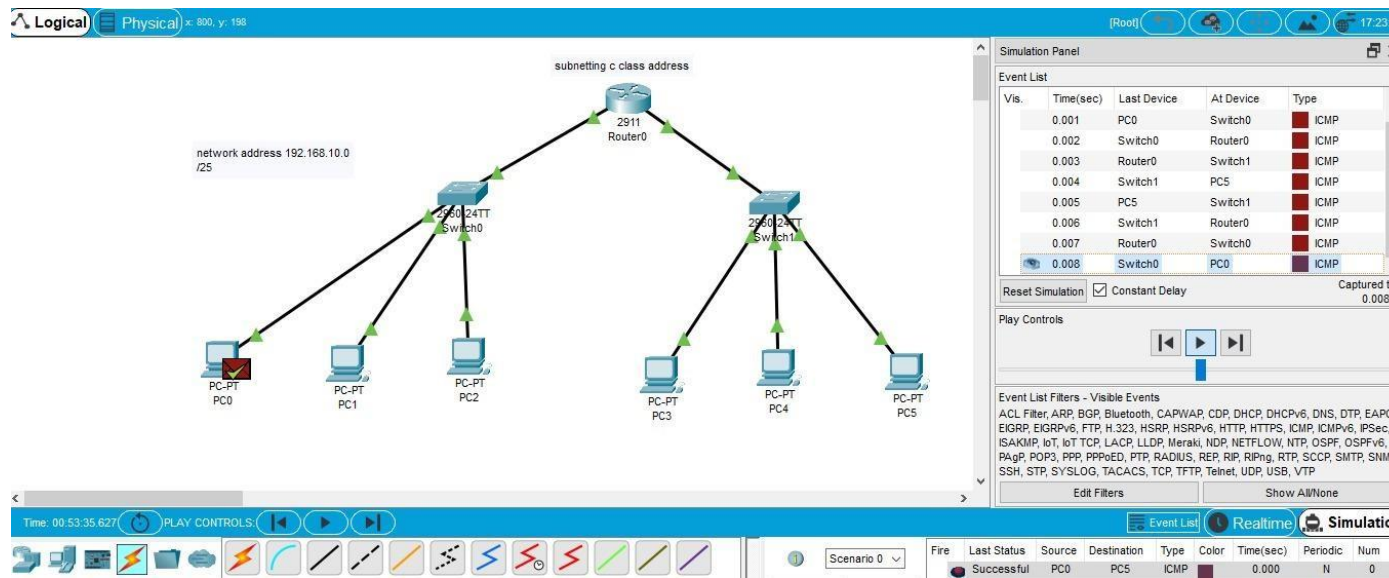



9

Functionalities Of TCP,UDP

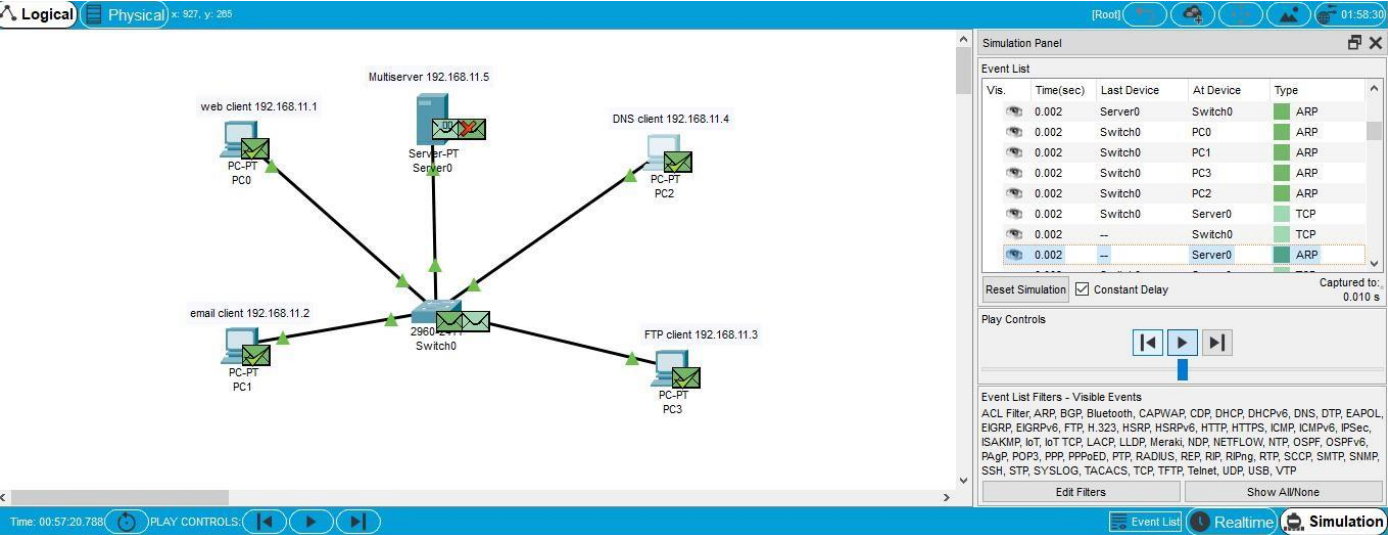


10


Exploration of TCP, UDP

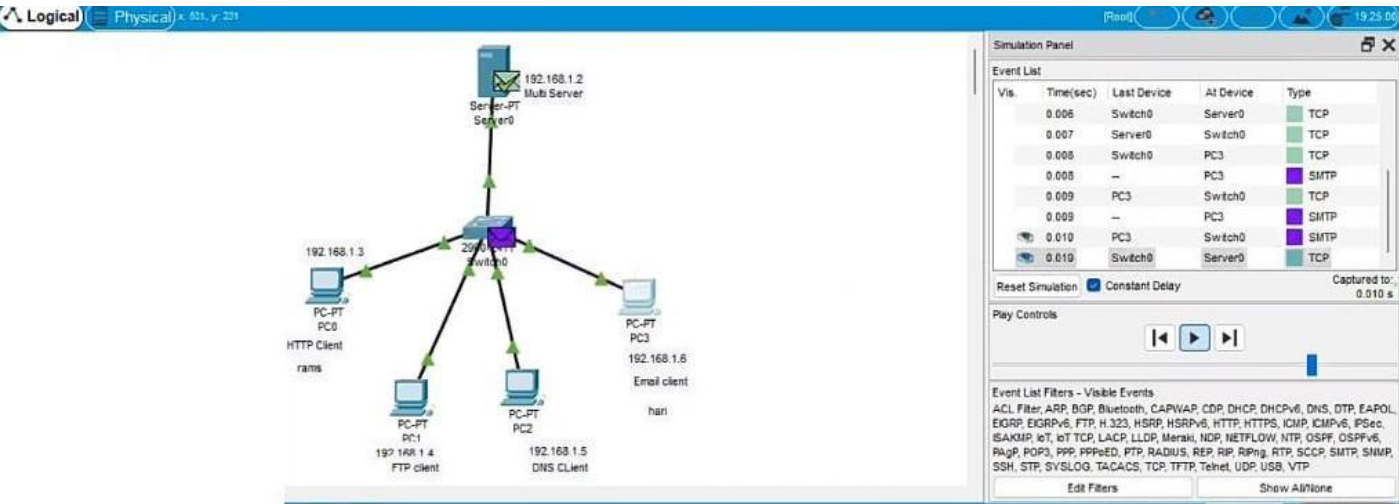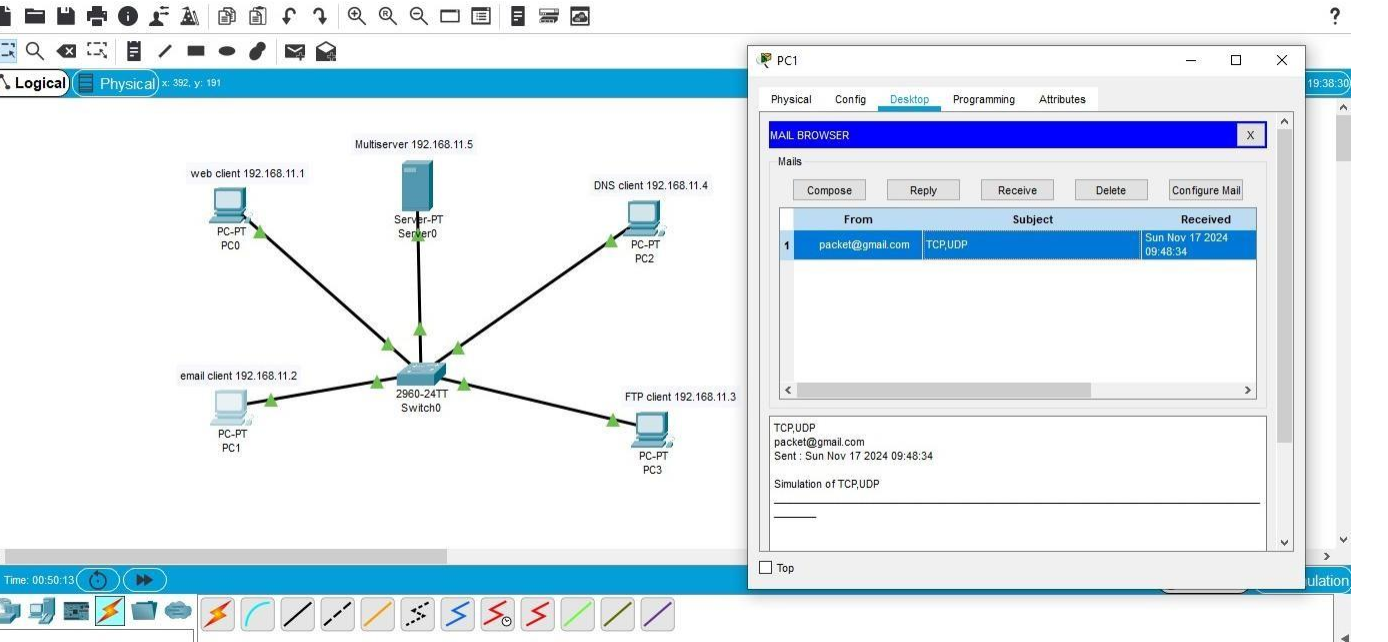


11
IoT Based Smart Home

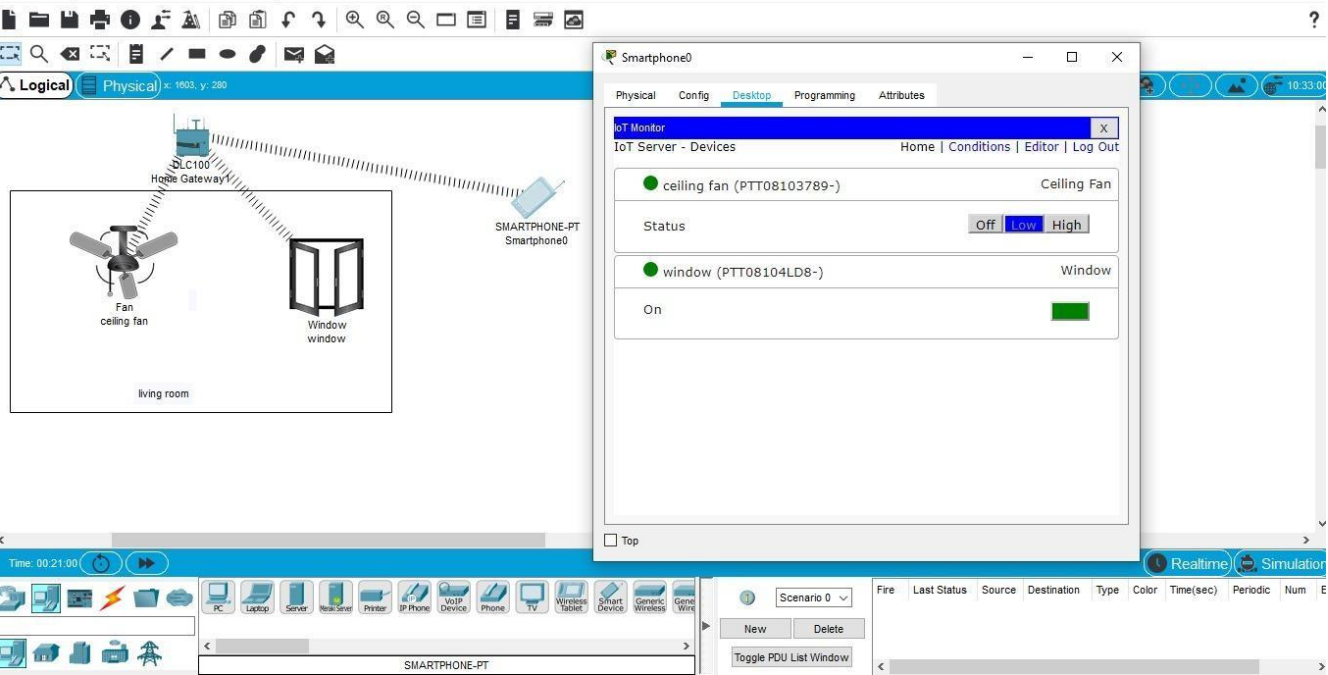

12
Smart Garden

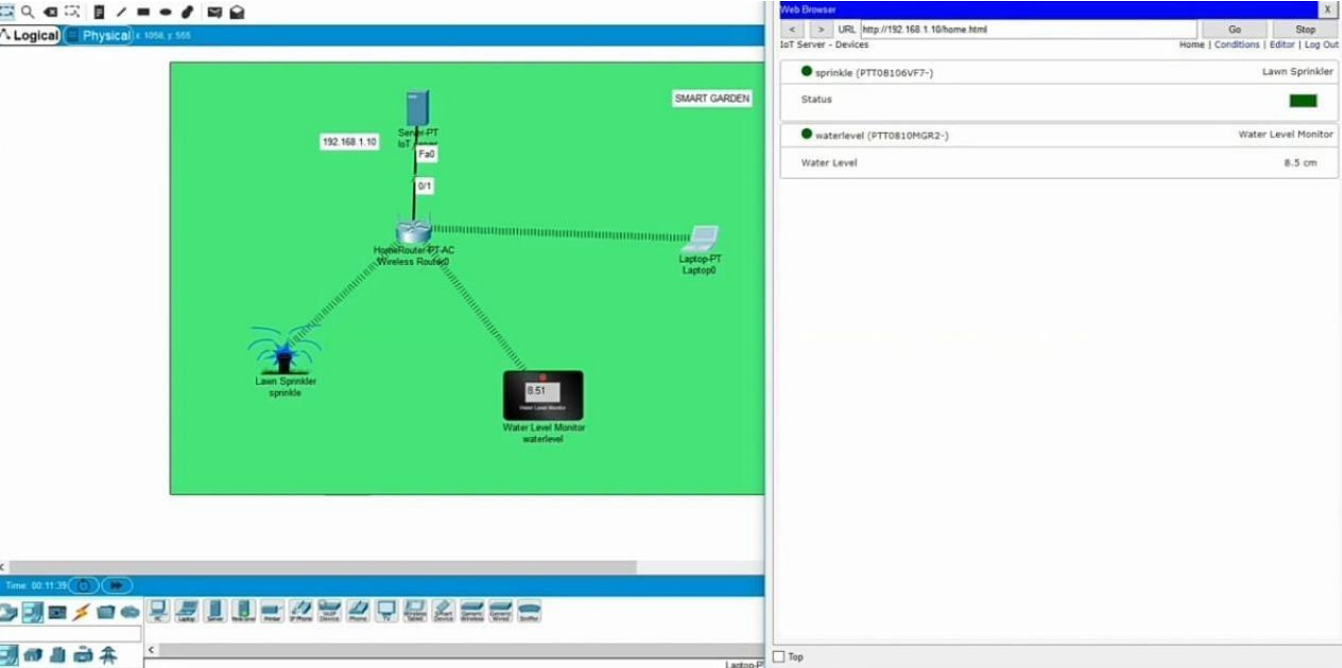


13
IoT Devices in Networking

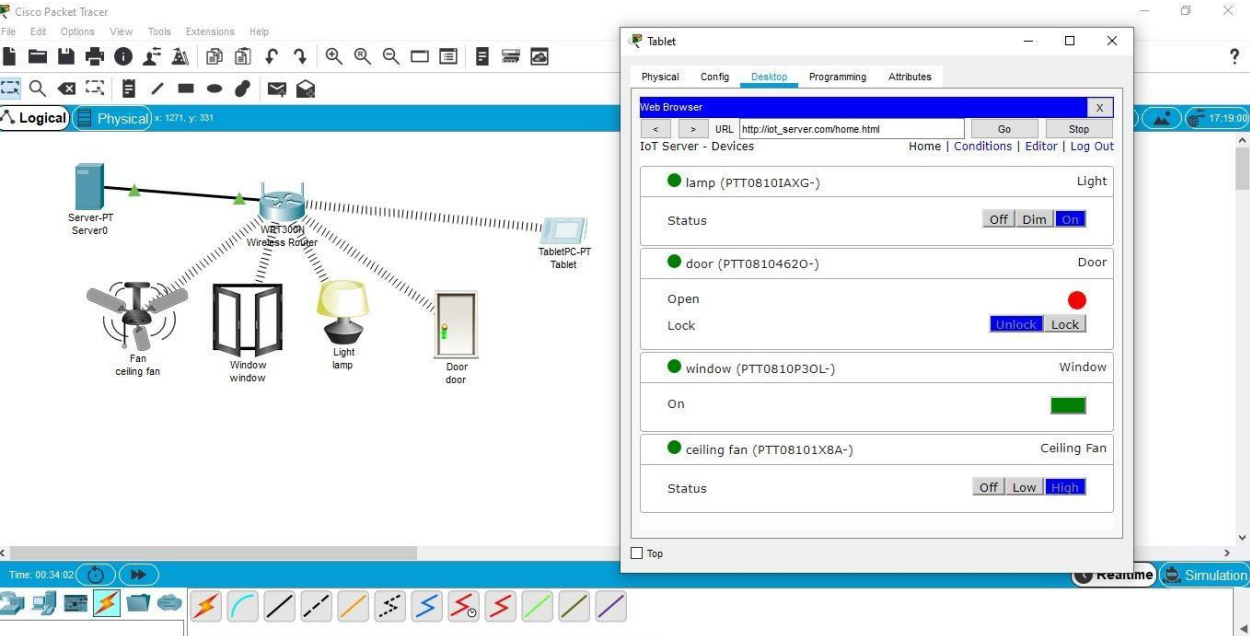


14

X,Y,Z Company Network Design

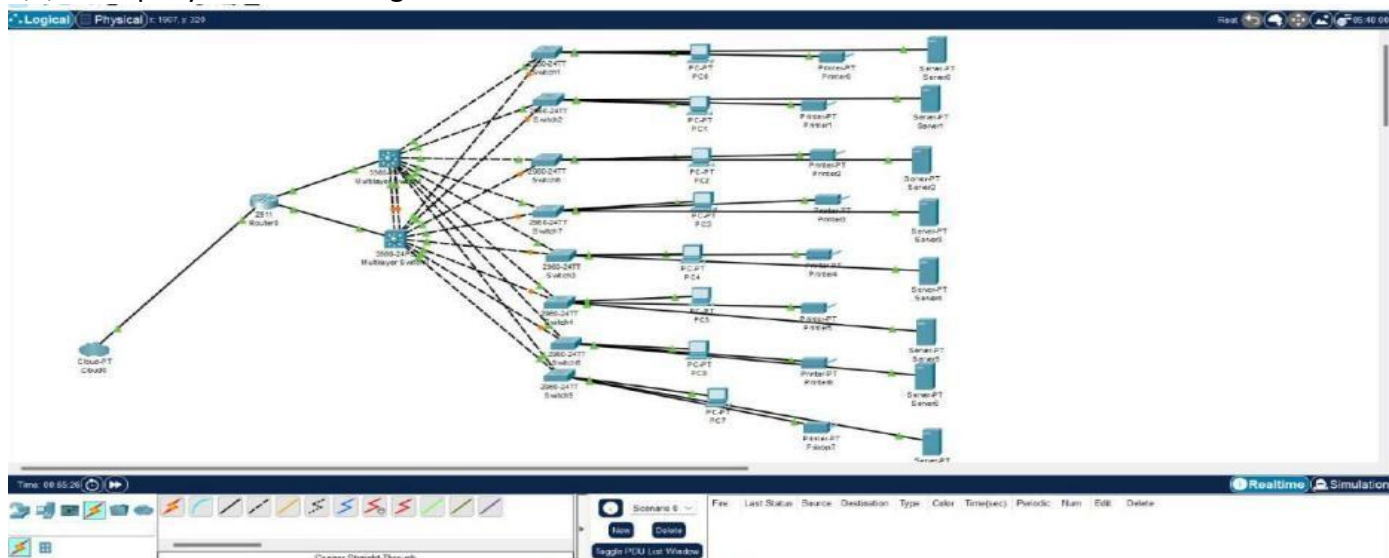


15

Computer Lab

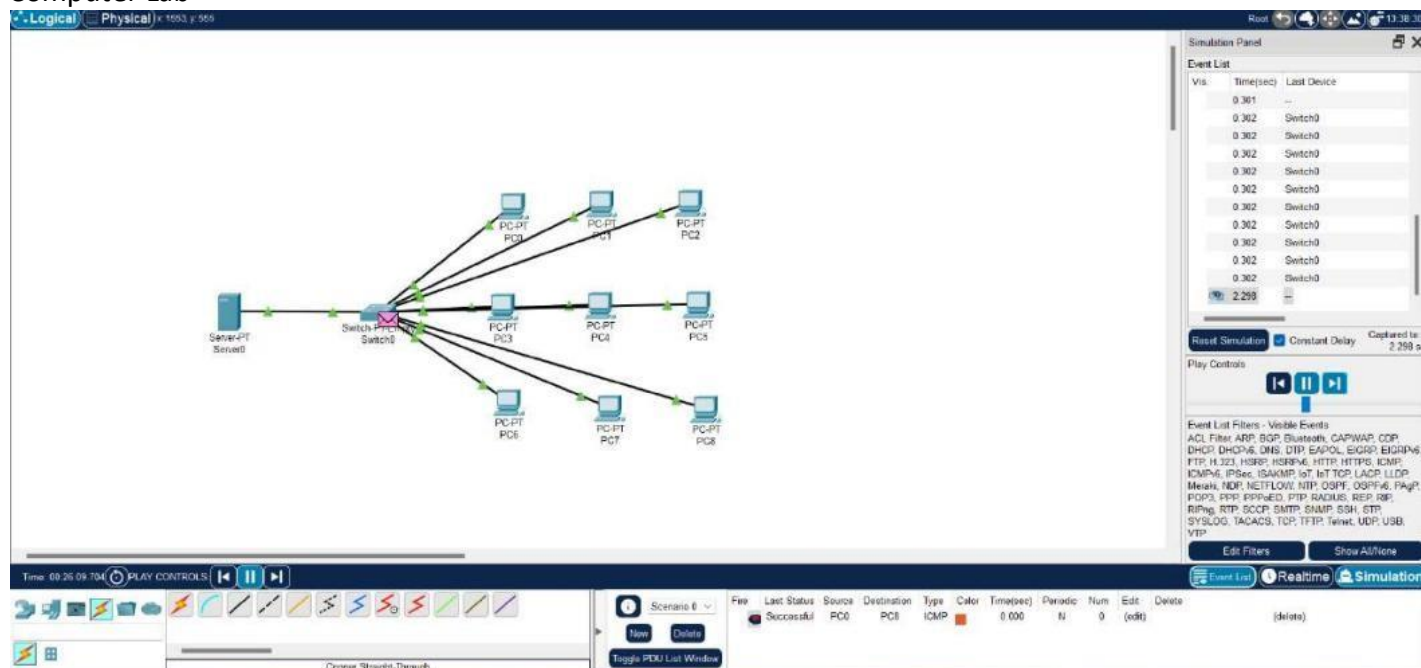

16

Multimedia Network

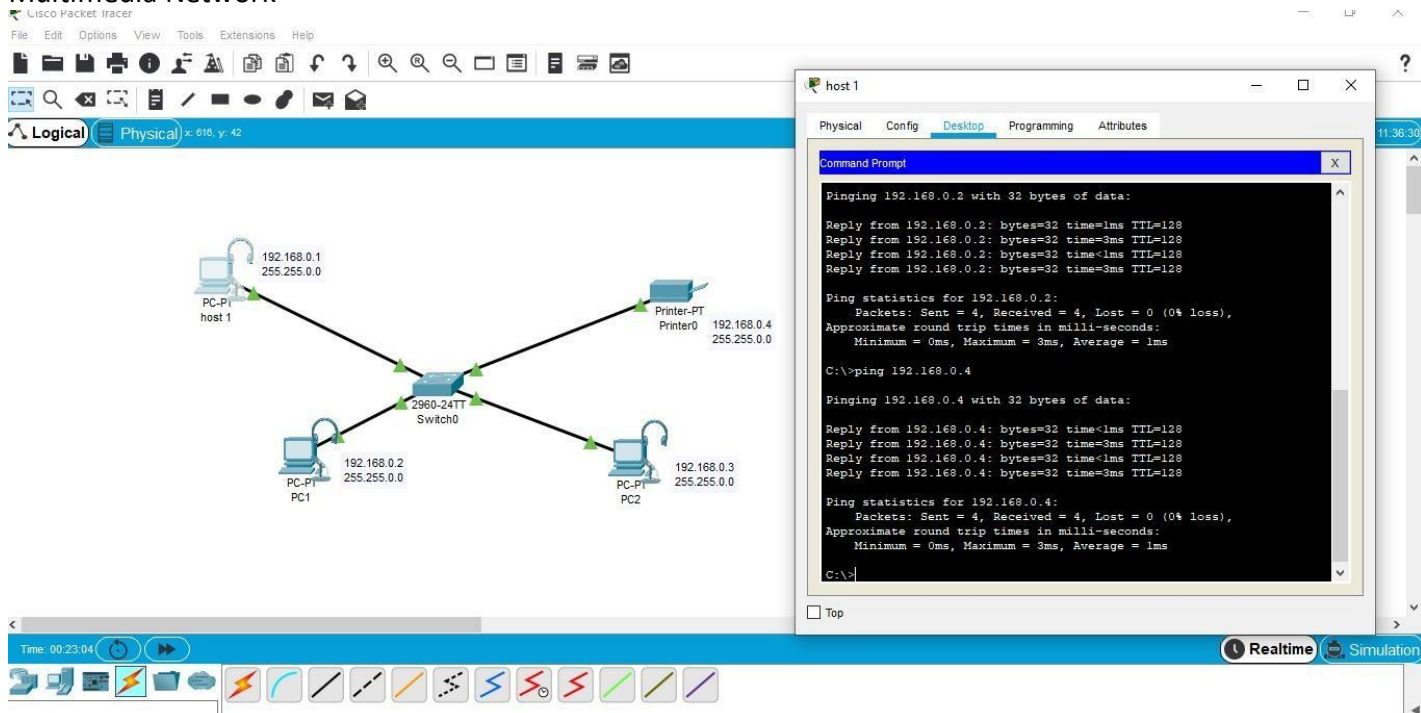

17 AAA Local & Server Authentication Configuration

The network diagram shows a topology with a 2960-24TT Switch0 connected to a PC-PT PC0. The Switch0 is connected to a 1941 Router0. The Router0 is connected to a Server-PT Server0. The IP addresses are 192.168.10.1 for the Router0 and 192.168.1.2 for the Server0. A PC0 window is open, showing a Command Prompt with the following output:

```
Command Prompt
Password:
% Password: timeout expired!
[Connection to 192.168.10.1 closed by foreign host]
C:\>
C:\>ssh -l teacher 192.168.1.1
Password:
R1>en
% No password set.
R1>exit
[Connection to 192.168.1.1 closed by foreign host]
C:\>ssh -l principal 192.168.10.1
Password:
% Login invalid
Password:
% Login invalid
Password:
R1>
```

18 WPA Security & Radius Server

The network diagram shows a topology with an IoT & Radius Server connected to a Switch. The Switch is connected to a Wireless Router0. The Wireless Router0 is connected to a Laptop0, a G_Door, a Fan, a Door, and a Lamp. The IP address is 192.168.0.10 for the Wireless Router0. A Laptop0 window is open, showing a web browser with the URL <http://192.168.0.10/home.html>. The IoT Server - Devices section shows a list of devices, including a Fan (PTT0810QLK8-) with a status of Off, Low, or High.