


Initial configuration of a Palo Alto VM (PA-VM) in a virtual environment.

The left pane shows a network topology diagram with a central switch (SW) connected to two hosts: Win (10.0.0.10) and VPC (10.0.0.20). The Win host is connected to the switch via interface e0, and the VPC host is connected via interface eth0. The switch has interfaces e0/0 and e0/1.

The right pane shows the PA-VM configuration interface. The **NETWORK** tab is selected, displaying the **Zones** configuration table.

NAME	TYPE	INTERFACES / VIRTUAL SYSTEMS	ZONE PROTECTION PROFILE	ENABLE HEADER INSPECTION	PACKET BUFFER PROTECTION	LOG SETTING	ENABLED	INCLUDED NETWORKS	EXCLUDED NETWORKS	ENABLED	INCLUDED NETWORKS	EXCLUDED NETWORKS
inside	layer3	ethernet1/1		☐	☒		☐	any	none	☐	any	none
outside	layer2	ethernet1/2		☐	☒		☐	any	none	☐	any	none

The bottom status bar indicates the VM is in **Physical** mode, with a timer at 01:00:00 and a **START** button. The system clock shows 5:22 PM on 18-Sep-26.

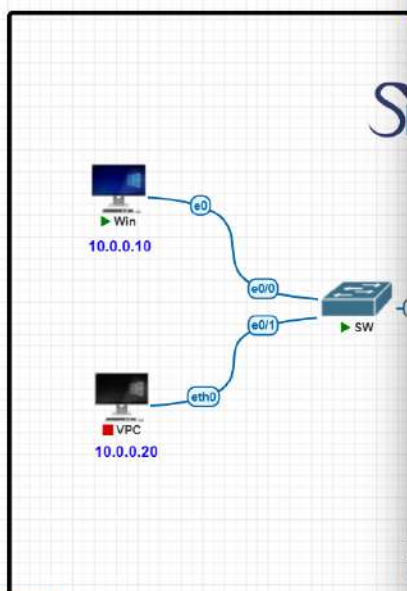

PA-VM

DASHBOARD ACC MONITOR POLICIES OBJECTS NETWORK DEVICE

Interfaces

Ethernet | VLAN | Loopback | Tunnel | SD-WAN

INTERFACE	INTERFACE TYPE	MANAGEMENT PROFILE	LINK STATE	IP ADDRESS	VIRTUAL ROUTER	TAG	VLAN / VIRTUAL WIRE	SECURITY ZONE	SD-WAN INTERFACE PROFILE	UPSTREAM NAT	FEATURE
ethernet1/1	Layer3	ping-port	Up	10.0.1/8	default	Untagged	none	inside		Disabled	
ethernet1/2	Layer3	ping-port	Up	20.0.1/8	default	Untagged	none	outside		Disabled	
ethernet1/3			Up	none	none	Untagged	none	none		Disabled	
ethernet1/4			Up	none	none	Untagged	none	none		Disabled	
ethernet1/5			Up	none	none	Untagged	none	none		Disabled	
ethernet1/6			Up	none	none	Untagged	none	none		Disabled	
ethernet1/7			Up	none	none	Untagged	none	none		Disabled	
ethernet1/8			Up	none	none	Untagged	none	none		Disabled	
ethernet1/9			Up	none	none	Untagged	none	none		Disabled	
ethernet1/10			Up	none	none	Untagged	none	none		Disabled	
ethernet1/11			Up	none	none	Untagged	none	none		Disabled	
ethernet1/12			Up	none	none	Untagged	none	none		Disabled	
ethernet1/13			Up	none	none	Untagged	none	none		Disabled	
ethernet1/14			Up	none	none	Untagged	none	none		Disabled	
ethernet1/15			Up	none	none	Untagged	none	none		Disabled	

24 zones

Add Interface Delete PDF/CSV

10.10.2020 04:24:34

Initial configuration of a network topology in PNETLab.

The topology shows a central switch (SW) connected to two hosts: Win (10.0.0.10) and VPC (10.0.0.20). The Win host is connected to the switch via interface e0, and the VPC host is connected via interface eth0. The switch has interfaces e0/0 and e0/1 connected to the Win and VPC hosts respectively.

The PA-VM interface displays the configuration for the Virtual Router - default. The Static Routes tab is active, showing a table of routes:

NAME	DESTINA...	INTERFA...	TYPE	VALUE	ADMIN DISTANCE	METRIC	BFD	ROUTE TABLE
default	0.0.0.0/0	ethernet1...	ip-address	20.0.0.2	default	10	None	unicast

The PA-VM interface also shows the Router Settings tab, which includes options for Redistribution Profile, RIP, OSPF, OSPFV3, BGP, and Multicast.

The PA-VM interface includes a sidebar with various network components and a bottom status bar showing the Physical layer and a timer.

PNETLab | Topology

labs.surretnetwork.com/legacy/topology

QEMU (MGMT)

PA-VM

Not secure | https://1.0.0.1/#policysecvsys1:policies/security-rulebase

DASHBOARD ACC MONITOR **POLICIES** OBJECTS NETWORK DEVICE

Security

- NAT
- QoS
- Policy Based Forwarding
- Decryption
- Tunnel Inspection
- Application Override
- Authentication
- DoS Protection
- SD-WAN

Policy Optimizer

- New App Viewer
- Rules Without App Controls
- Unused Apps
- Log Forwarding for Security S...
- Rule Usage
 - Unused in 30 days
 - Unused in 90 days
 - Unused

	NAME	TAGS	TYPE	ZONE	Source	Destination	APPLIC				
					ADDRESS	USER	DEVICE	ZONE	ADDRESS	DEVICE	
1	Internet	none	universal	inside	SD_LAN	any	any	outside	any	any	any
2	Interzone-default	none	Interzone	any	any	any	any	Interzone	any	any	any
3	Interzone-default	none	Interzone	any	any	any	any	any	any	any	any

Object: Addresses

Initial-Config

Physical

01 : 00 : 00 START

5:23 PM 18-Sep-26

PNETLab | Topology

labs.surretnetwork.com/legacy/topology

QEMU (MGMT)

PA-VM

Not secure | https://1.0.0.1/#policies/nat-rulebase

DASHBOARD ACC MONITOR **POLICIES** OBJECTS NETWORK DEVICE

Security NAT QoS Policy Based Forwarding Decryption Tunnel Inspection Application Override Authentication DoS Protection SD-WAN

Original Packet

NAME	TAGS	SOURCE ZONE	DESTINATION ZONE	DESTINATION INTERFACE	SOURCE ADDRESS	DESTINATION ADDRESS	SERVICE	SOURCE TRANSLATION
1 nat-internet	none	inside	outside	ethernet1/2	SD_LAN	any	any	dynamic-ip-and-port ethernet1/2 20.0.0.1/8

Policy Optimizer

Rule Usage

- Unused in 30 days
- Unused in 90 days
- Unused

Object: Addresses

10/18/2024 04:24:34

Physical

01 : 00 : 00 START

5:23 PM 18-Sep-26

INITIAL-CONFIG

```
graph LR
    Win[Win 10.0.0.10] --- e0((e0))
    VPC[VPC 10.0.0.20] --- eth0((eth0))
    e0 --- SW[SW]
    eth0 --- SW
    SW --- PA-VM[PA-VM QEMU MGMT]
```

PNETLab | Topology

labs.surrennetwork.com/legacy/topology

QEMU (MGMT)

PA-VM

Dashboard ACC MONITOR POLICIES OBJECTS NETWORK DEVICE

Addresses

NAME	LOCATION	TYPE	ADDRESS	TAGS
SO_LAN		IP Network	10.0.0.0/8	

Win 10.0.0.10

VPC 10.0.0.20

SW

Initial-Config

Physical

01 : 00 : 00 START

5:23 PM 18-Sep-26

PNETLab | Topology

labs.surenetwork.com/legacy/topology

QEMU (MGMT)

PA-VM

Dashboard | ACC | MONITOR | POLICIES | **OBJECTS** | NETWORK | DEVICE

Not secure | https://1.0.0.1/#objects/vsys1:objects/services

3 items

NAME	LOCATION	PROTOCOL	DESTINATION PORT	TAGS
☐ DNS		UDP	53	
☐ service-http	Predefined	TCP	80,8080	
☐ service-https	Predefined	TCP	443	

Initial-Config


Physical

01 : 00 : 00

START

5:23 PM 18-Sep-26

The screenshot displays the PNETLab interface. On the left, a network topology diagram shows a 'Win' node (IP 10.0.0.10) and a 'VPC' node (IP 10.0.0.20) connected to a central 'SW' (switch) node. The 'Win' node is connected to 'e0', which connects to 'e0/0' of the switch. The 'VPC' node is connected to 'eth0', which connects to 'e0/1' of the switch. On the right, the 'QEMU (MGMT)' window is open, showing the 'PA-VM' management console. The console has a sidebar with various configuration categories like 'Addresses', 'Services', and 'Security Profiles'. The main area displays a table of services, including 'DNS', 'service-http', and 'service-https'. At the bottom, there is a 'Physical' tab and a 'START' button. The system clock shows 5:23 PM on 18-Sep-26.

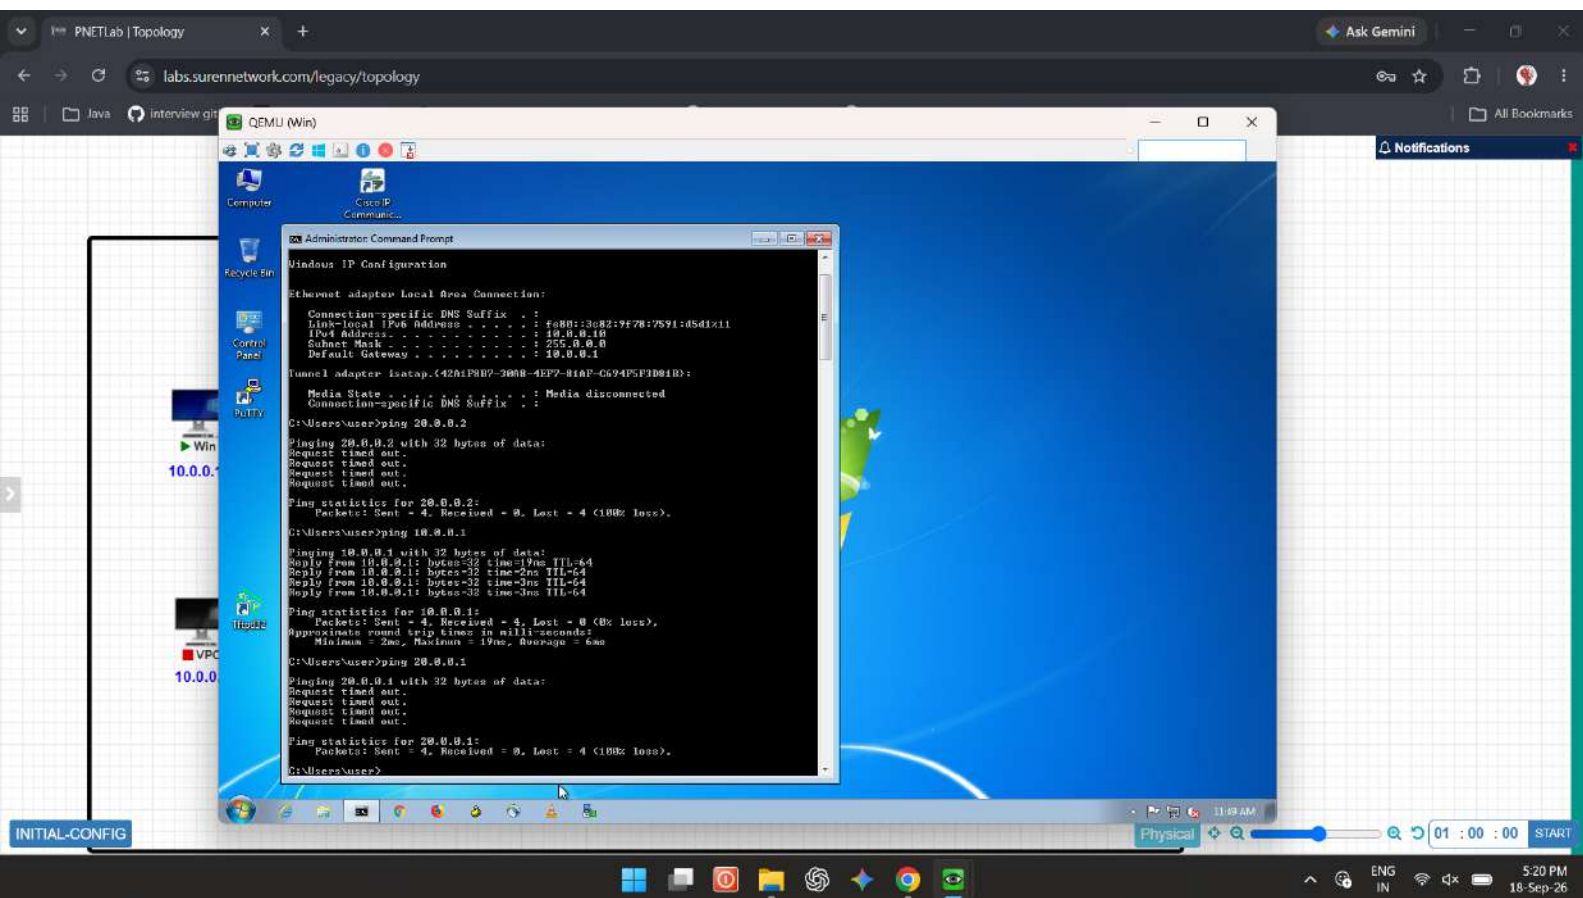

PNETLab | Topology

ISP

```
ISP#  
ISP#  
ISP#ping 20.0.0.1  
Type escape sequence to abort.  
Sending 5, 100-byte ICMP Echos to 20.0.0.1, timeout is 2 seconds:  
!!!!!  
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms  
ISP#
```

Net

ACT FIBER NET ISP

SW

PaloAlto

VPC 10.0.0.20

MGMT 1.0.0.10

10.0.0.1

20.0.0.1

20.0.0.2

1.0.0.1

Physical

01 : 00 : 00

START

5:20 PM 18-Sep-26

PNETLab | Topology

labs.surrennetwork.com/legacy/topology

QEMU (PaloAlto)

```
Enter new password :
Confirm password :
Password changed

Number of failed attempts since last successful login: 0

Warning: Your device is still configured with the default admin account credentials. Please change your password prior to deployment.

admin@Palo-VM> configure
Entering configuration mode
[edit]
admin@Palo-VM> set deviceconfig setting type static
Invalid syntax.
[edit]
admin@Palo-VM> set deviceconfig system type static
[edit]
admin@Palo-VM> set device
> device-object device-object
> deviceconfig deviceconfig
admin@Palo-VM> set deviceconfig system ip
+ ip-address IP address for the management interface
+ ip-address-localhost ip-address-localhost
+ ipv6-address IPv6 address for the management interface
+ ipv6-default-gateway IPv6 Default gateway
admin@Palo-VM> set deviceconfig system ip-address 1.0.0.1 netmask 255.0.0.0
[edit]
admin@Palo-VM> commit
Commit job 3 is in progress. Use Ctrl+C to return to command prompt
.....33%.....75%.....100%
Configuration committed successfully
[edit]
admin@Palo-VM>
```

Win 10.0.0.10

VPC 10.0.0.20

eth0

eth0/0

eth0/1

MGMT 1.0.0.10

Physical

01 : 00 : 00 START

5:22 PM 18-Sep-26

