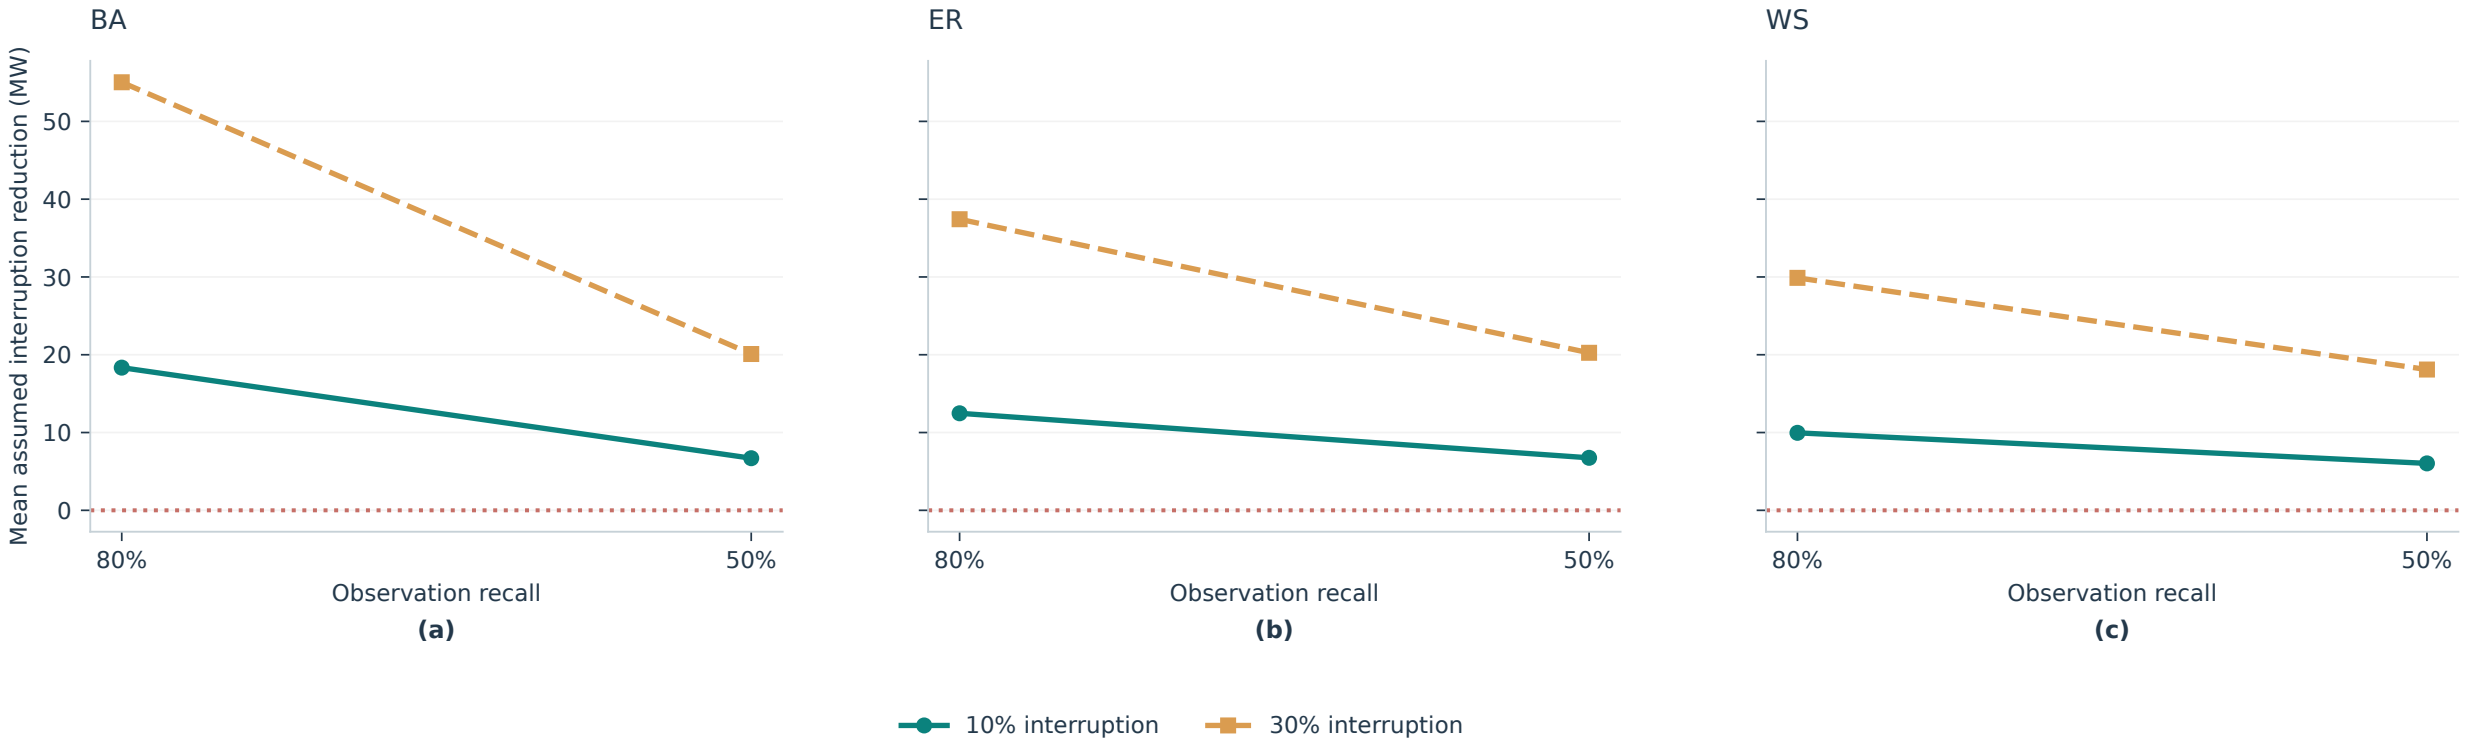
BA
ER
WS
Mean assumed interruption reduction (MW)
0
10
20
30
40
50
80%
50%
Observation recall
(a)
(b)
(c)
10% interruption
30% interruption