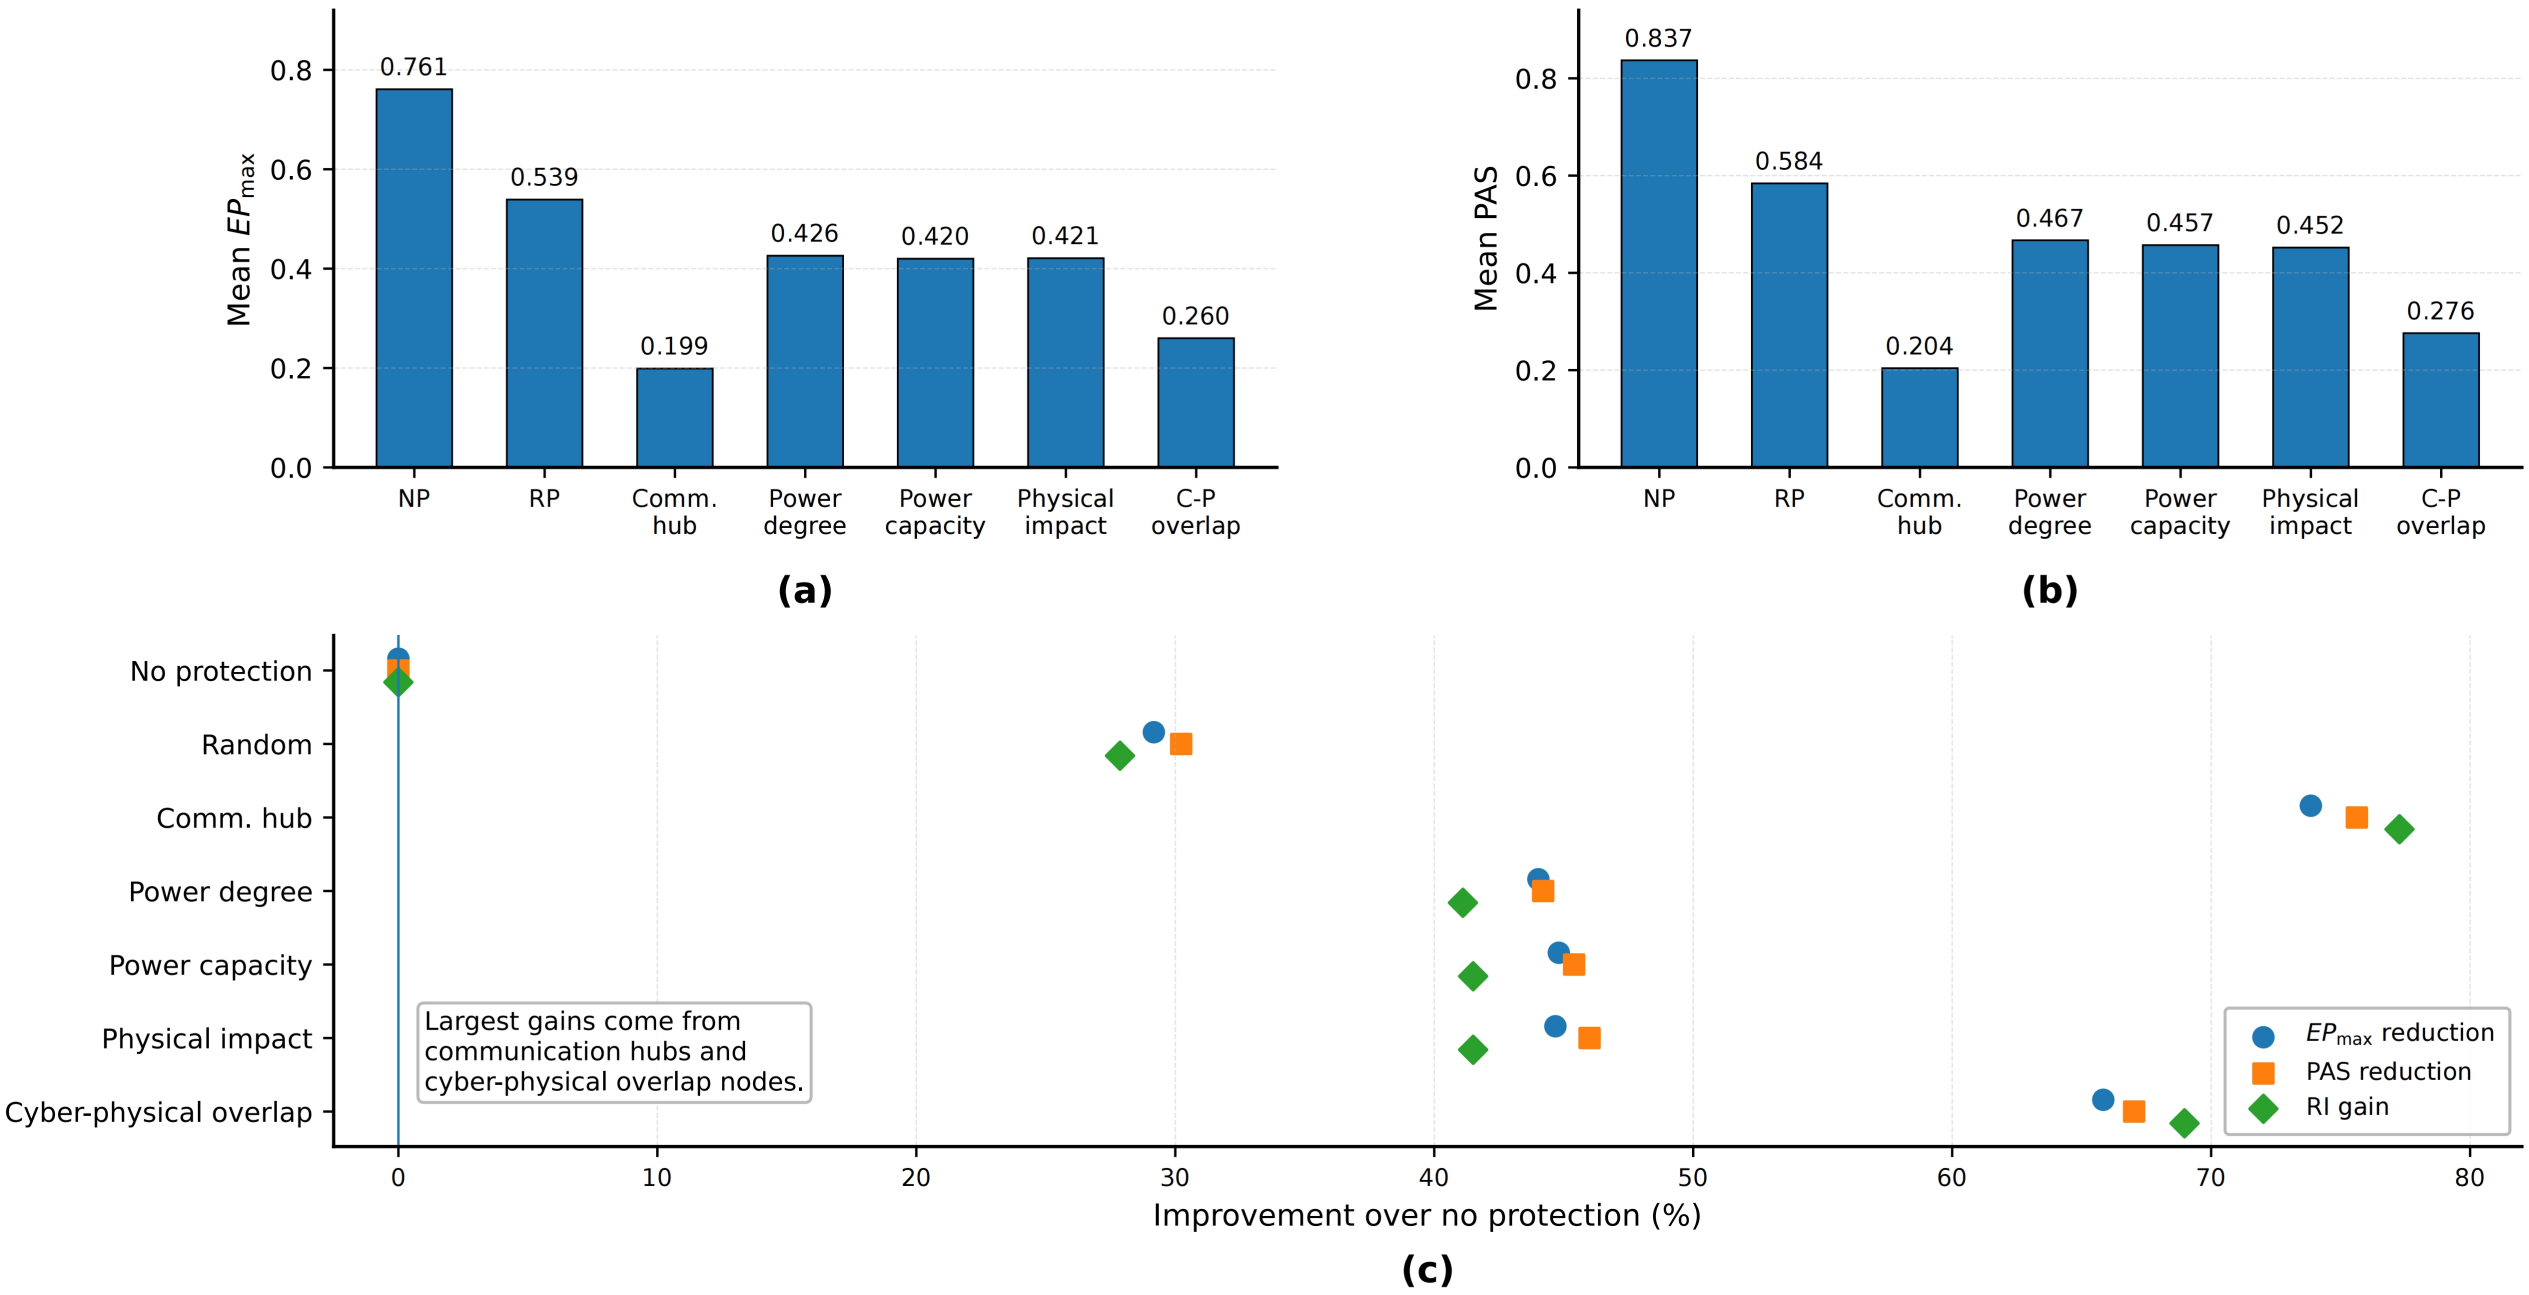

Mean EP_{max}
0.761
0.539
0.199
0.426
0.420
0.421
0.260
NP
RP
Comm. hub
Power degree
Power capacity
Physical impact
C-P overlap
(a)
Mean PAS
0.837
0.584
0.204
0.467
0.457
0.452
0.276
(b)
No protection
Random
Comm. hub
Power degree
Power capacity
Physical impact
Cyber-physical overlap
Largest gains come from communication hubs and cyber-physical overlap nodes.
EP_{max} reduction
PAS reduction
RI gain
Improvement over no protection (%)
(c)