












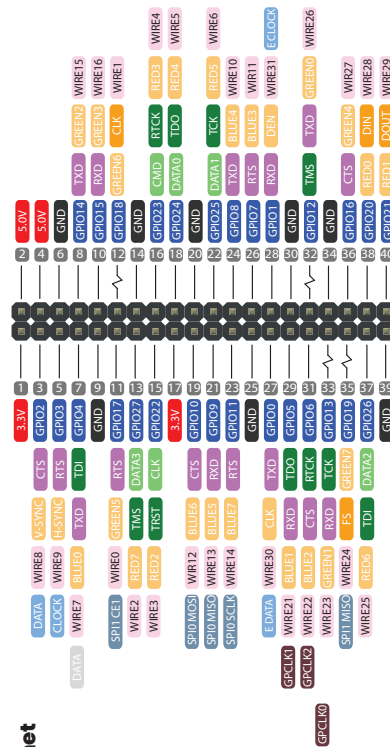





RASPBERRY PI 4 MODEL B

Powered over Ethernet (PoE)
IEEE 802.3af-2003 PoE Standard

-  PWM - Pulse-width Modulation
-  Physical Pin number
-  Power Pin
-  GND Pin
-  GPIO Pin
-  JTAG - Joint Test Action Group
-  DPI - Display Parallel Interface
-  PCM - Pulse-code Modulation
-  I2C - Inter Integrated Circuit
-  WiringPi
-  UART - Universal Asynchronous Receiver/Transmitter
-  W1-GPIO - One-Wire Interface
-  SDIO - SD card Interface
-  SPI - Serial Peripheral Interface
-  GPCLK - General Purpose CLock



-  Physical Pin number
-  Power Pin
-  GND Pin
-  Mode A Pin
-  Mode B Pin
-  Wire Color

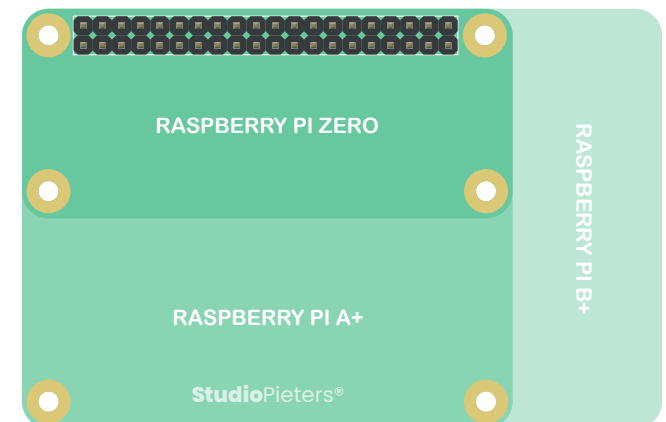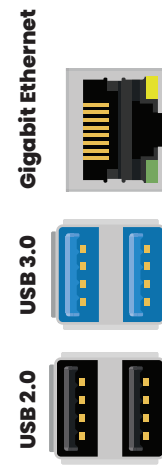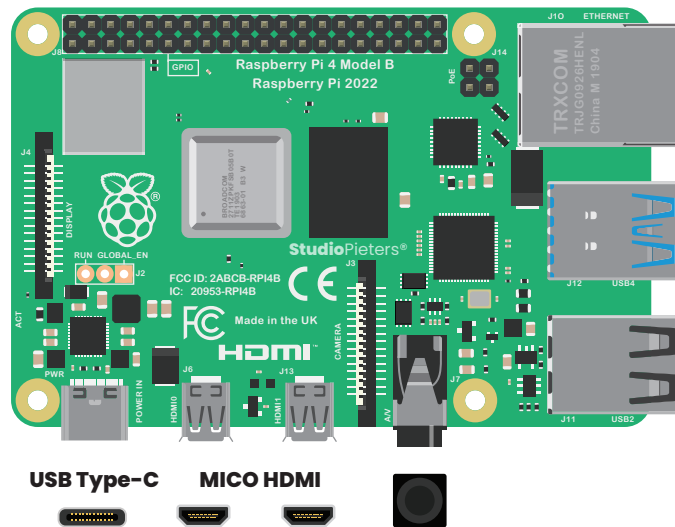

StudioPieters®
Innovation and Learning Labs