

**QUALITY IS OUR
FIRST PRIORITY**

www.atcchain.com

Serving the Best Quality of Conveyor Chains, Modular Belts and Components since, 1995, we

“ATC CHAINS INDIA”

are a developing business entity engaged in largest manufacturing unit.



TODAY “ ATC ” HAS...

2100+

WE HAVE 2100 SATISFIED CUSTOMER TO WHOM WE HAVE SERVED WITH QUALITY

900+ PRODUCTS

WIDE RANGE OF COMPONENTS AND 65+ VARIETY OF MODULAR BELT TO CHOOSE FROM.

CUSTOMER SUPPORT

OUR PROFESSIONAL TEAM PROVIDES TECHNICAL SUPPORT FOR DESIGN, MAINTENANCE AND OPERATING PROCEDURES TO CUSTOMERS

100+

WE HAVE 107 EXPERTS INVOLVED IN MANUFACTURING CONVEYOR SYSTEMS AND CONVEYOR COMPONENTS

10+ COUNTRIES

WE HAVE NATIONAL AND GLOBAL PRESENCE FOR CONVEYORS AND CONVEYOR COMPONENTS

OUR INFRASTRUCTURES

OUR MANUFACTURING UNIT IS EQUIPED WITH LATEST TECHNOLOGY TO PROVIDE ANY SPECIFIED CUSTOMISATION.

OUR PRODUCTS

1 YEAR GUARANTY WARRANTY

**ZERO NOISE,
VIBRATION,
MAINTENANCE**

**FULLY REASSEMBLE
& CUSTOMISED**

SS SLAT CONVEYOR CHAIN

SS SINGLE HINGE STRAIGHT CHAIN


(PITCH - 25.4mm, 38.1mm)



PART NO.	WIDTH
SS 812-K200	2.00" (50.8 mm)
SS 812-K275	2.75" (70 mm)
SS 812-K325	3.25" (82.6 mm)
SS 812-K350	3.50" (89 mm)
SS 812-K400	4.00" (101.6 mm)
SS 812-K450	4.50" (114.3 mm)
SS 812-K600	6.00" (152.4 mm)
SS 812-K750	7.50" (190.5 mm)

SS 304 DOUBLE HINGE STRAIGHT CHAIN

(PITCH - 38.1mm)



PART NO.	WIDTH
SS 802-K450	4.50" (114.3 mm)
SS 802-K600	6.00" (152.4 mm)
SS 802-K750	7.50" (190.5 mm)
SS 802-K1000	10.00" (254 mm)
SS 802-K1200	12.00" (304.8 mm)

SS SIDE FLEX WITH TAB

(PITCH - 38.1mm)



PART NO.	RADIUS	WIDTH
SS 881 TAB-K325	R-500	3.25" (82.6 mm)
SS 881 TAB-K450	R-500	4.50" (114.3 mm)
SS 881 TAB-K600	R-610	6.00" (152.4 mm)
SS 881 TAB-K750	R-610	7.50" (190.5 mm)

SS SIDE FLEX WITHOUT TAB

(PITCH - 38.1mm)



Magnetic (SS 430)		
PART NO.	RADIUS	WIDTH
SS 811M-K325	R-500	3.25" (82.6 mm)
SS 811M-K450	R-500	4.50" (114.3 mm)
SS 811M-K600	R-610	6.00" (152.4 mm)
SS 811M-K750	R-610	7.50" (190.5 mm)

SS RUBBER TOP STRAIGHT RUNNING CHAIN

(PITCH - 38.1mm)



PART NO.	WIDTH
SS 812F-K325	3.25" (82.6 mm)
SS 812F-K750	7.50" (190.5 mm)
SS 802F-K750	7.50" (190.5 mm)
SS 802F-K1200	12.00" (304 mm)

SS MULTI LINK CHAIN

(PITCH - 38.1mm)



PART NO.	WIDTH
SS 812-3L-K325-975	9.75" (246 mm)
SS 812-3L-K350-1050	10.5" (266.7 mm)
SS 812-3L-K400-1200	12.00" (304.8 mm)
SS 812-2L-K325-650	6.5" (165.1 mm)
SS 812-2L-K350-700	7" (177.8 mm)
SS 812-2L-K450-900	9" (228.6 mm)

Available Material & Temp.: SS 304 -50 to 400 °C SS 316 -50 to 800 °C SS 430 -50 to 150 °C

THERMOPLASTIC SLAT CHAIN

TH. SINGLE HINGE STRAIGHT CHAIN

(PITCH - 38.1mm)



PART NO.	WIDTH
TH 820-K325	3.25" (82.6 mm)
TH 820-K350	3.50" (89 mm)
TH 820-K400	4.00" (101.4 mm)
TH 820-K450	4.50" (114.3 mm)
TH 820-K500	5.00" (127 mm)
TH 820-K600	6.00" (152.4 mm)
TH 820-K750	7.50" (190.2 mm)

TH. DOUBLE HINGE STRAIGHT CHAIN

(PITCH - 38.1mm)



PART NO.	WIDTH
TH 821-K750	7.50" (190.5 mm)
TH 821-K1000	10.00" (254.0 mm)
TH 821-K1200	12.00" (304.8 mm)

TH. SIDE FLEX WITHOUT TAB

(PITCH - 38.1mm)



Magnetic		
PART NO.	RADIUS	WIDTH
TH 880 TAB-K325	R-500	3.25" (82.6 mm)
TH 880 TAB-K450	R-500	4.50" (114.3 mm)

TH. SIDE FLEX WITH TAB

(PITCH - 38.1mm)



Non Magnetic		
PART NO.	RADIUS	WIDTH
TH 880 TAB-K325	R-500	3.25" (82.5 mm)
TH 880 TAB-K450	R-500	4.50" (114.3 mm)
TH 882 TAB-K500	R-610	5.00" (127 mm)
TH 882 TAB-K600	R-610	6.00" (152.4 mm)
TH 882 TAB-K750	R-610	7.50" (190.5 mm)
TH 882 TAB-K1000	R-610	10.00" (254.0 mm)
TH 882 TAB-K1200	R-610	12.00" (304.8 mm)

TH. SMALL RADIUS FLEX WITH TAB

(PITCH - 38.1mm)



PART NO.	RADIUS	WIDTH
880 TAB-RT-K325	R-200	3.25" (82.5 mm)
880 TAB-RT-K450	R-200	4.5" (114.3 mm)

TH. MULTI LINK CHAIN

(PITCH - 38.1mm)



PART NO.	WIDTH
TH 820-3L-K325-975	9.75" (246 mm)

Material: Derlin (POM) Color: Brown/White Pin Material: SS 304 Temp.: -40 to 90 °C


PLASTIC CHAIN

1060 HEAVY DUTY CHAIN (PITCH - 25.4 mm)



PART NO.	RADIUS	WIDTH
ATC-1060-K325-HVY	R-500	3.29" (83.8 mm)

CAP ELEVATOR (PITCH - 25.4 mm)



PART NO.	WIDTH	CLEAT HEIGHT
	120 mm	9 mm
ATC - CE		12 mm
	190 mm	9 mm
		12 mm


SNAP ON GRIPPER CHAIN (PITCH - 19.05 mm)



PART NO.	WIDTH
1873 - K325	82.6 mm
1873 - K450	114.3 mm
1873 - K600	152.4 mm
1873 - K750	190 mm

PART NO.	WIDTH
1873 - D - K750	190mm


MINIATURE CHAIN (PITCH - 25.4 mm)




PART NO.	WIDTH
TH 820-K200	2.00" (50.8 mm)

63 FINGER CHAIN (PITCH - 25.4 mm)


PLAIN



CLEATED



LH + RH




10 TO 20 mm

10 TO 20 mm

103 FINGER CHAIN (PITCH - 35.5 mm)

PLAIN



CLEATED



C.H. -10 TO 30 mm

87 FINGER CHAIN (PITCH - 30 mm)

PLAIN



CLEATED




C.H. -12 mm

83 FINGER CHAIN SIDE FLEX WITH TAB (PITCH - 25.4 mm)



220 FINGER CHAIN (PITCH - 25.4 mm)



PLASTIC TAB MULTIFLEX CHAINS

1700A




(PITCH - 47 mm)

1700B



(PITCH - 51 mm)


2600 CASE CHAINS (CC-600) (PITCH - 62 mm)




2600 TAB CASE CHAINS (CC-600TAB) (PITCH - 62 mm)



10P/40P PLASTIC CHAIN (PITCH - 8.2/12.7 mm)



60P PLASTIC CHAIN (PITCH - 19.05 mm)



Material: POM Color: Brown/White Pin Material: SS 304 Temp.: -40 to 90 °C

SLAT CHAIN SPROCKETS

ATC®

**812-K200 SPROCKET SOLID
(25 mm)**

TEETH	OD.	PITCH
17	72	12.7
19	78	12.7
14	114	25.4
16	135	25.4



**812/811 SPKT MOULDED
(53 mm)**

TEETH	OD.
17	103
21	127
23	139
25	152



**812/811 SPROCKET SOLID
(40 mm)**

TEETH	OD.
17	103
19	115
21	127
23	139
25	152



**802/821 SPROCKET SOLID
(80 mm)**

TEETH	OD.
21	127
25	152



**881/811 TAB MOULDED
SPKT**

TEETH	OD.
17	103
21	127
23	139
25	152



**880/880TAB/828 SPKT
MOULDED (16 mm)**

TEETH	OD.
10	122
11	134
12	146



882 MOULDED SPKT

TEETH	OD.
10	123
11	136
12	148



820 SPKT MOULDED GRV

TEETH	OD.
17	103
21	127
23	139
25	151



820 SPROCKET SOLID GRV

TEETH	OD.
17	103
19	115
21	127
23	139
25	152



**63 FINGER CHAIN SPKT
(GROOVE-22mm)**

TEETH	OD.
10	83
11	89
16	130



**83 FINGER CHAIN SPKT
(GROOVE-31mm)**

TEETH	OD.
9	98
10	107
11	118
12	125
13	139



**103 FINGER CHAIN SPKT
(GROOVE-47mm)**

TEETH	OD.
10	125
12	146



1060 SPROCKET SOLID

TEETH	OD.
16	133
18	149



**2600 (CC 600) PLASTIC
CHAIN SPKT**

TEETH	OD.
8	169
10	209
11	229
12	249



**1700 A CHAIN SPROCKET
(11 mm)**

TEETH	OD.
8	135
10	165
12	197



**1700 B CHAIN SPROCKET
(11 mm)**

TEETH	OD.
8	135
10	165
12	197



40P / 2040P CHAIN SPKT

TEETH	OD.
12	50
15	62
19	79
25	102
28	116
38	158



60P CHAIN SPKT

TEETH	OD.
16	101
18	113
20	126
25	156



**812 IDLER PULLEY
MOULDED (21T)**

TEETH	OD.
17	104
21	127



812 IDLER PULLEY SOLID

TEETH	OD.
17	104
21	129
23	141
25	153



802 IDLER PULLEY SOLID

TEETH	OD.
21	129
25	153



802 IDLER PULLEY SOLID

TEETH	OD.
21	129
25	153




WEAR STRIP

ATC-WNG -12	ATC-WNG -28	ATC-WNG -35	ATC-WNGAP -16	ATC-WAP -6051
NECK GUIDE - 12	NECK GUIDE - 28	NECK GUIDE - 35	NECK GUIDE - 16	C TYPE + ALU. SEC.
ATC-WL-20552	ATC-WL -30103	ATC-WL -303010	ATC-WL -402010	ATC-WCP-1311
L TYPE - 20X55X2	L TYPE - 30X10X3	L TYPE - 30X30X10	L TYPE - 40X20X10	SP. FOR FINGER CHAIN
ATC-WR-B1-2103	ATC-WCR -2103	ATC-WCR -2603	ATC-WCP - 2520	ATC-WCP -40204
COLLAR TYPE - 21	COLLAR TYPE - 21	COLLAR TYPE - 26	CLIP TYPE - 25X20	CLIP TYPE - 40X20X4
ATC-WZ-2012	ATC-WZ-2312	ATC-WZ-2512	ATC-WZ-3013	ATC-WC-4131
Z TYPE - 20	Z TYPE - 23.5	Z TYPE - 25	Z TYPE - 30	C TYPE - 41X31
ATC-WP-12	ATC-WCG-6051	ATC- WCT-40303	ATC-WT-4044	ATC-WCT-41364
PLAIN TYPE 25 X 3 40 X 3 50 X 3 25 X 5 40 X 5 50 X 5 25 X 10 40 X 10 80 X 5	C GRIPPER - 60X51	FOR SHOE INLET GUIDE	T TYPE - 40X4	CT TYPE - 41X36X4
ATC-WCT-46424	ATC-WN-16127	ATC-WCT-2524	ATC-WC-7030	ATC-WCP-1814
CT TYPE - 46X42X4	U TYPE - 16	JT TYPE - 28X24	C TRACK	FOR 50 MM SLAT CHAIN




CORNER TRACK FOR MAGNETIC SLAT CHAIN


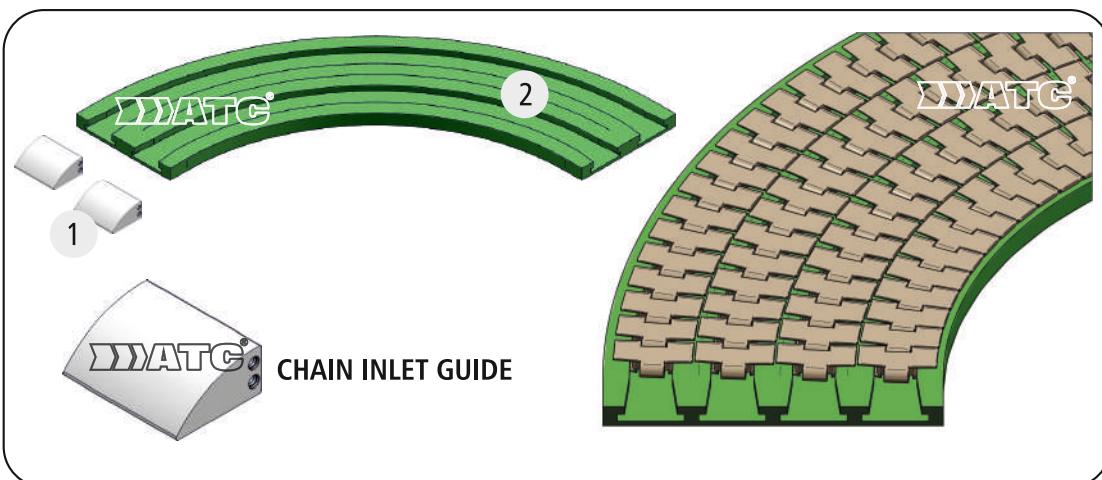


CODE	W	H	R
K325	100	25	500
K450	130	25	500
K500	135	30	610
K600	160	30	610
K750	200	30	610
K1000	260	30	610
K1200	320	30	610

CORNER TRACK FOR NON MAGNETIC SLAT CHAIN

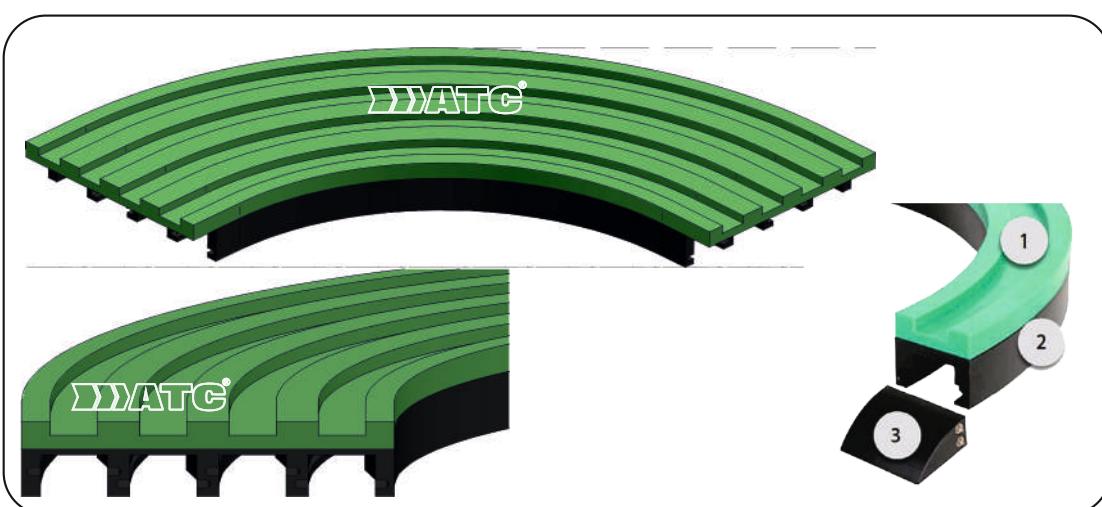

CODE	W	H	R
K325	100	25	500
K450	130	25	500
K500	135	30	610
K600	160	30	610
K750	200	30	610
K1000	260	30	610
K1200	310	30	610



ROLLER CHAINS



SIMPLEX ROLLER CHAIN



SIMPLEX ATTACHMENT CHAIN K1, K2



SIMPLEX HOLLOW PIN CHAIN




SIMPLEX EXTENDED PIN CHAIN



ROLLER CHAIN




ROLLER ATTACHMENT CHAIN K1, K2

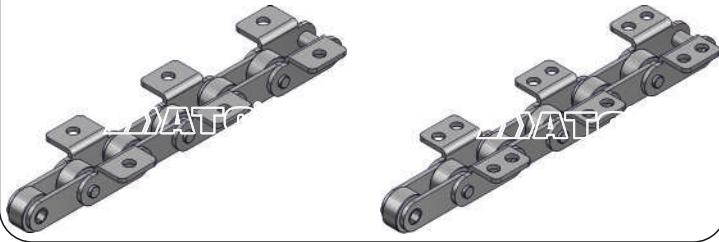

HOLLOW PIN CHAIN




DUPLEX ROLLER CHAIN



FREE FLOW CHAIN - 1.5"



CC - 600 CASTING CHAIN
PITCH-63 mm



LEAF CHAIN
(MM ATTACHMENT
CHAIN)



BUCKET ELEVATOR CHAIN



...LAYER CHAIN



EYELINK BELT - LINK
CONNECTING
PITCH-50 mm



EYELINK BELT - ROLLER
CONNECTING



MULTI HINGE SLAT CHAIN



SLAT CHAIN WITH ROLLER
CHAIN



CHIP CONVEYOR CHAIN




CHAIN SPROCKETS

SIMPLEX ROLLER
CHAIN




FOR SUITABLE PITCH

ROLLER CHAIN



LINK TYPE
EYE-LINK BELT




CC-600 CHAIN




PLASTIC MODULAR BELT

PITCH - 10 mm




T-50-FLT

PITCH - 12 mm




T-1400-FLT
O.A. : 2%




T-1400-FLS
O.A. : 15%

PITCH - 12 mm




T-1410-FLT

PITCH-12.7 mm




T-1600-FLS-PLN
O.A. : 16%


PITCH-15.2 mm



T-200-FLT




T-200-FLS
O.A. : 28%




T-1410-PFT
O.A. : 8%

PITCH-19.5 mm



T-300-PFT
O.A. : 12%




T-300-PFT-CLT
C.H. : 10 TO 50 mm




T-300-PFT-BKT
S.W.H: 25/50 mm


PITCH-19.5 mm




T-400-FLT



T-400-FLT-CLT
C.H. : 10 TO 50 mm




T-400-FLT-BKT
S.W.H. : 25/50 mm




T-400-FLOT
F.W. : 76 mm

PITCH-25 mm




T-1700-FLS
O.A. : 27%




T-1700-FLS-CLT
C.H. : 25/ 50 mm

PITCH-25.4 mm



T-25-FLT




T-25-FLT-CLT
C.H. : 25/ 50 mm

ATC®


PLASTIC MODULAR BELT

ATC®

PITCH - 25.4 mm




T-25-FLS
O.A. : 35%



T-25-FLS-CLT
C.H. : 25/50 mm

PITCH - 25.4 mm




T-100-FLT




T-100-FLT-CLT
C.H. : 25/50 mm

PITCH - 25.4 mm




T-1000-FLT




T-1000-FLT-CLT
C.H. : 10/25/50/75/100 mm

PITCH - 25.4 mm




T-1210-FLT




T-1210-FLT-CLT
C.H. : 25/50 mm


PITCH - 25.4 mm



T-1200-FLT



T-1200-FLT-CLT
C.H. : 10 TO 50 mm




T-1200-FLT-BKT
S.W.H. : 25/50 mm


MODULAR CONVEYOR SYSTEM
WITH WORKING TABLE




PITCH - 25.4 mm



T-1200-PFT
O.A. : 22%



T-1200-PFT-CLT
C.H. : 10 TO 50 mm




T-1200-PFT-BKT
S.W.H. : 25/50 mm


Z INCLINED CON




PITCH - 27.2 mm



S-900-FLT



S-900-FLT-CLT
C.H. : 10 TO 50 mm



S-900-FLT-BKT
S.W.H. : 25/50 mm


PLASTIC MODULAR BELT



INDUSTRIES




PITCH - 27.2 mm



S-900-FLS
O.A. : 38%




S-900-FLS-CLT
C.H. : 25 TO 50 mm



S-900-FLS-BKT
S.W.H. : 25/ 50 mm

PITCH - 38.1 mm




T-1300-FLT

PITCH - 40 mm




T-600-FLS
O.A. : 14%

PITCH - 50 mm



T-700-FLS
O.A. : 27%




T-700-FLS-L-CLT
L.C.H. : 70 mm


RADIUS CONVEYOR SYSTEM




PITCH - 50.8 mm



A-SRS-FLT



A-SRS-FLT-CLT
C.H. : 25/ 50/ 75/100 mm



A-SRS-FLT-BKT
S.W.H. : 50/ 75/100 mm


INCLINED CONVEYOR SYSTEM




PITCH - 50.8 mm



A-SRS-PFT
O.A. : 12%




A-SRS-PFT-CLT
C.H. : 25 TO 100 mm




A-SRS-PFT-BKT
S.W.H. : 50/ 75/100 mm


PITCH - 50.8 mm



A-SRS-1XX
O.A. : 35%



A-SRS-1XX-CLT
C.H. : 25/ 50/ 75/ 100 mm




A-SRS-1XX-BKT
S.W.H. : 50/ 75/ 100 mm

PLASTIC MODULAR BELT




PITCH - 50.8 mm



MPB-50-FLT



MPB-50-FLT-CLT
C.H. : 25/ 50/ 75/ 100 mm



MPB-50-FLT-BKT
S.W.H. : 75/ 100 mm


FEATURES

- Raw Materials Sourced From BASF, Germany to Meet Global Standards.
- Direct Food Contact Modular Belts With ISO & FDA Compliance.
- Cost Effective & Ergonomic design
- Easy For Installation & Maintenance
- Optimum High Heat Resistance & Best Anti-Corrosion
- Rust Resistance & Easy to Clean


PITCH - 50.8 mm



MPB-50-PFT
O.A. : 23%



MPB-50-PFT-CLT
C.H. : 25/ 50/ 75/ 100 mm




MPB-50-PFT-BKT
S.W.H. : 75/ 100 mm

PITCH - 50.8 mm



MPB-50-FLT-L-CLT
C.H. : 76/ 102 mm




MPB-50-FLT-L-BKT
S.W.H. : 75/ 100 mm

PITCH - 50.8 mm



MPB-50-PFT-L-CLT
C.H. : 76/ 102 mm




MPB-50-PFT-L-BKT
S.W.H. : 75/ 100 mm

PITCH - 25.4 mm




T-800-RDS
O.A. : 42%
IR : 2.5 X BELT WIDTH

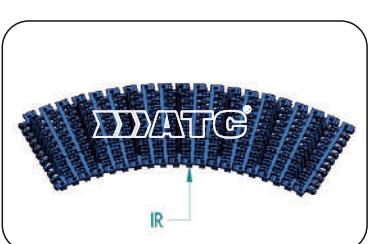

T-800-RDS-CLT
C.H. : 25/ 50 mm
IR : 2.5 X BELT WIDTH

PITCH - 50 mm

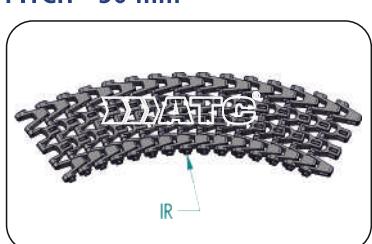


T-1100-RDS
O.A. : 43%
IR : 2.7 X BELT WIDTH

PITCH - 50.8 mm




T-500-WRM
O.A. : 34%




T-500-WRM-CLT
C.H. : 25/ 50/ 75/100 mm

PITCH - 38.1 mm



LBP882-K400
S.W. : 101.6 mm

PITCH - 25.4 mm



T-1500-LBP-ROT

MODULAR BELT SPROCKET

ATC®

T-25 MOULDED
(P-25.4 mm)



TEETH	OD.
12	100
16	130

T-50 MOULDED
(P-10 mm)



TEETH	OD.
24	78

T-100 MOULDED
(P-25.4 mm)



TEETH	OD.
12	97
15	122
18	146
21	170

T-200 MOULDED
(P-15.2 mm)



TEETH	OD.
16	79
18	86
24	118

T-300/400 MOULDED
(P-19.02 mm)



TEETH	OD.
12	77
16	101
18	113
20	126
25	156

T-400 SOLID FLOATER
(P-19.02 mm)



TEETH	OD.
27	169

T-500 SOLID
(P-50.8 mm)



TEETH	OD.
8	132
10	164
12	196

T-600 MOULDED
(P-40 mm)



TEETH	OD.
8	98
10	126
12	157
13	165

T-700 MOULDED
(P-50 mm)



TEETH	OD.
10	158
12	190

T-800 MOULDED (P-25.4 mm)



TEETH	OD.
8	65
10	82
12	99
16	132
18	149
20	165

S-900 MOULDED
(P-27.2 mm)



TEETH	OD.
6	53
9	81
12	109
18	160
20	180

T-1000 MOULDED
(P-25.4 mm)



TEETH	OD.
10	80
12	97
16	129
20	162

T-1100 MOULDED
(P-50 mm)



TEETH	OD.
8	134
10	167
12	200

T-1200 MOULDED
(P-25.4 mm)



TEETH	OD.
12	96
16	129
18	146
20	163

T-1210 MOULDED
(P-25.4 mm)



TEETH	OD.
12	98
14	114
16	130
18	146

T-1300 SOLID
(P-38.1 mm)



TEETH	OD.
17	104
19	117
21	129
23	141
25	153

T-1400 MOULDED (P-12 mm)



TEETH	OD.
12	50
15	62
19	79
25	102
28	116
38	158

T-1600 MOULDED
(P-12.7 mm)



TEETH	OD.
28	114
38	154

T-1700 MOULDED
(P-25.4 mm)



TEETH	OD.
12	100
16	132
20	166

A SERIES MOULDED
(P-50.8 mm)



TEETH	OD.
8	132
10	164
12	196

MPB-50 MOULDED
(P-50.8 mm)



TEETH	OD.
8	123
10	156

MPB-50 MOULDED
(P-50.8 mm)
TYPE-2



TEETH	OD.
6	92
10	156
12	191

LBP MOULDED SPROCKET
(P-38.1 mm)



TEETH	OD.
17	103
21	129
23	135
25	150



T-1500 LPB SPROCKET
(T-1005) (P-25.4 mm)



TEETH	OD.
14	114
16	130
18	147





CONVEYOR COMPONENTS

®

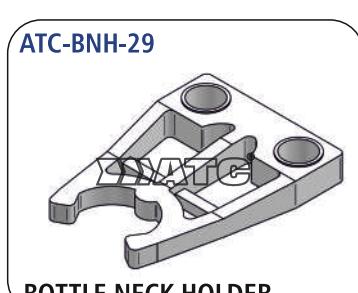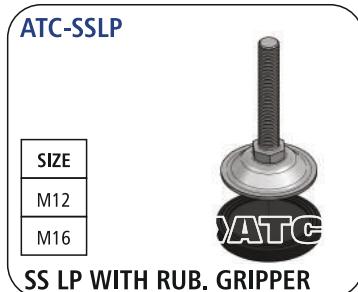



CONVEYOR COMPONENTS

ATC®

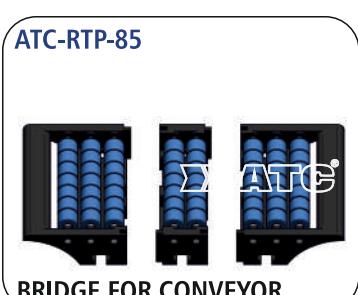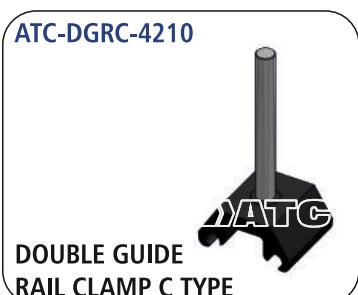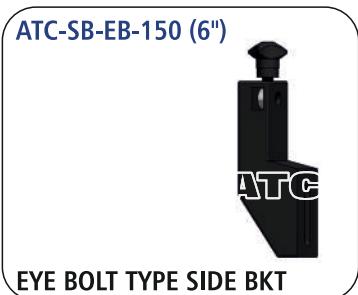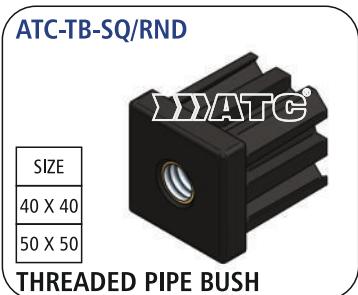


CONVEYOR COMPONENTS

ATC®

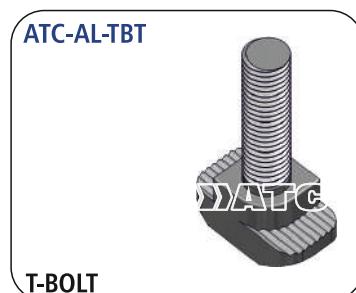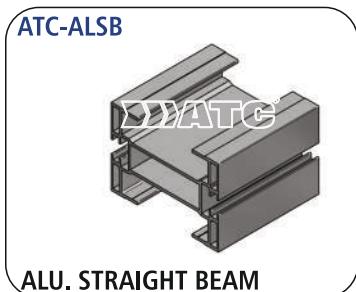

CONVEYOR COMPONENTS - SET

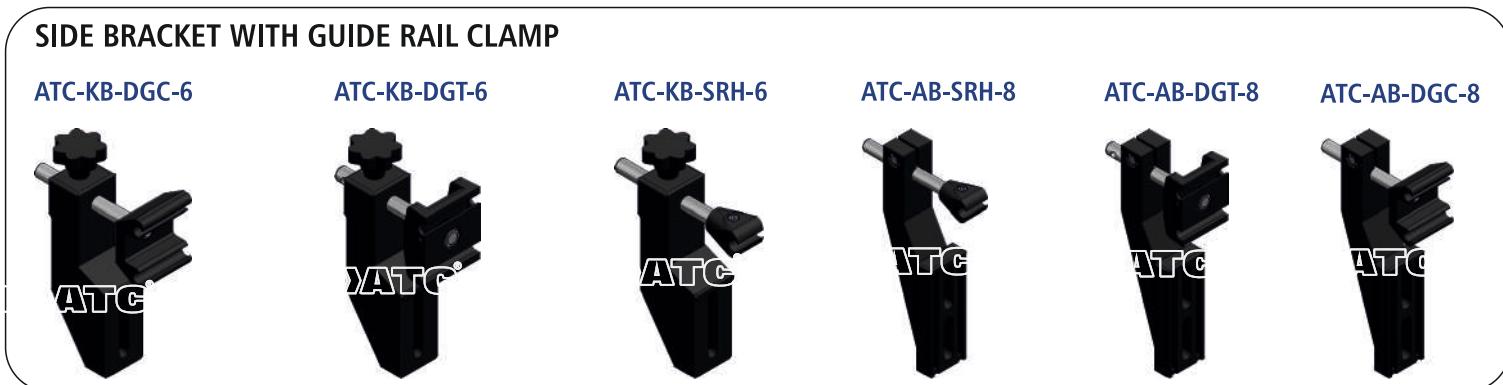


FOOD GRADE BEARINGS


S-UCF




S-UCFL



S-UCFB



S-UCT



S-UCP



CODE	204	205	206	207	208	209	210	211	212
ID	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	50 mm	55 mm	60 mm

FRICTION FREE GRAVITY ROLLER CONVEYOR ASSEMBLY



(I)



(ii)



(iii)



(iv)



DRAG CHAIN / CABLE CARRIAGE



8 series (Pitch - 14 mm)

TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TP-8X8 FIXED	8 X 8	R - 18



10 series (Pitch - 21 mm)

TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TP-10X15 FIXED	10 X 15	R - 20



15 series (Pitch - 26 mm)

TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TP-15X15	15 X 15	R - 28
ATC-TP-15X30	15 X 30	
ATC-TP-15X40	15 X 40	
ATC-TP-15X50	15 X 50	




18 series (Pitch - 33 mm)

TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TP-18X25	18 X 25	R - 30
ATC-TP-18X40	18 X 40	
ATC-TP-18X50	18 X 50	



25 series (Pitch - 45 mm)

TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TZ-25X25	25 X 25	R - 55 R - 100 R - 125
ATC-TZ-25X38	25 X 38	
ATC-TZ-25X50	25 X 50	
ATC-TZ-25X75	25 X 75	
ATC-TZ-25X103	25 X 103	




30 series (Pitch - 65 mm)

TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TZ-30X50	30 X 50	R - 150
ATC-TZ-30X75	30 X 75	
ATC-TZ-30X100	30 X 100	



35 series (Pitch - 67 mm)

TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TZ-35X50	35 X 50	R - 78 R - 100 R - 125
ATC-TZ-35X75	35 X 75	
ATC-TZ-35X100	35 X 100	
ATC-TZ-35X150	35 X 150	



45 series (Pitch - 67 mm)


TYPE	INSIDE DIMENSION	BENDING RADIUS
ATC-TZ-45X75	45 X 75	R - 78 R - 100 R - 125
ATC-TZ-45X100	45 X 100	
ATC-TZ-45X150	45 X 150	



**C TRACK
WEAR STRIPS**



24 TEETH MS SPROCKET
OD : 310 mm

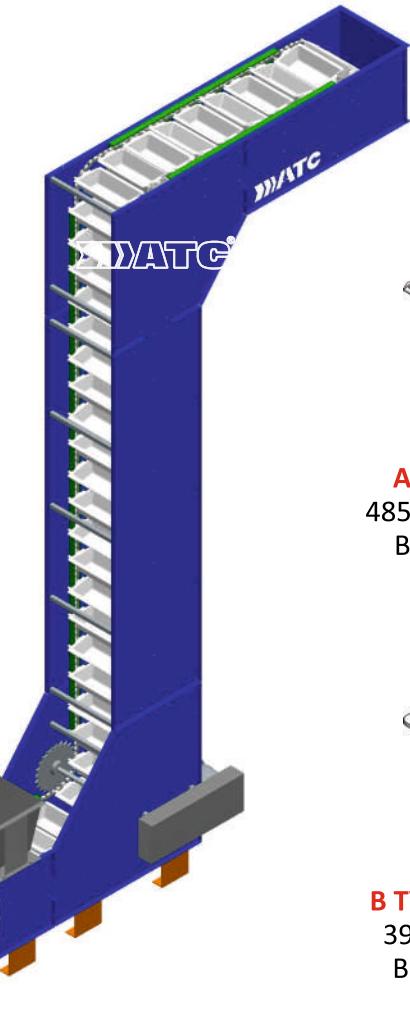

All Type of Bucket

FOR MULTIPLE DISCHARGE



A-1 Z ELEVATOR BUCKET
485 X 150 X 88 mm - 2.25 Ltr.
BUCKET PITCH - 159 mm




A-2 Z ELEVATOR BUCKET
600 X 150 X 90 mm - 2.85 Ltr.
BUCKET PITCH - 159 mm



B TYPE Z ELEVATOR BUCKET
394 X 201 X 96 mm - 4 Ltr.
BUCKET PITCH - 190 mm



C-TYPE IMP BUCKET
420 X 133 X 72 mm - 1.8 Ltr.
BUCKET PITCH - 127 mm

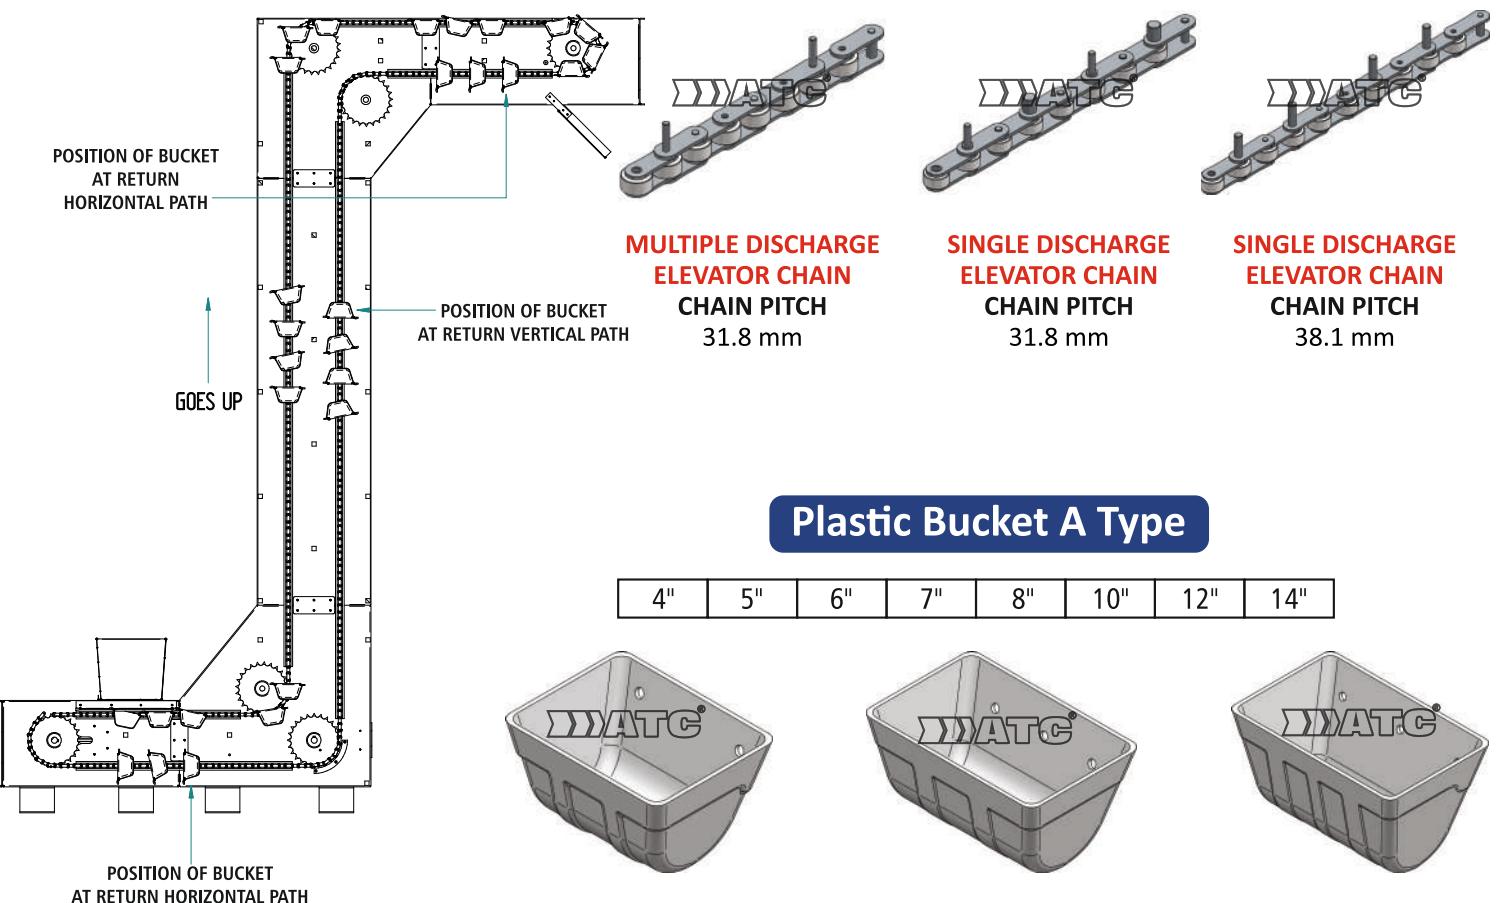

CONVEYOR SYSTEM



PVC Belt Conveyor



Multiflex Finger Chain Conveyor



Side Flex Chain Conveyor



Plastic Chain Conveyor



Z Inclined Modular Belt Conveyor



LBP Table Top Conveyor



Side Flex Plastic Chain Conveyor



Bottle Conveyor



Multiflex Chain Conveyor



Modular Conveyor For Washing



Multilink Slat Conveyor Chain



Product Sorting Conveyor



Radius Modular Belt Conveyor



Packaging Conveyor



Radius SS Slat Chain Conveyor



Slat Chain With Roller Chain Conveyor System



Eyelink Conveyor For Bakery



Crate Washing Conveyor



Plastic Modular Belt Conveyor



Dairy Chain Conveyor



ATC CHAINS INDIA

 OFFICE : 22, Kalyan Nagar Society, Opp. Akhand Anand School,
Shahpur Fire Station Road, Mehandikuva, Shahpur,
Ahmedabad - 380004, Gujarat, INDIA.

 PLANT : Block No. 1156, Peiki-1 at Santej Village, Opp. Jyoti Resins,
Ta. Kalol, Dist. Gandhinagar. PIN.: 382721

 +91 91736 10999
+91 95107 70995

 sales@atcchain.com
accounts@atcchain.com

 www.atcchain.com



Please scan the
QR code to locate us.