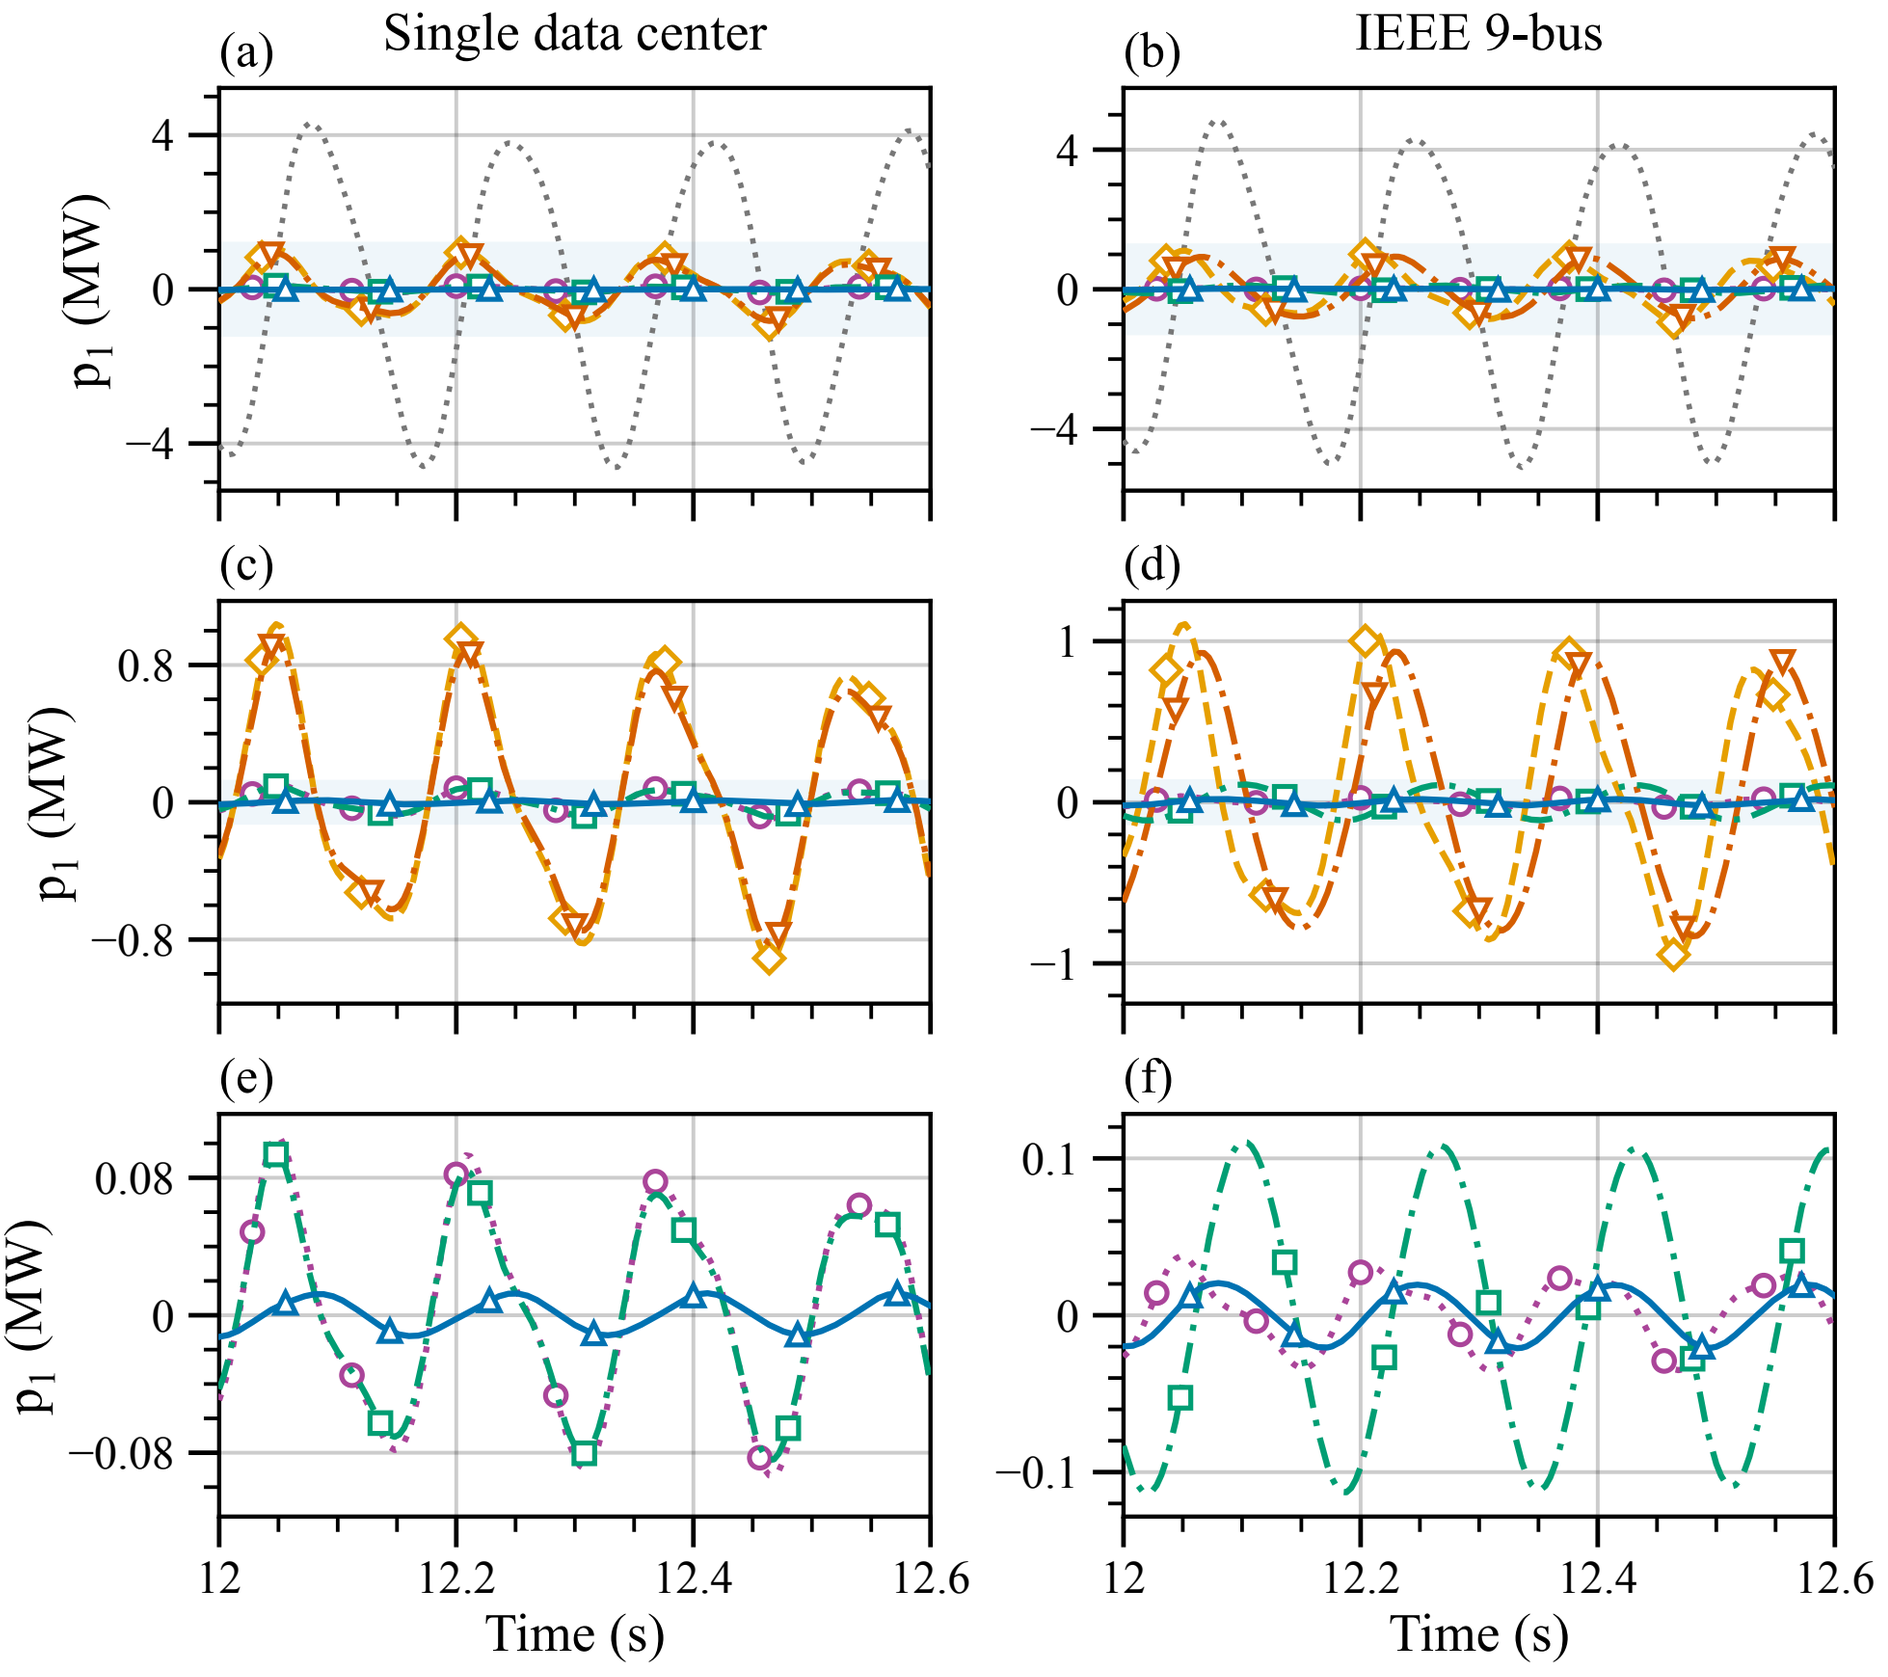
Single data center
IEEE 9-bus
(a)
(b)
(c)
(d)
(e)
(f)
p1 (MW)
Time (s)
No HESS
Power only
RBC (adapted)
RBC + support
Lead + support (opt.)
Proposed