


DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1501	A	RELEASED	JWM	10/7/03	HO	10/14/03	DJC	10/14/03

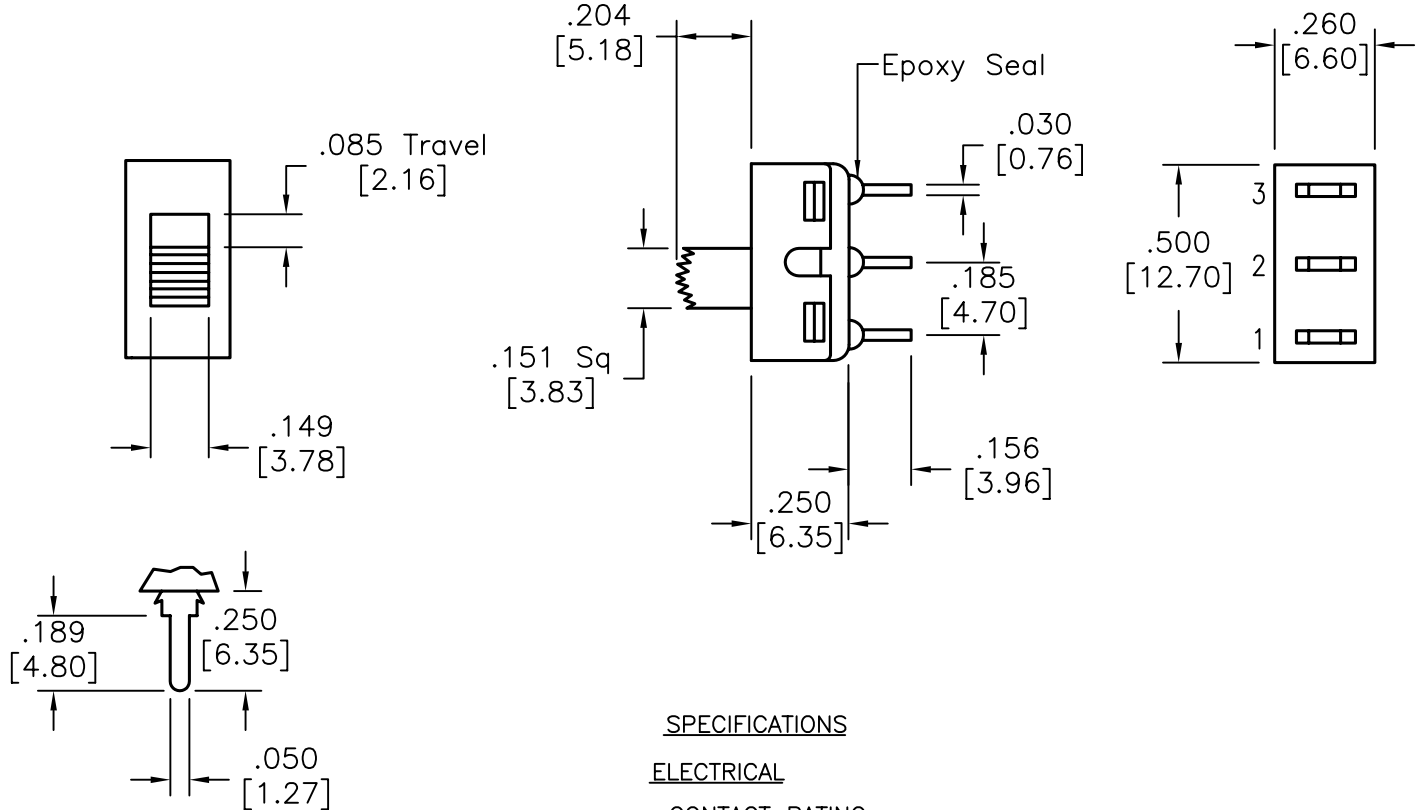

SPECIFICATIONS

ELECTRICAL

CONTACT RATING:

0.4 VA MAX. @ 20 V MAX. (AC OR DC)

CONTACT RESISTANCE: 10 MILLIOHMS MAX.

INSULATION RESISTANCE: 1,000 MEGOHMS MIN. AT 500 VDC

DIELECTRIC STRENGTH: 1,000 VRMS

MECHANICAL

LIFE: 30,000 CYCLES

ENVIRONMENTAL

OPERATING TEMPERATURE: -30°C TO +85°C

MATERIAL


CASE: DAP, UL94V-0

HOUSING: STAINLESS STEEL


ACTUATOR: NYLON, BLACK

CONTACTS/TERMINALS: COPPER ALLOY, GOLD PLATED

FOR PC MOUNT TERMINATION ONLY.



PCB LAYOUT

	SWITCHING FUNCTION		
	ON	NONE	ON
CONN. TERMS	2-1	OPEN	2-3
SCHEMATIC	SPDT 		

SPC-F004.DWG

NON-SHORTING TYPE

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	Jeff McVicker	10/7/03	Slide Switch, SPDT, PCB Mount			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	Hisham Odish	10/14/03	A	SPC12416	53H6675.dwg	A
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1
	Daniel Carey	10/14/03				