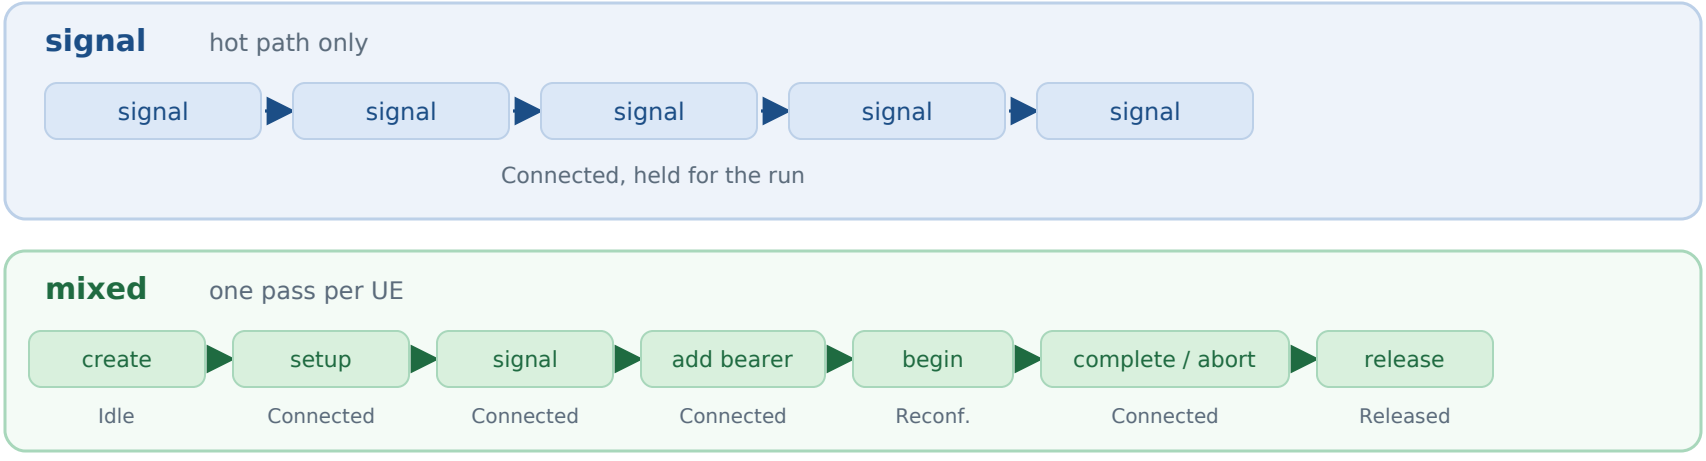
signal
hot path only
signal
signal
signal
signal
signal
Connected, held for the run
mixed
one pass per UE
create
setup
signal
add bearer
begin
complete / abort
release
Idle
Connected
Connected
Connected
Reconf.
Connected
Released