



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[U-ER34615M/W200](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

U-ER34615M/W200: D Size Spiral Cell

Technical Datasheet



Features

- High and flat operating voltage
 - High power and higher energy for the whole battery life
- High drain capability
 - Higher power applications
- Low self-discharge rate (<1% per year at 20°C)
 - Battery life higher than 10 years, depending on the application
- Hermetic glass-to-metal sealing
 - Avoid leakage, key for higher than 10 year battery life
- Non-flammable electrolyte
 - Safer operation in case of abuse
- PTC device
 - Safe operation in the event of a short circuit

Typical Applications

- Military and other radio applications
- Smart meters
- Alarm and security systems
- Beacons and emergency location transmitters
- GPS
- LED lighting applications

Technical Specifications

Part No.	ER34615M (P/N 1000098)
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Thionyl Chloride
Voltage Range	2.0 to 3.7V
Nominal Voltage	3.6V
Nominal Capacity	14.5Ah @ 10mA to 2.0V @ 20°C
Max. Continuous Discharge Current	2000mA continuous
Max. Pulse Discharge Current	Up to 3000mA (life and temperature dependent)
Weight	107g
Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C (max 30°C for a >5 years life)
Exterior/Housing	Stainless steel container
Terminals/Connector	200mm flying leads with Molex 5264 Connector
Safety	AL-MSDS/RD-002 Material Safety Datasheet - MSDS041 Safety Guide UBM-5112
Transportation	Class 9 - A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.


Quality Assurance

AceOn manufacturing facilities are ISO 9001:2008 registered.
This product is listed under the Component Recognition Program of Underwriters Laboratories (UL) and has passed UN transportation testing, which is required for international transportation of all lithium batteries.


Univercell by:-

AceOn Battery Solar Technology Ltd
Unit 9B, Stafford Park 12, Telford, TF3 3BJ
Tel: +44(0)1952 293388


Dimensions

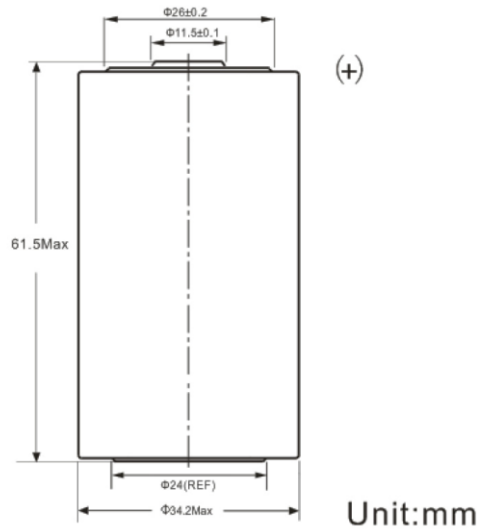

Typical Performance Graphs

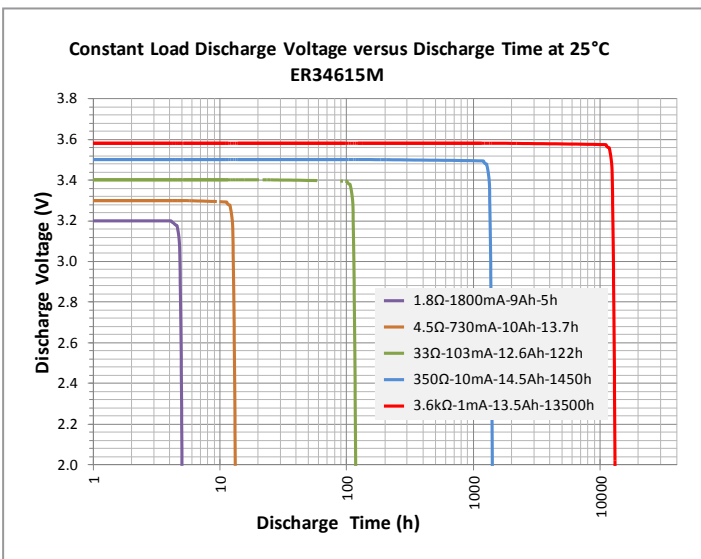

High and flat voltage at high and low drain

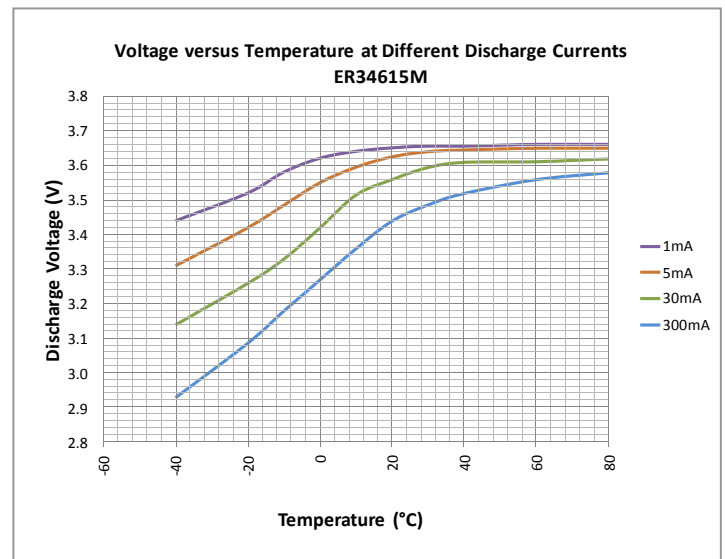

High voltage at high drain even at -30°C

Univercell by:-
AceOn Battery Solar Technology Ltd
Unit 9B, Stafford Park 12, Telford, TF3 3BJ
Tel: +44(0)1952 293388



element14

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[U-ER34615M/W200](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant