


# Piston Air Compressors

Performance | Technology | Reliability...at its best



## Belt Driven

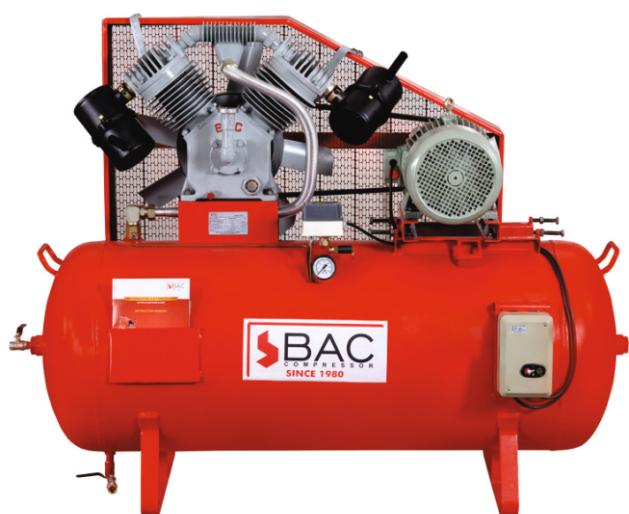

## RECIPROCATING AIR COMPRESSORS

**APPLICATIONS :** Painting, Air filling, Rock blasting, Pneumatic uses

### SINGLE STAGE SINGLE CYLINDER AIR COMPRESSOR

MODEL	Power		Tank capacity	Compressor speed	Maximum Working Pressure		Piston Displacement		Dimension	Weight	Belt Size *	Oil Capacity
	HP	KW			LTRS	RPM	Psi	Kg/Cm <sup>2</sup>				
BAC-S-50-30L	0.5	0.37	30	1000	60	4.2	2.8	78.5	825x300x650	36	A39	100
BAC-S-75-45L	0.75	0.555	40	1000	75	5.3	2.8	78.5	875x360x650	38	A39	100
BAC-S-100-95L	1	0.74	95	1000	100	7.0	4.0	113.0	1000x420x775	49	A47	150
BAC-S-150-110L	1.5	1.11	110	820	100	7.0	5.1	143.7	1075x420x812	64	A47	150
BAC-S-200-180L	2	1.48	180	820	100	7.0	6.9	195.6	1275x460x875	78	B50	150

### SINGLE STAGE DOUBLE CYLINDER

BAC-D-150-110L	1.5	1.11	110	720	125	8.8	8.2	232.0	1050x420x850	74	B50	300
BAC-D-200-180L	2	1.48	170	1080	125	8.8	8.5	241.6	1275x460x875	83	B50	300
BAC-D-300-180L	3	2.22	180	720	125	8.8	16.6	470.8	1300x550x1025	149	A64	650
BAC-D-500-220L	5	3.7	220	960	125	8.8	22.2	627.7	1350x550x1100	162	A68	650
BAC-D-750-400L	7.5	5.55	400	600	125	8.8	33.9	960.8	1625x1300x1300	199	B68	900
BAC-D-1000-400L	10	7.4	400	720	125	8.8	43.4	1228.3	1625x1300x1300	199	B68	900

### SINGLE STAGE TRIPLE CYLINDER

BAC-TC-1000-500L	10.0	7.4	400	720	125	8.8	36.7	1038.6	1880x900x1325	240	B74	1100
BAC-TC-1250-500L	12.5	9.3	400	600	125	8.8	50.9	1441.3	1880x900x1325	240	B77	1100
BAC-TC-1500-500L	15.0	11.1	500	720	125	8.8	67.8	1921.7	1880x900x1325	240	B80	1100

### TWO STAGE DOUBLE CYLINDER

BAC-TS-150-110L	1.5	1.11	110	1080	150	10.5	5.6	157.9	1050x420x850	74	B50	300
BAC-TS-200-180L	2	1.48	170	1230	175	12.3	7.2	197.3	1275x460x875	94	B50	300
BAC-TS-300-180L	3	2.22	180	480	175	12.3	10.2	288.5	1300x550x1025	157	A64	650
BAC-TS-500-220L	5	3.7	220	720	175	12.3	12.2	346.2	1350x550x1100	170	A66	650
BAC-TS-750-400L	7.5	5.55	400	690	175	12.3	16.3	460.4	1612x625x1287	196	B68	900
BAC-TS-1000-400L	10	7.4	500	720	175	12.3	23.2	657.0	1612x625x1287	196	B68	900

### TWO STAGE TRIPLE CYLINDER

BAC-TSTC-1000-500L	10.0	7.4	500	720	175	12.3	23.2	657.0	1612x625x1287	196	B68	900
BAC-TSTC-1250-500L	12.5	9.3	500	720	175	12.3	33.9	960.8	1880x900x1325	236	B77	1100
BAC-TSTC-1500-500L	15.0	11.1	500	960	175	12.3	45.2	1281.1	1880x900x1325	236	B80	1100

### TWO STAGE TRIPLE CYLINDER - PET BOTLING COMPRESSORS

BAC-PB-1250-500L	12.5	9.3	500	720	300	21	24.4	692.4	1800x900x1325	256	B77	1100
BAC-PB-1500-500L	15.0	11.1	500	960	425	30	45.2	1281.1	1880x900x1325	256	B80	1100

\* Subject to change depending on motor used.

\* Compressors available with variable capacity air receivers also.

\* Request for technical specification absent in the above chart.

For enquiries contact :  
**Bakgiyam Engineering Private Limited, Coimbatore**  
Mobile : 94433 16946  
[www.bac-compressors.com](http://www.bac-compressors.com)  
[sales@bac-compressors.com](mailto:sales@bac-compressors.com)

