FLOMAXX

# 2W BRASS BODY 2-WAY DIAPHRAGM TYPE SOLENOID VALVE

**2W** | **160** | **15** | **AC220V**


- **2W** — 2Way
- **160** — orifice
- **15** — Pipe Size
- **AC220V** — Available voltage
  - AC: 110v
  - AC:220V
  - DC: 24V
  - Contact the Factory for others









## SPECIFICATION

| Model | 2W025~06 | 2W025~08 | 2W040~10 | 2W160~10 | 2w160~15 | 2w250~20 | 2w250~25 | 2w350~35 | 2w400~40 | 2w500~50 |
|---|---|---|---|---|---|---|---|---|---|---|
| Symbol | | | | | | | | | | |
| Fluid Media | Air, Water, Gas | | | | | | | | | |
| Operating Mode | Direct Acting, Diaphragm Type | | | | | | | | | |
| Type | Normally Closed | | | | | | | | | |
| Orifice | 2.5 | | 16 | | 20 | 25 | 35 | 40 | 50 | |
| Cv Factor | 0.23 | | 4.8 | | 7.6 | 12 | 24 | 29 | 48 | |
| Pipe Size | 1/8" | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | |
| Viscosity | Under 20CTS | | | | | | | | | |
| Operating Pressure(kg/cm2) | Water: 0~7 Air 0~7 | | | | | | | | | |
| Fluids Temp . | -5 ~80°C | | | | | | | | | |
| Available Voltage | +_10% | | | | | | | | | |
| Body Material | Brass | | | | | | | | | |
| Seal Material | NBR | | | | | | | | | |

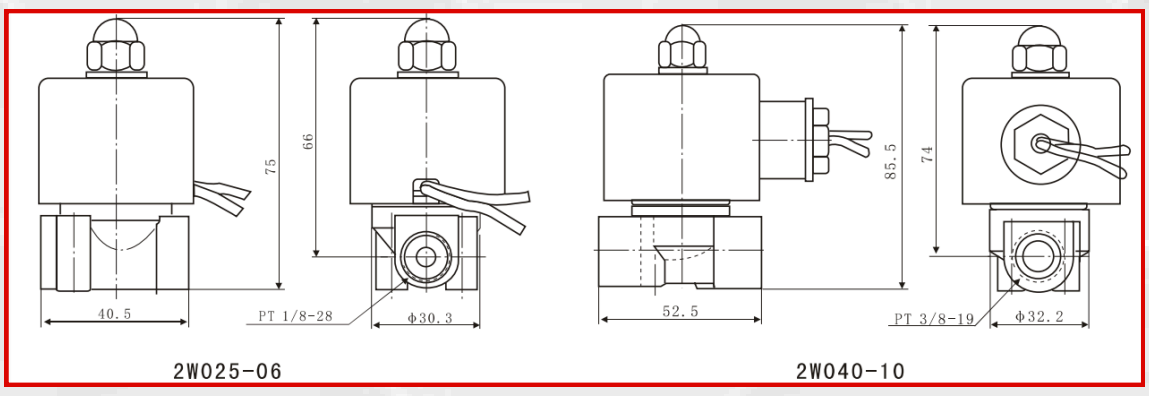

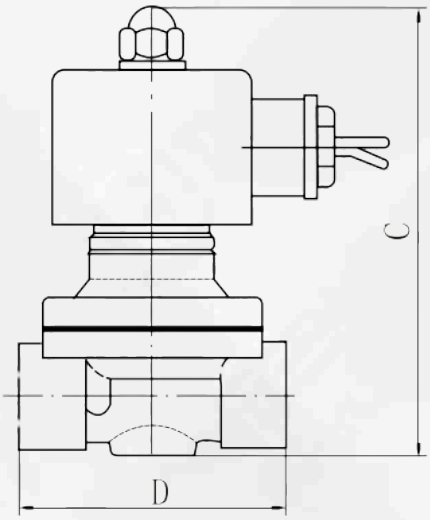

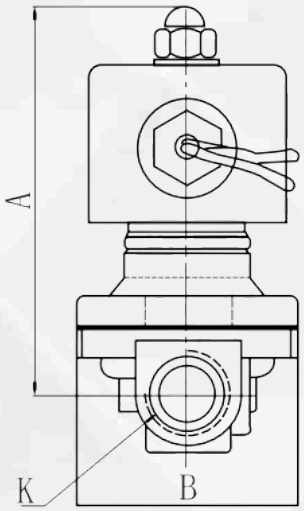
| Model Code | A | B | C | D | K |
|---|---|---|---|---|---|
| 2W025-08 | - | - | - | - | 1/4" |
| 2W160-15 | 101.5 | 57 | 117 | 69 | PT 1/2" |
| 2W220-20 | 107 | 57 | 123.5 | 73 | PT 3/4" |
| 2W250-25 | 111.5 | 73.5 | 134.5 | 99 | PT 1" |
| 2W350-35 | 142 | 95 | 172 | 112 | PT1 1/4" |
| 2W400-40 | 142 | 95 | 172 | 123 | PT1 1/2" |
| 2W500-50 | 172 | 123 | 209 | 168 | PT2" |

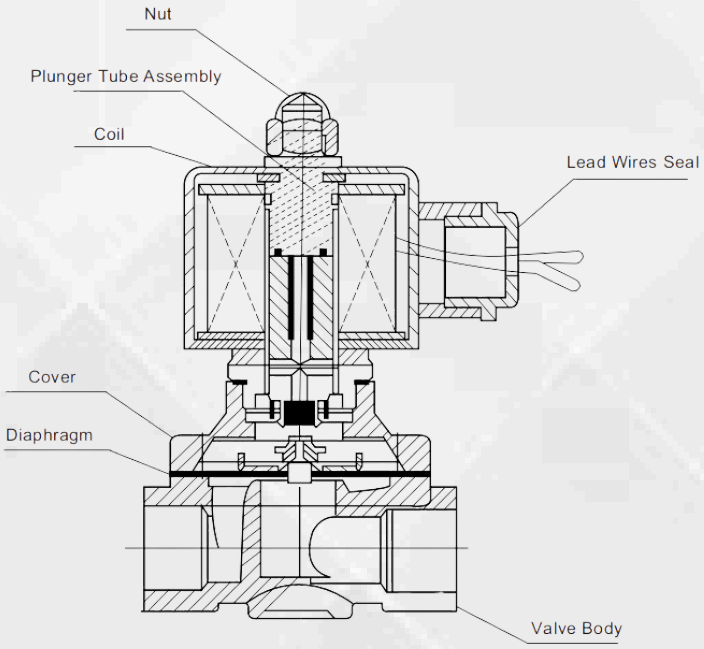