



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range




For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us

Send Us **BULK**
Enquiries



Ash[®] PV Modules

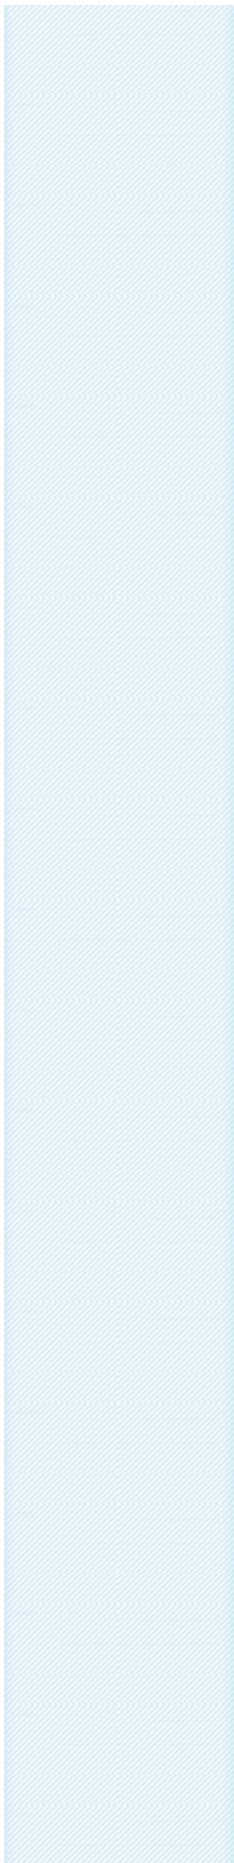

We provide PV modules from recognized A grade vendors for good efficiency and time tested performance. These highly efficient PV modules helps you to derive maximum energy out of Sunlight and maximize the savings.

- » Mono & Poly-crystalline Silicon PV Modules (3Wp to 300Wp)
- » Thin-film Photovoltaic Modules



Mono & Poly-crystalline Silicon PV Modules

Features

- » High Power Module using mono/poly-crystal Silicon solar cell.
- » Bypass diode to minimize power drop caused by shade.
- » Anti-Reflection coating to improve cell Conversion efficiency.
- » Al frame.
- » Lead wire with weatherproof connector for output terminal.



Thin-film Photovoltaic Modules

Features

- » A-Si, Cd.Te, CIS panels.
- » Bypass diode to minimize power drop caused by shade.
- » Lead wire with weatherproof connector.

Ash® Standard Solar PV Products

Solar Street Light (LED/CFL Model)

Features


- » Single/Double LED/CFL Lamp for high light Output.
- » High Efficiency Poly-Crystalline Module.
- » High Lumen Efficiency.
- » Battery Box & Luminaries casing for long life.
- » Lead Acid Battery for lower topping requirement.
- » Auto Dusk to Dawn Operation.
- » Two-Three days battery back-up for operation during non-sunny days



Ash® Solar PV Power Plant and Home Lights

Off-Grid Solar PV Power Plant(Standalone/Hybrid Systems/Home Lights)

Schematic Diagram

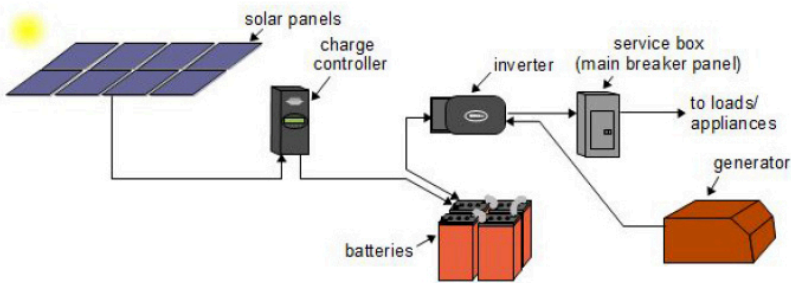


Features

- » Provides uninterrupted & stable Power as per customer load requirement.
- » Battery Back-up to operate load during night and non-sunny days.
- » Solar PV & AC-Mains/ DG can also be combined to provide Stable & continuous power.
- » Solar PV Power Plant Capacity range from 500W to 25 KW.
- » Solar home lighting and lanterns.

Grid Connect Solar PV Power Plant

Schematic Diagram

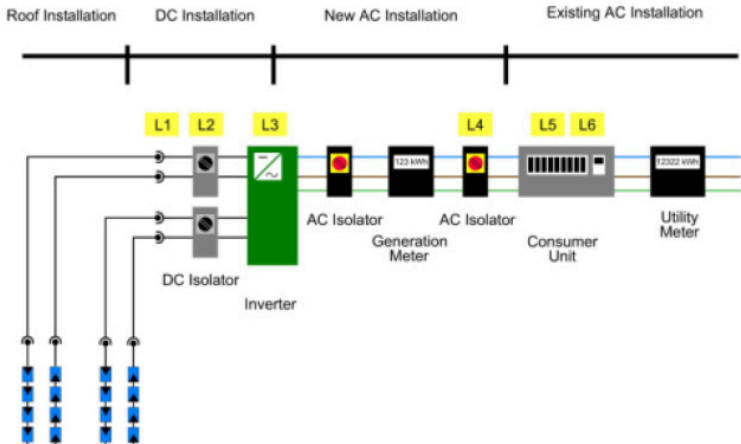



Features

- » Direct feeding of power from PV panels to Utility Grid.
- » Feed powers during peak hours & helps in grid stability.
- » Help reduce T&D losses by improving System voltage & Freq.
- » Generates Power at the point of use to meet partial & peak Load demand of the building (for captive consumption).
- » Grid Connect PV Power Plant range from 1KW to 100 MW

Ash® Solar Geysers

We provide all kinds of solar water heaters.

Features

- » Saves up to 70% on electricity bills.
- » Eco friendly, No noise, No smoke, no electrical shocks, No fire hazards.
- » Better performance in winter and cloudy days.
- » PUF Insulated Stainless Steel Inner Tank.



OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies,
Creator of IndiaBusinessPortal.com



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us

Send Us **BULK**
Enquiries 

Ash[®] Gel Earthing Electrode

Maintenance Free 'Ash' Gel Earthing Electrode by utilizing metal alloys and natural chemical compositions, the Gel Earthing Electrode is able to provide a multifaceted proactive earthing protection strategy. The Earthing Electrode is manufactured from custom-made I.S.I tube to ensure maximum conductivity and prolonged service life. The Gel Earthing Electrode contains a conductor rich crystalline mixture that will protect the main earth electrod in the soil. This will ensure a highly conductive state for the fault current to pass on to earth.

Earthing is very important area of electrical engineering maintenance. In most cases it fails due to corrosion of the pipe. Therefore Earthing Electrode can be used for effective earthing, which will ensure safety to human life, appliances, machines, equipment's etc., Earthing is absolutely essential and it is mandatory by various electrical department

A good and continuous effective earthing is of paramount importance. Ash Gel Earthing Electrode is most effective product for earthing.

Thus Ash Gel Earthing Electrode is totally maintenance free solution for many years and is suitable to any application required high performance earthing.

Technical Specification

DIAGRAM OF G.I. PIPE

Code No.	Length (L) (mm)	Outer Dia (D2) (in mm) approx	Internal Dia (D1) (in mm) approx	Internal Copper Strips	Terminal (T1 & T2) Point (Dia mm)	Inner Pipe (SWG)	Outer Pipe (SWG)	Pipe
Ash-19	2000 mm	46-50 mm	22-25 mm		12 mm	18	14	G.I.
Ash-19	3000 mm	46-50 mm	22-25 mm		12 mm	18	14	G.I.
Ash-39	2000 mm	76-80 mm	37-40 mm		14 mm	16	12	G.I.
Ash-39	3000 mm	76-80 mm	37-40 mm		14 mm	16	12	G.I.
Ash-50	2000 mm	60-63 mm		50×3 mm	12 mm	-	-	Copper
Ash-50	3000 mm	60-63 mm		50×3 mm	12 mm	-	-	Copper

Note


- » Ash-19 Code No-we recommended this for LT application.
- » Ash-39 Code No- we recommended this for HT application.
- » Ash-50 Code No-where, only copper earthing is required.

Primary Conducting & Surface Area:

- » Ash gives maximum surface Area (in sq.mm.)
- » Ash gives maximum cross sectional Primary conducting Area (insq.mm.)

Maximum Surface Area (approx.) of Ash :


Ash-19	Ash-39	Ash-50
L-2000 mm L-3000mm	L-2000 mm L-3000 mm	L-2000 mm L-3000 mm
3,14,000 sq.mm	5,02,400 sq.mm	3,95,640 sq.mm



4,71,000 sq.m

7,53,600 sq.mm

5,93,460 sq.mm



The above specification can be changed at any time for the development of the product.


" The Latest development in Earthing Technologies. "

Faradey Caze / Octopus Earthing Solution

Faraday cages are often put to a dual purpose: to block electric fields, as explained above, and to block electromagnetic radiation. The latter application is known as RF shielding.

Practical Faraday cages can be made of a conducting mesh instead of a solid conductor. However, this reduces the cage's effectiveness as an RF shield. Some real-world structures, such as automobiles, behave approximately like a Faraday cage.

That's why : A Faraday cage is best understood as an approximation to an ideal hollow conductor. Electric fields produce forces on the charge carriers (i.e., electrons) within the conductor. As soon as an electric field is applied to the surface of an ideal conductor, it generates a current that causes displacement of charge inside the conductor that cancels the applied field inside.

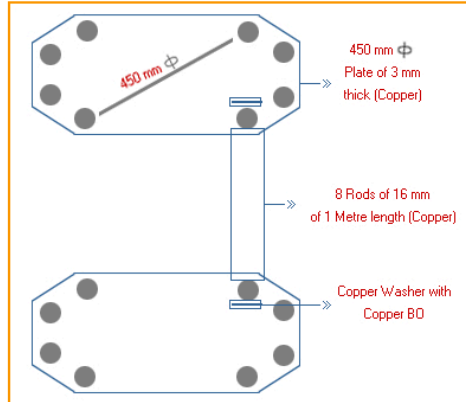

OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies,
Creator of IndiaBusinessPortal.com

Member
SstDesigns.com



COOLING TOWERS

- FRP Shape Cooling Tower
- Rectangular Shape Cooling Tower

[read more](#)



SOLAR DIVISION

- EPC to Solar Projects

[read more](#)



WATER MANAGEMENT

- Industrial Reverse Osmosis System
- Commercial Reverse Osmosis System
- Mineral Water Plant with Packaging / Bottling Unit
- Domestic Reverse Osmosis System
- Industrial Package Softener / DM Plant

[read more](#)



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

 Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range




For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries



Ash[®] PV Modules

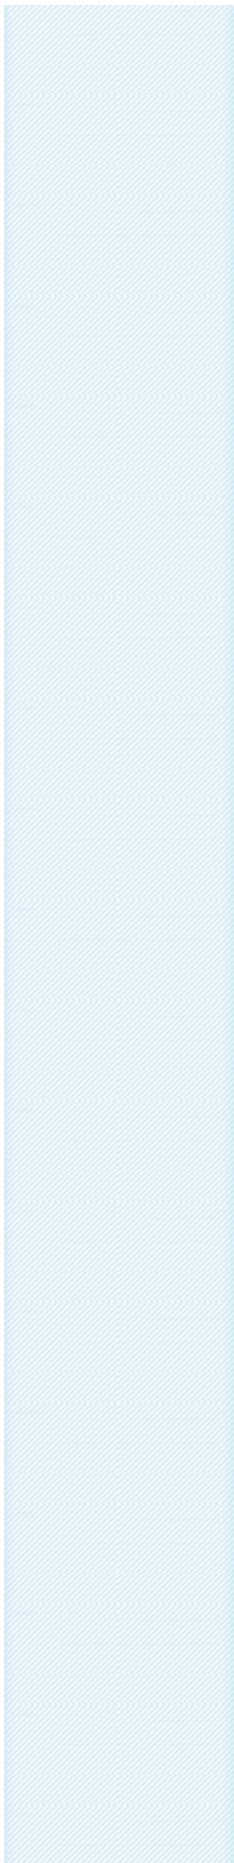

We provide PV modules from recognized A grade vendors for good efficiency and time tested performance. These highly efficient PV modules helps you to derive maximum energy out of Sunlight and maximize the savings.

- » Mono & Poly-crystalline Silicon PV Modules (3Wp to 300Wp)
- » Thin-film Photovoltaic Modules



Mono & Poly-crystalline Silicon PV Modules

Features

- » High Power Module using mono/poly-crystal Silicon solar cell.
- » Bypass diode to minimize power drop caused by shade.
- » Anti-Reflection coating to improve cell Conversion efficiency.
- » Al frame.
- » Lead wire with weatherproof connector for output terminal.



Thin-film Photovoltaic Modules

Features

- » A-Si, Cd.Te, CIS panels.
- » Bypass diode to minimize power drop caused by shade.
- » Lead wire with weatherproof connector.

Ash® Standard Solar PV Products

Solar Street Light (LED/CFL Model)

Features


- » Single/Double LED/CFL Lamp for high light Output.
- » High Efficiency Poly-Crystalline Module.
- » High Lumen Efficiency.
- » Battery Box & Luminaries casing for long life.
- » Lead Acid Battery for lower topping requirement.
- » Auto Dusk to Dawn Operation.
- » Two-Three days battery back-up for operation during non-sunny days



Ash® Solar PV Power Plant and Home Lights

Off-Grid Solar PV Power Plant(Standalone/Hybrid Systems/Home Lights)

Schematic Diagram

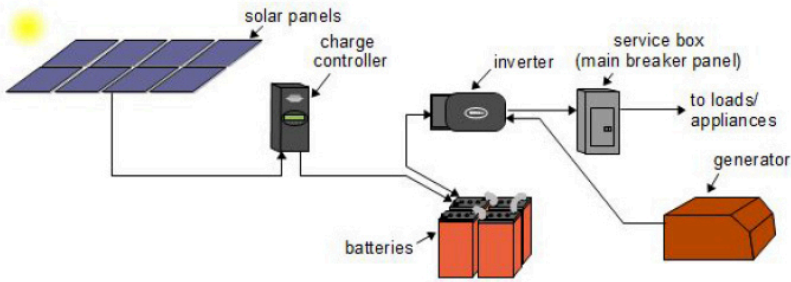


Features

- » Provides uninterrupted & stable Power as per customer load requirement.
- » Battery Back-up to operate load during night and non-sunny days.
- » Solar PV & AC-Mains/ DG can also be combined to provide Stable & continuous power.
- » Solar PV Power Plant Capacity range from 500W to 25 KW.
- » Solar home lighting and lanterns.

Grid Connect Solar PV Power Plant

Schematic Diagram

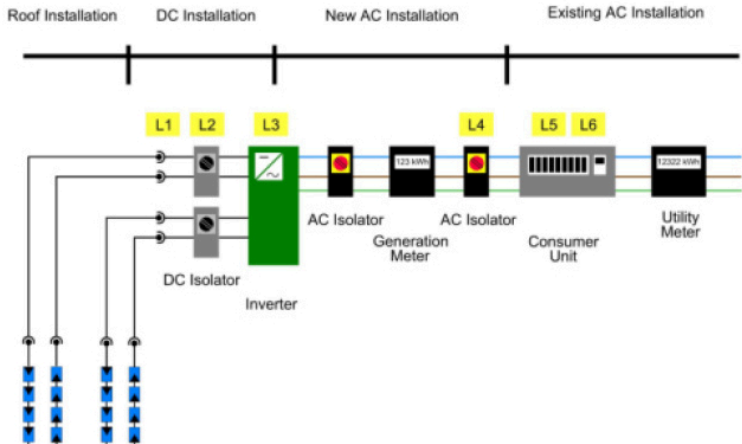



Features

- » Direct feeding of power from PV panels to Utility Grid.
- » Feed powers during peak hours & helps in grid stability.
- » Help reduce T&D losses by improving System voltage & Freq.
- » Generates Power at the point of use to meet partial & peak Load demand of the building (for captive consumption).
- » Grid Connect PV Power Plant range from 1KW to 100 MW

Ash® Solar Geysers

We provide all kinds of solar water heaters.

Features

- » Saves up to 70% on electricity bills.
- » Eco friendly, No noise, No smoke, no electrical shocks, No fire hazards.
- » Better performance in winter and cloudy days.
- » PUF Insulated Stainless Steel Inner Tank.



OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies,
Creator of IndiaBusinessPortal.com





EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries 

Ash[®] Bottle Shape FRP & Rectangular / Wooden Cooling Tower

Casting : Casting to Tower made of Fiber Glass Reinforced Plastic. The cooling Tower designed and constructed for minimum maintenance and long lasting, you can able to operate in aggressive environment and resistant to water born contaminants.



P.V.C. Fill : A pre - eminent quality and long life fill consists of modular block of honey combs construction to create prolonged contact time of hot air water for maximum heat transfer. The air pressure drop through the fill sincerely negligible.

Drift Eliminator : To reduce carry over losses through entrainment of moisture drops in the air stream by specially designed multi blade rotary drift eliminator made of F.R.P. Aluminium sheets.

Sinkler : The uniform distribution of water over the honey combs fill this sprinkler rotates by self propulsion and eliminated the need for atomising the water through nozzles. The head side include ball bearing requiring minimum maintenance.

Motor : Electro Magnetic designs of the entire range of New India and Bharat Motor covered by 3N series have been developed in keeping with the latest national and international practice and confirm in general to 1 EC recommendations.

Fan : An aero - dynamically axille flow type fan is well balanced construction. The Fan blades are of case aluminium alloy, fan with variable pitched blades is dynamically balanced for low vibration and efficiency.



Design Parameter :

Flow rate : m³/hr (max)

Inlet Temperature : 42° C

Outlet Temperature : 32° C

TECHNICAL DETAIL OF "STRUCTURE INDIA" FRP BOTTLE SHAPE COOLING TOWERS

S.No.	Model	Capacity TR	Heat Rejection Kcal/hr x1000	Dia. mm	Height mm	Fan dia mm	Motor HP/RPM	Inlet Outlet Size mm	Operating weight Kg.	Pump Head MM WC
01.	SI-FB-81	7.5	28	900	2000	600	0.75/960	40	210	180
02.	SI-FB-101	10	38	900	2000	600	1/960	40	250	200
03.	SI-FB-151	15	56	1100	2000	700	1/960	40	350	200
04.	SI FB-251	25	98	1900	2300	900	2/960	50	520	2500
05.	SI-FB-301	30	115	1900	2300	900	2/960	50	600	2500
06.	SI-FB-401	40	160	2200	2900	1200	2/960	50	800	3000
07.	SI-FB-501	50	190	2200	2900	1200	2/960	80	900	3000
08.	SI-FB-601	60	225	2200	2900	1200	3/960	80	1200	3000

09.	SI-FB-801	80	320	2900	3100	1450	3/960	80	1500	3000
10.	SI-FB-1002	100	380	2900	3100	1450	5/960	100	1650	3200
11.	SI-FB-1252	125	477	3250	3100	1500	5/960	100	1850	3200
12.	SI-FB-1502	150	568	3250	3100	1500	7.5/960	100	1950	3400
13.	SI-FB-1752	175	645	3700	3300	1800	7.5/960	150	2200	3400
14.	SI-FB-2002	200	775	3700	3300	1800	10/720	150	2300	3500
15.	SI-FB-2502	250	940	4200	3600	1800	10/720	150	3400	3800
16.	SI-FB-3002	300	1128	4200	3600	1800	10/720	150	3700	3800
17.	SI-FB-4002	400	1550	6000	3800	3000	15/560	200	6000	4200
18.	SI-FB-5002	500	1890	6000	4100	3000	15/560	200	6500	4500

Note: The Company operates a policy of continuous improvement & reserves the right to amend the above data without notice.

Ash[®] Rectangular / Wooden Cooling Tower

We are proud to offer you the complete range of Cooling Tower that includes wooden & F.R.P. Cooling Tower. We also offers the spare parts & maintenance for all type of cooling towers through our highly technically equipped supports for all kinds of industrial heat exchangers including Air Compressors, Injection Moulding Machines, Induction Furnace, Air Conditioning, Refrigeration & Diesel Engine Generating Sets etc.



OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
 Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
 Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
 <> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries 

Ash[®] Industrial Package Softener

Elements like Calcium (Ca) and magnesium (Mg) present in water makes it "hard". This water adversely the quality of your skin and hair and is also undesirable for bathing, laundry and dishwashing. These softeners provide soft water for all your water requirements.



Sr. No.	Model	Type	M.O.C.	Value (NB)	Dia X H.O.S. (MM)	Resin Qty (Lt)	Flow Rate M3/ Hr	Erection Charges (Rs.)
1	SI-101/U	UF	FRP	15 Top Mounted	160 X 800	15	1.0	1,000
2	SI-201/U	UF	FRP	15 Top Mounted	220 X 950	30	1.5	1,000
3	SI-202/U	UF	FRP	15 Top Mounted	260 X 1200	55	2.0	1,000
4	SI-301/U	UF	FRP	15 Top Mounted	310 X 1200	80	2.0	1,000
5	SI-401/U	UF	FRP / MS	40	400 X 1100	135	6.0	1,500
6	SI-512/U	UF	MS	40	500 X 1200	200	10	1,500
7	SI-515/U	UF	MS	40	500 X 1500	260	10	1,500
8	SI-615/U	DF	MS	40	600 X 1500	350	10	2,000
9	SI-622/D	DF	MS	70	600 X 2200	300-425	10	2,000
10	SI-722/D	DF	MS	40	700 X 2200	400-550	10/15	2,500
11	SI-822/D	DF	MS	40/50	800 X 2200	500-700	10/15	2,500
12	SI-922/D	DF	MS	50/80	900 X 2200	600-700	15/35	3,000
13	SI-1022/D	DF	MS	80/100	1000 X 2200	750-1060	35/50	4,000
14	SI-1222/D	DF	MS	80/100	1200 X 2200	1075-1500	30/50	5,000
15	SI-1422/D	DF	MS	80/100/150	1400 X 2200	1450-2100	30/50/90	5,000

Ash[®] DM Plant

The demineralisation process utilises acid regenerated cation resin & caustic regenerated anion resin to remove minerals from water. We offer DM Plants of different sizes as per requirement of the customers. Trolley mounted automatic operation DM Plants are also available for small industries and laboratories.



Technical Specifications

Ion Exchange Unit	Cation Column	Anion Column
No. Required	One	One
Normal Flow	1.5 - 2.5 M3/Hr	1.5 - 2.5 M3/Hr
Type of Resin	Strong Acid Cation(H+)	Strong Base Anion (OH-)
Type of Control Valve	Single Multi Port Valve	Single Multi Port Valve
M.O.C.	FRP/SS	FRP/SS
Regeneration Chemical	Hcl	NaOh
Resin Qty	30 Lt. or More	30 Lt.or More
Regeneration Tank	One	One
Reg. Tank Capacity	50 Lt. or More	50 Lt. or More

Scope of Supply

One No.	FRP Pressure Strong Acid Cation Column along with Multiport Valve, pipeline, Internal distribution system.
One No.	FRP Pressure Strong Base Anion Column along with Multiport Valve, pipeline, Internal distribution system.
One No.	Conductivity Meter along with sensor.
One No.	M.S. Epoxy Painted Stand.
Two No.	HDPE regeneration tank.
One No.	Interconnection pipeline & valve.

OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies.
Creator of IndiaBusinessPortal.com



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries



Ash[®] Industrial Package Softener

Elements like Calcium (Ca) and magnesium (Mg) present in water makes it "hard". This water adversely the quality of your skin and hair and is also undesirable for bathing, laundry and dishwashing. These softeners provide soft water for all your water requirements.



Sr. No.	Model	Type	M.O.C.	Value (NB)	Dia X H.O.S. (MM)	Resin Qty (Lt)	Flow Rate M3/ Hr	Erection Charges (Rs.)
1	SI-101/U	UF	FRP	15 Top Mounted	160 X 800	15	1.0	1,000
2	SI-201/U	UF	FRP	15 Top Mounted	220 X 950	30	1.5	1,000
3	SI-202/U	UF	FRP	15 Top Mounted	260 X 1200	55	2.0	1,000
4	SI-301/U	UF	FRP	15 Top Mounted	310 X 1200	80	2.0	1,000
5	SI-401/U	UF	FRP / MS	40	400 X 1100	135	6.0	1,500
6	SI-512/U	UF	MS	40	500 X 1200	200	10	1,500
7	SI-515/U	UF	MS	40	500 X 1500	260	10	1,500
8	SI-615/U	DF	MS	40	600 X 1500	350	10	2,000
9	SI-622/D	DF	MS	70	600 X 2200	300-425	10	2,000
10	SI-722/D	DF	MS	40	700 X 2200	400-550	10/15	2,500
11	SI-822/D	DF	MS	40/50	800 X 2200	500-700	10/15	2,500
12	SI-922/D	DF	MS	50/80	900 X 2200	600-700	15/35	3,000
13	SI-1022/D	DF	MS	80/100	1000 X 2200	750-1060	35/50	4,000
14	SI-1222/D	DF	MS	80/100	1200 X 2200	1075-1500	30/50	5,000
15	SI-1422/D	DF	MS	80/100/150	1400 X 2200	1450-2100	30/50/90	5,000

Ash[®] DM Plant

The demineralisation process utilises acid regenerated cation resin & caustic regenerated anion resin to remove minerals from water. We offer DM Plants of different sizes as per requirement of the customers. Trolley mounted automatic operation DM Plants are also available for small industries and laboratories.



Technical Specifications

Ion Exchange Unit	Cation Column	Anion Column
No. Required	One	One
Normal Flow	1.5 - 2.5 M3/Hr	1.5 - 2.5 M3/Hr
Type of Resin	Strong Acid Cation(H+)	Strong Base Anion (OH-)
Type of Control Valve	Single Multi Port Valve	Single Multi Port Valve
M.O.C.	FRP/SS	FRP/SS
Regeneration Chemical	Hcl	NaOh
Resin Qty	30 Lt. or More	30 Lt.or More
Regeneration Tank	One	One
Reg. Tank Capacity	50 Lt. or More	50 Lt. or More

Scope of Supply

One No.	FRP Pressure Strong Acid Cation Column along with Multiport Valve, pipeline, Internal distribution system.
One No.	FRP Pressure Strong Base Anion Column along with Multiport Valve, pipeline, Internal distribution system.
One No.	Conductivity Meter along with sensor.
One No.	M.S. Epoxy Painted Stand.
Two No.	HDPE regeneration tank.
One No.	Interconnection pipeline & valve.

OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies.
Creator of IndiaBusinessPortal.com





EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries 

Ash[®] Domestic Reverse Osmosis System

Reverse Osmosis is a hyperfiltration process in which all impurities (dissolved ions, heavy molecular, weight compounds, bacteria, viruses) are removed from water by passing through the membrane holes, containing only permissible ingredient. All undesirable elements including salts & biological impurities flush out along with rejected water. Before membrane, water is pretreated by passing through softener, sediment filter, carbon filter & chlorination if desired. Other purification method have no effect on TDS level of water.

Benefits of using ASH systems :

- » Enhance taste of water by removing undesirable heavy salts & minerals and protects from high blood pressure, kidney stones, indigestion, gastric bacterial diseases etc.
- » Hard saline water, Bore well, Municipal Supplied can be handled to give you soft & tasty water.
- » Does not use any type of chemicals, each part is of high food grade quality.



Unique stages of ASH systems :

- » Sediment filter for removing suspended impurities in water like sand, dirt, rust, silt.
- » Granular carbon Pre-Filter for removing chlorine, clour, odour etc.
- » Melt Blown Fine Carbon Filter protects from residual suspended particles enhances the life of membrane
- » TFC Membrane invented by NASA USA, water is split into two streams. Undesirable elements of chemicals & biological impurities flush out along with reject water, pure water received for healthy life.
- » Silver Impregnated Post Treatment to enhance the taste & finally polishing of water.

How ASH is best among all purifiers :

Disease	Contamination	ASH RO	Ultra - Violet	Boiling
Heart Disease	Sodium	*	x	x
Kidney Stone	Calcium	*	x	x
Kidney Stone	Magnesium	*	x	x
Nephralgia, Mental Retardation	Lead	*	x	x
Indigestion	Copper	*	x	x
Pain	Mercury	*	x	x
Dysentery	Nitrate	*	x	x
Bacterial Disease	Bacteria	*	*	*
Fever	Pyrogen	*	x	x
Viral Diseases	Virus	*	*	*
Flouorsis	Fluoride	*	x	x
Poisoning	Arsenic	*	x	x
Constipation, Dysentery	Iron	*	x	x
Cancer	Insecticides &Pesticides	*	x	x

Proposed Treatment Scheme / Stages:

a)	Raw Water Pump : To pressure feed raw water to the sediment filter and further treatment stages.
b)	Sediment Filter : Feed water will pass through the unit for removal of existing suspended impurities, by the action of media / bed provided into the unit.
c)	Antiscalant Dosing : To eliminate / reduce the chance of salt precipitation/ scaling at membrane surface during the process and to maintain the life & performance of Membranes, a selected antiscalant chemical would be dosed into the water stream being fed RO Membranes.
d)	Micron Filtration Unit : Water is passed through the micron filter for removal of fine suspended particles to protect the High Pressure Pump & Membranes.
e)	High Pressure Pump : To Boost up the water pressure as required for system performance.
f)	RO Desalination : The pressurized water is diverted into two streams as Permeate (product water) and Concentrate (reject water) as the result of Reverse Osmosis across the semi permeable membrane.

g)	Membrane Cleaning / Flushing System: To maintain the performance & life of R.O. Membranes it is necessary to adopt the following. Regular flushing (with treated water) of R.O. Membranes. Chemical cleaning of R.O. Membrane at suitable intervals.
----	--

To perform above activities, a flushing / cleaning system to be provided with the RO System.

Limiting Parameters of RO Feed Water

Suspended Solids	Nil
Colour	Absent
Odour	Absent
Turbidity	<1 NTU
Silt Density Index	<3 NTU
Free Chlorine	Nil
Oil & Grease	Nil
Free Organics	Nil
Total Iron	<0.1 mg/l
Heavy Metal	Nil
Temperature	40 ⁰ C

Exclusions of work

1. All Civil work, foundations & drain sumps etc.
2. Raw Water inlet connection with required Pressures .
3. Antiscalant for R O Plant.

Warrenty : The system is guaranteed for Eighteen months from the date of commissioning against inherent manufacturing defects only. Please note warranty would not stand for the losses due to transportation, system mishandling, use of sub- standard/ non-approved spares & consumables and operational mistakes etc.

OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies,
Creator of IndiaBusinessPortal.com





EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9868525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries



Ash[®] Mineral Water Plant with Packaging / Bottling Unit

Special Features Of R.O. Plant

- » Plant design on latest state of art - european technology, compact, decent
- » We offered total imported systems
 - Sealed Packed ISO-9001 MEMBRANE- HYDRAUNATICS - California, U.S.A.
 - Micron Cartridge Filter Bag - Ametek - Suzuki - Japan
 - Anthracite
- » We offer our services for
 - Designing of the plant
 - Prompt after Sales Services
- » We offer you different manufacturing stage wise inspection at our factory.
 - After fabrication of the unit,
 - At the time of assembling of the unit.
 - We can offer of you inspection while Fitting of sealed pack Membrane.
 - We offer inspection of fully installed and running plant for 3 days at our factory with testing.
- » We are very close to you we offer best services. Besides our Technical Experts & Design Experts will visit frequently to your site for better performance.
- » Also visit of our Foreign Associates - if required.
- » SITPL, can offer Membrane Cleaning facility at its Factory, for enhancing life of Membrane Systems.
- » Plant is designed on 10% Higher capacity & T.D.S. i.e. 2795 ppm, for better result in future.
- » We can offer you 70% recovery of plant
- » Maintenance Free Systems.


[click here for more details >>](#)

OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries 


Ash[®] Lighting Conductor

Lightning is a capricious, random and unpredictable event. Its physical characteristics include current levels sometimes in excess of 100 kA and speeds approaching one third the speed of light. Globally, some 2000 on-going thunderstorms cause about 100 lightning strikes to earth each second. Lightning is a product of electrically charged storm clouds. The charged clouds induce an opposite charge (ground charge) on the surface of the earth beneath it as they travel through the atmosphere. When the ground charge reaches a structure, the cloud charge pulls it up onto the structure, concentrating the ground charge on and around it.

If the ground charge builds to a level exceeding the dielectric (insulation resistance) of the intervening air, an arc or lightning strike will occur. The process begins with stepped leaders branching down from the clouds. When they come within close proximity to the ground, approximately 500 feet, the electric field intensity at ground level becomes so strong that objects and structures begin to break down electronically, shooting streamers up toward the stepped leaders. When a streamer and a stepped leader connect, a path is created for a lightning strike. To protect the buildings or telecommunication towers against lightning, a proper designed lightning protection system is needed.

Conventional Lightning Protection System

The main function of the lightning protection system installed on the existing building is to capture a lightning stroke and then conduct discharge current safely to the ground. As shown above, the building requires number of copper rods, number of down conductors, number of earth pits, maintenance of all this put together becomes a costly & wastage of time also.




In some conditions, however the active lightning system is the only possible method to protect from direct lightning strokes. Due to the arguments mentioned above, we recommend to use the active lightning protection whenever the conventional solution is inconvenient or when the former is more preferable to the latter as in the case of the efficient protection of architect.

Early Streamer Emission Lightning Conductors

Early streamer emitting air terminals are designed to emit a streamer early in the streamer-formation phase of a lightning strike, thereby becoming the preferred lightning attachment point. As the ground charge builds immediately before the lightning strike, the ESE air terminal accumulates ground charge. In the instant before the strike, when the stepped leaders are branching down from the cloud, the ESE terminal emits a series of pulses of ground charge, forming a streamer from itself before streamers emit from other structures. Its streamer reaches the stepped leaders before competing streamers, thereby winning the competition. Ground charge accumulation and streamer triggering is done by FRANKLIN FRANCE Saint-Elmo ESE lightning conductor.

FRANKLIN FRANCE Early Streamer Emission Lightning Conductor



FRANKLIN FRANCE's Saint - Elmo reputation in the field of lightning has invested heavily in the manufacture of its Early Streamer Emission Lightning Conductor. This has involved both fundamental research into the physical phenomena associated with lightning, as well as extensive product development. The latest series provides optimal protection against the direct effects of lightning.

Standard protection - Radius of Protection

Between sky and earth

With piezoelectric exciter device Complies with NFC 17-102 standard Franklin - France / CEA patent Franklin France presents you the Saint-Elmo[®] lightning conductor. It results from the research work conducted with the French Atomic Energy Commission, and is the efficient, inexpensive and clean protection solution, using piezo - electric ceramics to transform the wind energy into electric energy.

Principle

A rod - type lightning conductor, connected to earth, efficiently works by altering, at its level, the equipotentials which match the structures of the building it protects. The emergence of the



lightning conductor is an important factor in increasing the local electric field. The principle of the piezoelectric lightning conductor designed by Franklin France relies on several factors : the reinforcement of the local electric field and the early creation of a preferential discharge channel.

Description

The SAINT-ELME® piezoelectric lightning conductor is mainly composed of the following :

Capture Head Profiled, inalterable and good conductor, structured to generate a forced air circulation at its tip and in its prolongation (VENTURI system : air intakes and peripheral ejectors).

Support Pole Of treated copper (or stainless steel according to models) which upper part has one or more stainless steel ion emitter points, inserted in an insulating sleeve and subjected to the potential supplied by the piezo-electric ceramic. The emitter points are protected from direct impact by lightning and from the weather by the capture head which, like the support pole, is permanently connected to the earth potential.

Transducer (piezoelectric stimulator) Built into the lower part of the pole and consisting of piezoelectric ceramics stressed in an insulating container, combined with a simple, perfectly reliable and mechanical stimulation system (CEA and FRANKLIN patents). A high - voltage cable running inside the pole connects the stimulator to the emitter point(s). The voltage created by the ceramic is applied to the emitter point through the high voltage cable.

Piezoelectric Stimulation

Any artificial increase in the ionic density of the air surrounding an electrode favours a lowering of the breakdown potential. Therefore, by favouring :

- > The increase of the local electric field,
- > The presence of a seed electron at the capture point (electron that is rare in the atmosphere and necessary for the excitation process),
- > The creation of a rising ionized air channel in the prolongation of the lightning conductor, it will lead to the shortening of the excitation lag, and to favourably influence the initial conditions of the triggering of the corona effect.

Reduction of the excitation time of the CORONA effect

Capture head Transducer

Free charges are created by the corona effect by applying on the Saint-Elme® lightning conductor's ionized point(s) the voltage supplied by cells of piezo-electric ceramics (lead zirconate-titanate); their feature is to produce a very high voltage by simply modifying the applied pressure. The Saint-Elme® lightning conductor is therefore equipped with a mechanical device that transforms the stress resulting from the wind action on the lightning conductor into a pressure stress on the piezo-electric cells.

The voltage therefore produced is applied, through the high voltage cable that runs inside the lightning conductor's support pole, onto the ionized point(s) to create, by corona effect, free charges. Then, these charges are expelled, by the venturi system, from the lightning conductor's head, profiled on purpose (forced air circulation). When they are outside the head, these charges are submitted to the cloud-ground electrical field. The charges polarized like the cloud are repelled towards the ground, the channel of charges that forms in prolongation of the lightning conductor is then exclusively composed of charges from the opposite pole to the cloud's electric pole (it takes into account the discharges's pole : positive or negative).

The ability to promote excitation at lower values of the electrostatic field (hence earlier) enhances the capture probability of lightning conductors. This capacity gives them greater efficiency in the role of "preferential capture points" compared to any other point of the building they protect. Therefore these lightning conductors offer superior guarantees during low intensity discharges (2 to 5 KA) compared with simple rod type lightning conductors, which can only intercept them over short distances ($D = 10 \frac{1}{3} I$, where D is in meters, I in KA).

Preferential capture Larger zone of protection

The zones of protection of lightning conductors are obtained theoretically by plotting the electrogeometric model, but are comparable in practice, for low heights, to a cone of revolution which apex is the tip of the lightning conductor. French standard NFC 17 100 describes the calculation method applicable to Franklin and meshed cages rods. French standard NFC 17 102 deals with early streamer emission (ESE) lightning conductors, and takes into account the levels of protection Np of varying severity (I to III), to be determined previously by an assessment of the lightning risk for each project.

It defines the installation rules and the radii of protection Rp (m) depending on the average excitation advance ? L (m) of the lightning conductors and the excitation distance D (m), considered according to the degree of severity : D (I) = 20 m, D (II) = 45 m, D (III) = 60 m. The table hereunder gives the Rp (m) values for the three levels of protection Np depending on the actual height h(m) of the lightning conductor in relation to the different planes considered.

OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries 

Ash[®] Bottle Shape FRP & Rectangular / Wooden Cooling Tower

Casting : Casting to Tower made of Fiber Glass Reinforced Plastic. The cooling Tower designed and constructed for minimum maintenance and long lasting, you can able to operate in aggressive environment and resistant to water born contaminants.



P.V.C. Fill : A pre - eminent quality and long life fill consists of modular block of honey combs construction to create prolonged contact time of hot air water for maximum heat transfer. The air pressure drop through the fill sincerely negligible.

Drift Eliminator : To reduce carry over losses through entrainment of moisture drops in the air stream by specially designed multi blade rotary drift eliminator made of F.R.P. Aluminium sheets.

Sinkler : The uniform distribution of water over the honey combs fill this sprinkler rotates by self propulsion and eliminated the need for atomising the water through nozzles. The head side include ball bearing requiring minimum maintenance.

Motor : Electro Magnetic designs of the entire range of New India and Bharat Motor covered by 3N series have been developed in keeping with the latest national and international practice and confirm in general to 1 EC recommendations.

Fan : An aero - dynamically axille flow type fan is well balanced construction. The Fan blades are of case aluminium alloy, fan with variable pitched blades is dynamically balanced for low vibration and efficiency.



Design Parameter :

Flow rate : m³/hr (max)

Inlet Temperature : 42° C

Outlet Temperature : 32° C

TECHNICAL DETAIL OF "STRUCTURE INDIA" FRP BOTTLE SHAPE COOLING TOWERS

S.No.	Model	Capacity TR	Heat Rejection Kcal/hr x1000	Dia. mm	Height mm	Fan dia mm	Motor HP/RPM	Inlet Outlet Size mm	Operating weight Kg.	Pump Head MM WC
01.	SI-FB-81	7.5	28	900	2000	600	0.75/960	40	210	180
02.	SI-FB-101	10	38	900	2000	600	1/960	40	250	200
03.	SI-FB-151	15	56	1100	2000	700	1/960	40	350	200
04.	SI FB-251	25	98	1900	2300	900	2/960	50	520	2500
05.	SI-FB-301	30	115	1900	2300	900	2/960	50	600	2500
06.	SI-FB-401	40	160	2200	2900	1200	2/960	50	800	3000
07.	SI-FB-501	50	190	2200	2900	1200	2/960	80	900	3000
08.	SI-FB-601	60	225	2200	2900	1200	3/960	80	1200	3000

09.	SI-FB-801	80	320	2900	3100	1450	3/960	80	1500	3000
10.	SI-FB-1002	100	380	2900	3100	1450	5/960	100	1650	3200
11.	SI-FB-1252	125	477	3250	3100	1500	5/960	100	1850	3200
12.	SI-FB-1502	150	568	3250	3100	1500	7.5/960	100	1950	3400
13.	SI-FB-1752	175	645	3700	3300	1800	7.5/960	150	2200	3400
14.	SI-FB-2002	200	775	3700	3300	1800	10/720	150	2300	3500
15.	SI-FB-2502	250	940	4200	3600	1800	10/720	150	3400	3800
16.	SI-FB-3002	300	1128	4200	3600	1800	10/720	150	3700	3800
17.	SI-FB-4002	400	1550	6000	3800	3000	15/560	200	6000	4200
18.	SI-FB-5002	500	1890	6000	4100	3000	15/560	200	6500	4500

Note: The Company operates a policy of continuous improvement & reserves the right to amend the above data without notice.

Ash[®] Rectangular / Wooden Cooling Tower

We are proud to offer you the complete range of Cooling Tower that includes wooden & F.R.P. Cooling Tower. We also offers the spare parts & maintenance for all type of cooling towers through our highly technically equipped supports for all kinds of industrial heat exchangers including Air Compressors, Injection Moulding Machines, Induction Furnace, Air Conditioning, Refrigeration & Diesel Engine Generating Sets etc.



OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
 Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
 Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
 <> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9868525835 / 6
- Send Online Enquiry 
- Contact Us 

Send Us **BULK**
Enquiries



Ash[®] Industrial Reverse Osmosis System

Following are the **Standard Features** of Industrial Reverse Osmosis System :

- » Raw Water pump.
- » Dual Media Filter
- » Antiscalant Dosing System
- » Cartridge Filter
- » High Pressure Pumps, Valves, Pressure Gauges
- » Fibreglass - wrapped Thin Film Composite RO Membranes
- » Fibreglass Pressure Vessels
- » Flow Instrumentation
- » Low and High Pressure Switch
- » Corrosion - Resistent Piping
- » Electric Control Panel with MIMIC Diagram
- » MS Epoxy Coated Skid



Optional Features :

- » pH Correction System
- » Chlorination / De-Chlorination System
- » Clean-in-Place (CIP) System.

OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies,
Creator of IndiaBusinessPortal.com

Member
SstDesigns.com



EARTHING & LIGHTING

- Gel Earthing Electrode
- Earthing Backfill Compound
- Lighting Conductor

[read more](#)

Ash[®]
Gel Earthing Electrode

Choose Your Languages : 

Dealer's Network

Estd. 2000

OUR PRODUCTS

- > Gel Earthing Electrode
- > Earthing Backfill Compound
- > Industrial Reverse Osmosis System
- > Commercial Reverse Osmosis System
- > Lighting Conductor
- > Mineral Water Plant with Packaging / Bottling Unit
- > Domestic Reverse Osmosis System
- > Industrial Package Softener & DM Plant
- > Bottle Shape FRP & Rectangular / Wooden Cooling Tower
- > Solar Products Range



For Assistance ?

- Dial + 91 - 9968525835 / 6
- Send Online Enquiry 
- Contact Us

Send Us **BULK**
Enquiries



Ash[®] Earthing Backfill Compound

Our Ash Gel Earthing having a strength named Back Fill compound (B.F.C.), our unique back-fill-compound is a combination of natural earth minerals, which having hygroscopic property to retain the moisture for a long time. During installation with proper water pouring, our powder B.F.C. convert into the 'gel' and its quality to retain the moisture upto twenty times its dry volume as well as it create a gel layer surrounding of our electrode, our back-fill-compound is a combination of totally corrosion free and highly conductive & non-corrosive minerals.

How It Play The Important Role :

Our unique B-F-C maintains the moisture surrounding the Ash Gel Earthing Electrode, which helps to create the balance & consistence ohmic value within the safe limit without any fluctuation of results, as a safeguard of equipment.

» As well as its layer works as a highly conductive path to pass the fault current, noise filtrations, resolve the problem of earth to neutral voltage difference and supported to active/passive lightning protection device too.

» It, also helps to give the life to our Ash Gel Earthing Electrode through its layer between electrode & direct soil, so minimise the chances of corrosion.

» This enables the 'compound' - electrode interface, that expands and contracts thus reducing the surge impedance (when charged the B-F-C zone, becomes highly positively charged zone as well as gives the cathodic ray protection to Ash Gel Earthing Electrode.



OUR PRODUCTS

Gel Earthing Electrode <> Earthing Backfill Compound <> Lighting Conductor
Industrial Reverse Osmosis System <> Commercial Reverse Osmosis System
Mineral Water Plant with Packaging / Bottling Unit <> Domestic Reverse Osmosis System <> Industrial Package Softener & DM Plant
<> Bottle Shape FRP Cooling Tower & Rectangular / Wooden Cooling Tower <> Solar Products Range

[home](#) || [about company](#) || [quality](#) || [infrastructure](#) || [clients](#) || [dealers network](#) || [contact](#)

© Copyright, Structure India, All Rights Reserved, Resources
Website Designing & Website Promotion By Sai Soft Technologies,
Creator of IndiaBusinessPortal.com

