


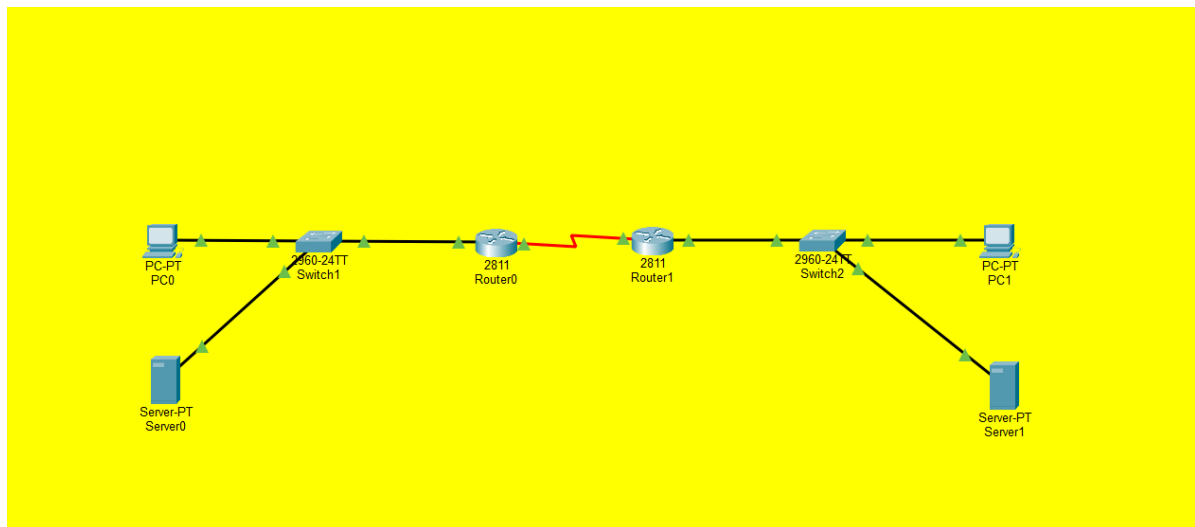

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.1

Pinging 192.168.20.1 with 32 bytes of data:

Request timed out.
Request timed out.
Reply from 192.168.20.1: bytes=32 time=5ms TTL=254
Reply from 192.168.20.1: bytes=32 time=1ms TTL=254

Ping statistics for 192.168.20.1:
    Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 5ms, Average = 3ms

C:\>ping 192.168.10.100

Pinging 192.168.10.100 with 32 bytes of data:

Reply from 192.168.10.100: bytes=32 time<1ms TTL=128
Reply from 192.168.10.100: bytes=32 time=1ms TTL=128
Reply from 192.168.10.100: bytes=32 time<1ms TTL=128
Reply from 192.168.10.100: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.20.11

Pinging 192.168.20.11 with 32 bytes of data:

Request timed out.
Reply from 192.168.20.11: bytes=32 time=1ms TTL=126
Reply from 192.168.20.11: bytes=32 time=1ms TTL=126
Reply from 192.168.20.11: bytes=32 time=7ms TTL=126

Ping statistics for 192.168.20.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 7ms, Average = 3ms

C:\>ping 192.168.20.100

Pinging 192.168.20.100 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.20.100:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.20.12

Pinging 192.168.20.12 with 32 bytes of data:
  
```

Ping from PC 0 to Server 0 & 1 and to PC 1

Configuration of Router 0 Interface

```
R0> enable
R0# configure terminal
R0(config)# interface FastEthernet0/0
R0(config-if)# ip address 192.168.10.1 255.255.255.0
R0(config-if)# no shutdown
R0(config)# interface Serial0/0/0
R0(config-if)# ip address 10.0.0.1 255.255.255.252
R0(config-if)# clock rate 64000
R0(config-if)# no shutdown
```

Configuration of Router 1 Interface

```
R1> enable
R1# configure terminal
R1(config)# interface Serial0/0/0
R1(config-if)# ip address 10.0.0.2 255.255.255.252
R1(config-if)# no shutdown
R1(config)# interface FastEthernet0/0
R1(config-if)# ip address 192.168.20.1 255.255.255.0
R1(config-if)# no shutdown
```

Configuration of DHCP on Router 0

```
R0(config)# ip dhcp pool LEFT
R0(config-dhcp)# network 192.168.10.0 255.255.255.0
R0(config-dhcp)# default-router 192.168.10.1
R0(config-dhcp)# dns-server 8.8.8.8
R0(config-dhcp)# exit
R0(config)# ip dhcp excluded-address 192.168.10.1 192.168.10.10
```

Configuration of DHCP on Router 1

```
R1(config)# ip dhcp pool RIGHT
R1(config-dhcp)# network 192.168.20.0 255.255.255.0
R1(config-dhcp)# default-router 192.168.20.1
R1(config-dhcp)# dns-server 8.8.8.8
R1(config-dhcp)# exit
R1(config)# ip dhcp excluded-address 192.168.20.1 192.168.20.10
```

Configuration of Server 0

```
IP address (Static)
IP Address: 192.168.10.100
Subnet mask: 255.255.255.0
```

Configuration of Server 1

```
IP address (Static)
IP Address: 192.168.20.100
Subnet mask: 255.255.255.0
```