









We exist to deliver safe, reliable energy that drives value to our customers

Supply Market Trends & Material Lead Times August 2023











Table of Contents

Page 2: Table Of Contents

Page 3: Non-Wire/Cable/Conductor Data Visualization For Purchased Lead Time Differences between New and Old Kamick

Page 4: Al Analysis for Non-Wire/Cable/Conductor Data Page 5: Wire/Cable/Conductor Data ONLY Visualization For Purchased Lead Time Differences between New and Old Kamick

Page 6: Al Analysis for Wire/Cable/Conductor Data ONLY

Page 7: DataFrame Visualization For


NON-Wire/Cable/Conductor Data

Page 8: DataFrame Visualization For Wire/Cable/Conductor Data ONLY

Top 50 Lead Time Differences by Description excluding

Lead Time Difference

The average lead time for non-wire/cable/conductor data is 77.56 days. The standard deviation is 62.5339613852394. The highest lead time is 300.0 days and the lowest lead time is 34.0 days.

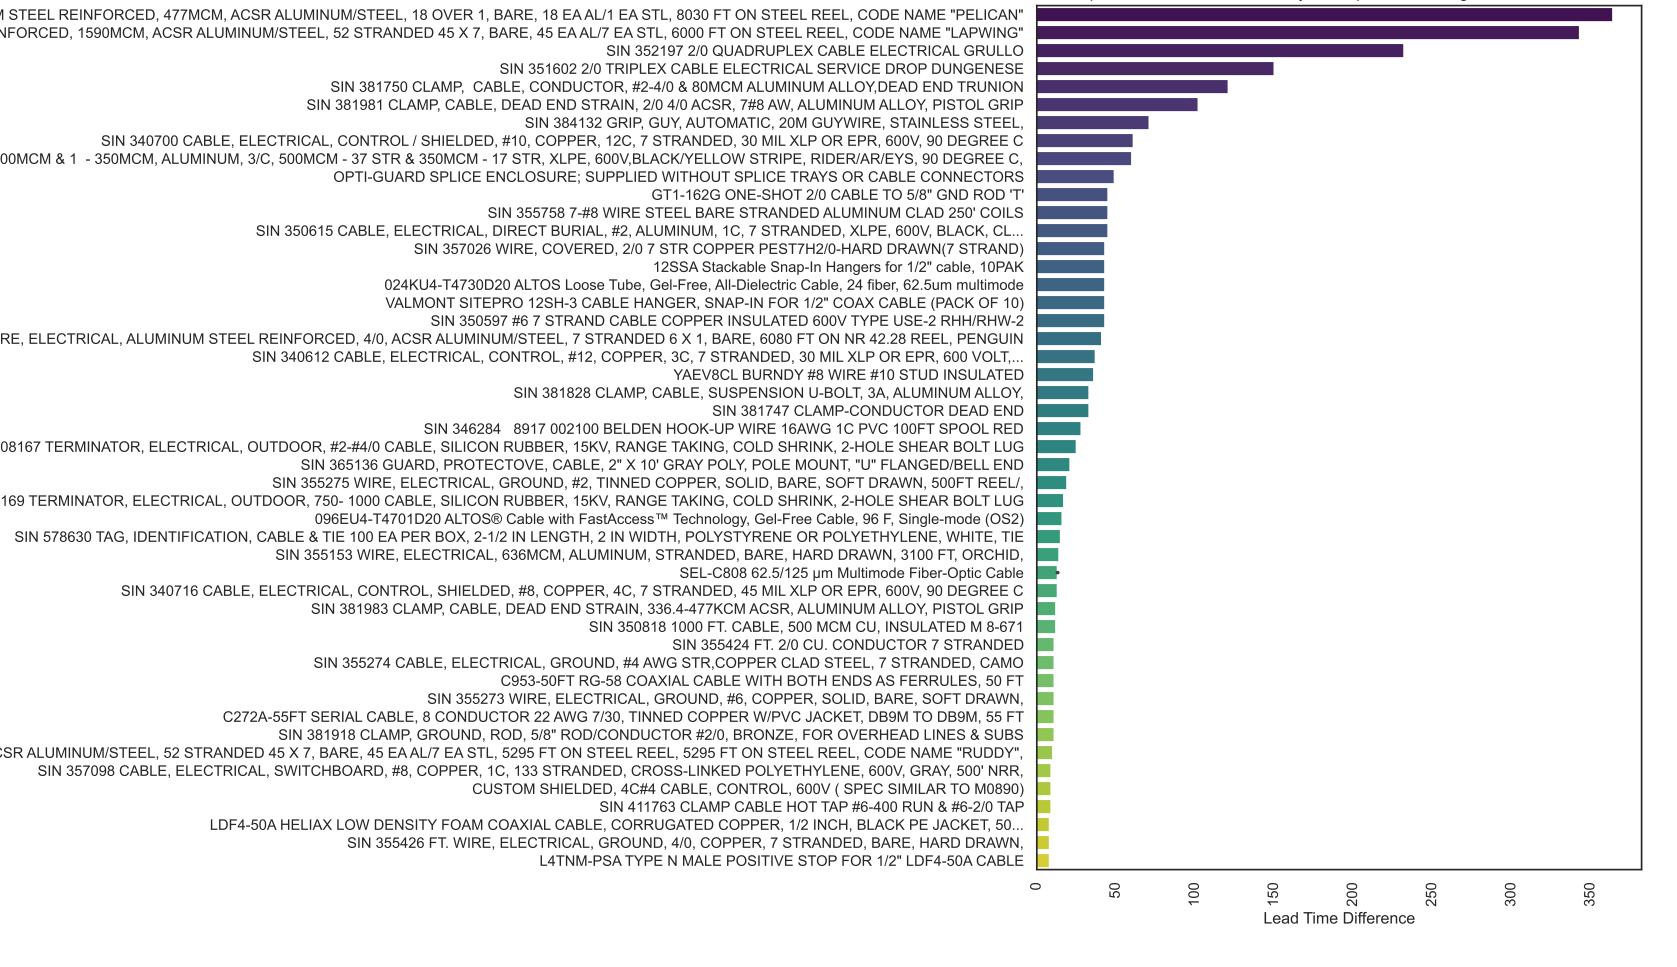

Based on the above data, it can be concluded that the average lead time for wire is 48.82 days. The standard deviation is 74.83 days, which means that the majority of lead times fall within 74.83 days of the average. The highest lead time is 364 days and the lowest lead time is 8 days.

LeadTimeDifference		Description
300.0		90 PLUS SHOT ERICO
289.0		CADWELD 500PLUSF20 SHOTS
243.0		90 PLUS SHOT ERICO
179.0		3" PVC FEMALE ADAPTER
179.0	SIN 373909 I	NSULATOR, POST, CLAMP TOP/VERTICAL POST, 69KV, POLYMER, GRAY, 3/4" THREADS, HO
170.0		3" PVC FEMALE ADAPTER
110.0	SIN 413970 C	ONNECTOR, COMPRESSION, TERMINAL, 1590MCM(45X7), ACSR, 4 HOLE NEMA PAD, HEAV
106.0		SIN 734629 INSULATOR - POST TYPE 69KV 350KV BIL PORC GRAY/BROWN 3" BC
103.0		3" PVC COUPLING
102.0		SIN 366812 OUTLET COVER, WEATHERPROOF, GFI
93.0		#250 PLUS SHOT
92.0	SIN 412003	CONNECTOR, COMPRESSION, SPLICE, 2/0 (6X1) / 2/0 (7), ACSR/ALUMINUM ALLOY, FULL TI
89.0		ENERSYS 12V BATTERY SBS-190F
89.0		6" PVC FEMALE ADAPTER
84.0		SIN 340616 12GA 4C 7STR BC030" XLPE .045" PVC JKT BLK (UL) TC-ER 600V 90'C
79.0		200 PLUS SHOT
79.0		YAEV14
71.0		200 PLUS SHOT
64.0	<u> </u>	N 380681 BOLT, DOUBLE ARM, ASSEMBLY, 5/8" DIA, 24" LGTH, HOT DIPPED GALV STEEL,
63.0		SIN 355768 12.5M-AW7
57.0		90 PLUS SHOT ERICO
54.0		#115 PLUS SHOT
53.0		nan
53.0	SIN 414109 YA	E10N BURNDY CONNECTOR, COMPRESSION, TERMINAL, #12-#10, COPPER, #8-#10 SC REV
50.0		nan
49.0		nan
49.0		SIN 374297 INSULATOR, ELECTRICAL, SUSPENSION,
46.0		nan
45.0	SIN 412580	CONNECTOR, COMPRESSION, SPLICE, #4 (6 & 7X1) / #4 (7), ACSR/ALUMINUM ALLOY, 138k
44.0		nan
44.0		ELA662556-12
44.0		1/2 EMT
43.0		SIN 380219 ARM, MECHANICAL, SINGLE, TANGENT, 10 FT LENGTH, FIBERGLASS,
43.0		nan
43.0		SIN 380862 BOLT, EYE, ASSEMBLY, 3/4 IN, 8 IN, HOT DIPPED GALV STEEL,
43.0		SIN 380220 ARM, MECHANICAL, SINGLE, DEADEND, 10 FT LENGTH, FIBERGLASS
42.0		SIN 380562 ANCHOR ROD HAS-R 1/2" X 6-1/2" SS316
41.0		nan
41.0		ATR3/8 B-LINE 3/8" THREADED ROD
40.0	SIN 38	354 BRACKET, MOUNTING, B CUTOUT/ARRESTER, GALV STEEL, BOLTED, CROSSARM MOU
40.0	51 00	SIN 371482 CUTOUT, DISTRIBUTION, POLYMER, OPEN TYPE 15KV, 200A, SINGLE SHOT
40.0		#8 X 3/4" ROBERTSON PAN HEAD SHEET METAL ZINC PLATED SCREW
40.0		nan
37.0		SIN 518521 FT. TUBING 3-1/2", 20' LENGTHS EHV PACKAGED 6063T6 SEAMLESS
37.0		nan
36.0		SIN 360999 CONDUIT, LIQUIDTIGHT, FLEXIBLE, 1/2 IN
36.0		CH4E4F512H3TUF001B
25.0		150 PLUS SHOT
35.0 35.0		SIN 518539 FT. TUBING 3-1/2", 30' LENGTHS EHV PACKAGED

LeadTimeDifference	Description
	REINFORCED, 477MCM, ACSR ALUMINUM/STEEL, 18 OVER 1, BARE, 18 EA AL/1 EA STL 8030 FT ON STEEL RE
	ORCED, 1590MCM, ACSR ALUMINUM/STEEL, 52 STRANDED 45 X 7, BARE, 45 EA AL/7 EA STL, 6000 FT ON STE
232.0	SIN 352197 2/0 QUADRUPLEX CABLE ELECTRICAL GRULLO
150.0	SIN 351602 2/0 TRIPLEX CABLE ELECTRICAL SERVICE DROP DUNGENESE
121.0 SIN 3	\$1750 CLAMP, CABLE, CONDUCTOR, #2-4/0 & 80MCM ALUMINUM ALLOY,DEAD END TRUNION
102.0 SIN 38 ⁻	981 CLAMP, CABLE, DEAD END STRAIN, 2/0 4/0 ACSR, 7#8 AW, ALUMINUM ALLOY, PISTOL GRIP
71.0	SIN 384132 GRIP, GUY, AUTOMATIC, 20M GUYWIRE, STAINLESS STEEL,
	ECTRICAL, CONTROL / SHIELDED, #10, COPPER, 12C, 7 STRANDED, 30 MIL XLP OR EPR, 600V, 90 DEGREE C
SIN 351662 CABOED, ELECTRICAL, TRIPLEX/DIRECT BURIAL 2	- 500MCM & 1 - 350MCM, ALUMINUM, 3/C, 500MCM - 37 STR & 350MCM - 17 STR, XLPE, 600V,BLACK/YELLOW \$
49.0 OPTI	GUARD SPLICE ENCLOSURE; SUPPLIED WITHOUT SPLICE TRAYS OR CABLE CONNECTORS
45.0	GT1-162G ONE-SHOT 2/0 CABLE TO 5/8" GND ROD 'T'
45.0	SIN 355758 7-#8 WIRE STEEL BARE STRANDED ALUMINUM CLAD 250' COILS
45.0 SIN 350615	CABLE, ELECTRICAL, DIRECT BURIAL, #2, ALUMINUM, 1C, 7 STRANDED, XLPE, 600V, BLACK, CL
43.0	SIN 357026 WIRE, COVERED, 2/0 7 STR COPPER PEST7H2/0-HARD DRAWN(7 STRAND)
43.0	12SSA Stackable Snap-In Hangers for 1/2" cable, 10PAK
43.0	4KU4-T4730D20 ALTOS Loose Tube, Gel-Free, All-Dielectric Cable, 24 fiber, 62.5um multimode
43.0 V	LMONT SITEPRO 12SH-3 CABLE HANGER, SNAP-IN FOR 1/2" COAX CABLE (PACK OF 10)
43.0	SIN 350597 #6 7 STRAND CABLE COPPER INSULATED 600V TYPE USE-2 RHH/RHW-2
41.0 SIN 355004 WIRE, ELECTRICAL, ALU	MINUM STEEL REINFORCED, 4/0, ACSR ALUMINUM/STEEL, 7 STRANDED 6 X 1, BARE, 6080 FT ON NR 42.28 RE
37.0 SIN 340612	CABLE, ELECTRICAL, CONTROL, #12, COPPER, 3C, 7 STRANDED, 30 MIL XLP OR EPR, 500 VOLT,
36.0	YAEV8CL BURNDY #8 WIRE #10 STUD INSULATED
33.0	SIN 381828 CLAMP, CABLE, SUSPENSION U-BOLT, 3A, ALUMINUM ALLOY,
33.0	SIN 381747 CLAMP-CONDUCTOR DEAD END
28.0	SIN 346284 8917 002100 BELDEN HOOK-UP WIRE 16AWG 1C PVC 100FT SPOOL RED
25.0 SIN 408167 TERMINATOR, ELEC	TRICAL, OUTDOOR, #2-#4/0 CABLE, SILICON RUBBER, 15KV, RANGE TAKING, COLD SHRINK, 2-HOLE SHEAR E
21.0 SIN 365	136 GUARD, PROTECTOVE, CABLE, 2" X 10' GRAY POLY, POLE MOUNT, "U" FLANGED/BELL END
19.0 SIN 35527	5 WIRE, ELECTRICAL, GROUND, #2, TINNED COPPER, SOLID, BARE, SOFT DRAWN, 500 FT REEL/,
17.0 SIN 408169 TERMINATOR, ELECT	RICAL, OUTDOOR, 750- 1000 CABLE, SILICON RUBBER, 15KV, RANGE TAKING, COLD SHRINK, 2-HOLE SHEAR
16.0 096EU	-T4701D20 ALTOS® Cable with FastAccess™ Technology, Gel-Free Cable, 96 F, Single-mode (OS2)
15.0 SIN 578630 TAG, IDENTIFICA	TION, CABLE & TIE 100 EA PER BOX, 2-1/2 IN LENGTH, 2 IN WIDTH, POLYSTYRENE OR POLYETHYLENE, WHIT
14.0 SIN 35515	3 WIRE, ELECTRICAL, 636MCM, ALUMINUM, STRANDED, BARE, HARD DRAWN, 3100 FT, ORCHID,
13.0	SEL-C808 62.5/125 µm Multimode Fiber-Optic Cable
13.0 SIN 340716 CABLE, E	LECTRICAL, CONTROL, SHIELDED, #8, COPPER, 4C, 7 STRANDED, 45 MIL XLP OR EPR 600V, 90 DEGREE C
13.0	SEL-C808 62.5/125 µm Multimode Fiber-Optic Cable
13.0	SEL-C808 62.5/125 µm Multimode Fiber-Optic Cable
	983 CLAMP, CABLE, DEAD END STRAIN, 336.4-477KCM ACSR, ALUMINUM ALLOY, PISTOL GRIP
12.0	SIN 350818 1000 FT. CABLE, 500 MCM CU, INSULATED M 8-671
11.0	SIN 355424 FT. 2/0 CU. CONDUCTOR 7 STRANDED
	5274 CABLE, ELECTRICAL, GROUND, #4 AWG STR, COPPER CLAD STEEL, 7 STRANDED, CAMO
11.0	C953-50FT RG-58 COAXIAL CABLE WITH BOTH ENDS AS FERRULES, 50 FT
11.0	SIN 355273 WIRE, ELECTRICAL, GROUND, #6, COPPER, SOLID, BARE, SOFT DRAWN,
	ERIAL CABLE, 8 CONDUCTOR 22 AWG 7/30, TINNED COPPER W/PVC JACKET, DB9M TO DB9M, 55 FT
	8 CLAMP, GROUND, ROD, 5/8" ROD/CONDUCTOR #2/0, BRONZE, FOR OVERHEAD LINES & SUBS
	OMCM, ACSR ALUMINUM/STEEL, 52 STRANDED 45 X 7, BARE, 45 EA AL/7 EA STL, 5295 FT ON STEEL REEL, 529
	RICAL, SWITCHBOARD, #8, COPPER, 1C, 133 STRANDED, CROSS-LINKED POLYETHYLENE, 600V, GRAY, 500' N
9.0	CUSTOM SHIELDED, 4C#4 CABLE, CONTROL, 600V (SPEC SIMILAR TO M0890)
9.0	SIN 411763 CLAMP CABLE HOT TAP #6-400 RUN & #6-2/0 TAP
	AX LOW DENSITY FOAM COAXIAL CABLE, CORRUGATED COPPER, 1/2 INCH, BLACK PE JACKET, 50
	355426 FT. WIRE, ELECTRICAL, GROUND, 4/0, COPPER, 7 STRANDED, BARE, HARD DRAWN,
8.0	L4TNM-PSA TYPE N MALE POSITIVE STOP FOR 1/2" LDF4-50A CABLE
0.0	LATINING ON THE INMINE FORTIVE STOLLOW 1/2 EDITA-SUN CABLE