


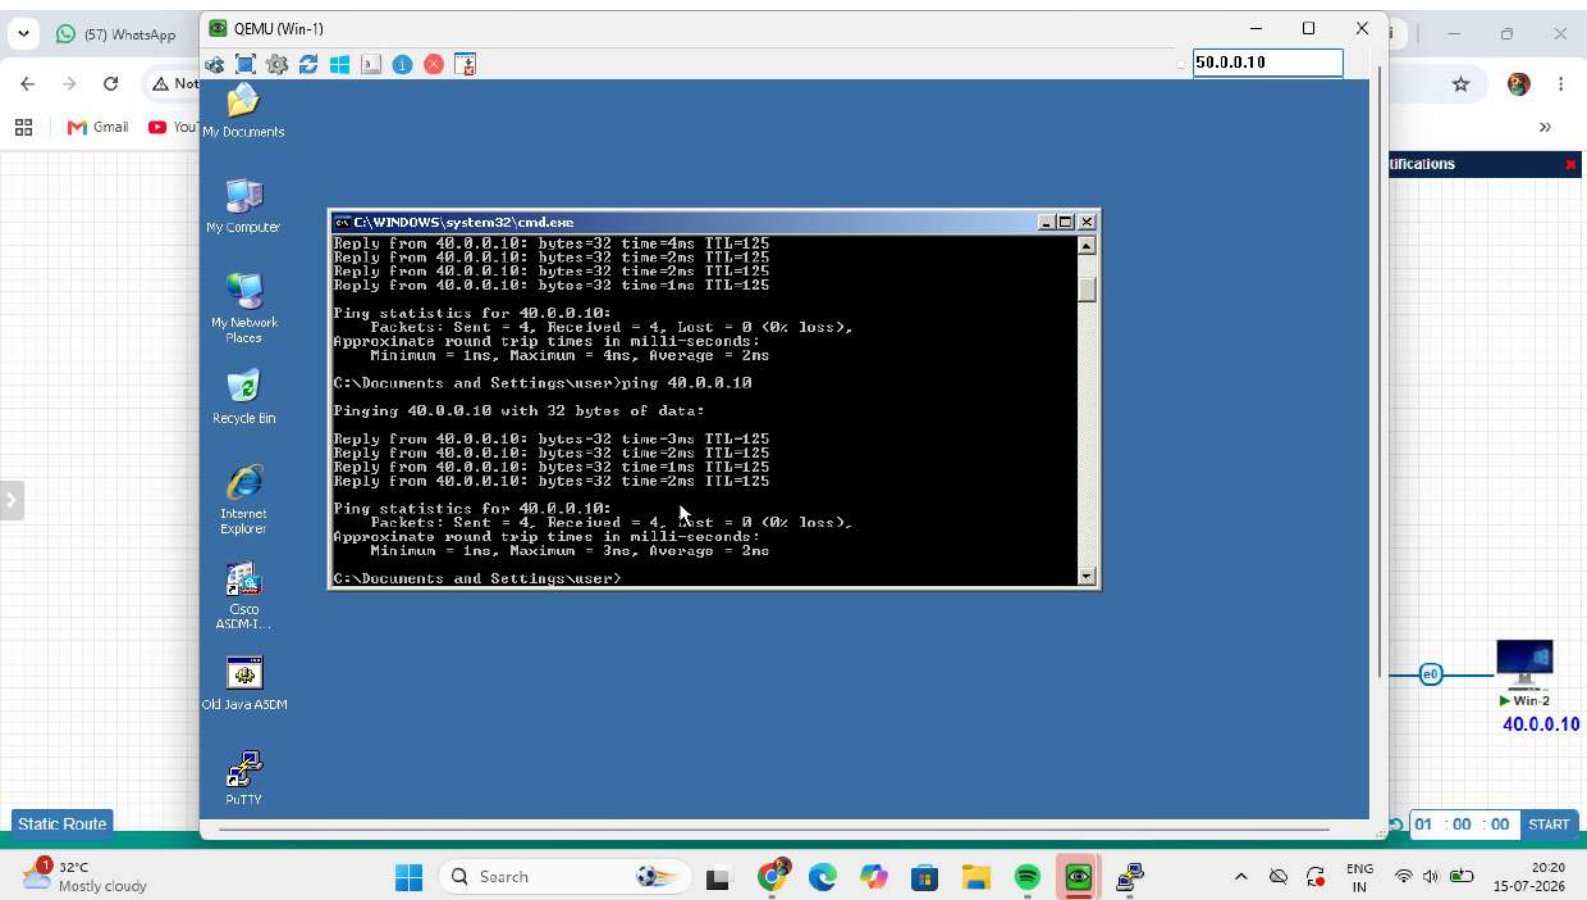

Browser tabs: (57) WhatsApp, PNETLab | Topology, Ask Gemini

Address bar: Notsecure 49.204.127.18/legacy/topology

Browser extensions: Gmail, YouTube, Maps, Free Cloud Computi..., Notifications | Linke..., Preparing CV for Fr..., https://www.amazo..., My Profile - AWS Sk..., foundit : Latest Jobs...

Notifications: Notifications

R1

```
R1(config)#exit
R1#
*Jul 15 14:49:29.760: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        +- replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
C       20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
S       40.0.0.0/8 [1/0] via 20.0.0.2
R1#
```

REN NETWORK
PLAY WITH TECHNOLOGIES

```
graph LR
    R2((R2)) ---|e0/0/1 30.0.0.1 --- R3((R3))
    R3 ---|e0/0/1 40.0.0.1 --- R4((R4))
    R4 ---|e0/0 40.0.0.10 --- Win2[Win-2]
    Win1[Win-1] ---|e0/0/1 10.0.0.10 --- R2
```

Static Route Physical 01 : 00 : 00 START

32°C Mostly cloudy

Search

20:19 15-07-2026

57) WhatsApp

PNETLab | Topology

Ask Gemini

Notsecure 49.204.127.18/legacy/topology

Gmail

YouTube

Maps

Free Cloud Computi...

Notifications | Linke...

Preparing CV for Fr...

https://www.amazo...

My Profile - AWS Sk...

foundit : Latest Jobs...

Notifications

R1

```
R1(config)#
R1(config)#conf t
% Invalid input detected at '^' marker.

R1(config)#no ip route 30.0.0.0 255.0.0.0
R1(config)#exit
R1#
*Jul 15 14:49:29.760: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
```

REN NETWORK
PLAY WITH TECHNOLOGIES

R2

30.0.0.1

e0/1

R3

30.0.0.2

e0/1

40.0.0.1

e0/0

Win-1

10.0.0.10

e0

Win-2

40.0.0.10

Static Route

Physical

01 : 00 : 00

START

32°C
Mostly cloudy

Search

ENG
IN

20:19
15-07-2026

The screenshot shows a PNETLab environment with a central router R3 and two PCs, Win-1 and Win-2. The router R3 is configured with static routes. The terminal window displays the following output for the 'show ip route' command:

```

R3[config]#exit
R3#
*Jul 15 14:46:54.457: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
      30.0.0.0/8 is directly connected, Ethernet0/1
      30.0.0.2/32 is directly connected, Ethernet0/1
    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
      40.0.0.0/8 is directly connected, Ethernet0/0
      40.0.0.1/32 is directly connected, Ethernet0/0
R3#
  
```

The topology diagram shows a central router R3 with two interfaces, e0/0 and e0/1. Interface e0/0 is connected to PC Win-2 (IP 40.0.0.10) via Ethernet0. Interface e0/1 is connected to PC Win-1 (IP 10.0.0.10) via Ethernet0. The status bar at the bottom indicates 'Static Route' and 'Physical' modes.

Static Route

Physical

01 : 00 : 00 START

32°C Mostly cloudy

20:17 15-07-2026

ENG IN

Search

Win-1 10.0.0.10

Win-2 40.0.0.10

R2 30.0.0.1

R3 30.0.0.2

40.0.0.1

R3#

R3#

R3#

R3#

R3#

R3#conf t

Enter configuration commands, one per line. End with CTRL/Z.

R3(config)#no ip route 20.0.0.0

% incomplete command.

R3(config)#no ip route 20.0.0.0 255.0.0.0

R3(config)#exit

R3#

*Jul 15 14:46:54.457: %SYS-5-CONFIG_I: Configured from console by console

R3#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, * - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP

a - application route

SUREN NETWORK

PLAY WITH TECHNOLOGIES

Notsecure 49.204.127.18/legacy/topology

PNETLab | Topology

Ask Gemini

Notifications

https://www.amazo...

My Profile - AWS Sk...

foundit : Latest Jobs...

Static Route

QEMU (Win-1)

50.0.0.10

```
C:\WINDOWS\system32\cmd.exe
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\User>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=4ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\User>
```

Win-2
40.0.0.10

01 : 00 : 00 START

32°C Mostly cloudy

Search

ENG IN

20:10 15-07-2026

57) WhatsApp

PNETLab | Topology

+

Ask Gemini

✖

✖

R3

```
R3#
*Jul 15 14:38:30.691: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
S    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
C    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
R3#
```

https://www.amazo... My Profile - AWS Sk... foundit : Latest Jobs...

Notifications

0.0.0.2

30.0.0.1

30.0.0.2

40.0.0.1

10.0.0.10

40.0.0.10

Win-1

Win-2

SUREN NETWORK
PLAY WITH TECHNOLOGIES

Static Route

Physical

01 : 00 : 00

START

32°C Mostly cloudy

Search

ENG IN

20:09 15-07-2026

Static Route

Physical

01 : 00 : 00 START

32°C Mostly cloudy

20:09 15-07-2026

ENG IN

Search

Win-1 10.0.0.10

Win-2 40.0.0.10

R1

```
Invalid input detected at '' marker.

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Ethernet0/0
L    10.0.0.1/32 is directly connected, Ethernet0/0
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/1
L    20.0.0.1/32 is directly connected, Ethernet0/1
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2

R1#
```

20.0.0.2 30.0.0.1 30.0.0.2 40.0.0.1

R2 R3

SUREN NETWORK
PLAY WITH TECHNOLOGIES

Static Route

Physical

01 : 00 : 00 START

32°C Mostly cloudy

20:09 15-07-2026

ENG IN

Search

Win-1 10.0.0.10

Win-2 40.0.0.10

R3

0.0.2

40.0.0.1

R2

```
R2#
'Jul 15 14:36:42.052: %SYS-5-CONFIG_I: Configured from console by console
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, I - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
L    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
S    40.0.0.0/8 [1/0] via 30.0.0.2
R2#
```

Static Route

Physical

01 : 00 : 00

START

32°C Mostly cloudy

Search

Win-1

10.0.0.10

Win-2

40.0.0.10

Win-1

10.0.0.10

Win-2

40.0.0.10

Static Route

Physical

01 : 00 : 00

START

32°C Mostly cloudy

Search

Win-1

10.0.0.10

Win-2

40.0.0.10

Win-1

10.0.0.10

Win-2

40.0.0.10

R3

R3(config-if)#exit
R3(config)#int e 0/1
R3(config-if)#ip add 30.0.0.2 255.0.0.0
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#exit
R3#
R3#
*Jul 15 14:28:16.753: %SYS-5-CONFIG_I: Configured from console by console
R3#
R3#
R3#
R3#show ip interface brief
Interface IP-Address OK? Method Status Prot
e0/0 40.0.0.1 YES manual up up
Ethernet0/0
Ethernet0/1 30.0.0.2 YES manual up up
Ethernet0/2 unassigned YES IFIP down down
Ethernet0/3 unassigned YES IFIP down down
R3#


30.0.0.1


30.0.0.2

40.0.0.1

10.0.0.10

40.0.0.10

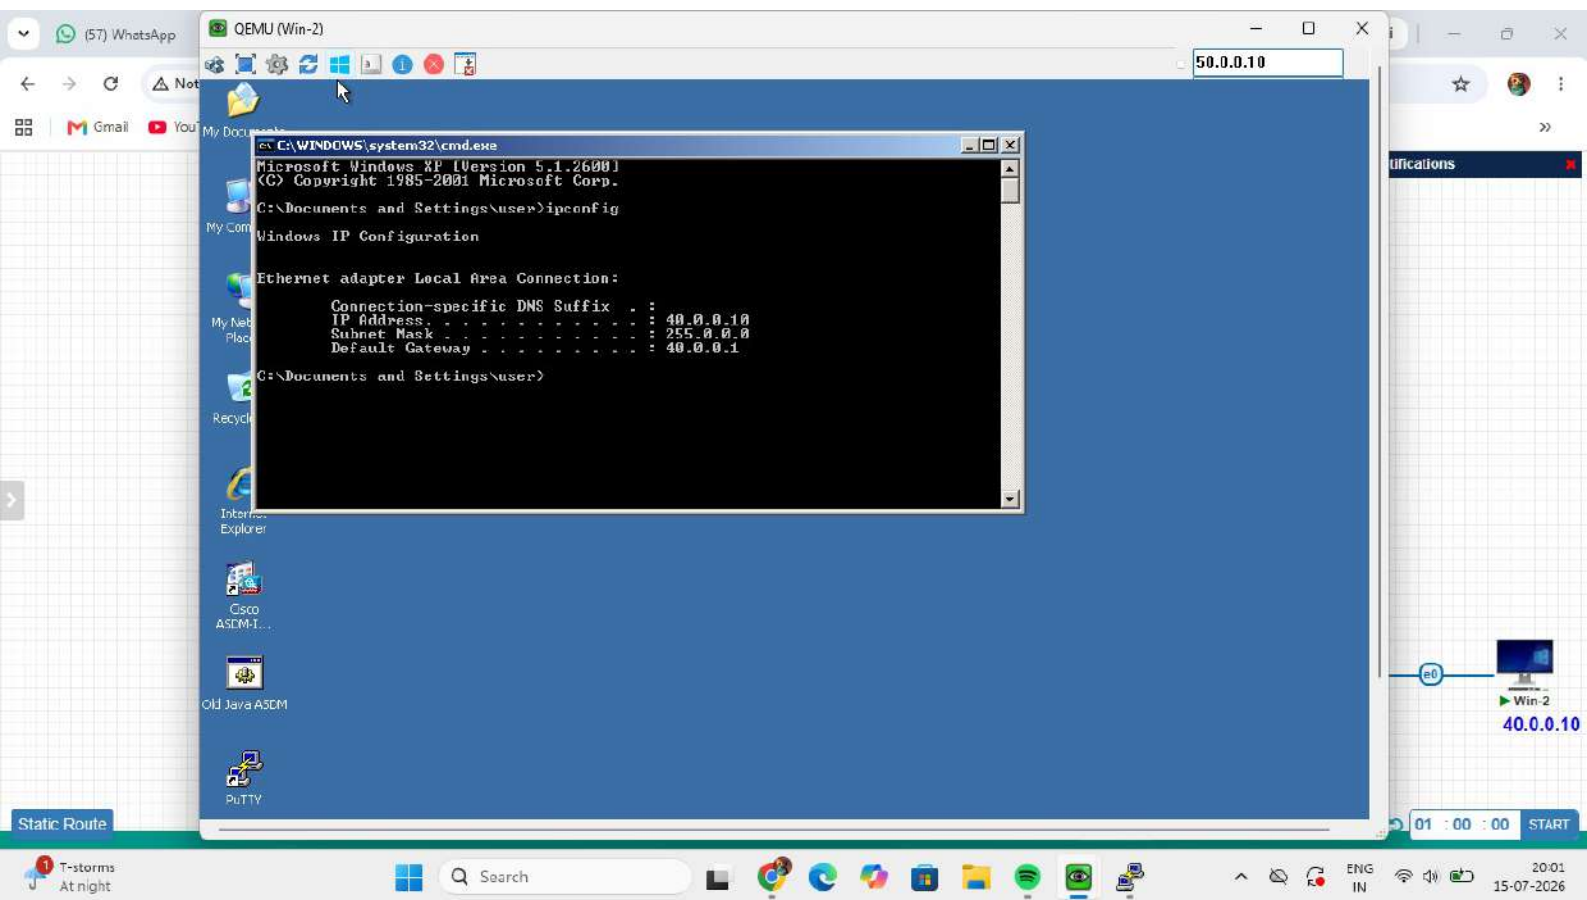

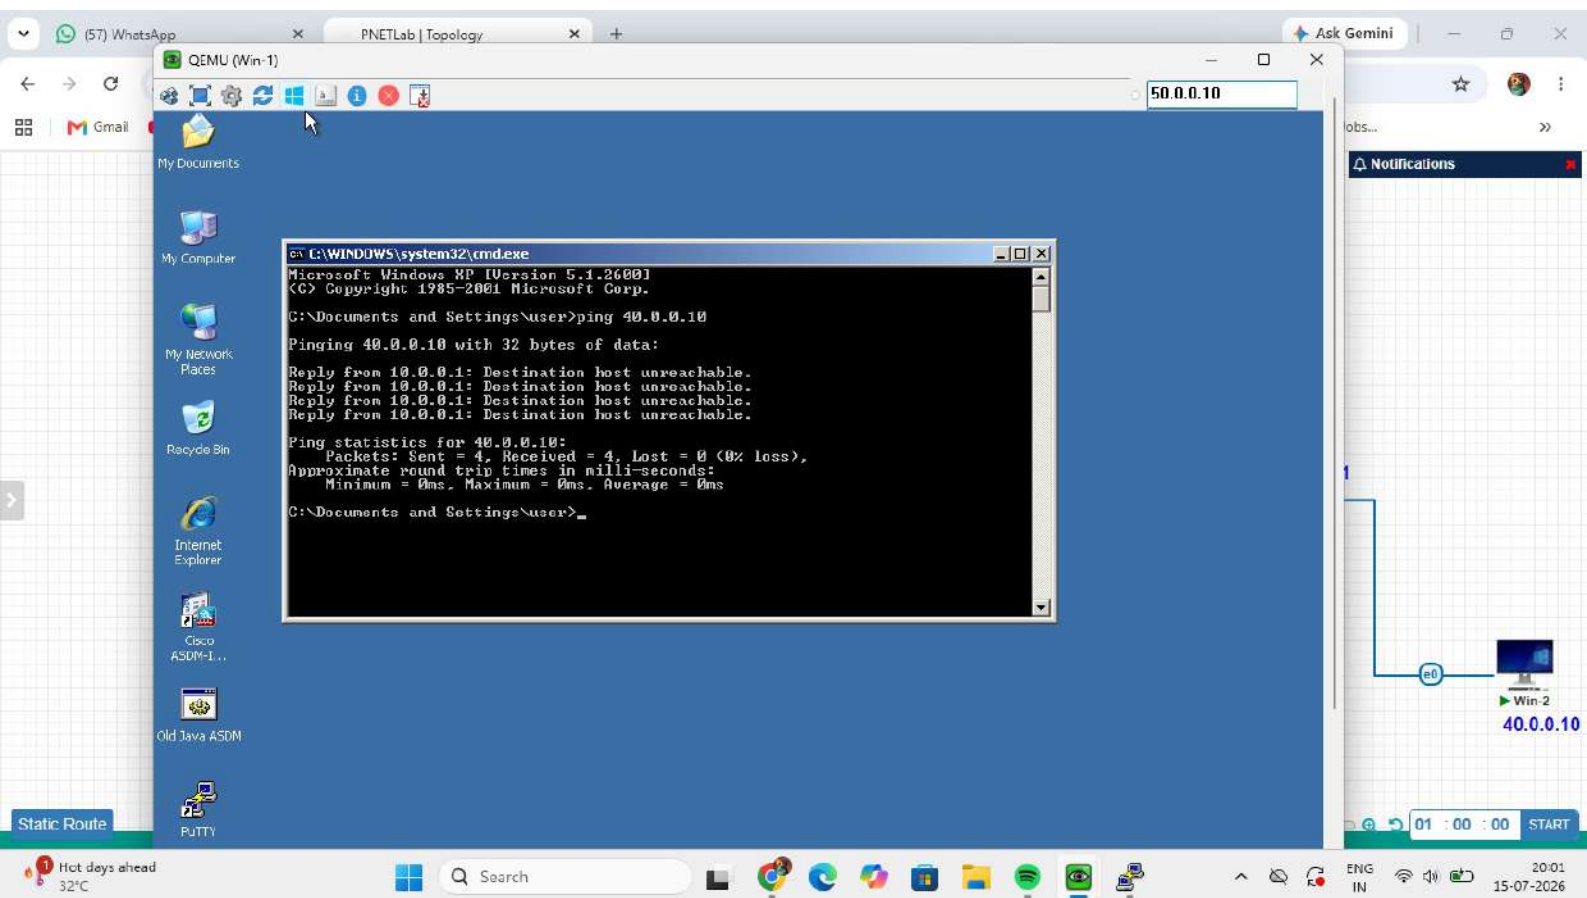

Static Route

Physical

01 : 00 : 00

START

32°C Mostly cloudy

Search

19:56

15-07-2026

Notsecure 49.204.127.18/legacy/topology

R2

R2 (config-if)#ip address 30.0.0.1 255.0.0.0
R2 (config-if)#no shutdown
R2 (config-if)#exit
R2 (config)#exit
R2#
*Jul 15 14:26:20.898: %SYS-5-CONFIG_I: Configured from console by console
R2#show
% Type "show ?" for a list of subcommands
R2#
R2#
R2#
R2#
R2#show ip interface brief
Interface IP-Address OK? Method Status Prot
e0/0
Ethernet0/0 20.0.0.2 YES manual up up
Ethernet0/1 30.0.0.1 YES manual up up
Ethernet0/2 unassigned YES TFTP down down
Ethernet0/3 unassigned YES TFTP down down
R2#

REN NETWORK

PLAY WITH TECHNOLOGIES

Win-1 10.0.0.10

Win-2 40.0.0.10

R2 30.0.0.1 e0/1

30.0.0.2 e0/1

R3 40.0.0.1 e0/0

The screenshot displays a PNETLab topology simulation. A terminal window for router R1 shows the following configuration commands and output:

```


R1(config)#interface e 0/1
R1(config-if)#ip address 20.0.0.1 255.0.0.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#exit
R1#
*Jul 15 14:23:46.266: %SYS-5-CONFIG_I: Configured from console by console
R1#
R1#
R1#
R1#
R1#
R1#show ip int brief

```

Interface	IP-Address	OK?	Method	Status	Protocol
0c01					
Ethernet0/0	10.0.0.1	YES	manual	up	up
Ethernet0/1	20.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

The network diagram shows a topology with three routers (R1, R2, R3) and two PCs (Win-1, Win-2). R1 is connected to Win-1 (10.0.0.10) via Ethernet0/0. R1 is connected to R2 via Ethernet0/1 (30.0.0.1) and Ethernet0/2 (30.0.0.2). R2 is connected to R3 via Ethernet0/0 (40.0.0.1). R3 is connected to Win-2 (40.0.0.10) via Ethernet0/0. The status of the interfaces is indicated by green arrows (up) or red arrows (down).

The bottom status bar shows "Static Route" and "Physical" tabs, a timer at 01:00:00, and a "START" button. The system tray at the bottom indicates a temperature of 32°C, mostly cloudy weather, and the date 15-07-2026.

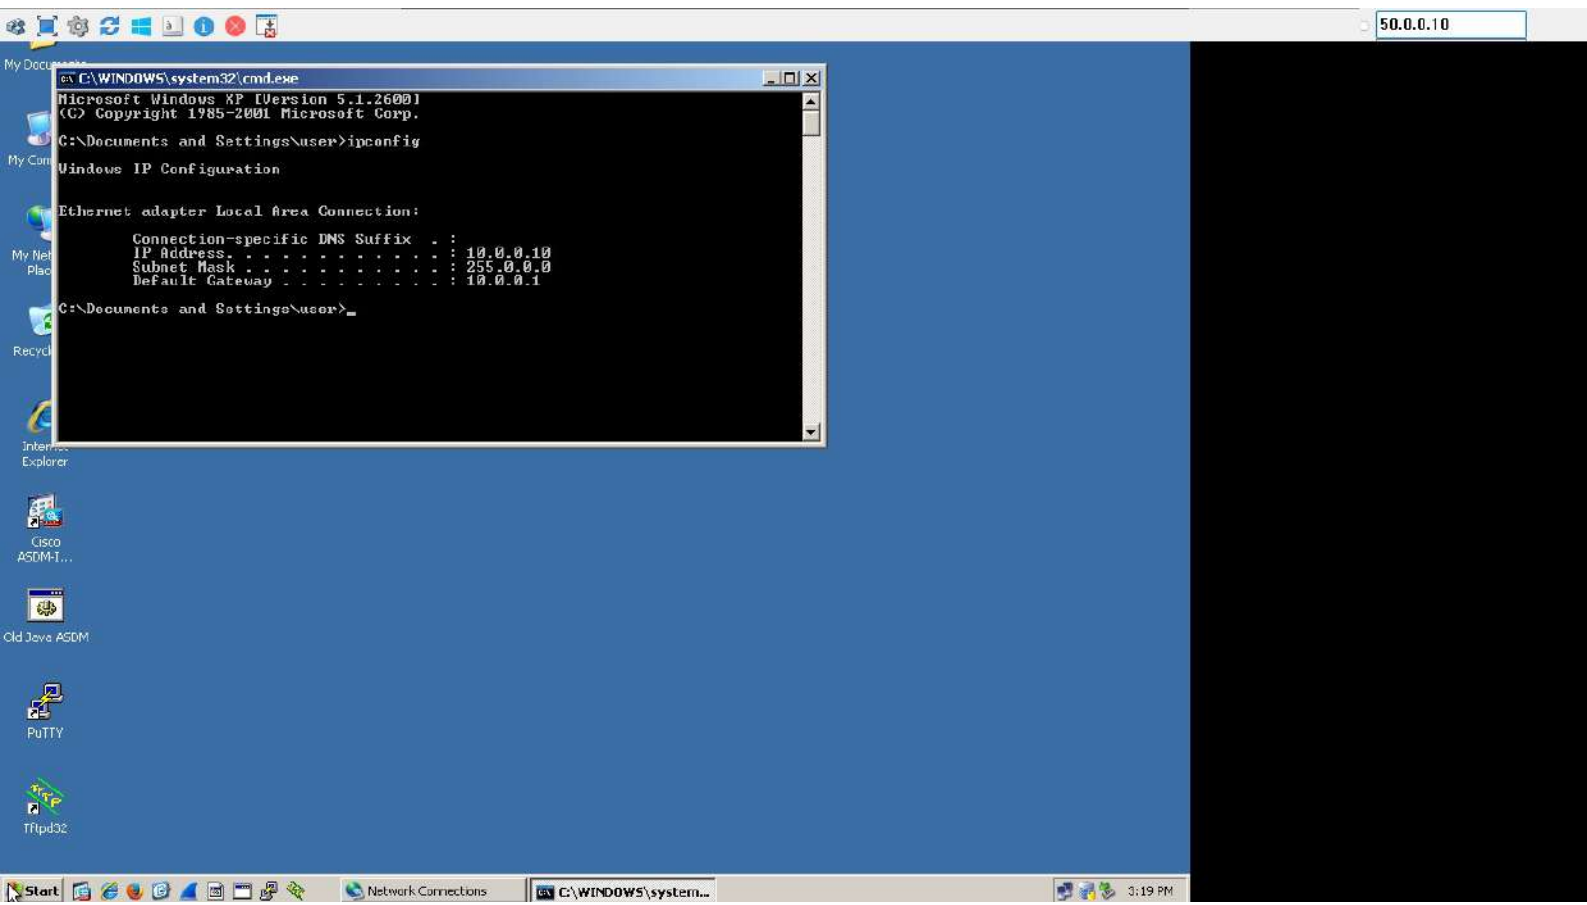

50.0.0.10

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address. : 10.0.0.10
Subnet Mask : 255.0.0.0
Default Gateway : 10.0.0.1

C:\Documents and Settings\user>

Start Network Connections C:\WINDOWS\system32\cmd.exe

3:19 PM