






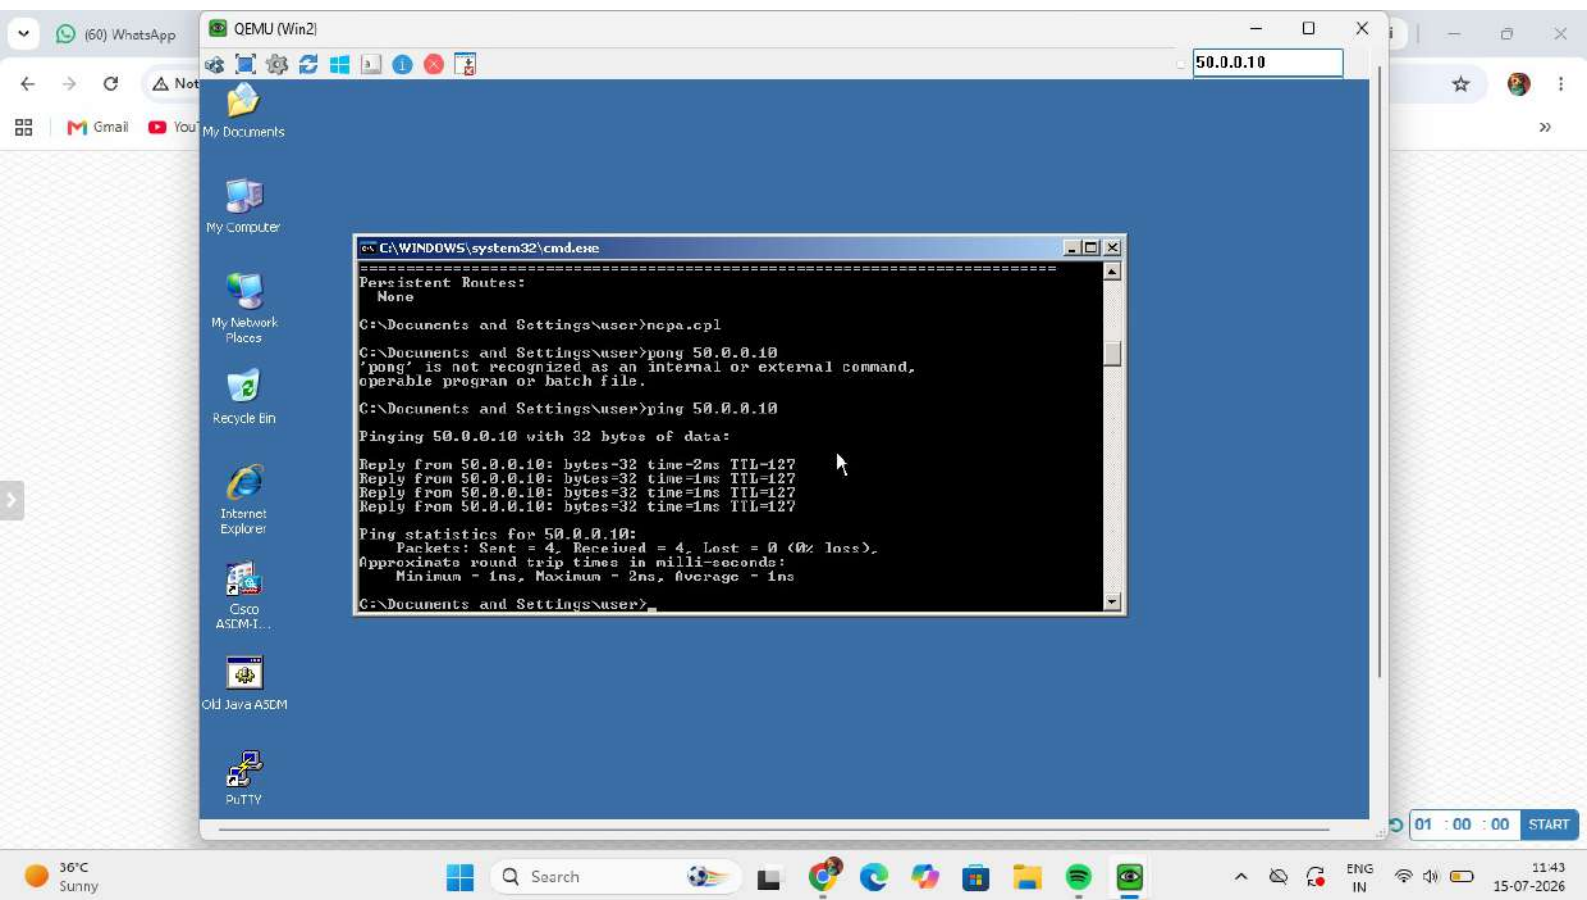

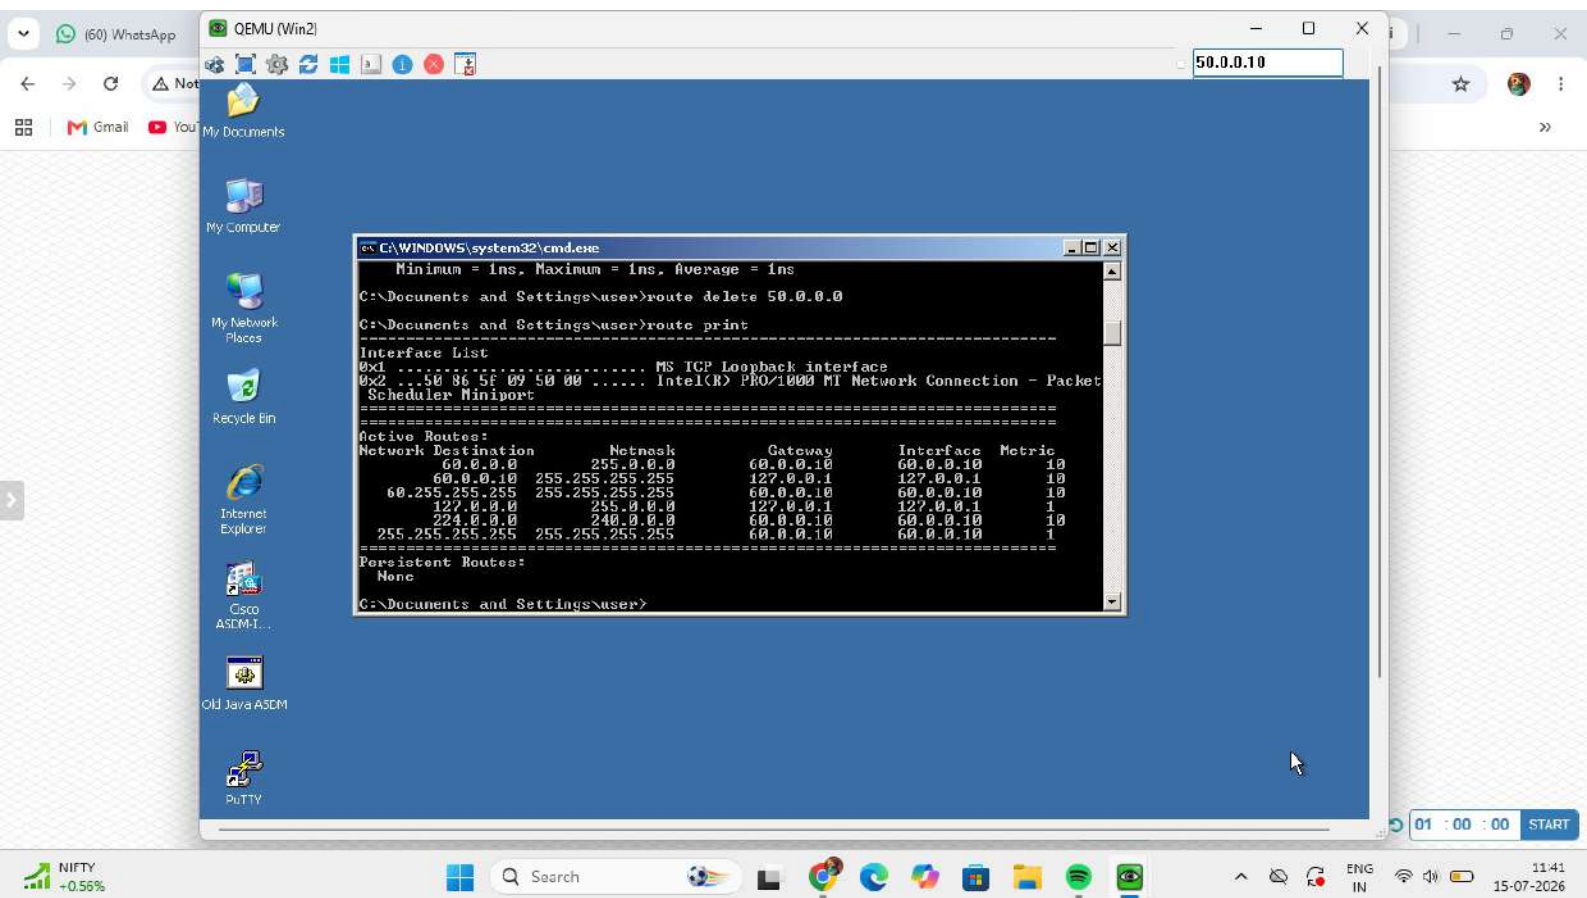

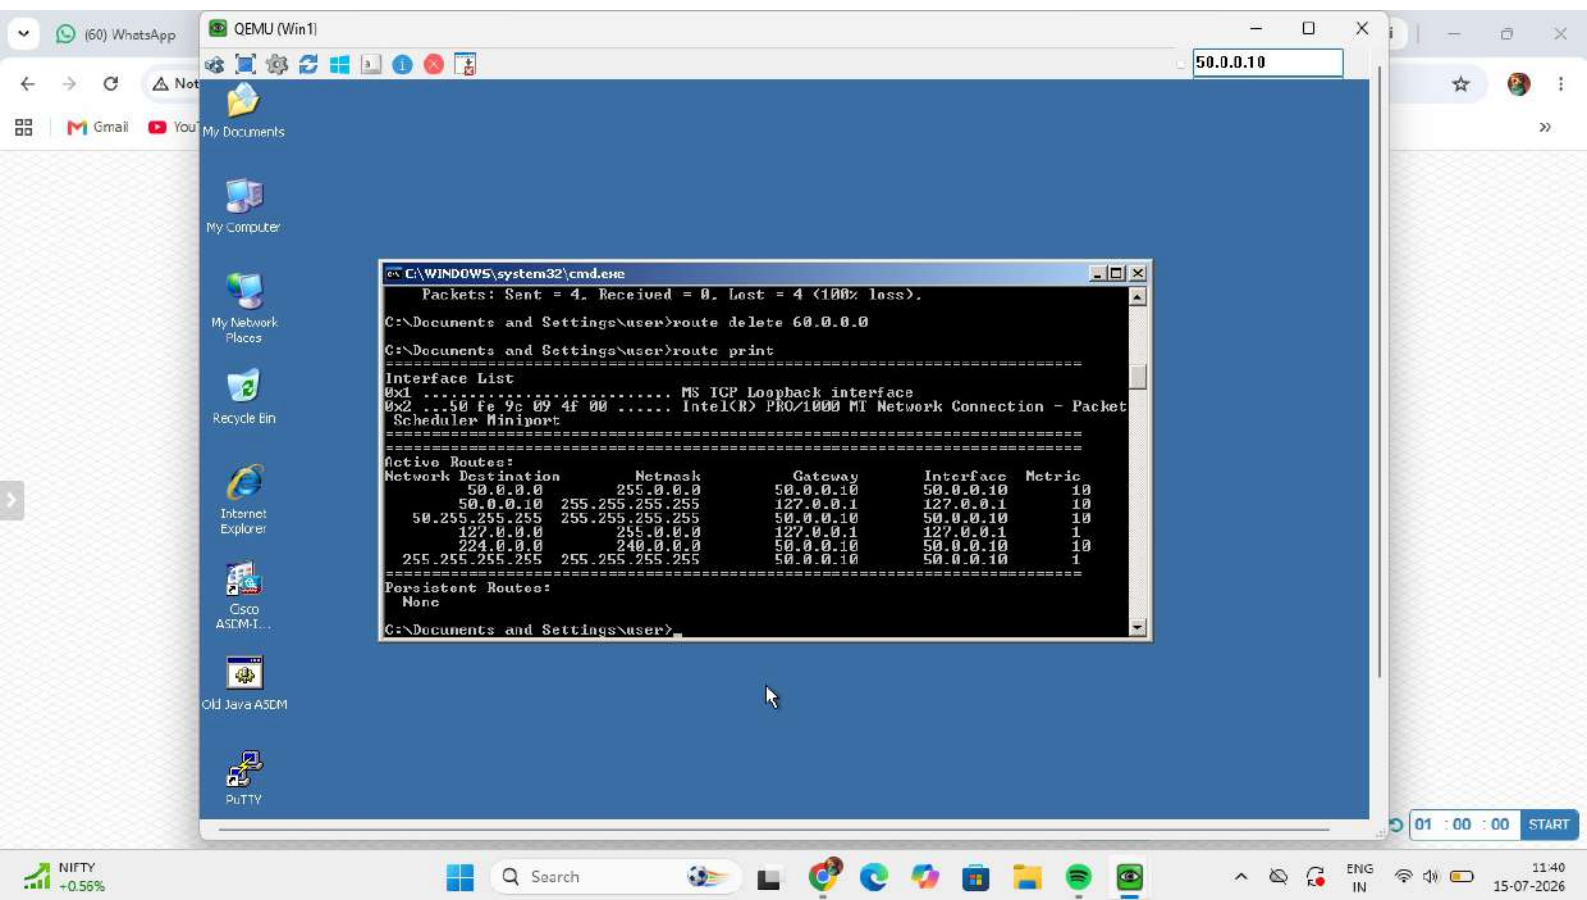

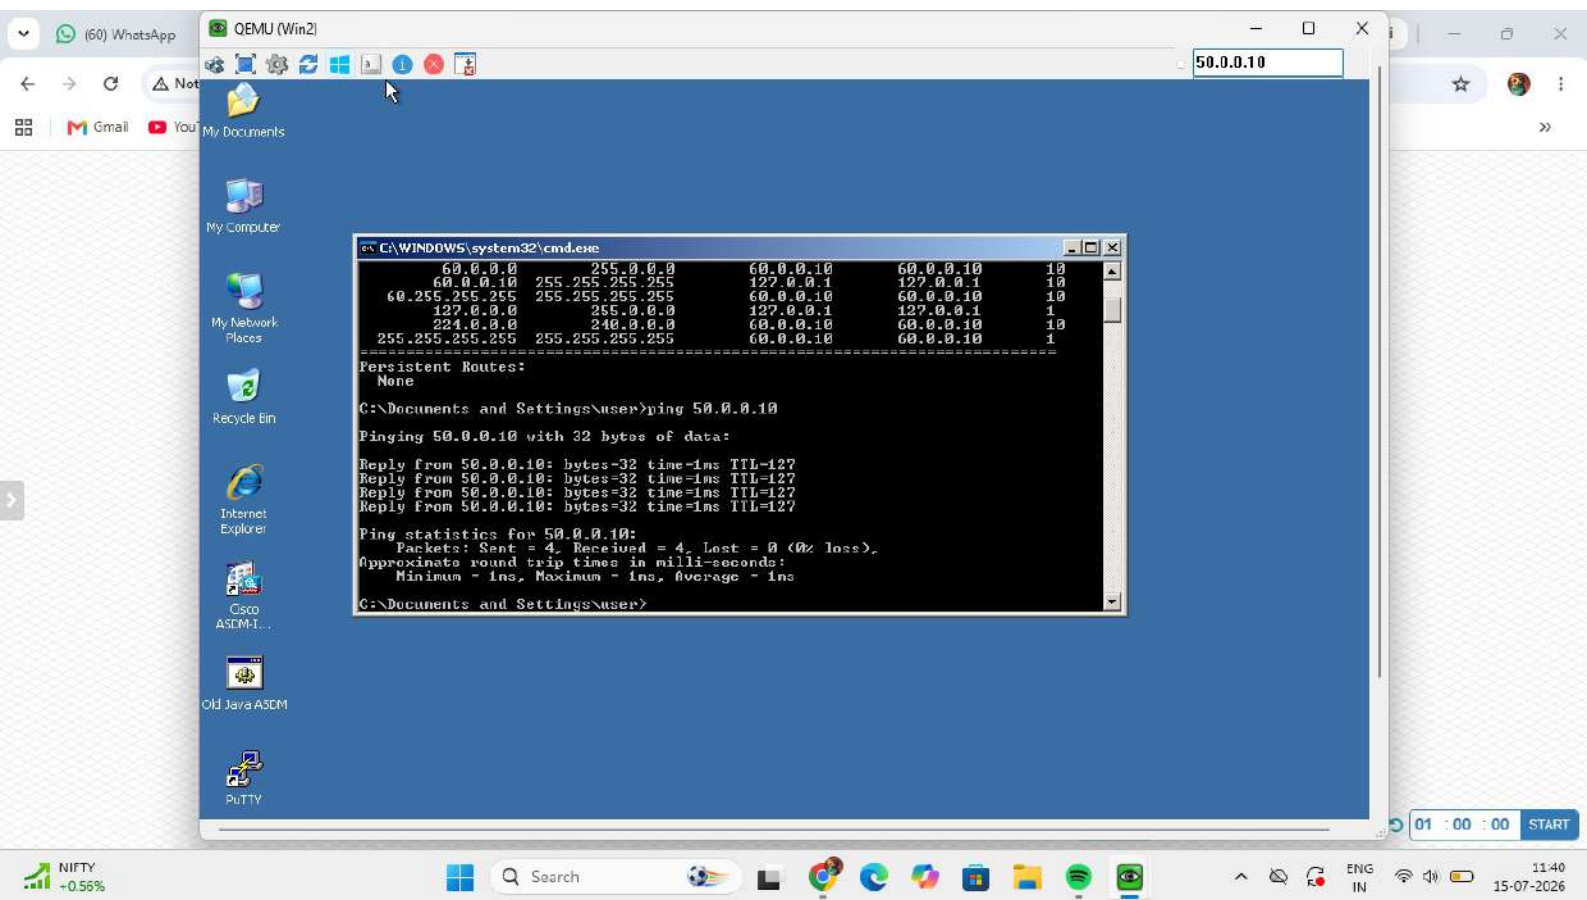

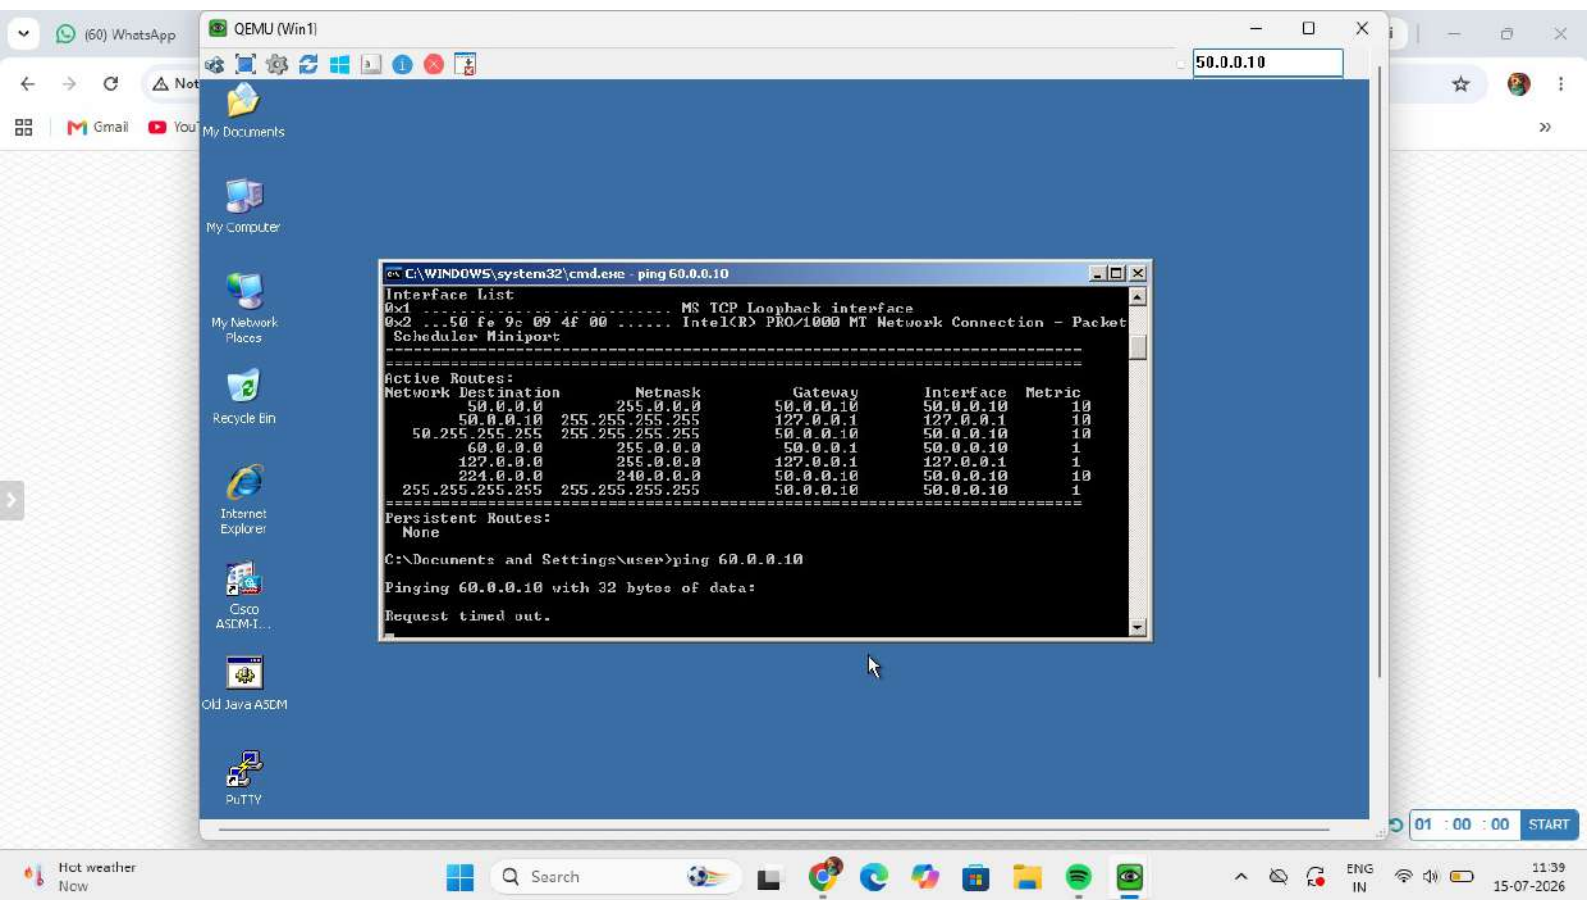



50.0.0.10

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-I...

Old Java ASDM

PuTTY

TRpd32

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.


C:\Documents and Settings\User>ping 50.0.0.1


Pinging 50.0.0.1 with 32 bytes of data:


Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255


Ping statistics for 50.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\User>
```

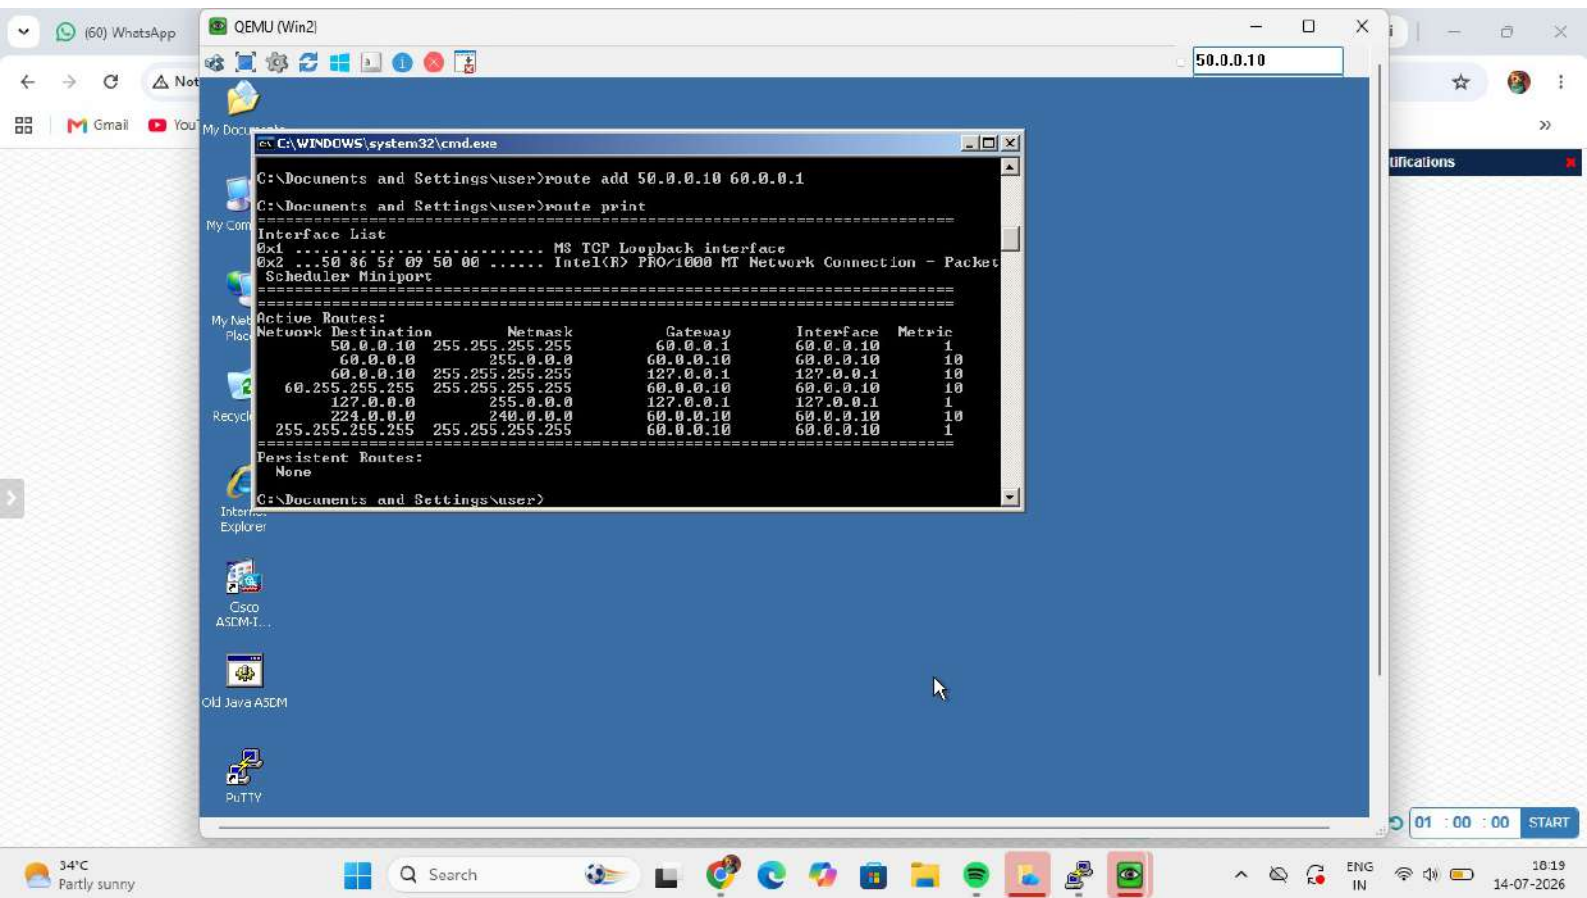

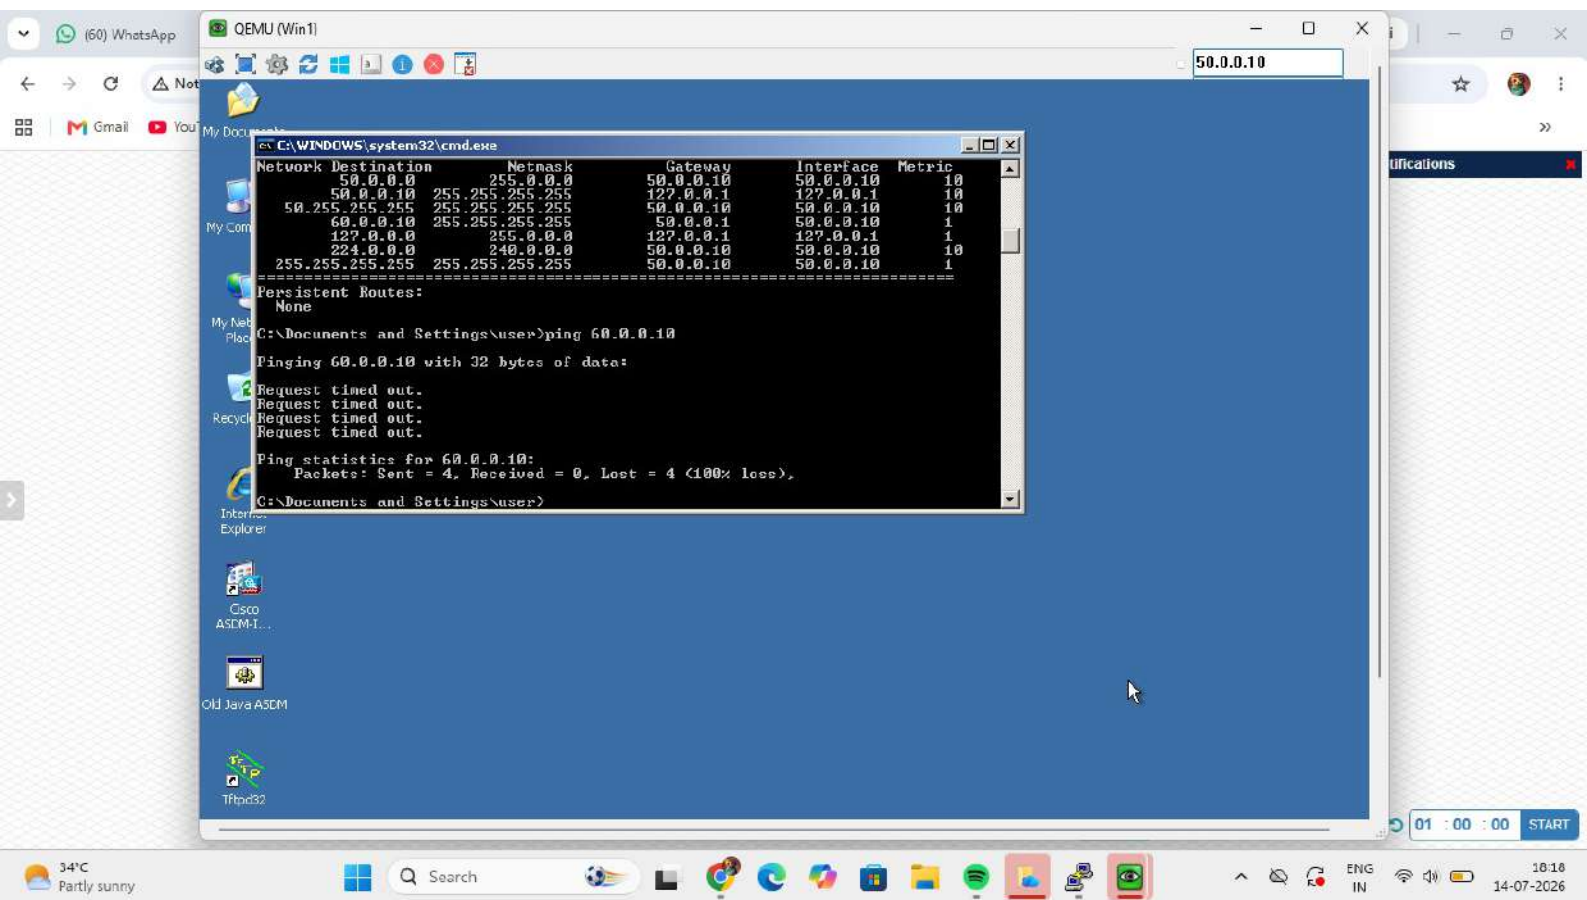

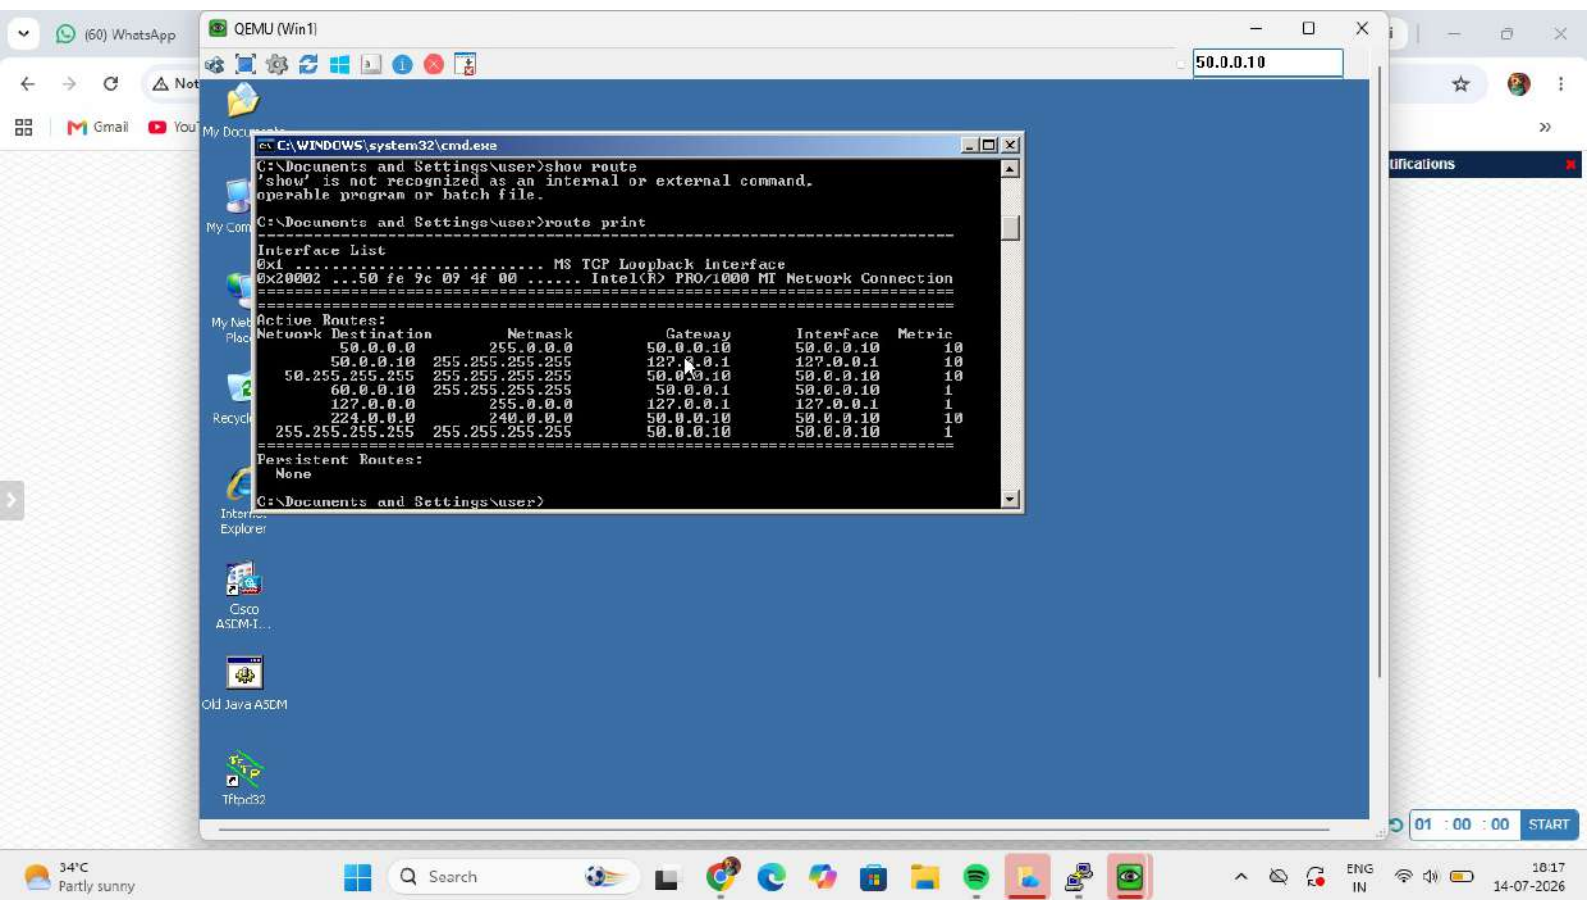

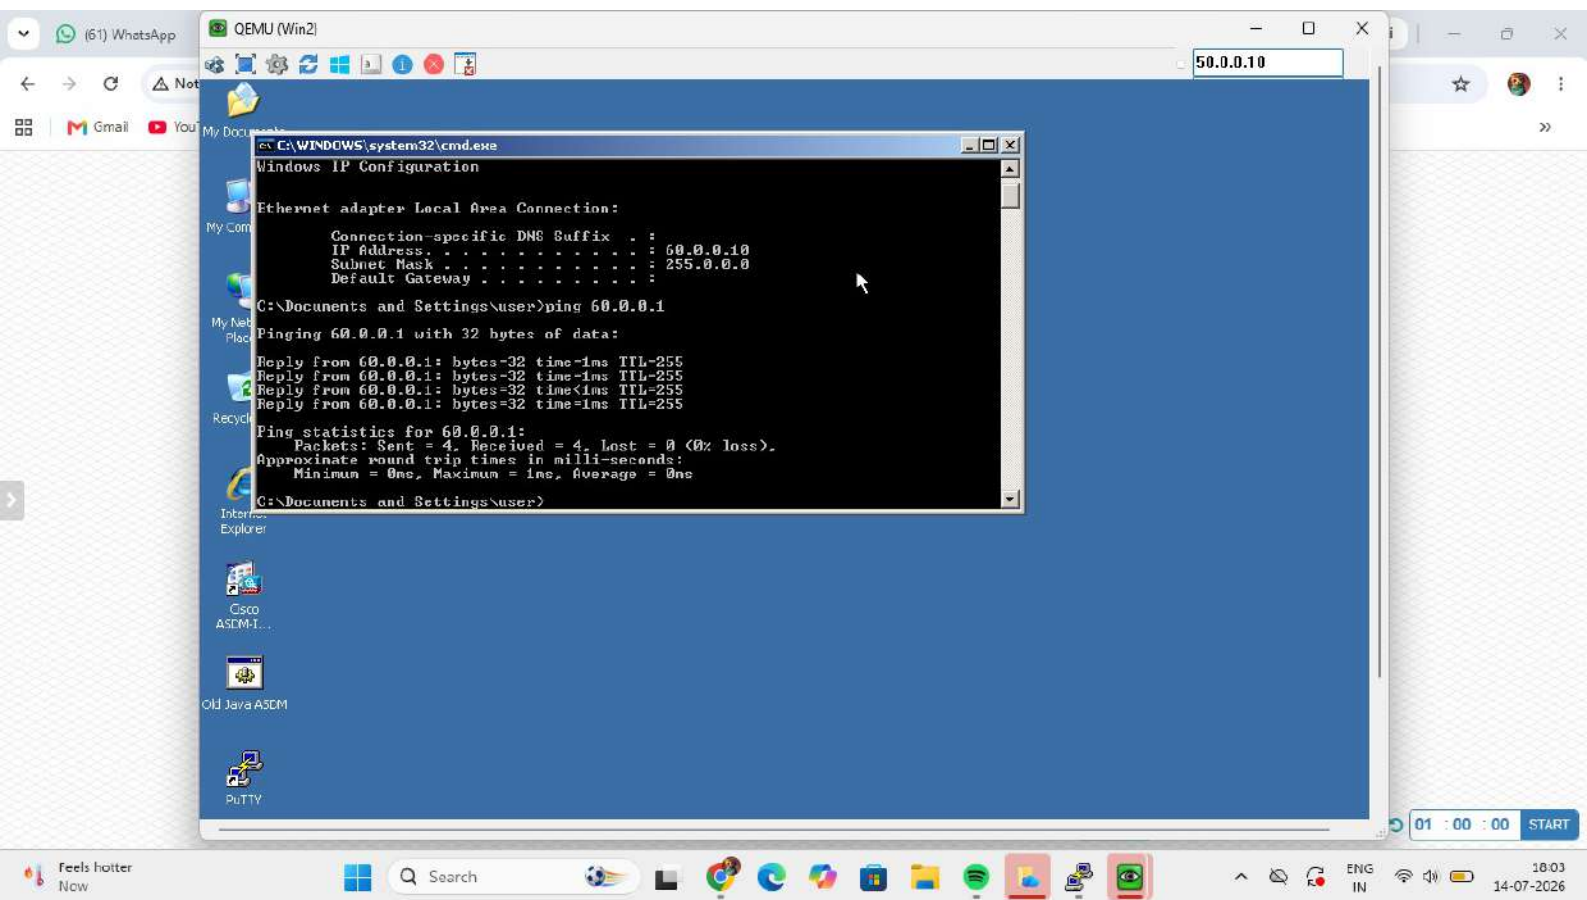



50.0.0.10

My Documents

```
C:\WINDOWS\system32\cmd.exe
Pinging 50.0.0.1 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 50.0.0.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\User>
C:\Documents and Settings\User>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\User>
```

Cisco
ASDM-T...

Old Java ASDM

TRpd32

PuTTY

Start C:\WINDOWS\system...

1:16 PM

Router

```
Router#
Router#
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - IGRP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

50.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    50.0.0.0/8 is directly connected, Ethernet0/0
L    50.0.0.1/32 is directly connected, Ethernet0/0
60.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    60.0.0.0/8 is directly connected, Ethernet0/1
L    60.0.0.1/32 is directly connected, Ethernet0/1
Router#
```

SUREN NETWORK
PLAY WITH TECHNOLOGIES


Win1 50.0.0.10 Router 50.0.0.1 60.0.0.1 Win2 60.0.0.10


Physical 01 : 00 : 00 START

Gold +0.69%

Search

ENG IN 17:42 14-07-2026

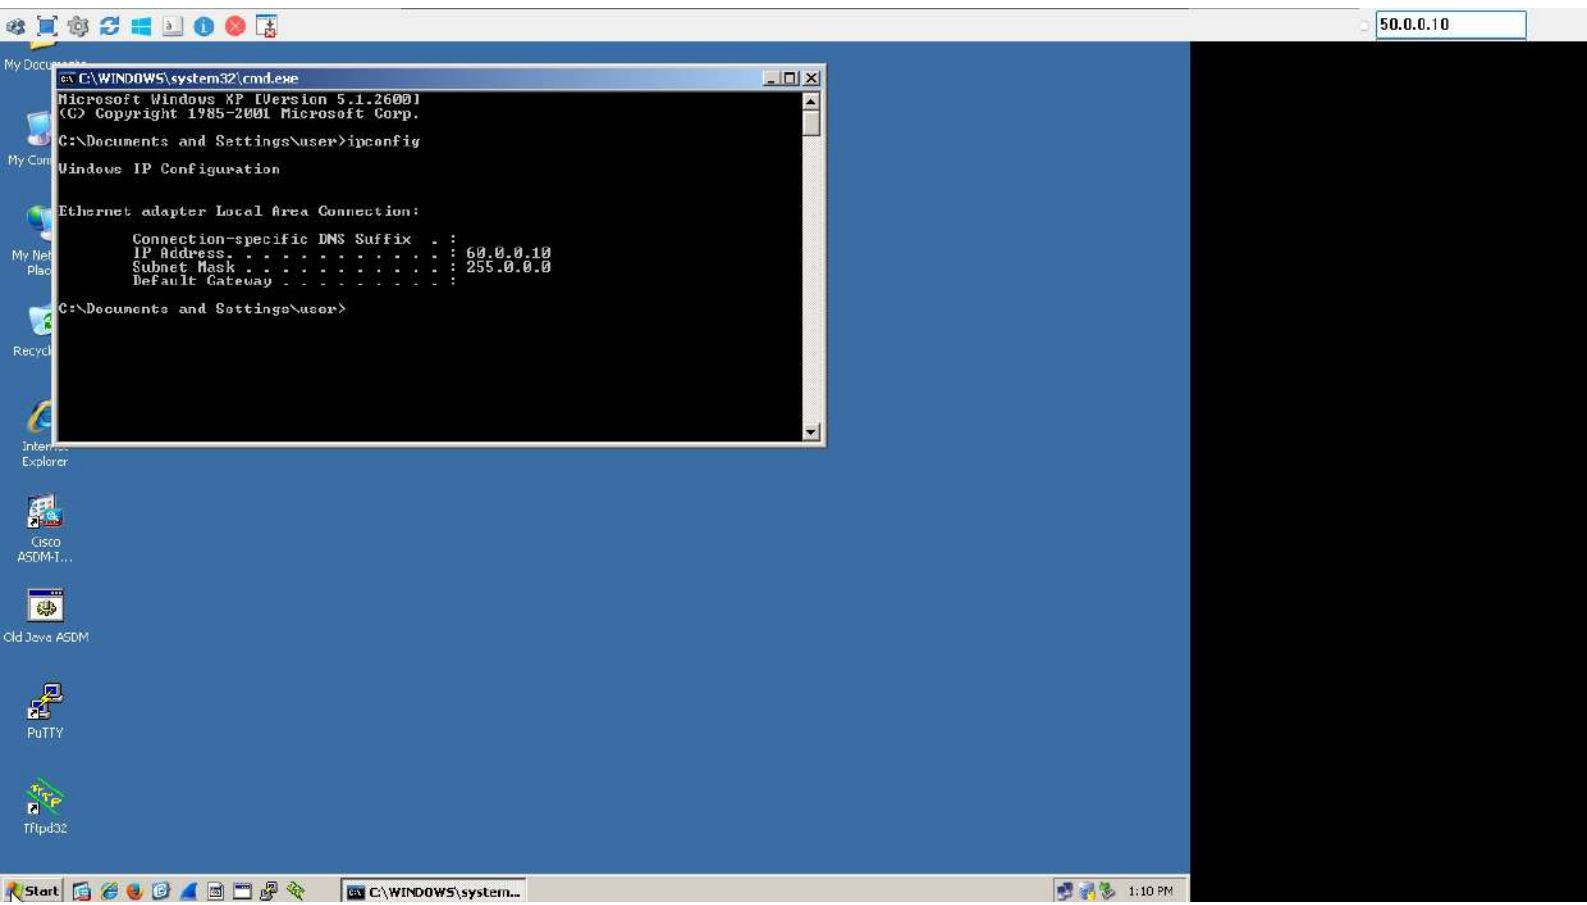

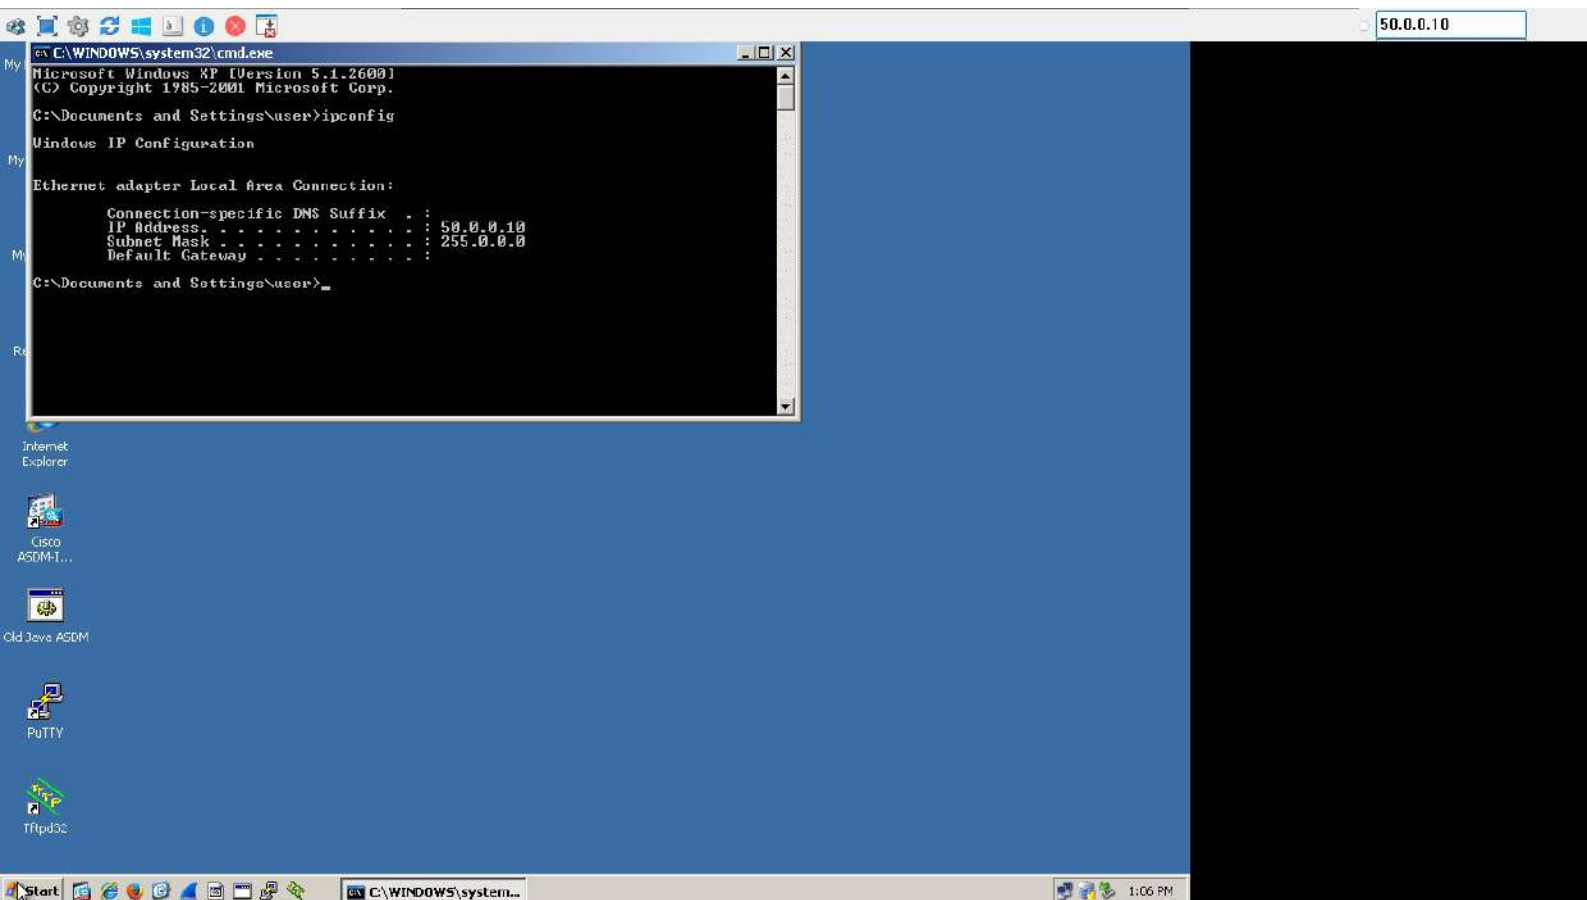

WhatsApp PNETLab | Topology Ask Gemini

Router

```
Router(config-if)#ip address 60.0.0.1
% Incomplete command.

Router(config-if)#ip address 60.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#exit
Router#
*Jul 14 11:59:20.868: %SYS-5-CONFIG_I: Configured from console by console
Router#show
*Jul 14 11:59:44.811: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
Router#show ip interface brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	50.0.0.1	YES	manual	up	up
Ethernet0/1	60.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

Router#

Win1 50.0.0.10 Router 60.0.0.1 Win2 60.0.0.10

SUREN NETWORK
PLAY WITH TECHNOLOGIES

Physical 01 : 00 : 00 START

17:30 14-07-2026

Router

```
Router#
*Jul 14 11:55:54.638: %SYS-5-CONFIG_I: Configured from console by console
Router#ip show interface brief
% Invalid input detected at '^' marker.

Router#show ip interface brief
Interface      IP-Address      OK? Method Status Prot
Ethernet0/0    unassigned      YES TFTP  up    up
Ethernet0/1    unassigned      YES TFTP  up    up
Ethernet0/2    unassigned      YES TFTP  down  down
Ethernet0/3    unassigned      YES TFTP  down  down

Router#configure terminal
Enter configuration commands, one per line. End with CNTRL/Z.
Router(config)#interface Ethernet 0/0
Router(config-if)#ip address 50.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#
```

SUREN NETWORK
PLAY WITH TECHNOLOGIES

Win1 50.0.0.10 Router 60.0.0.1 Win2 60.0.0.10

Physical 01 : 00 : 00 START

17:27 14-07-2026

Router

```
Router#
Router#
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
*Jul 14 11:55:54.638: %SYS-5-CONFIG_I: Configured from console by console
Router#ip show interface brief
Router#
% Invalid input detected at '^' marker.

Router#show ip interface brief
Interface IP-Address OK? Method Status Protocol
Ethernet0/0 unassigned YES TFTP up up
Ethernet0/1 unassigned YES TFTP up up
Ethernet0/2 unassigned YES TFTP down down
Ethernet0/3 unassigned YES TFTP down down
Router#
```


SUREN NETWORK
PLAY WITH TECHNOLOGIES


50.0.0.10 60.0.0.1 60.0.0.10


Win1 Router Win2


Physical 01 : 00 : 00 START


17:26 14-07-2026

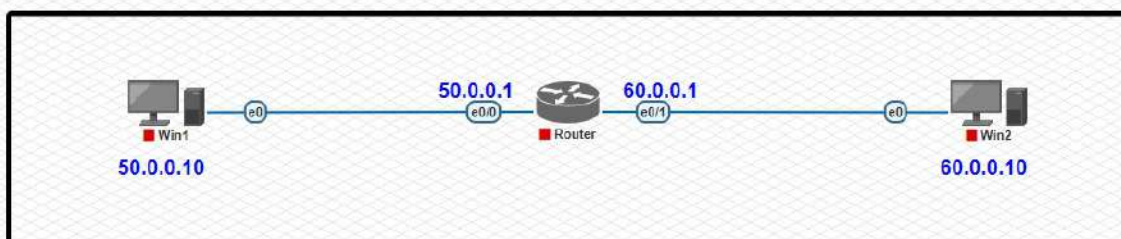


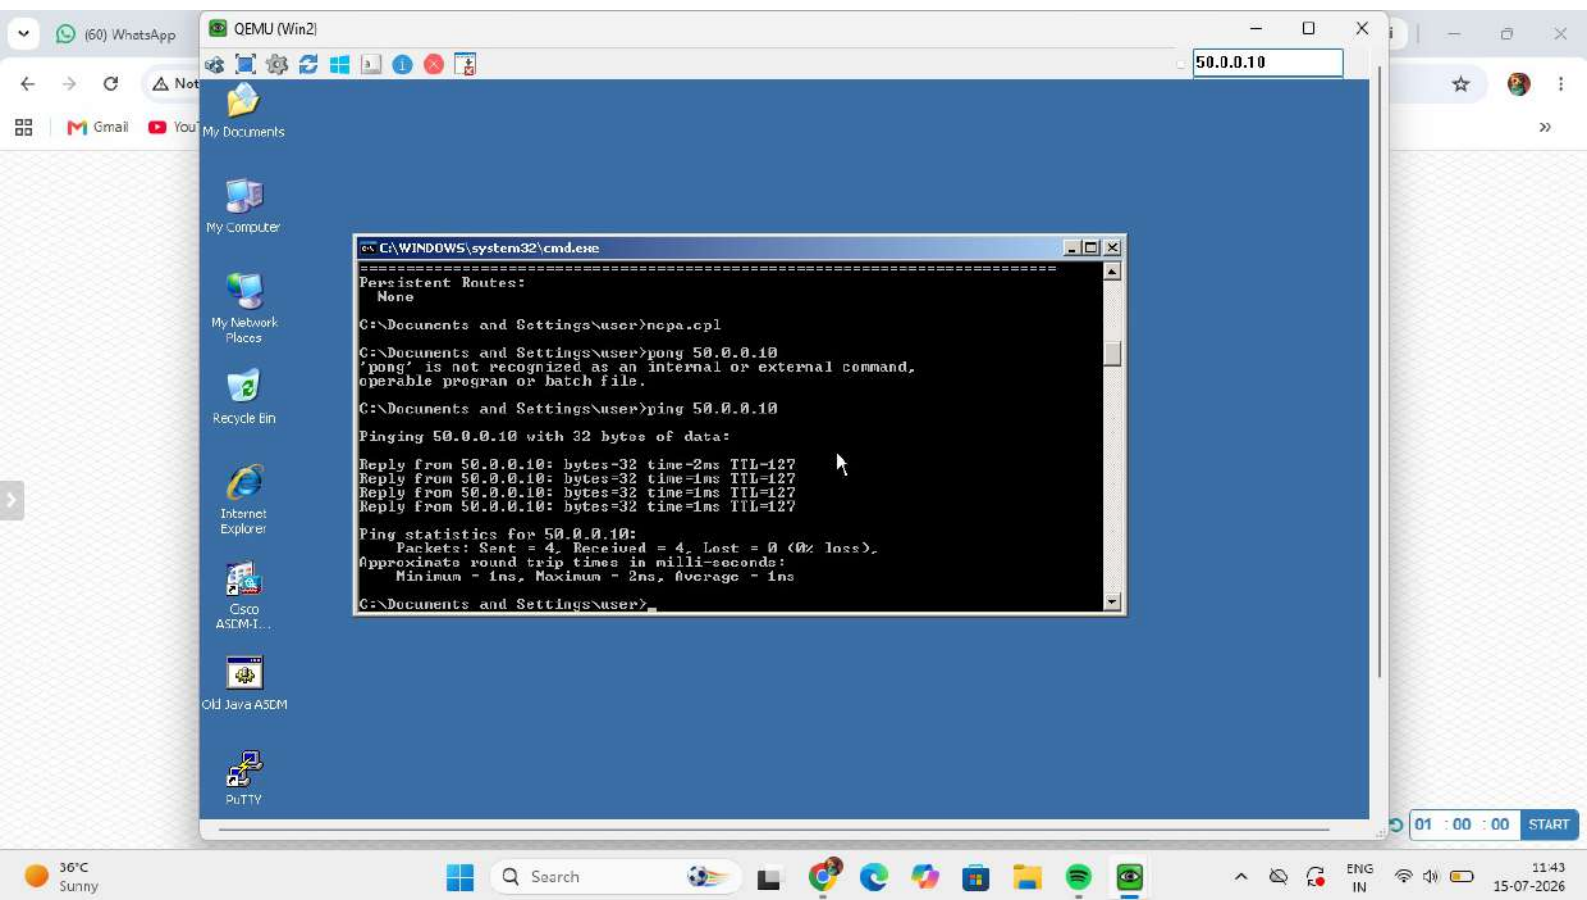

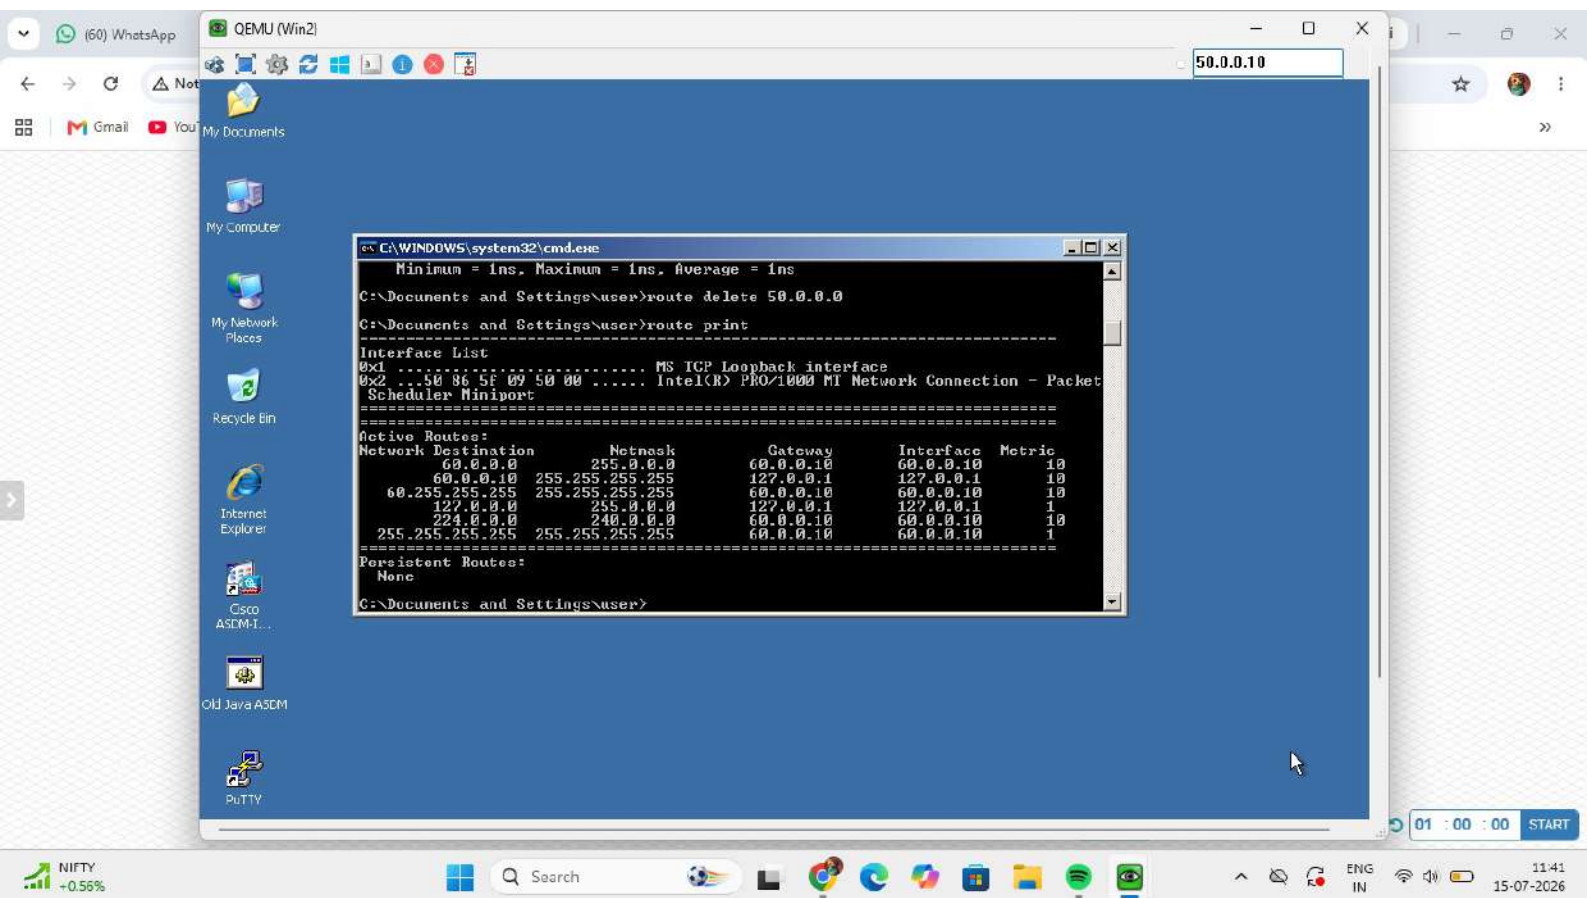

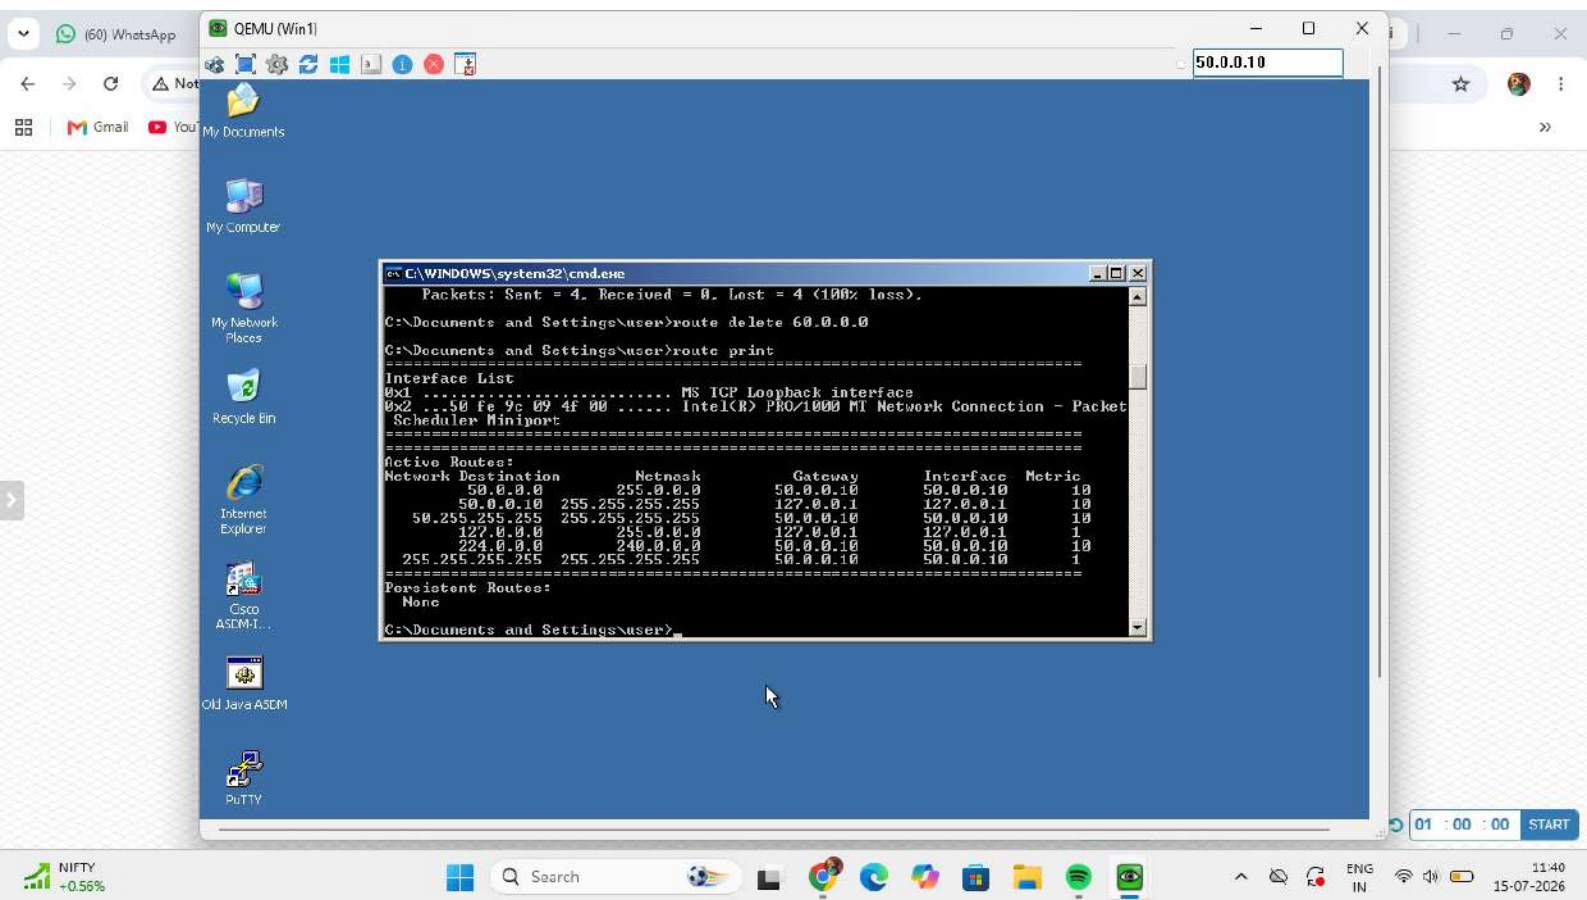

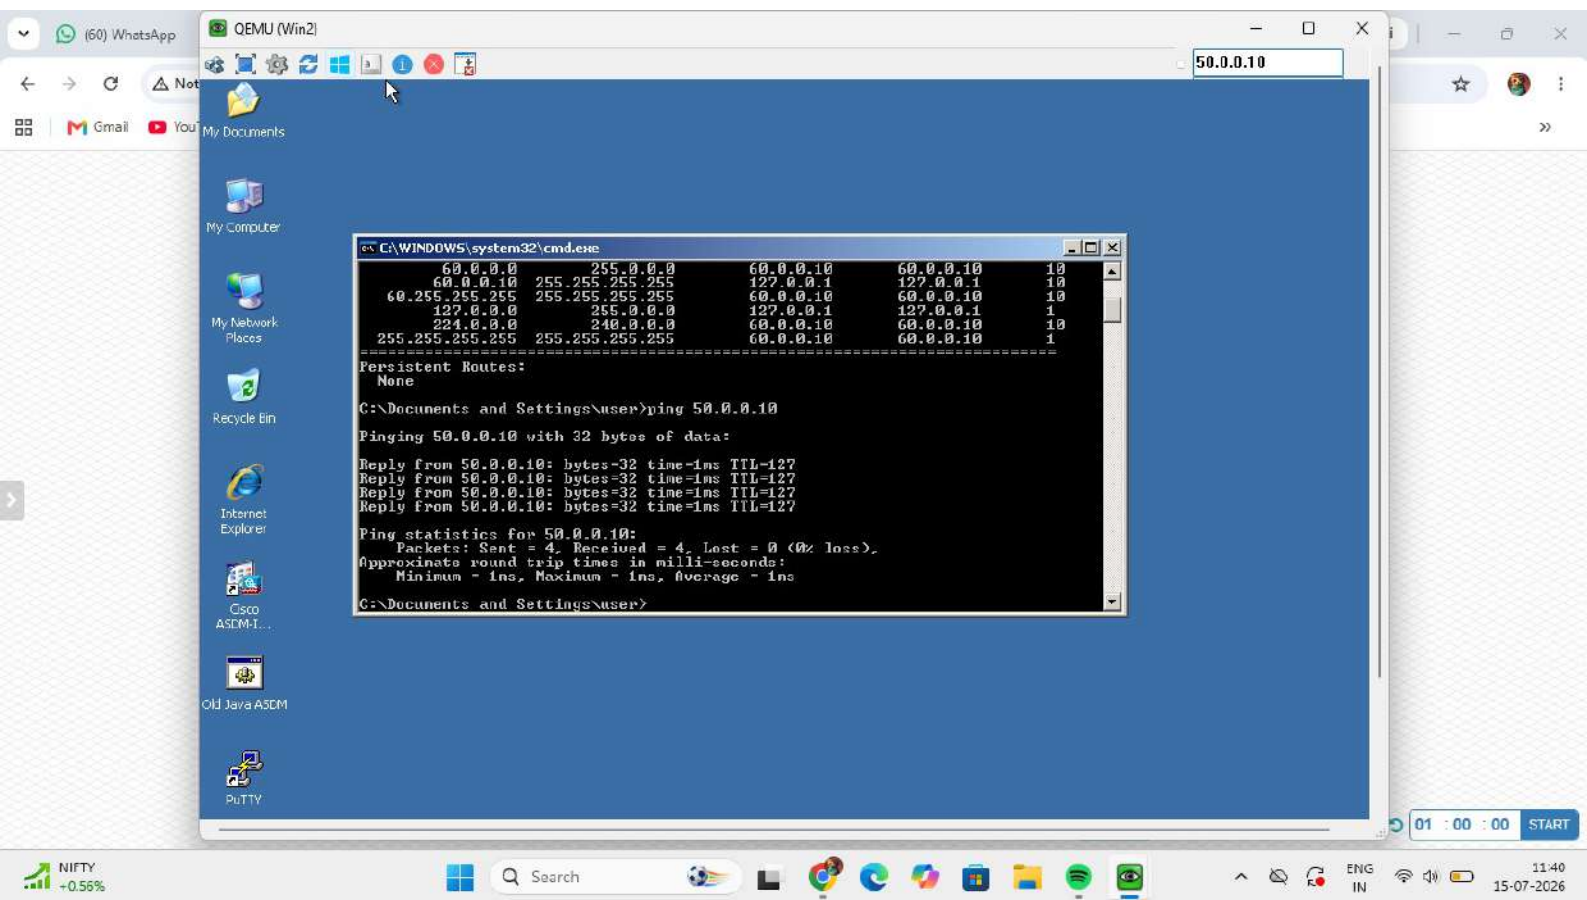

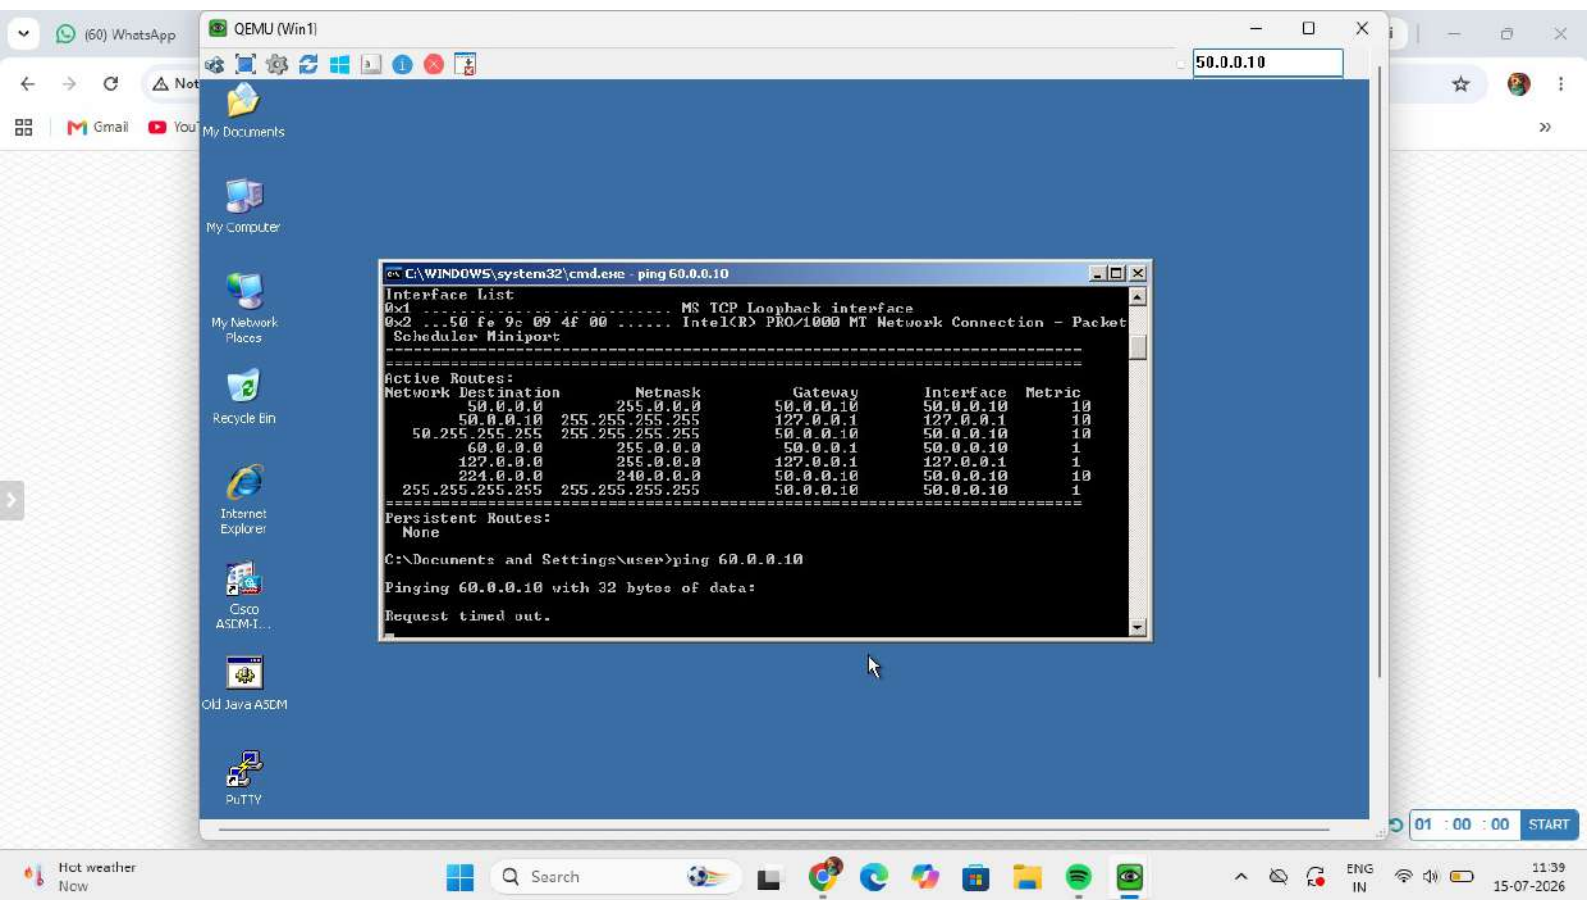



50.0.0.10

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-I...

Old Java ASDM

PuTTY

TRpd32

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\User>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:

Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255

Ping statistics for 50.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\User>
```

Start

7:06 AM