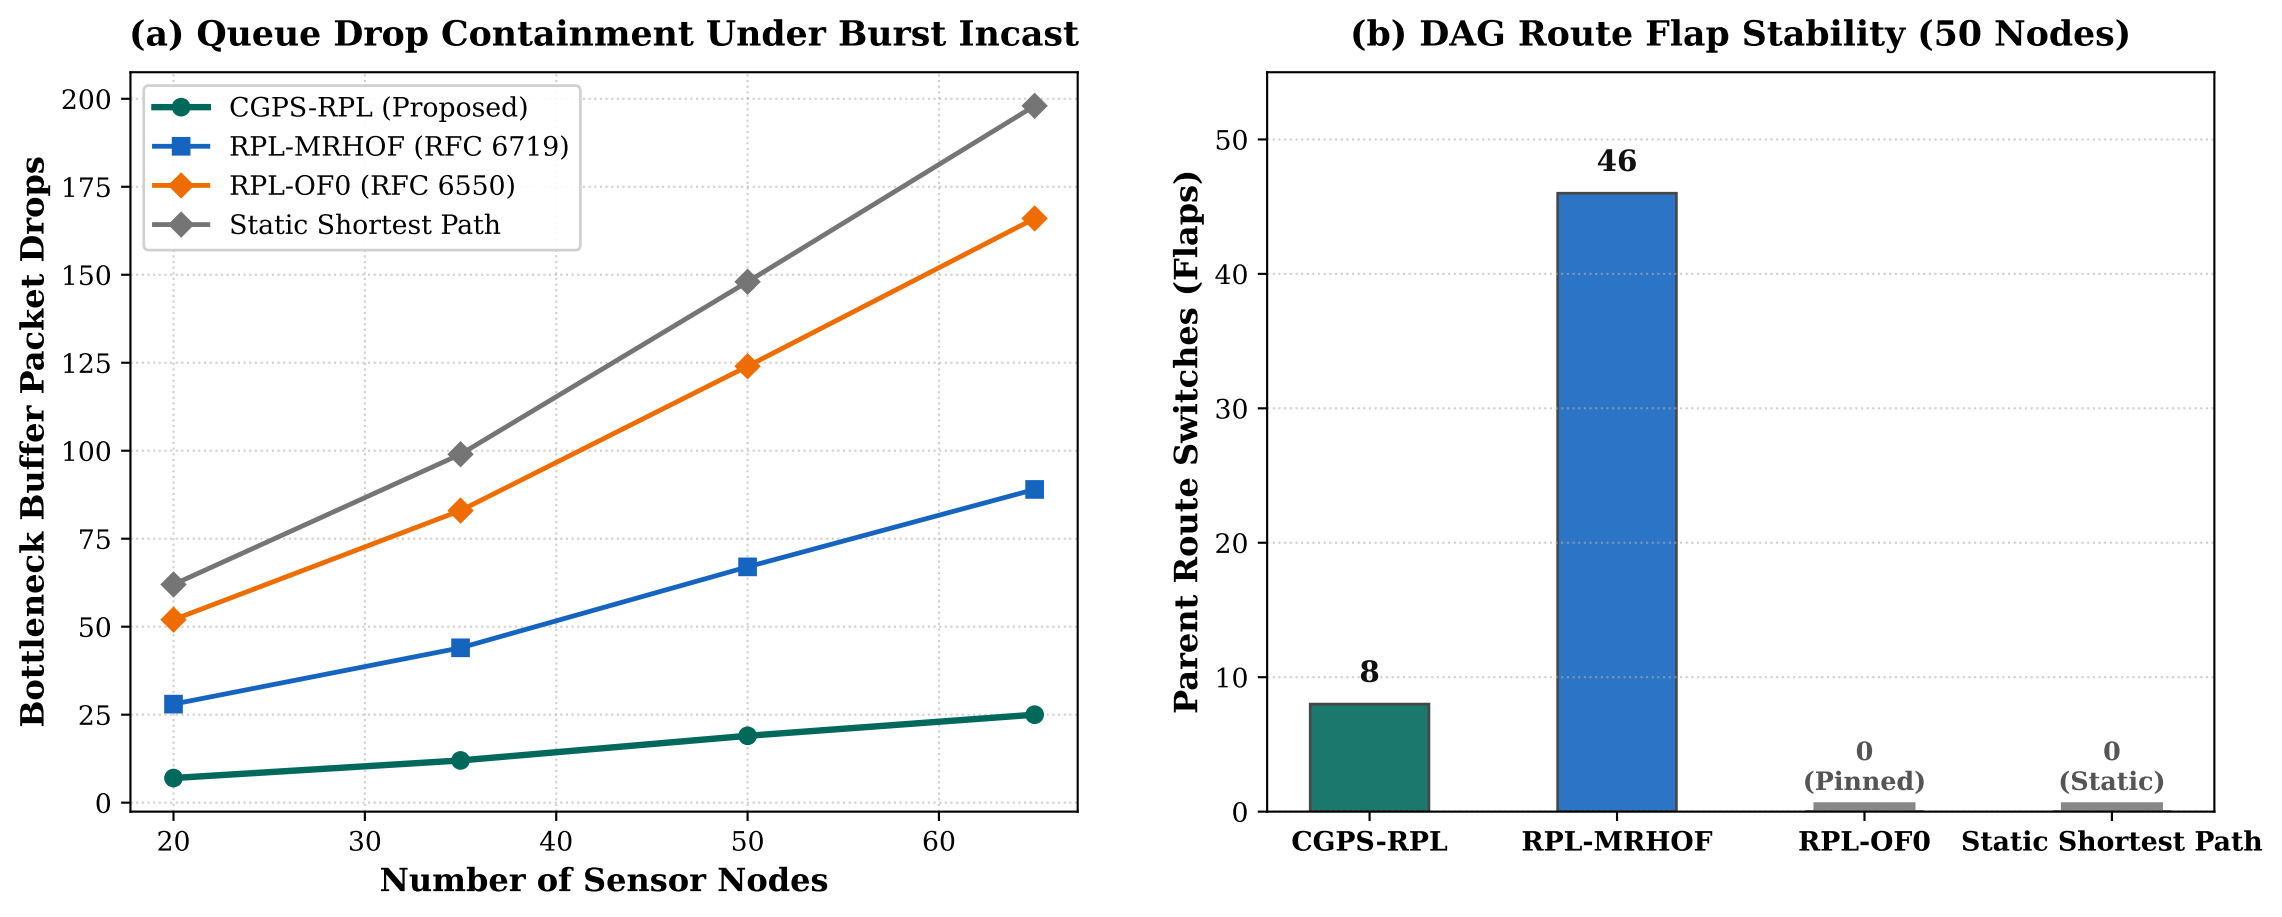
(a) Queue Drop Containment Under Burst Incast
Bottleneck Buffer Packet Drops
Number of Sensor Nodes
CGPS-RPL (Proposed)
RPL-MRHOF (RFC 6719)
RPL-OF0 (RFC 6550)
Static Shortest Path
0
25
50
75
100
125
150
175
200
20
30
40
50
60
(b) DAG Route Flap Stability (50 Nodes)
Parent Route Switches (Flaps)
0
10
20
30
40
50
8
46
0
(Pinned)
0
(Static)
CGPS-RPL
RPL-MRHOF
RPL-OF0
Static Shortest Path