
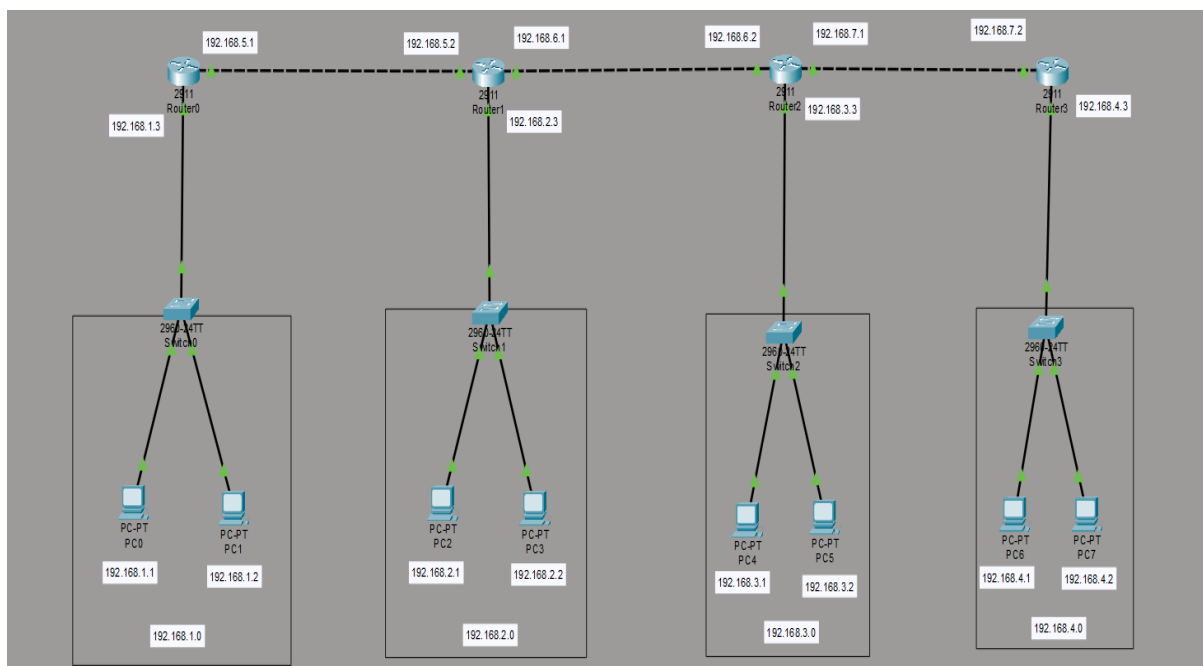


EXPERIMENT-4

Q1:- Create a network using four routers, four switches, and eight PCs in Cisco Packet Tracer. Configure IP addresses, default gateways, and static routing to establish communication between four different LANs. Verify end-to-end connectivity using the Ping command.

Sol:-

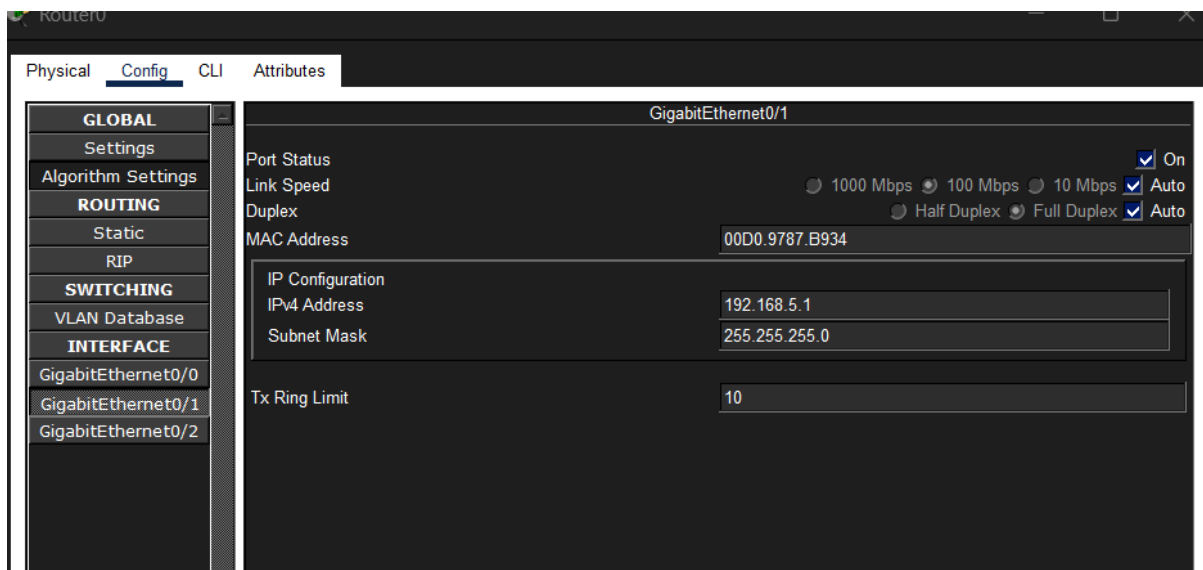

Cisco Packet Tracer - C:\Users\husan\AppData\Local\Packages\53192\Router2

File Edit Options View Tools Extensions Window Help

Logical Physical x 473, y 745

Router2

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0

GigabitEthernet0/1

GigabitEthernet0/2

Port Status

Link Speed

Duplex

MAC Address

IP Configuration

Pv4 Address

Subnet Mask

Tx Ring Limit

1000 Mbps

100 Mbps

10 Mbps

Auto

Auto

Auto

0030.A392.C485

192.168.7.1

255.255.255.0

10

LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Router#enable

Router#

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#interface GigabitEthernet0/0

Router(config-if)#

Router(config-if)#exit

Router(config)#interface GigabitEthernet0/1

Router(config-if)#

Time: 08:01:20

Top

Scenario 0

New Delete

Toggle PDU List Window

Realtime Simulation

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC1	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC2	PC3	ICMP		0.000	N	1	(edit)	(delete)
	Successful	PC4	PC5	ICMP		0.000	N	2	(edit)	(delete)
	Successful	PC6	PC7	ICMP		0.000	N	3	(edit)	(delete)