


Dynamic Routing

Step 1: Create Topology

- Add 2 routers, 2 switches, 2 PCs
- Connect:
 - PC → Switch → Router (straight cable)
 - Router ↔ Router (cross/serial cable)

Step 2: Assign IP Address

- LAN 1 (Router 1 side)
 - PC1: 192.168.1.2 /24
 - Gateway: 192.168.1.1
- LAN 2 (Router 2 side)
 - PC2: 192.168.2.2 /24
 - Gateway: 192.168.2.1
- Router Interfaces
 - R1: 192.168.1.1 , 10.0.0.1
 - R2: 192.168.2.1 , 10.0.0.2

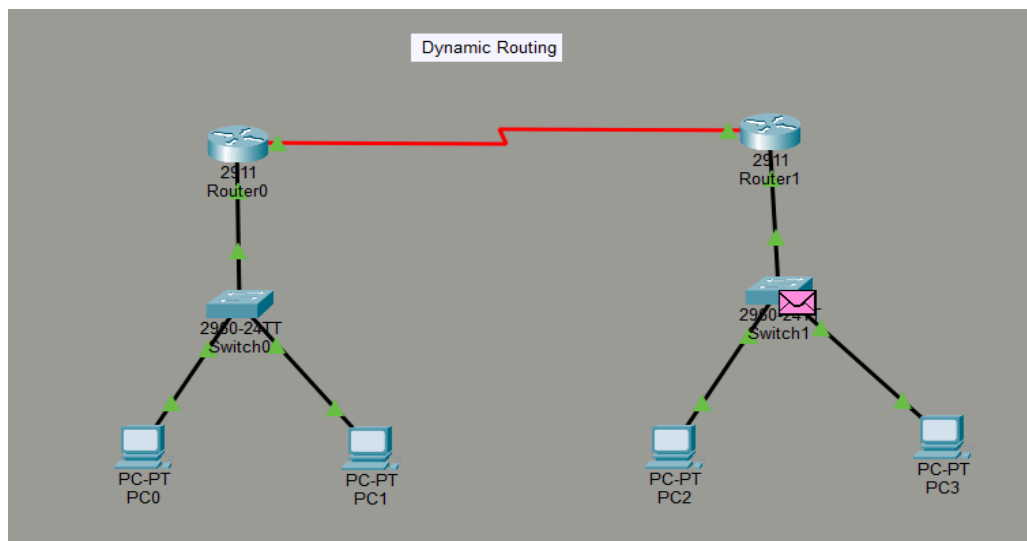

Step 3: Configure RIP

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0

GigabitEthernet0/1

GigabitEthernet0/2

Serial0/3/0

Serial0/3/1

Network Address	
10.0.0.0	
192.168.1.0	

Router1

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0

GigabitEthernet0/1

GigabitEthernet0/2

Serial0/3/0

Serial0/3/1

Network Address	
10.0.0.0	
192.168.2.0	