



Computing the Centre of Elasticity in Planar Frames

iNaCoMM 2025

R. Vishwanath G. K. Ananthasuresh

Multidisciplinary and Multiscale Design and Device (M2D2) Laboratory,
Indian Institute of Science, Bengaluru

December 09, 2025



1. Introduction

1.1 On spectral decomposition of stiffness matrix

2. Rigid-body transformation of point of interest

3. Serial concatenation of elements

4. Parallel concatenation of elements



5. Conclusions

Center of Elasticity



At the **center of elasticity** (CoE), the rotational and translational degrees of freedom are decoupled,


- linear forces applied at this point only cause translational displacement,
- moment applied at this point causes only rotational displacement.

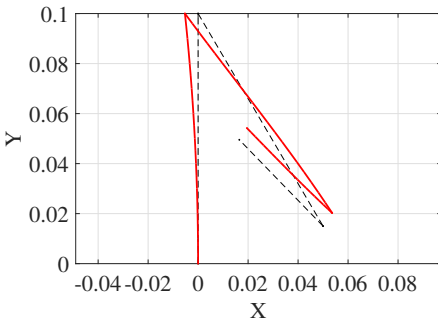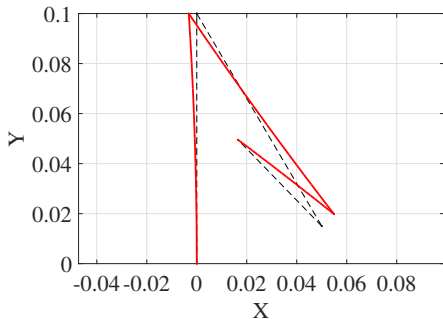

Center of Elasticity



- The CoE **does not** refer to any material point in a continuum body.
- The CoE **maps** each material point to a particular spatial coordinate.
- If this point were to be connected with a **rigid link**, the translation and rotation about this particular spatial coordinate would be decoupled.
- Existence of CoE is **guaranteed in planar bodies**.

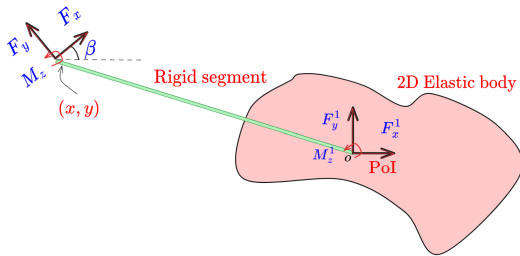



1. Introduction

1.1 On spectral decomposition of stiffness matrix

2. Rigid-body transformation of point of interest

3. Serial concatenation of elements

4. Parallel concatenation of elements

5. Conclusions



Let us consider a solid (isotropic linear elastic) body subjected to transverse loads and moments at some point(s) in the body; then the displacement (translational and rotational) at some other point(s) can be represented as:

$$\{f\} = [K]\{u\}$$

In mechanics, **normal forms of symmetric tensors are usually preferred for analysis and interpretation.**

Stiffness matrix (contd..)



As is usually done, let us attempt to do a rigid body transformation (only rotate the basis) to diagonalise the matrix.

Then

$$\mathbf{Q} = [\mathbf{v}_1, \mathbf{v}_2, \mathbf{v}_3]$$

but this is not allowed!!!

As for frame elements, admissible $\mathbf{Q}$ for rigid body rotation in this case is :

$$\mathbf{Q} = \begin{bmatrix} l & m & 0 \\ -m & l & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Stiffness matrix (contd..)



Consider the stiffness matrix for a cantilever beam:

$$[K] = \begin{bmatrix} EA/L & 0 & 0 \\ 0 & 12EI/L^3 & -6EI/L^2 \\ 0 & -6EI/L^2 & 4EI/L \end{bmatrix} = \begin{bmatrix} a & 0 & 0 \\ 0 & b & c \\ 0 & c & d \end{bmatrix}$$
$$[v_1, v_2, v_3] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \frac{2L}{3} - \frac{\sigma_2 + \sigma_1 + EI L^2}{L \sigma_2} & \frac{2L}{3} - \frac{\sigma_2 - \sigma_1 + EI L^2}{L \sigma_2} \\ 0 & 1 & 1 \end{bmatrix} \text{ and}$$
$$D = \begin{bmatrix} \frac{AE}{L} & 0 & 0 \\ 0 & \frac{2(3EI + \sigma_1 + EI L^2)}{L^3} & 0 \\ 0 & 0 & \frac{2(3EI - \sigma_1 + EI L^2)}{L^3} \end{bmatrix}$$


where, $\sigma_1 = EI\sqrt{L^4 + 3L^2 + 9}$ * and $\sigma_2 = 3EI$.

*Notice the incompatibility of dimensions!

Stiffness matrix (contd..)



Thus, just rigid body rotation alone won't suffice here. We also have to perform rigid-body translation of our point of interest.

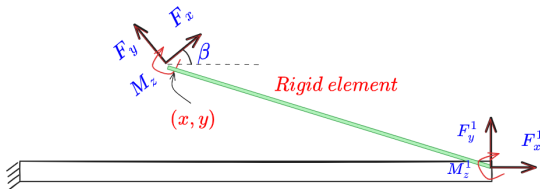


$$F_y^1 = F_y \cos \beta + F_x \sin \beta$$

$$F_x^1 = F_x \cos \beta - F_y \sin \beta$$

$$M_z^1 = M_z - F_y(L - x) - F_x y$$

Stiffness matrix under RB transformation (contd..)

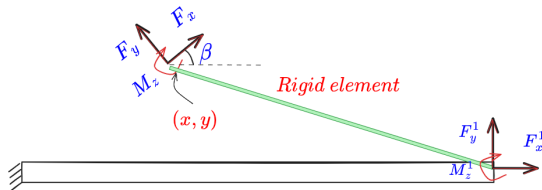

$$\begin{Bmatrix} F_x^1 \\ F_y^1 \\ M_z^1 \end{Bmatrix} = \begin{bmatrix} \cos \beta & -\sin \beta & 0 \\ \sin \beta & \cos \beta & 0 \\ -y \cos \beta - (L-x) \sin \beta & -(L-x) \cos \beta + y \sin \beta & 1 \end{bmatrix} \begin{Bmatrix} F_x \\ F_y \\ M_z \end{Bmatrix},$$

$$\begin{Bmatrix} u_x^1 \\ v_y^1 \\ \theta_z^1 \end{Bmatrix} = \begin{bmatrix} \cos \beta & -\sin \beta & l^* \sin \delta \\ \sin \beta & \cos \beta & l^* \cos \delta \\ 0 & 0 & 1 \end{bmatrix} \begin{Bmatrix} u_x \\ v_y \\ \theta_z \end{Bmatrix},$$

where $\delta = \tan^{-1}(\frac{y}{L-x})$ and $l^* = \sqrt{(L-x)^2 + y^2}$.

Stiffness matrix under RB transformation (contd..)



$$\{\mathbf{f}^1\} = [\mathbf{K}]\{\mathbf{u}^1\}$$

$$\{\mathbf{f}\} = [\mathbf{K}']\{\mathbf{u}\}$$

where

$$[\mathbf{K}'] = \begin{bmatrix} \cos \beta & -\sin \beta & 0 \\ \sin \beta & \cos \beta & 0 \\ -y \cos \beta - (L-x) \sin \beta & -(L-x) \cos \beta + y \sin \beta & 1 \end{bmatrix}^{-1} [\mathbf{K}] \begin{bmatrix} \cos \beta & -\sin \beta & l^* \sin \delta \\ \sin \beta & \cos \beta & l^* \cos \delta \\ 0 & 0 & 1 \end{bmatrix}$$

Stiffness matrix under RB transformation (contd..)







Let us consider the case $x = L/2$, $y = 0$, $\beta = 0$: where

$$\begin{aligned} [K'] &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & -L/2 & 1 \end{bmatrix}^{-1} \begin{bmatrix} EA/L & 0 & 0 \\ 0 & 12EI/L^3 & -6EI/L^2 \\ 0 & -6EI/L^2 & 4EI/L \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & L/2 \\ 0 & 0 & 1 \end{bmatrix} \\ [K'] &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & L/2 & 1 \end{bmatrix} \begin{bmatrix} EA/L & 0 & 0 \\ 0 & 12EI/L^3 & -6EI/L^2 \\ 0 & -6EI/L^2 & 4EI/L \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & L/2 \\ 0 & 0 & 1 \end{bmatrix} \\ &= \begin{bmatrix} AE/L & 0 & 0 \\ 0 & 12EI/L^3 & 0 \\ 0 & 0 & EI/L \end{bmatrix} \end{aligned}$$

The stiffness matrix is diagonal!

CoE of Cantilever beam about its tip

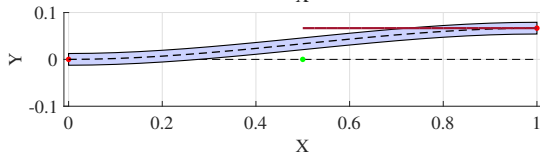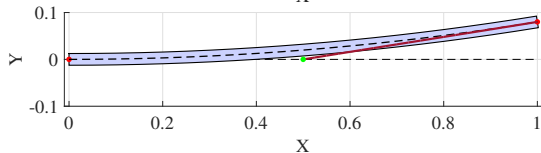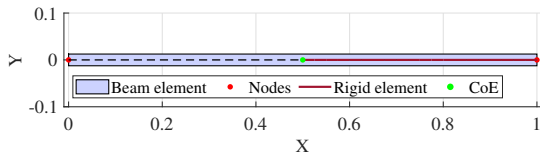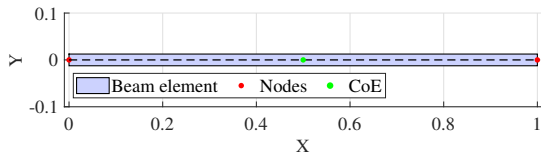



1. Introduction

1.1 On spectral decomposition of stiffness matrix


2. Rigid-body transformation of point of interest

3. Serial concatenation of elements

4. Parallel concatenation of elements

5. Conclusions

Rigid-body transformation of point of interest

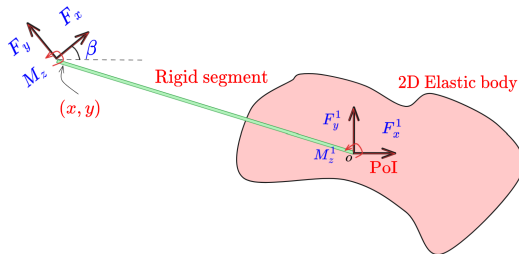

$$\begin{Bmatrix} F_x^1 \\ F_y^1 \\ M_z^1 \end{Bmatrix} = \begin{bmatrix} \cos \beta & -\sin \beta & 0 \\ \sin \beta & \cos \beta & 0 \\ -y \cos \beta + x \sin \beta & x \cos \beta + y \sin \beta & 1 \end{bmatrix} \begin{Bmatrix} F_x \\ F_y \\ M_z \end{Bmatrix},$$
$$\begin{Bmatrix} u_x^1 \\ v_y^1 \\ \theta_z^1 \end{Bmatrix} = \begin{bmatrix} \cos \beta & -\sin \beta & y \\ \sin \beta & \cos \beta & -x \\ 0 & 0 & 1 \end{bmatrix} \begin{Bmatrix} u_x \\ v_y \\ \theta_z \end{Bmatrix}$$

Rigid-body transformation of point of interest



$$[K] = \begin{bmatrix} \cos \beta & -\sin \beta & 0 \\ \sin \beta & \cos \beta & 0 \\ -y \cos \beta + x \sin \beta & x \cos \beta + y \sin \beta & 1 \end{bmatrix}^{-1} [K^1] \begin{bmatrix} \cos \beta & -\sin \beta & y \\ \sin \beta & \cos \beta & -x \\ 0 & 0 & 1 \end{bmatrix}$$

Rigid-body translation of Pol



$$[K] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ -y & x & 1 \end{bmatrix}^{-1} [K^1] \begin{bmatrix} 1 & 0 & y \\ 0 & 1 & -x \\ 0 & 0 & 1 \end{bmatrix} =$$
$$\begin{bmatrix} K_{11}^1 & K_{12}^1 & K_{31}^1 - x(K_{12}^1) + y(K_{11}^1) \\ \cdot & K_{22}^1 & K_{23}^1 - x(K_{22}^1) + y(K_{12}^1) \\ \cdot & \cdot & K_{33}^1 + (K_{11}^1)y^2 + (K_{22}^1)x^2 - (2K_{12}^1)xy + (2K_{13}^1)y - (2K_{23}^1)x \end{bmatrix}$$

Rigid-body translation of Pol



$$[\mathbf{C}] = \begin{bmatrix} 1 & 0 & y \\ 0 & 1 & -x \\ 0 & 0 & 1 \end{bmatrix}^{-1} [\mathbf{C}^1] \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ -y & x & 1 \end{bmatrix} =$$
$$\begin{bmatrix} C_{11}^1 - (2C_{13}^1)y + C_{33}^1y^2 & (C_{33}^1)x^2 + (2C_{23}^1)x + C_{22}^1 & \cdot \\ C_{12}^1 + (C_{13}^1)x - (C_{23}^1)y - (C_{33}^1)xy & C_{23}^1 + (C_{33}^1)x & \cdot \\ C_{13}^1 - (C_{33}^1)y & & C_{33}^1 \end{bmatrix}$$

Rigid-body rotation of Pol



$$\begin{aligned} [\mathbf{K}] &= \begin{bmatrix} \cos \beta & -\sin \beta & 0 \\ \sin \beta & \cos \beta & 0 \\ 0 & 0 & 1 \end{bmatrix}^{-1} [\mathbf{K}^1] \begin{bmatrix} \cos \beta & -\sin \beta & 0 \\ \sin \beta & \cos \beta & 0 \\ 0 & 0 & 1 \end{bmatrix} \\ &= \begin{bmatrix} K_{11} & K_{12} & K_{13}^1 \cos(\beta) + K_{23}^1 \sin(\beta) \\ \cdot & K_{22} & K_{23}^1 \cos(\beta) - K_{13}^1 \sin(\beta) \\ \cdot & \cdot & K_{33}^1 \end{bmatrix} \end{aligned}$$

Where,

$$K_{11} = K_{11}^1 \cos^2(\beta) + K_{22}^1 \sin^2(\beta) + K_{12}^1 \sin(2\beta)$$

$$K_{12} = K_{12}^1 \cos(2\beta) + 0.5(K_{22}^1 - K_{11}^1) \sin(2\beta)$$

$$K_{22} = K_{22}^1 \cos^2(\beta) + K_{11}^1 \sin^2(\beta) - K_{12}^1 \sin(2\beta)$$



1. Introduction

1.1 On spectral decomposition of stiffness matrix

2. Rigid-body transformation of point of interest

3. Serial concatenation of elements

4. Parallel concatenation of elements

5. Conclusions



Serial concatenation of elements




Let the single-point stiffness matrix of **element-1** about $\text{CoE}_1 (\{x_1, y_1\})$ and **element-2** about $\text{CoE}_2 (\{x_2, y_2\})$ be given by:

$$[\mathbf{C}_1] = \begin{bmatrix} C_{11} & C_{12} & 0 \\ C_{12} & C_{22} & 0 \\ 0 & 0 & C_{33} \end{bmatrix},$$


$$[\mathbf{C}_2] = \begin{bmatrix} G_{11} & G_{12} & 0 \\ G_{12} & G_{22} & 0 \\ 0 & 0 & G_{33} \end{bmatrix}$$

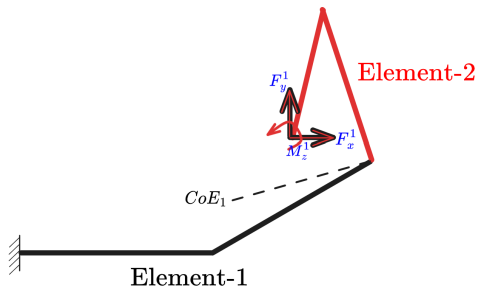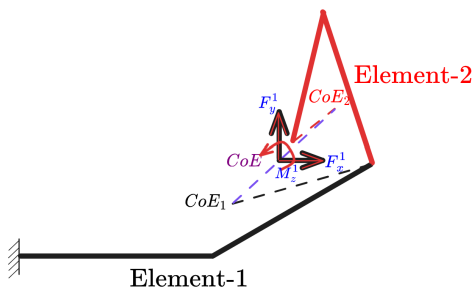

Serial concatenation of elements

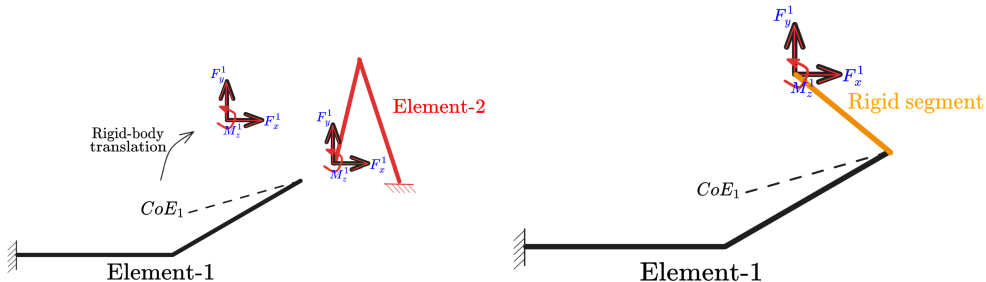

Serial concatenation of elements

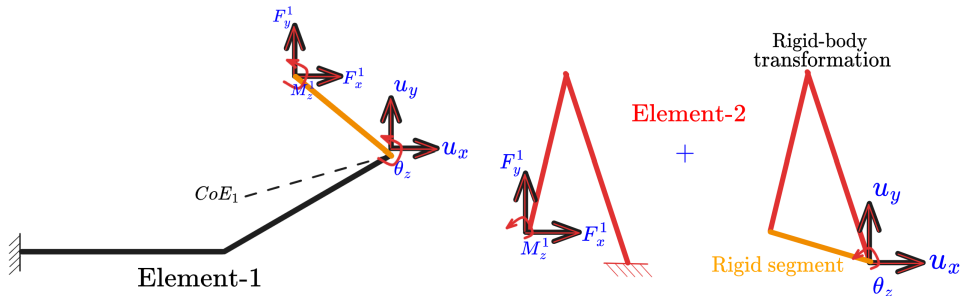

Serial concatenation of elements



$$[C_t^{net}] = \begin{bmatrix} C_{11} + G_{11} & C_{12} + G_{12} & -C_{33}(y_t - y_1) - G_{33}(y_t - y_2) \\ . & C_{22} + G_{22} & C_{33}(x_t - x_1) + G_{33}(x_t - x_2) \\ . & . & C_{33} + G_{33} \end{bmatrix}$$

$$(x_{CoE}, y_{CoE}) = \left(\frac{(C_{33})x_1 + (G_{33})x_2}{C_{33} + G_{33}}, \frac{(C_{33})y_1 + (G_{33})y_2}{C_{33} + G_{33}} \right)$$

Serial concatenation of beam elements




For beam elements: $C_{33}|_{\text{CoE}} = L/(EI)$


$$\Rightarrow \mathbf{r}_{\text{CoE}} = \frac{\sum_{i=1}^n (L_i/E_i I_i) \mathbf{r}_{m,i}}{\sum_{i=1}^n (L_i/E_i I_i)}$$

Thus, for elements with uniform flexural rigidity, the **CoE and centroid** (in skeletal frame representation) **are coincident**.


Serial concatenation of beam elements- Examples

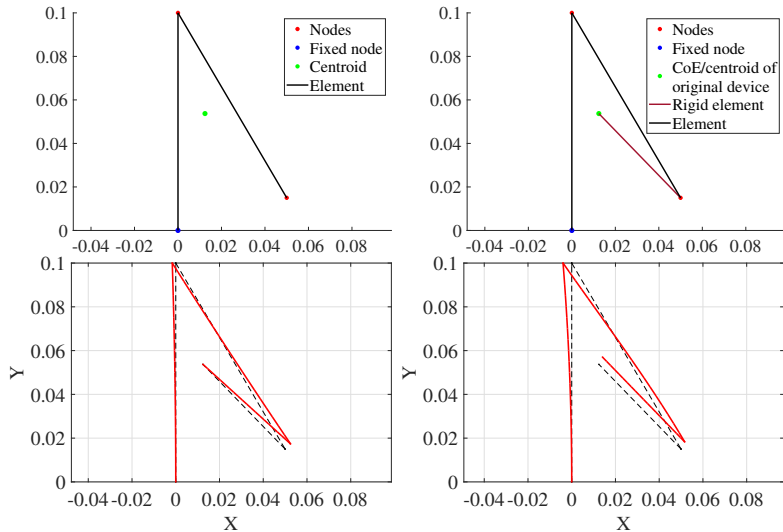

Serial concatenation of beam elements- Examples

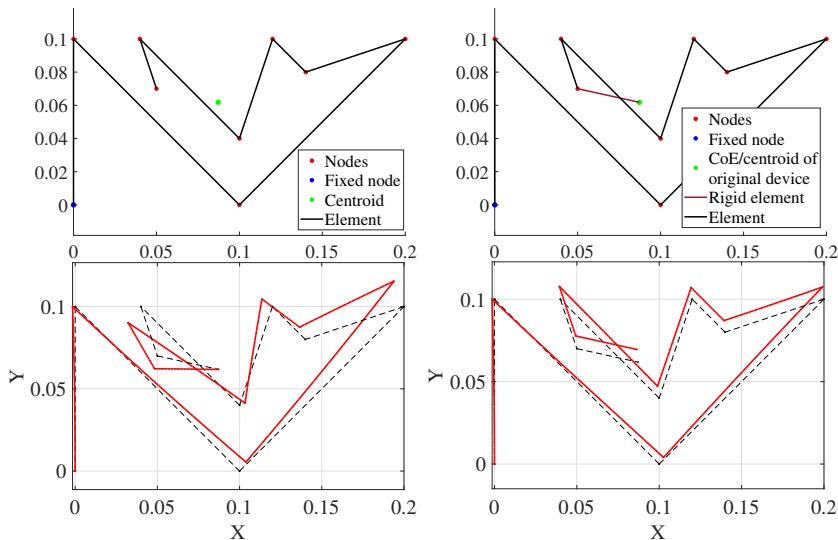

Serial concatenation of beam elements- Examples

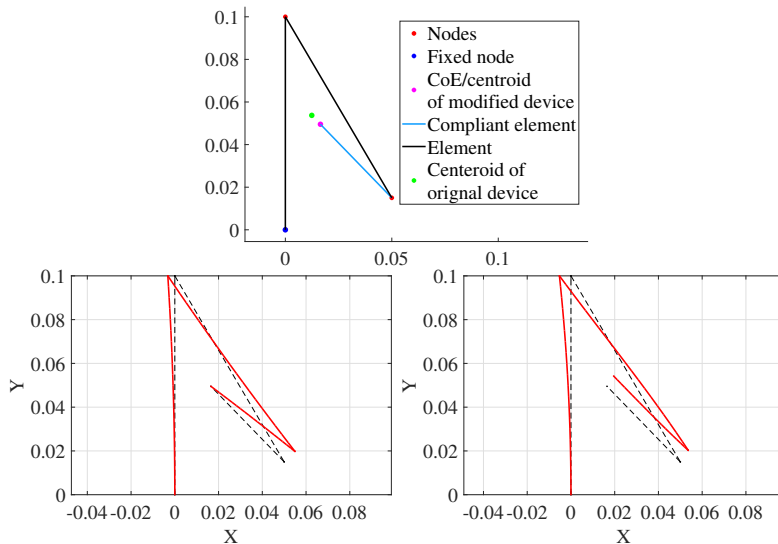



1. Introduction

1.1 On spectral decomposition of stiffness matrix

2. Rigid-body transformation of point of interest

3. Serial concatenation of elements

4. Parallel concatenation of elements

5. Conclusions


Parallel concatenation of elements



$$[K_1] = \begin{bmatrix} K_{11} & K_{12} & 0 \\ K_{12} & K_{22} & 0 \\ 0 & 0 & K_{33} \end{bmatrix}$$

$$[K_2] = \begin{bmatrix} P_{11} & P_{12} & 0 \\ P_{12} & P_{22} & 0 \\ 0 & 0 & P_{33} \end{bmatrix}$$

$$\begin{bmatrix} K_{11} + P_{11} & K_{12} + P_{12} \\ K_{12} + P_{12} & K_{22} + P_{22} \end{bmatrix} \begin{Bmatrix} y_{CoE} \\ -x_{CoE} \end{Bmatrix} = \begin{bmatrix} K_{11} & K_{12} \\ K_{12} & K_{22} \end{bmatrix} \begin{Bmatrix} y_1 \\ -x_1 \end{Bmatrix} + \begin{bmatrix} P_{11} & P_{12} \\ P_{12} & P_{22} \end{bmatrix} \begin{Bmatrix} y_2 \\ -x_2 \end{Bmatrix}$$

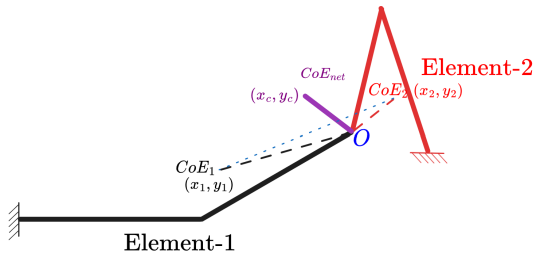



1. Introduction

1.1 On spectral decomposition of stiffness matrix

2. Rigid-body transformation of point of interest

3. Serial concatenation of elements

4. Parallel concatenation of elements

5. Conclusions



In 2D, 3 variables are needed to define a point (x, y, β) . But how many equations do we have?

$$\{\mathbf{f}\}_{3 \times 1} = [\mathbf{K}']_{3 \times 3} \{\mathbf{u}\}_{3 \times 1}$$

- **Case-1:** $f_x = 0, f_y = 0, m_z \implies u_x = 0, u_y = 0, \theta_z$ (2 equations)
- **Case-2:** $f_x = 0, f_y, m_z = 0 \implies u_x = 0, u_y, \theta_z = 0$ (2 equations)
- **Case-3:** $f_x, f_y = 0, m_z = 0 \implies u_x, u_y = 0, \theta_z = 0$ (2 equations)

We have six equations, of which 3 are degenerate (consequence of *Maxwell's Reciprocal theorem*). Thus, we have three equations and three unknowns; here the equations are nonlinear. But the existence of a solution is guaranteed.

Other kinds of elastic centers



In 3d, consider the following stiffness matrix:

$$[\mathbf{K}]_{6 \times 6} = \begin{bmatrix} \mathbf{A}_{3 \times 3} & \mathbf{B}_{3 \times 3} \\ \mathbf{B}_{3 \times 3}^T & \mathbf{C}_{3 \times 3} \end{bmatrix},$$

where $\mathbf{A}$ and $\mathbf{C}$ are symmetric.

If we can perform a rigid body transformation such that the off-diagonal matrix ($\mathbf{B}$) in the new coordinate frame is symmetric (or equivalently diagonal), then that point is defined as *centre of stiffness*.

At this point, the rotation and translation components are said to be maximally decoupled[†] (if $\mathbf{B}$ can be made zero, this point is its centre of elasticity).

[†]J. Loncaric. “Normal forms of stiffness and compliance matrices”. In: *IEEE Journal on Robotics and Automation* 3.6 (1987), pp. 567–572. DOI: 10.1109/JRA.1987.1087148.



- The concept of the CoE is elucidated through the **stiffness and compliance matrix**.
- Relations for finding the CoE of devices obtained through **serial and parallel concatenation of elements** are shown here.
- For a serial concatenation of beam elements of uniform flexural rigidity, the CoE of the device about the terminal node is **coincident with the centroid** of the device (in its skeletal frame representation).



Thank you!