

---

## PHOTOVOLTAIC MODULE

Made in Iran

---

### Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm

---




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 01000

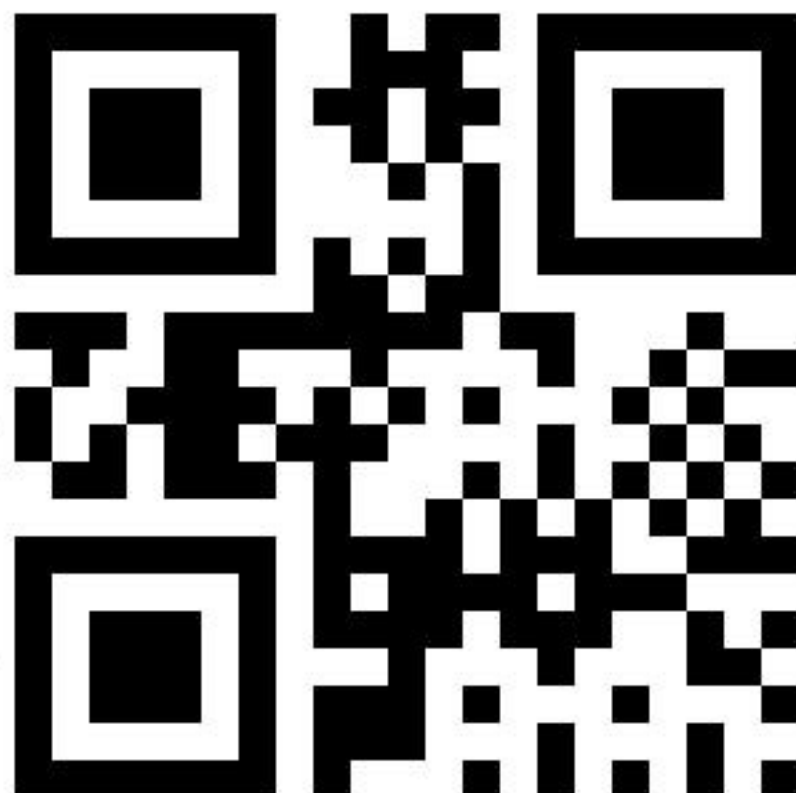

---

## PHOTOVOLTAIC MODULE

Made in Iran

---

### Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm

---




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 01001

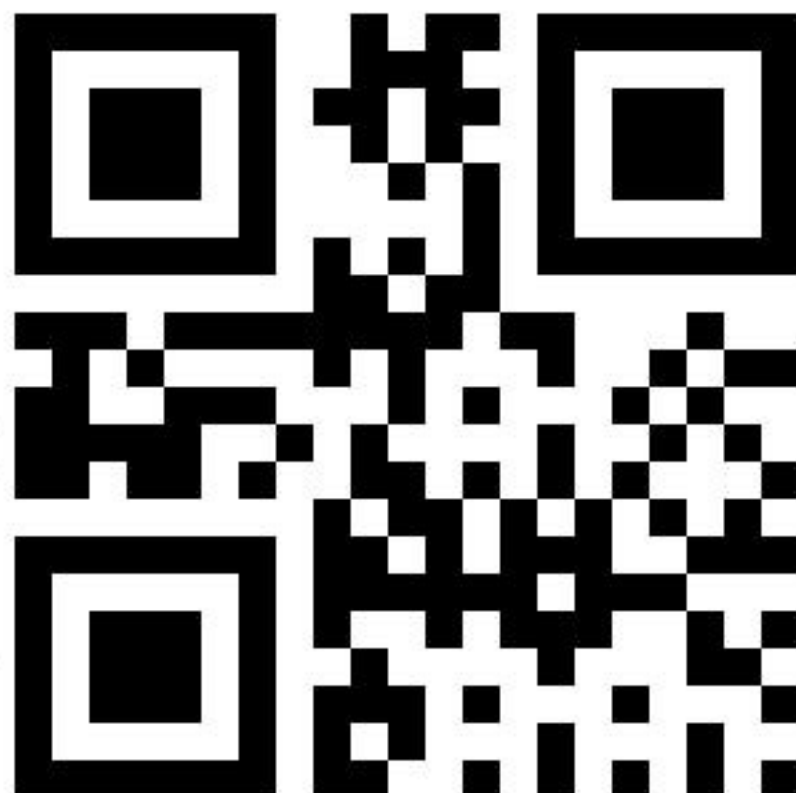



---

## PHOTOVOLTAIC MODULE

Made in Iran

---

### Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm

---



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 01002

