



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00301

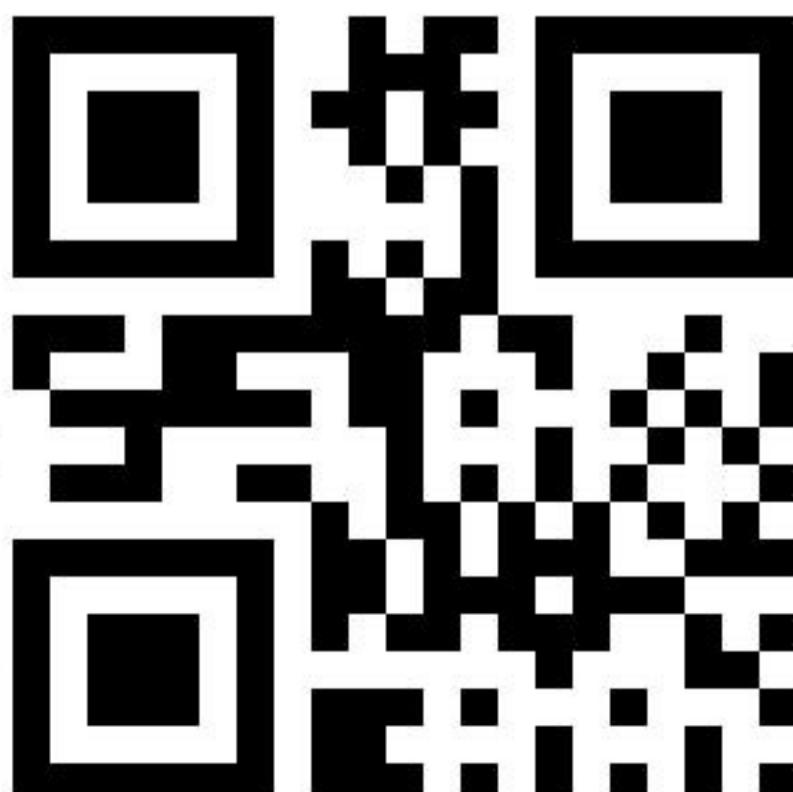



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00302

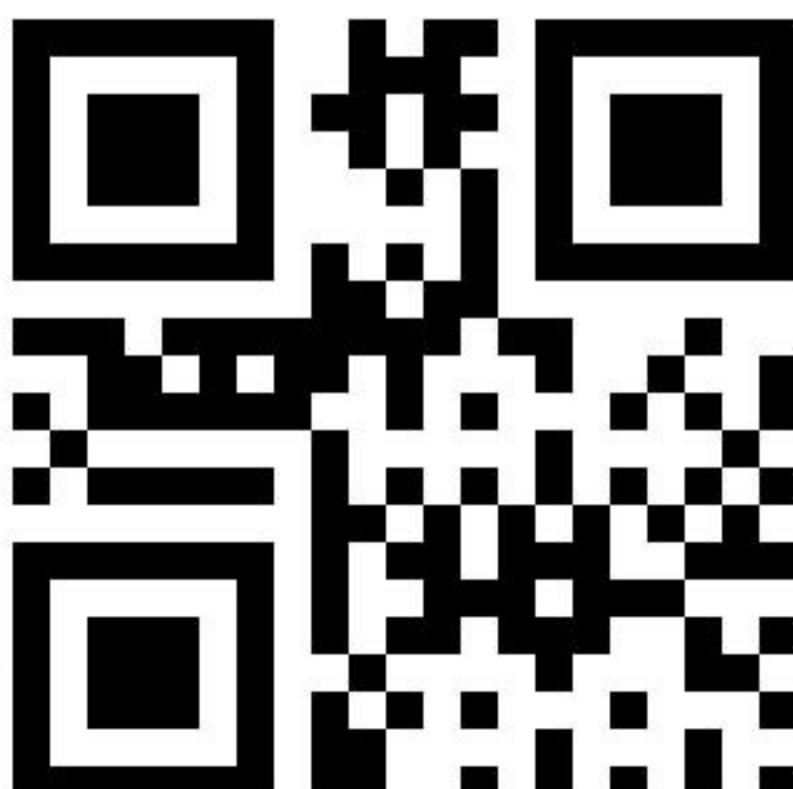



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00303

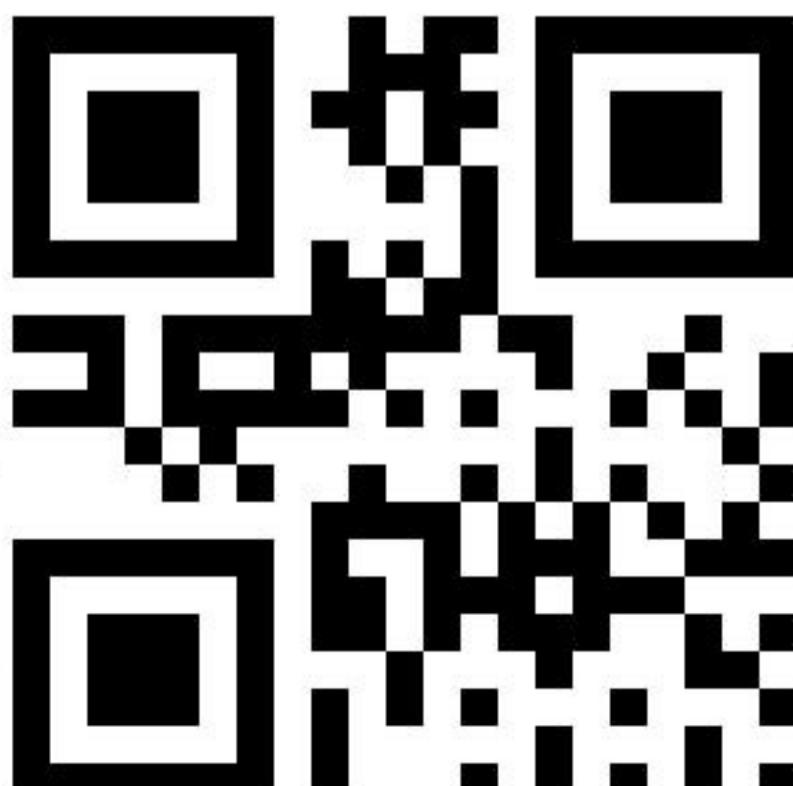



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00304

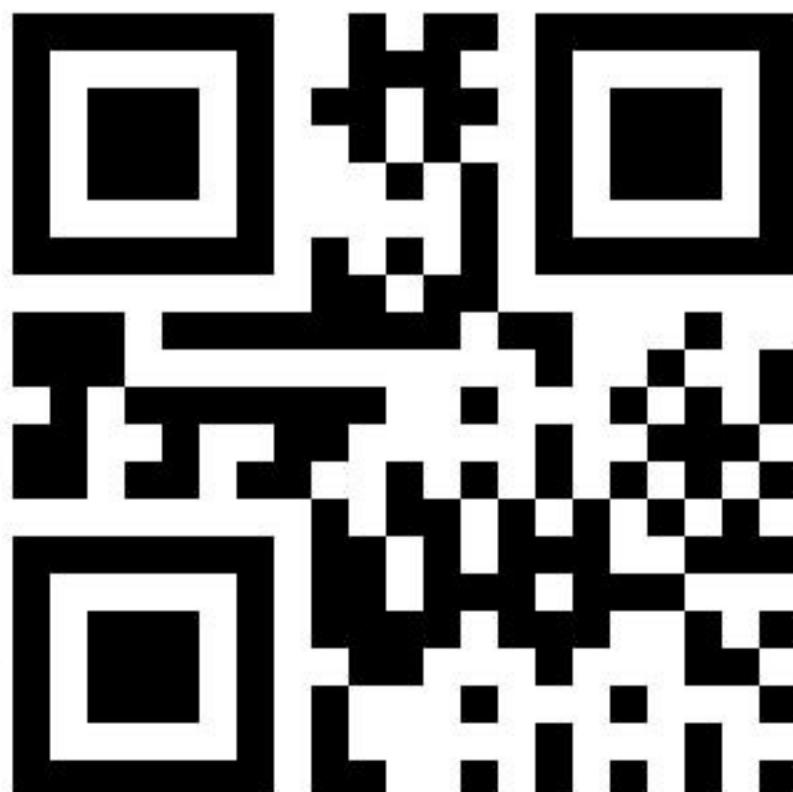



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00305

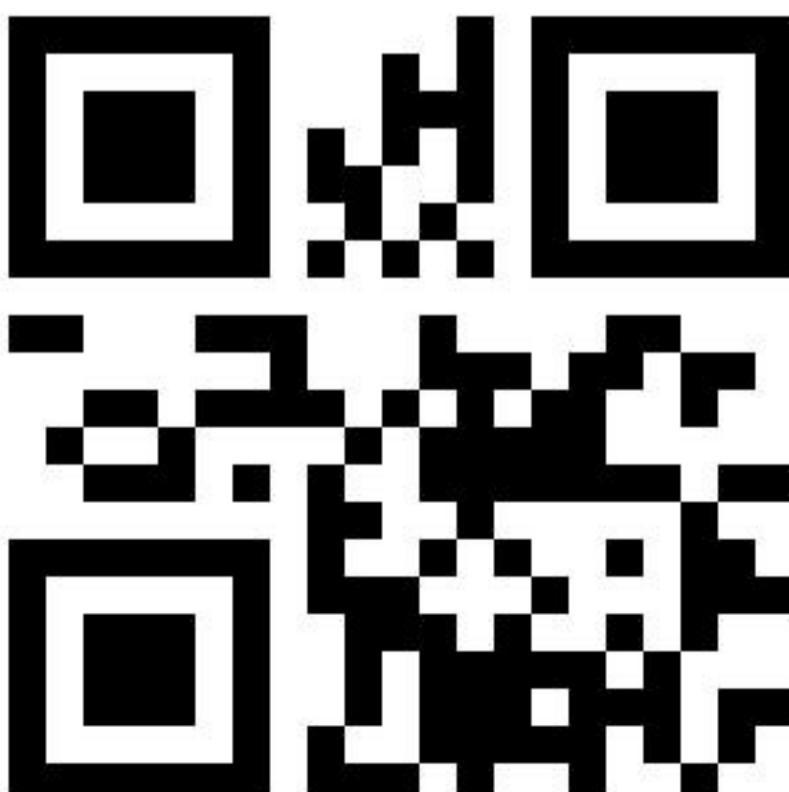



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00306

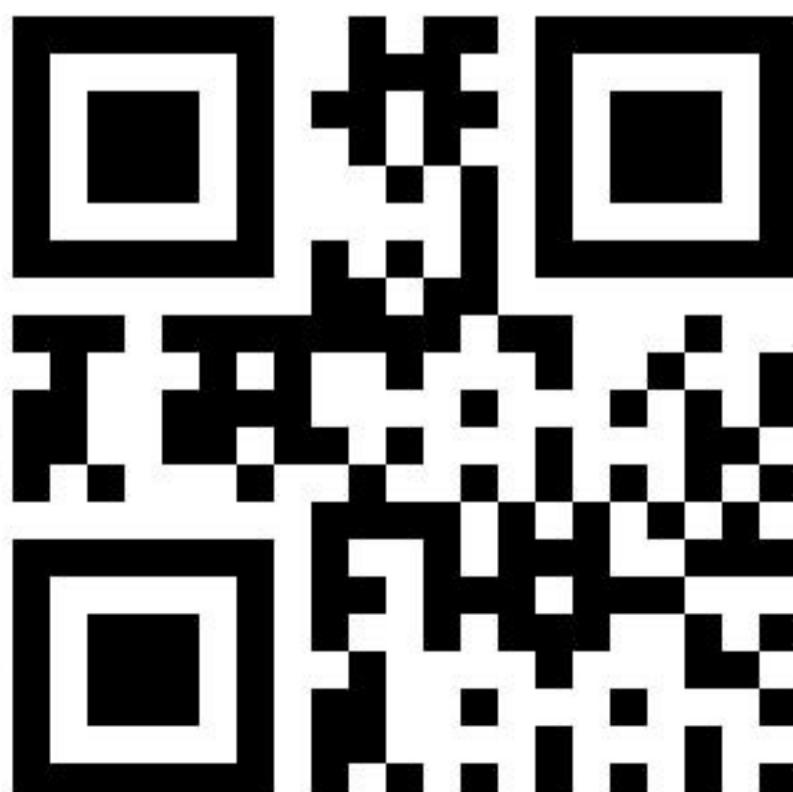



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00307

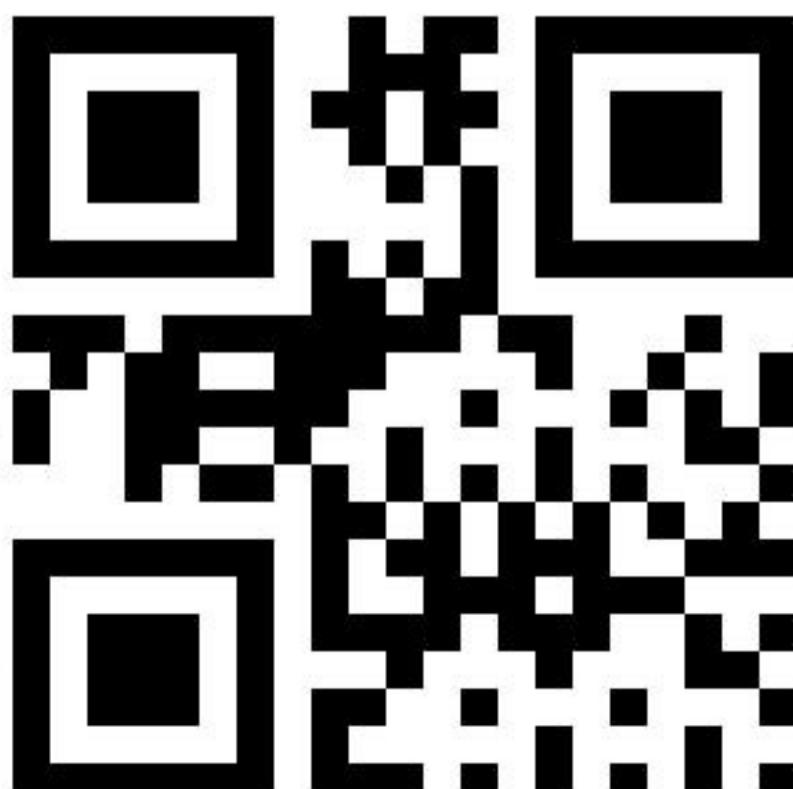



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 00308

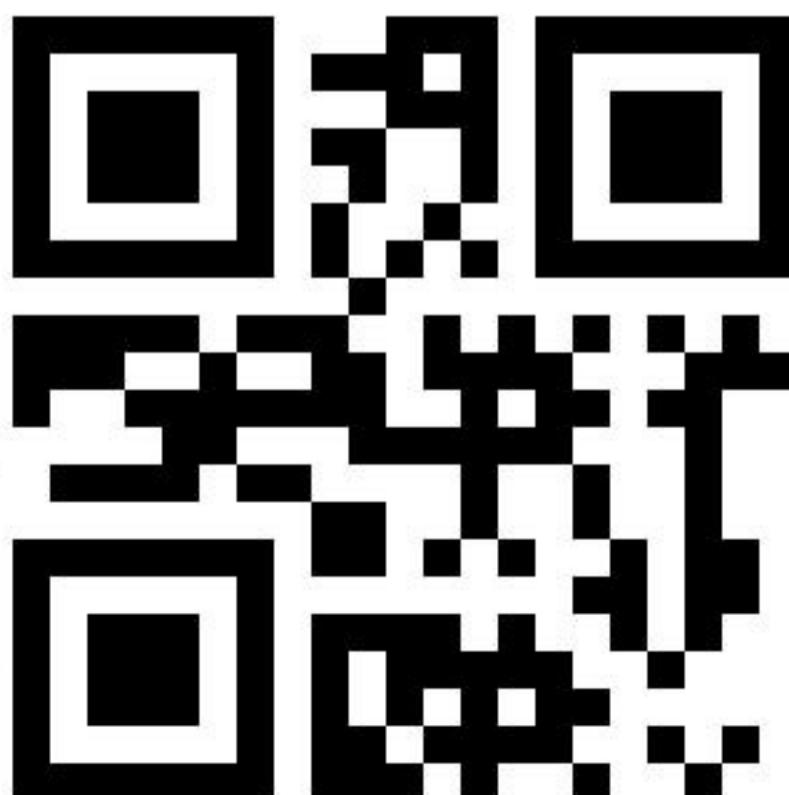



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00309

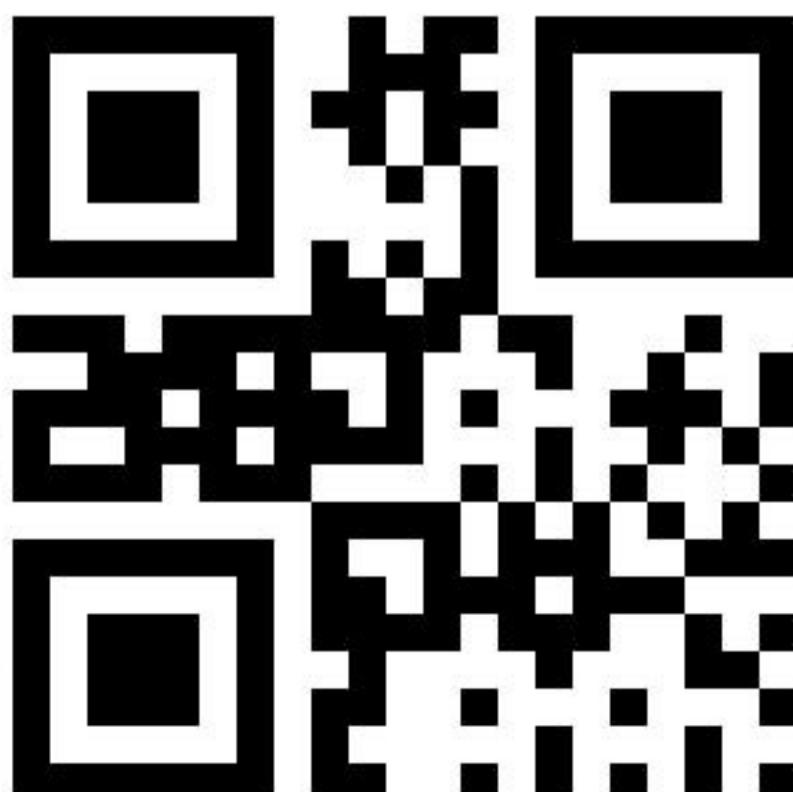



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00310

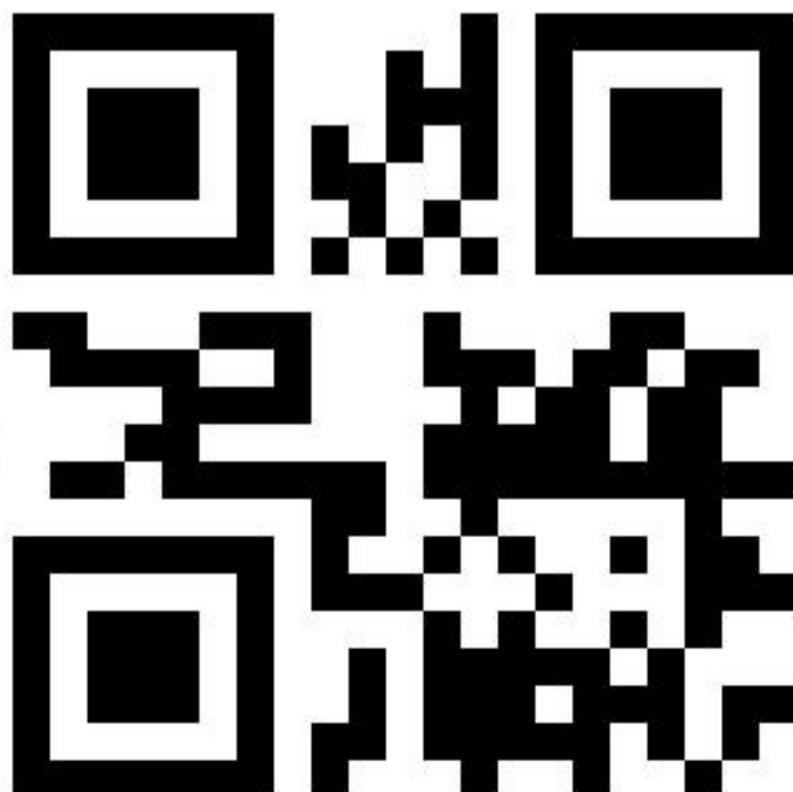



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00311

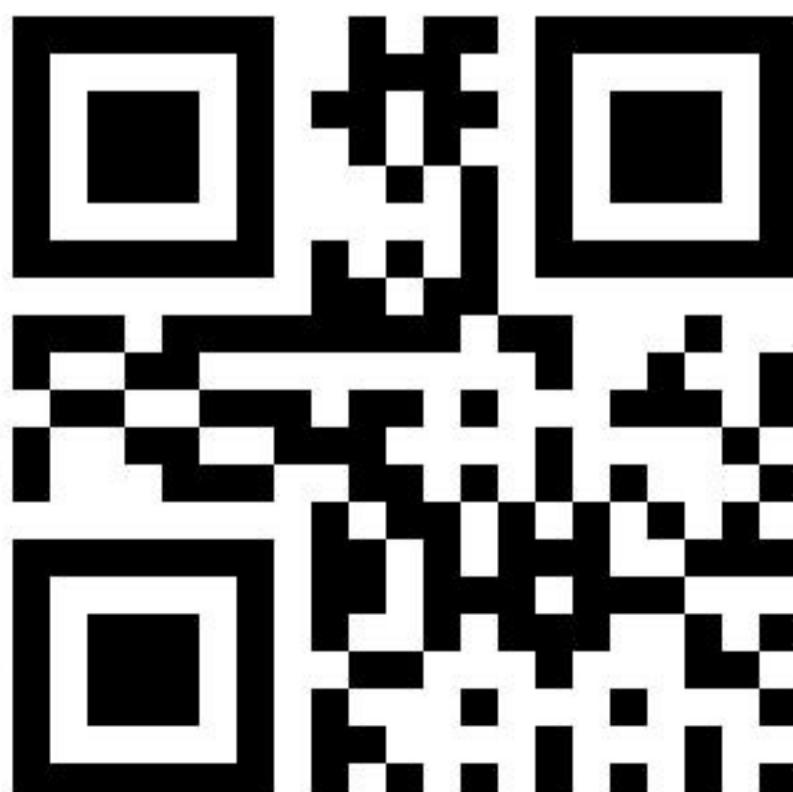



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00312

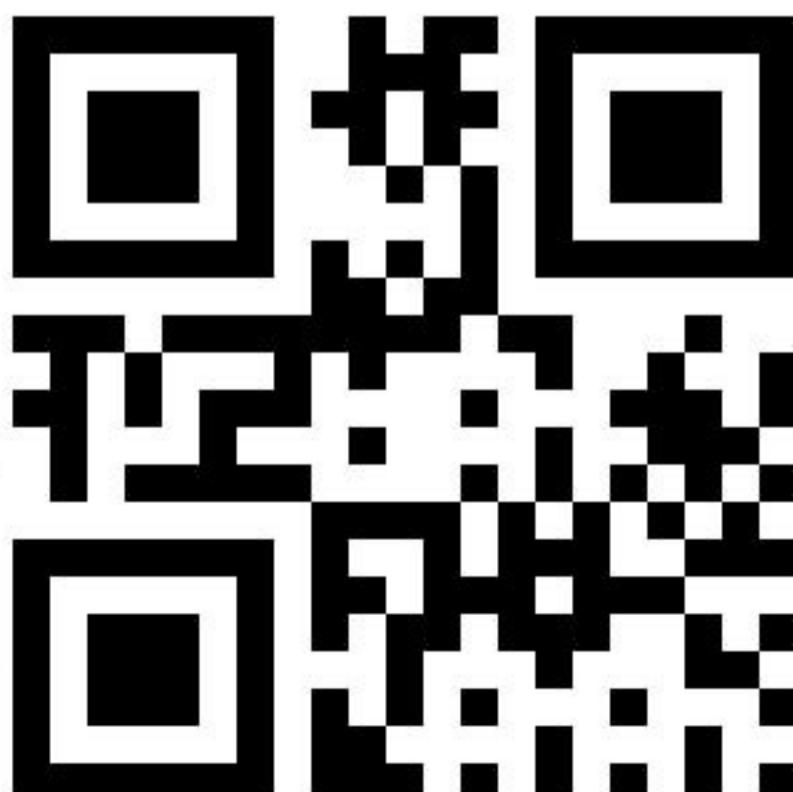



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00313

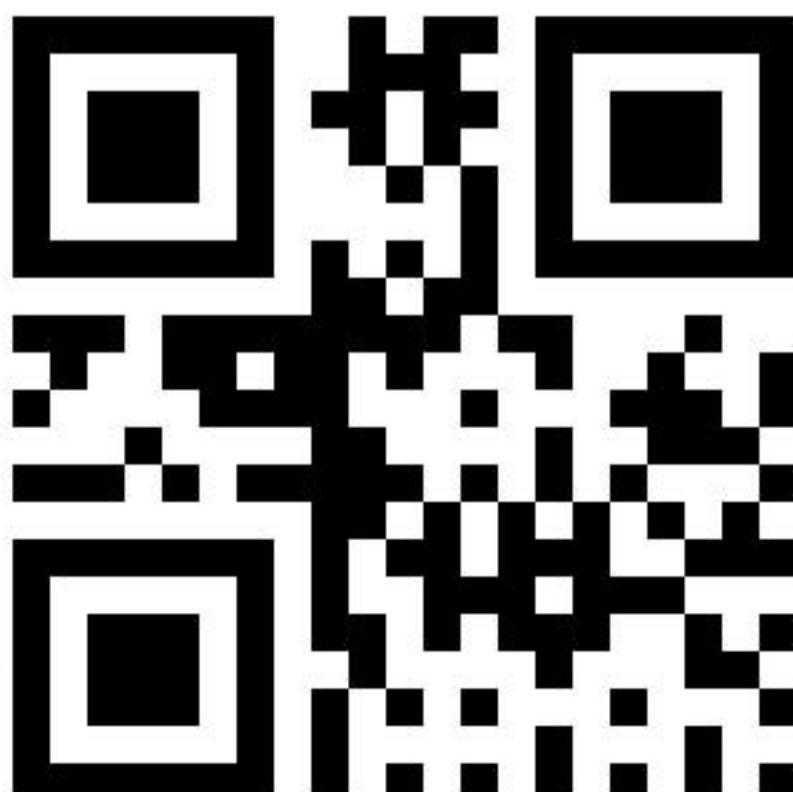



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00314





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00315

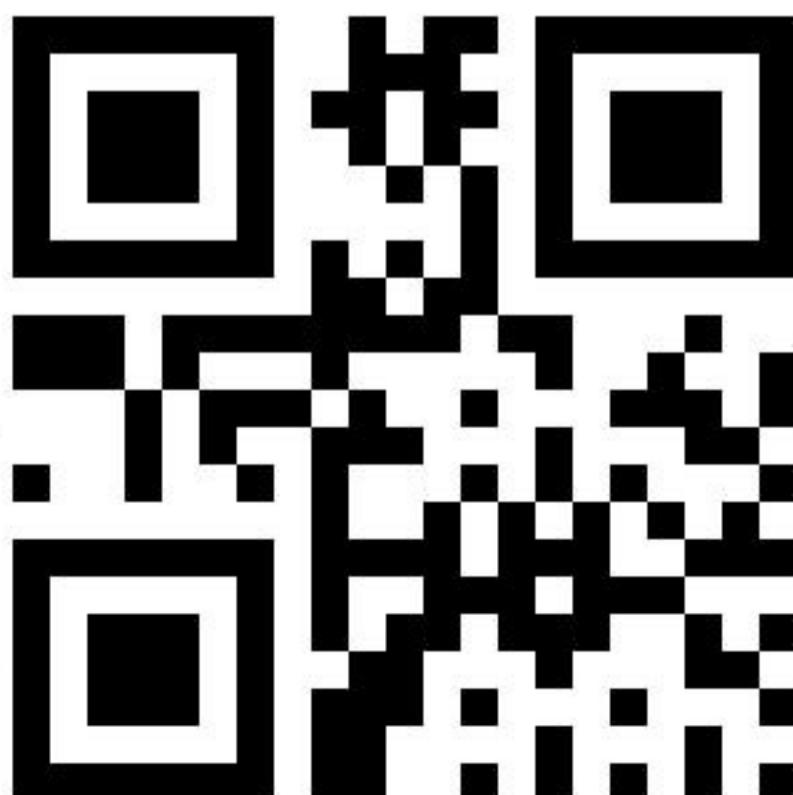



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00316

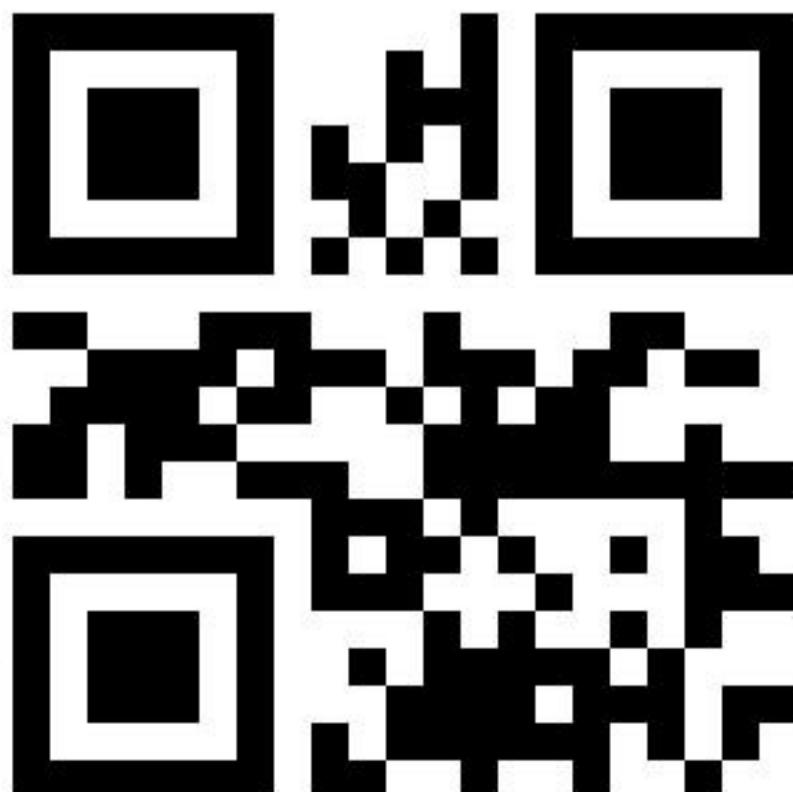



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00317

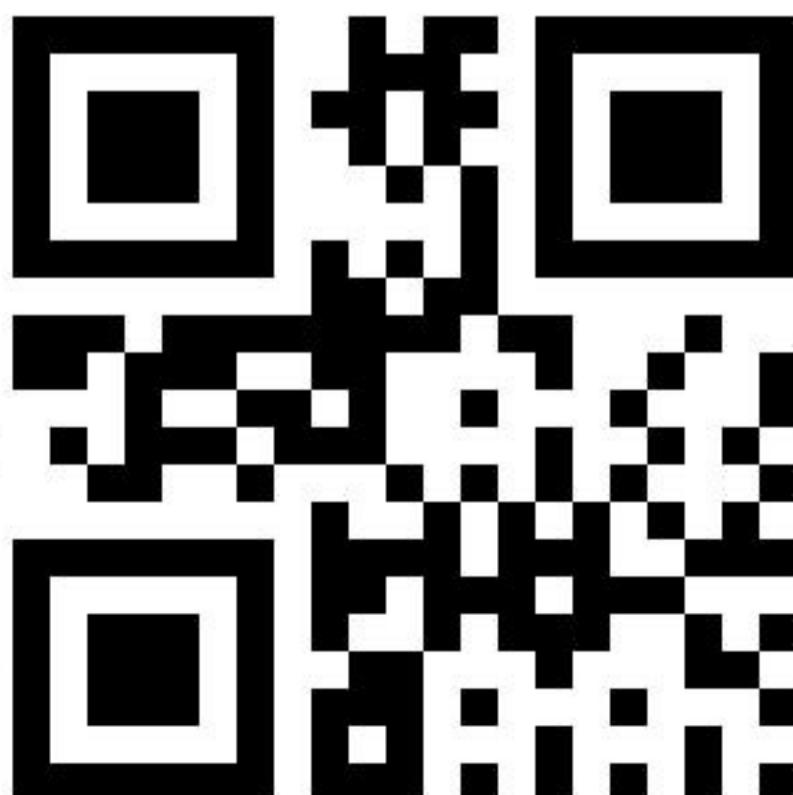



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00318

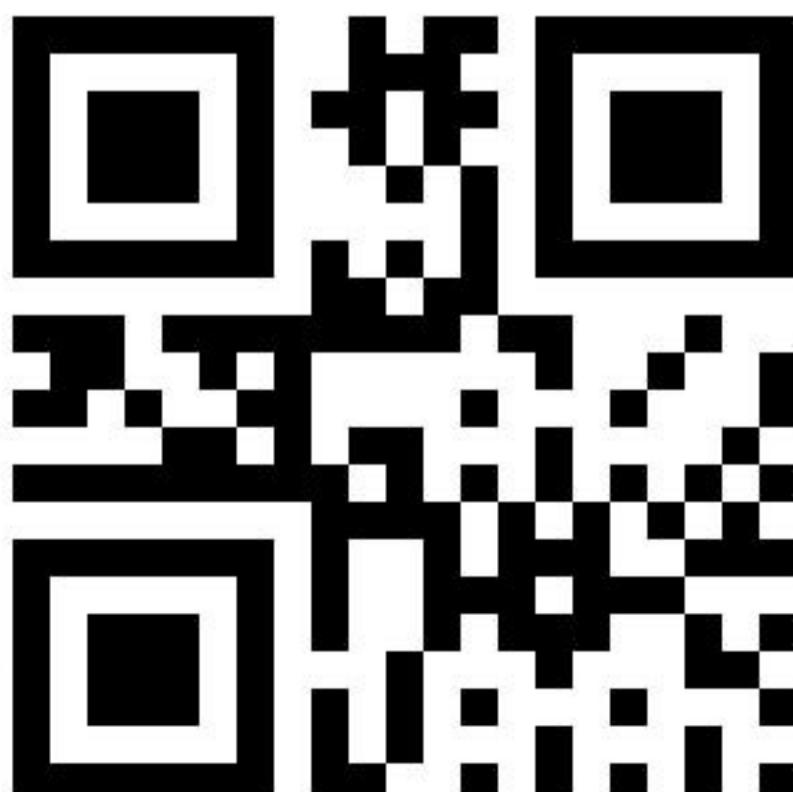



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00319

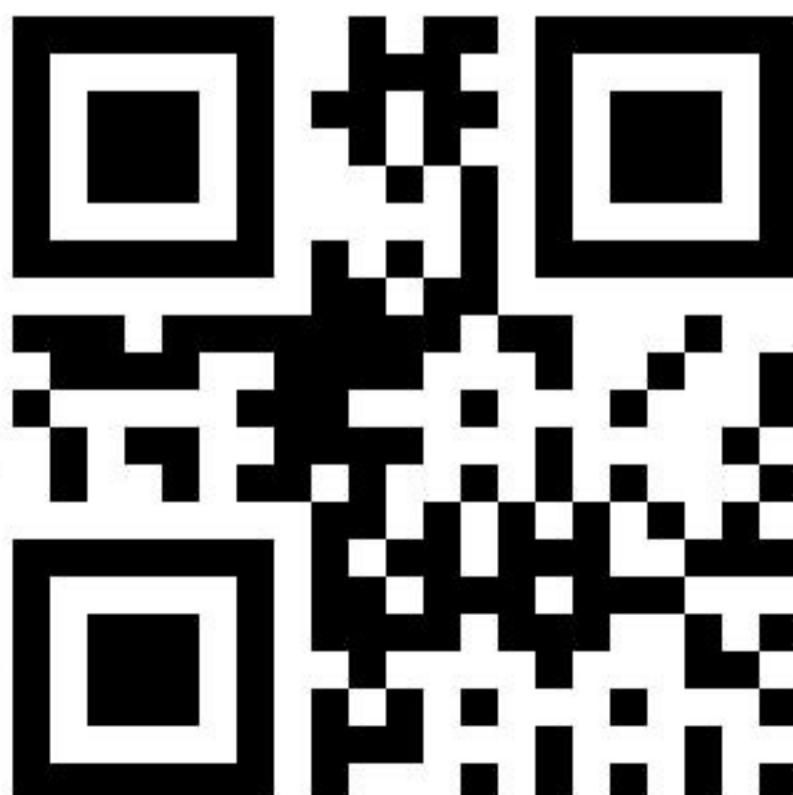



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 00320

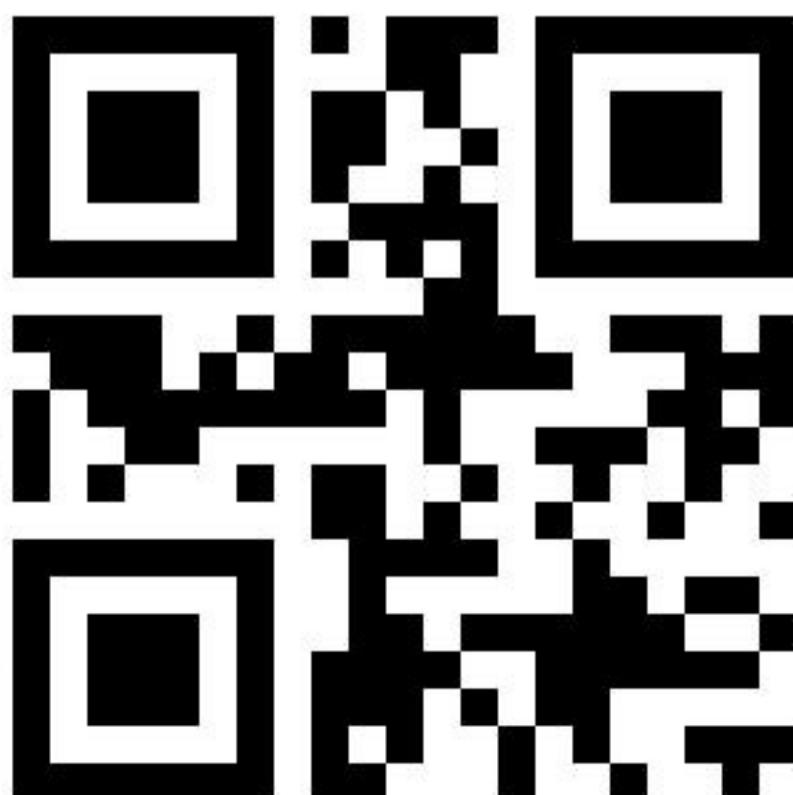



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00321

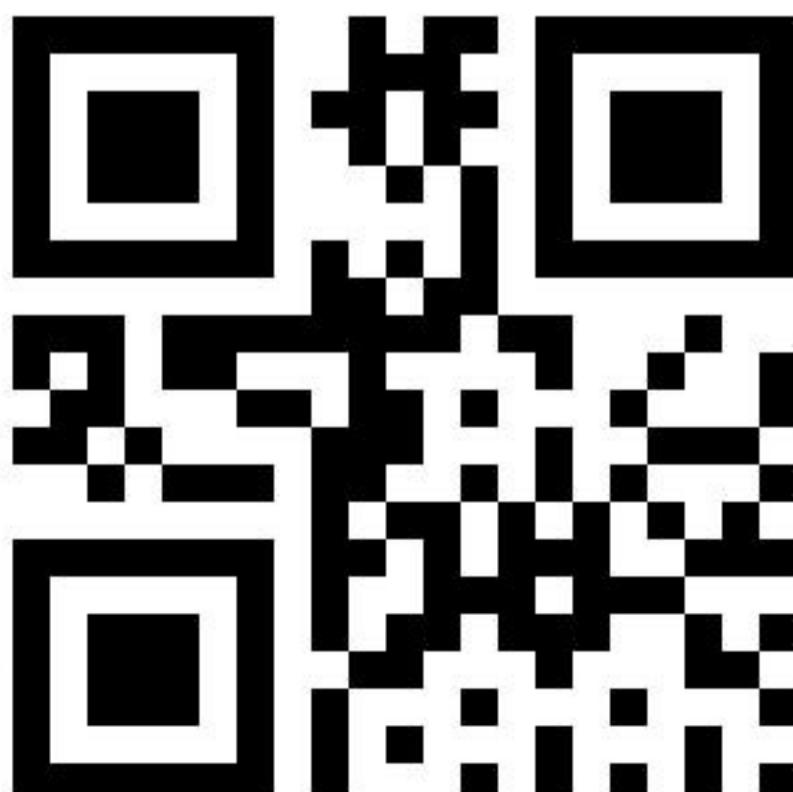



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00322

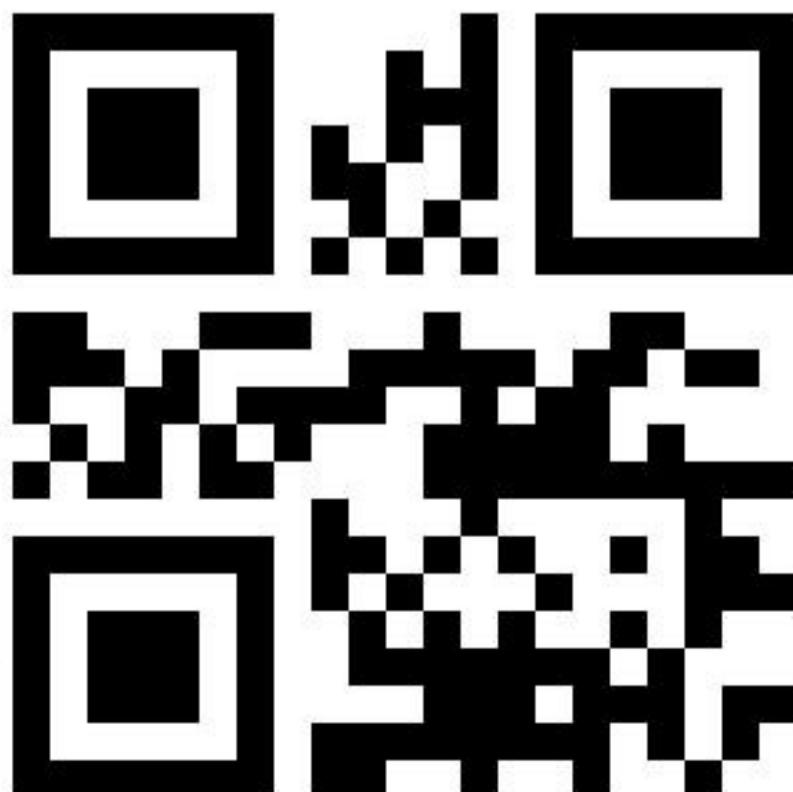



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00323

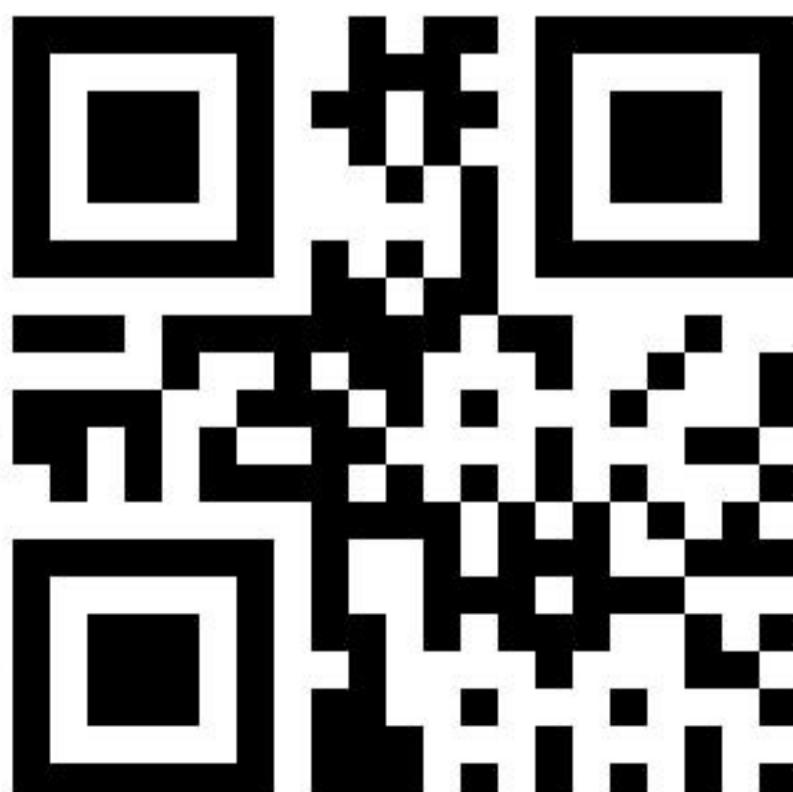



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00324

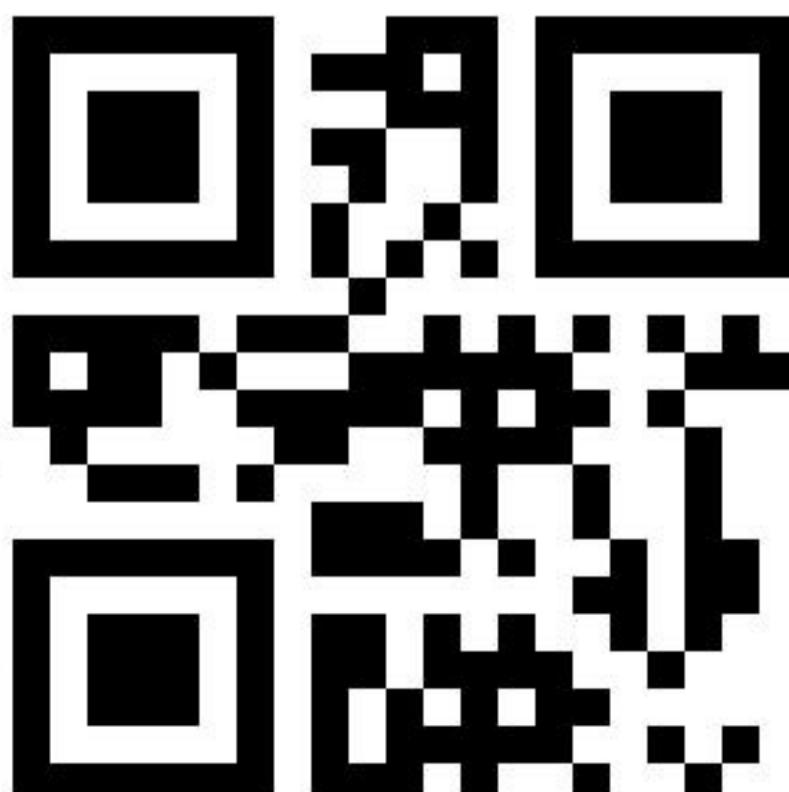



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00325

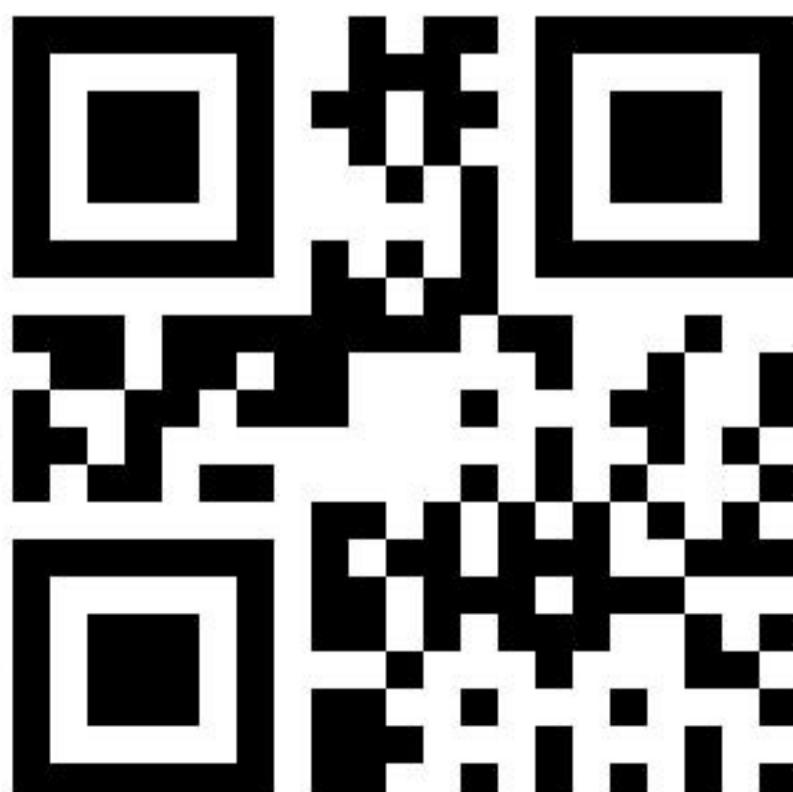



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00326

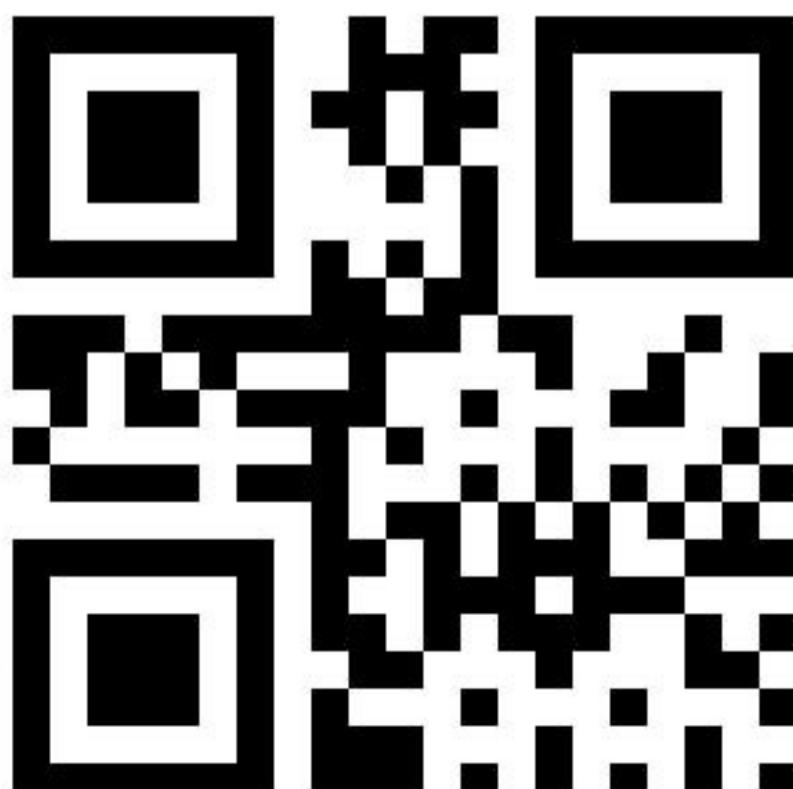



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00327





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00328

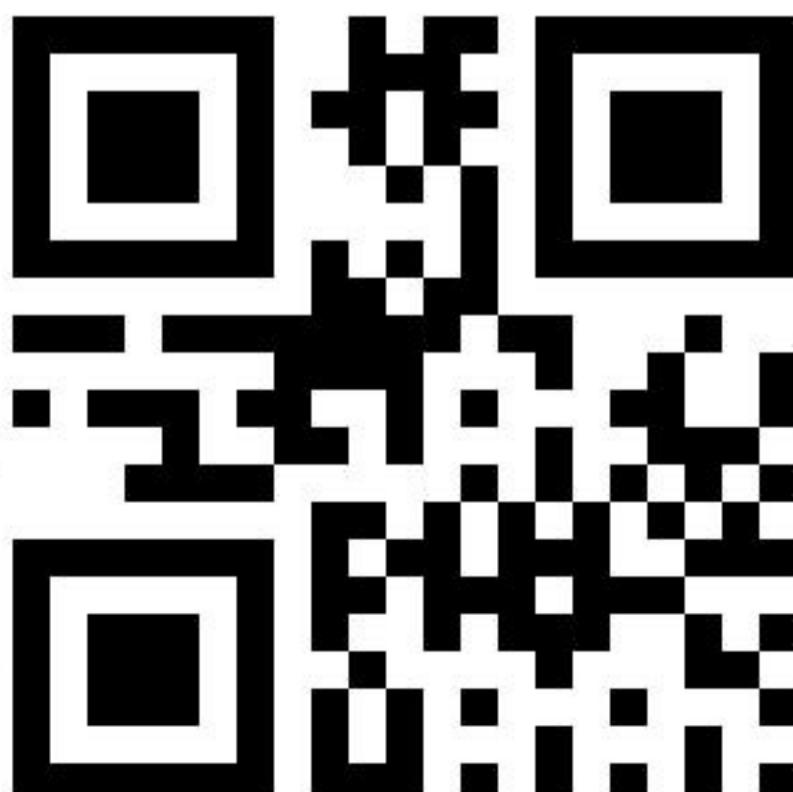



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00329

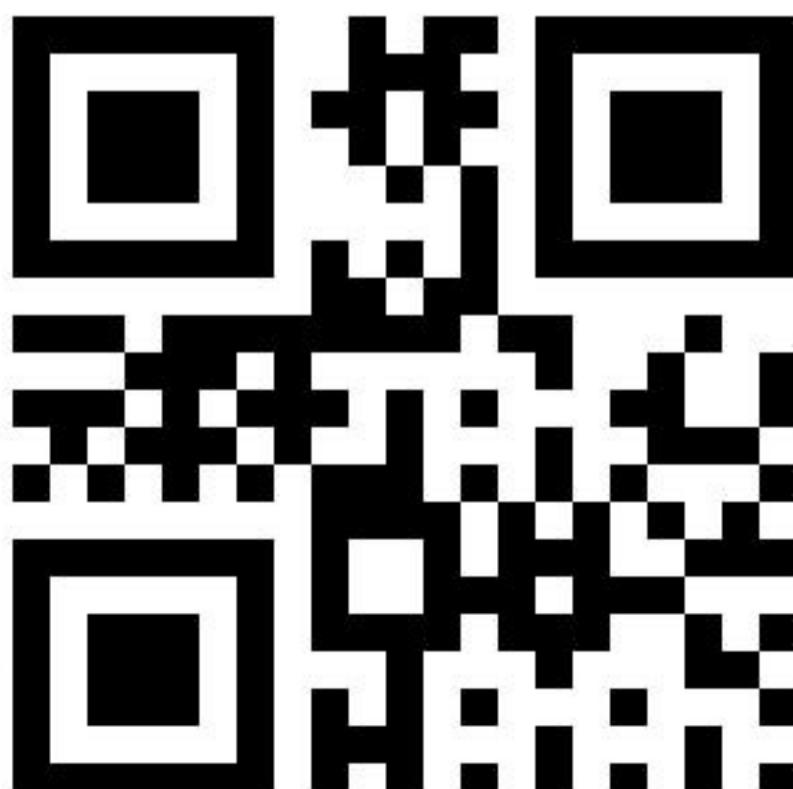



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003330

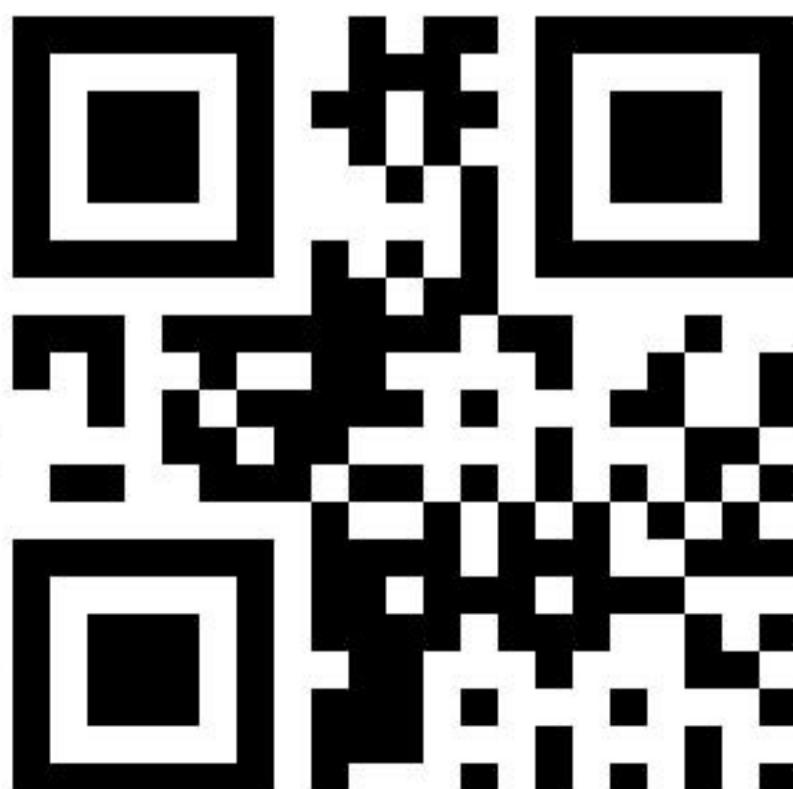



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003331

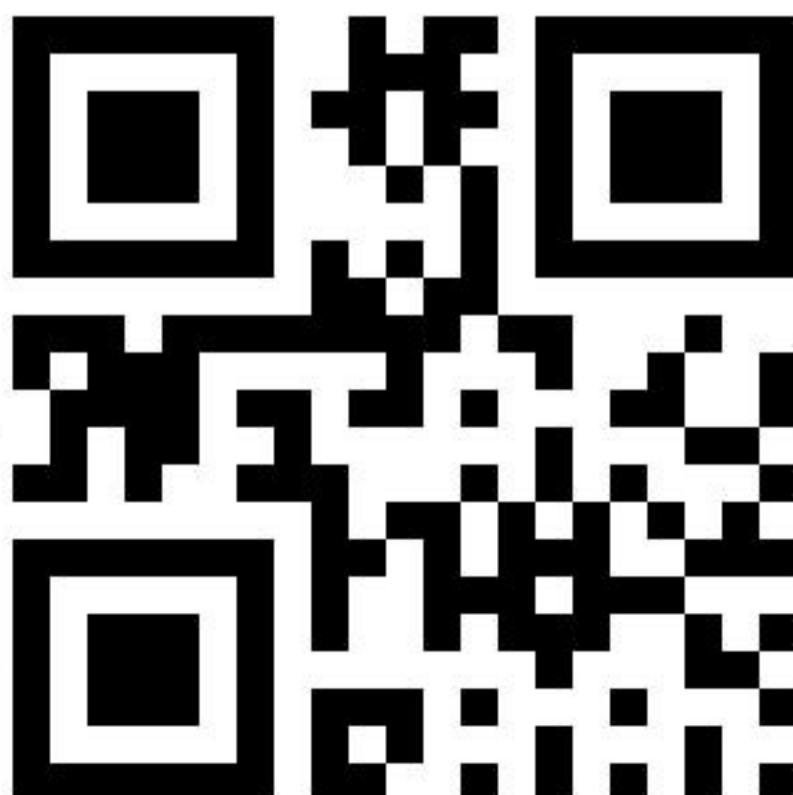



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003332

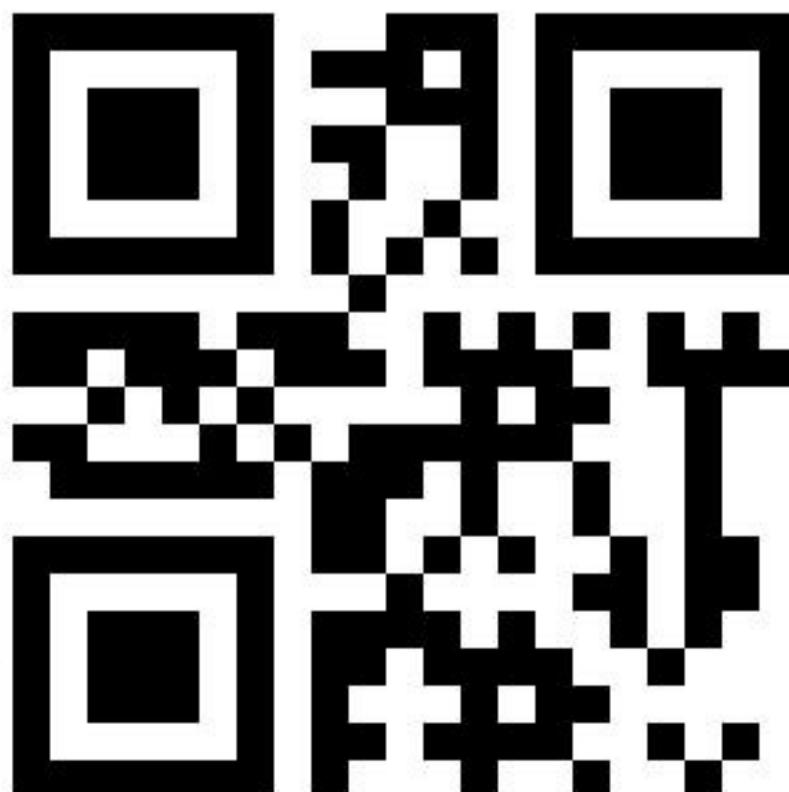



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003333

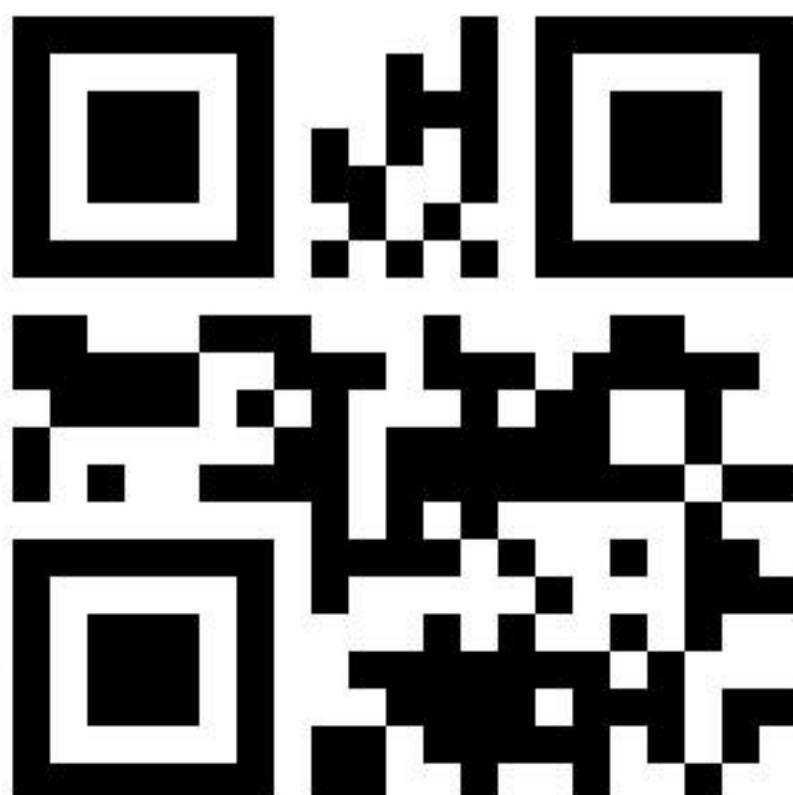



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003334

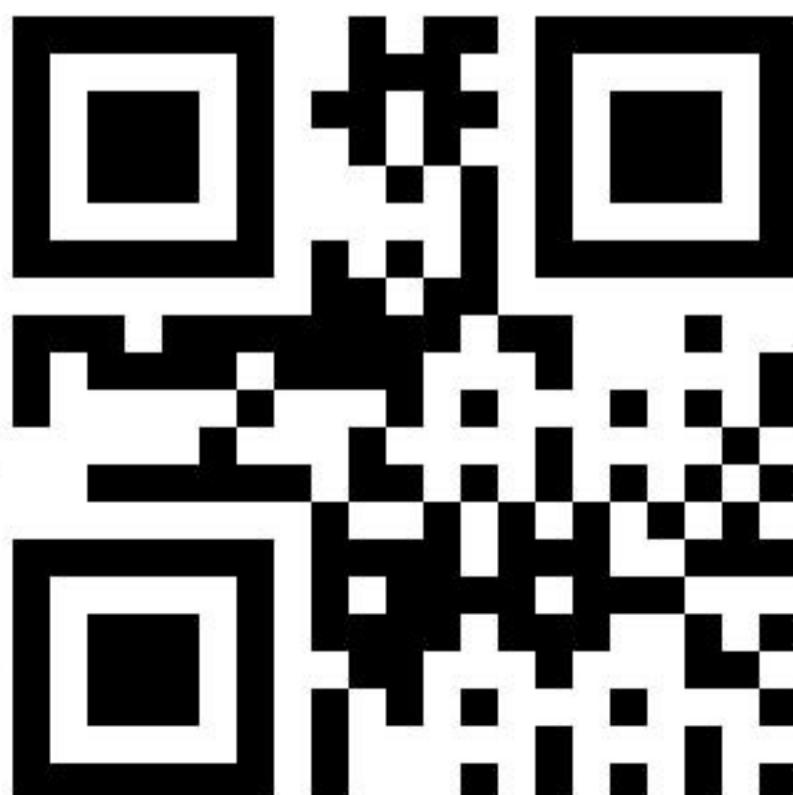



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003335





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003336

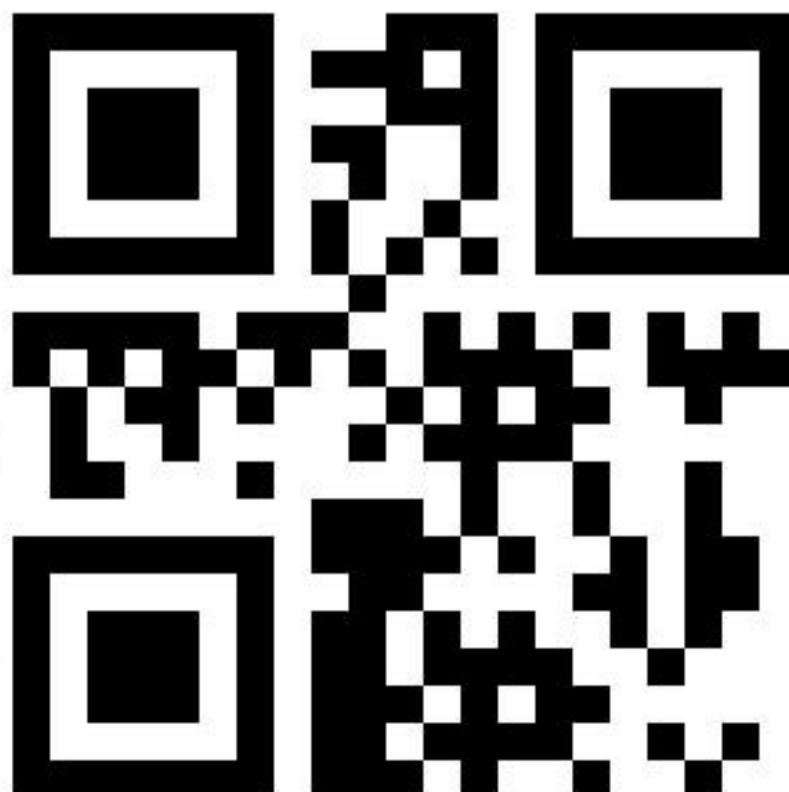



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003337

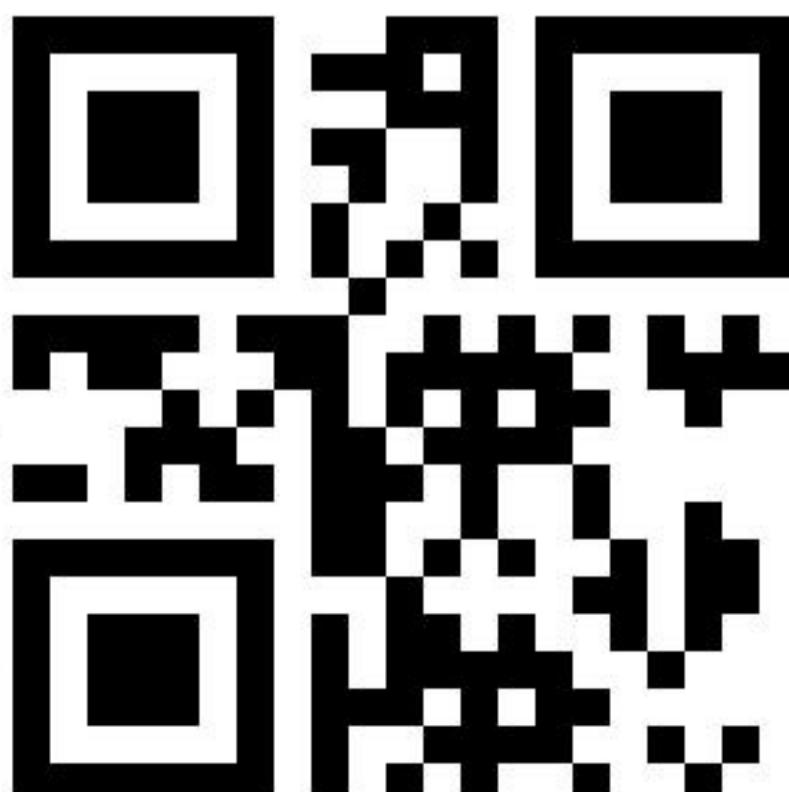



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 003338

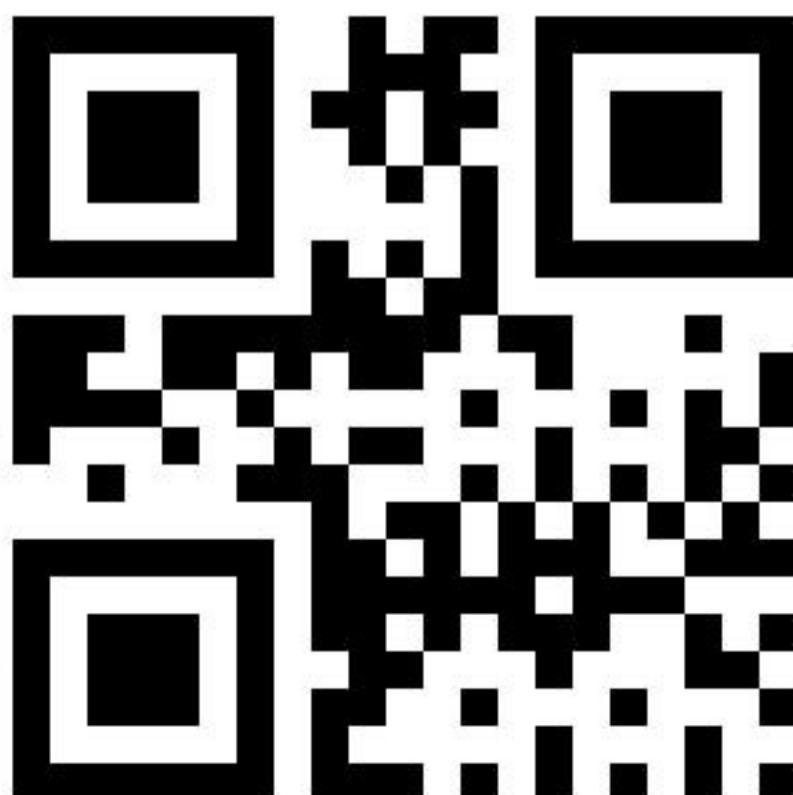



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 003339

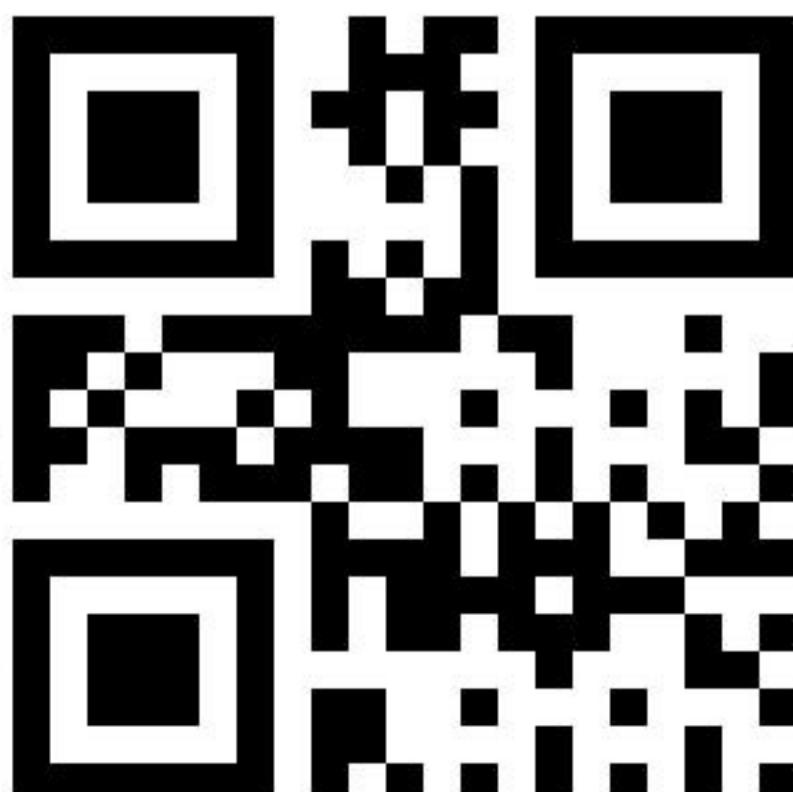



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00340

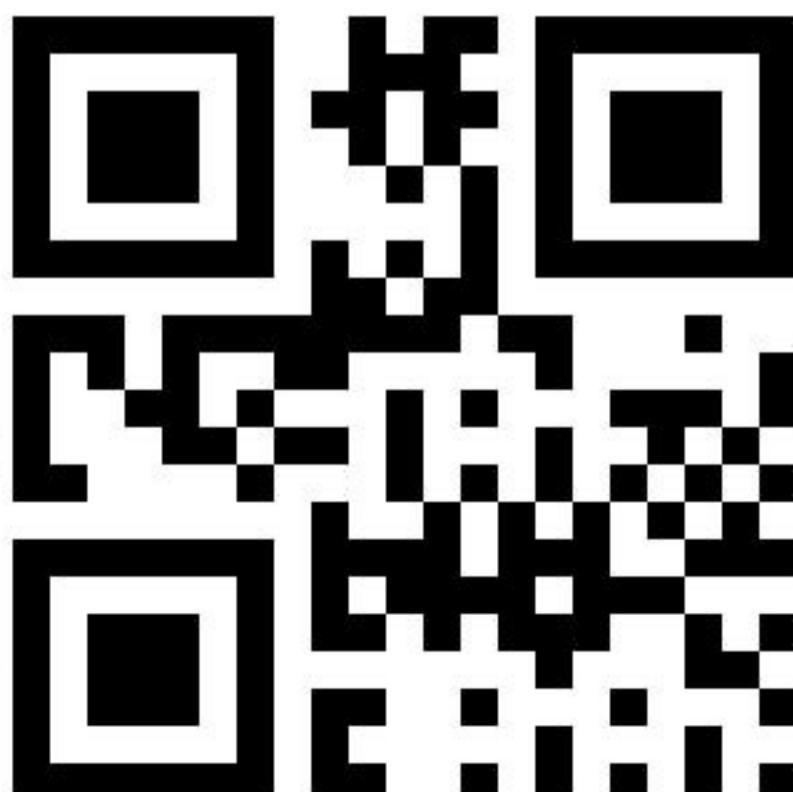



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00341

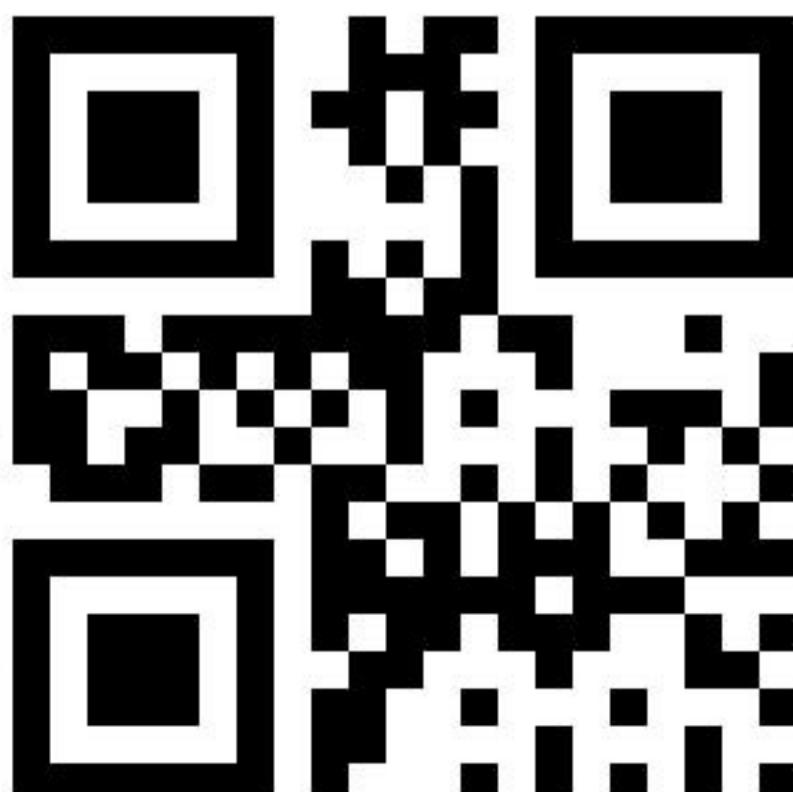



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00342

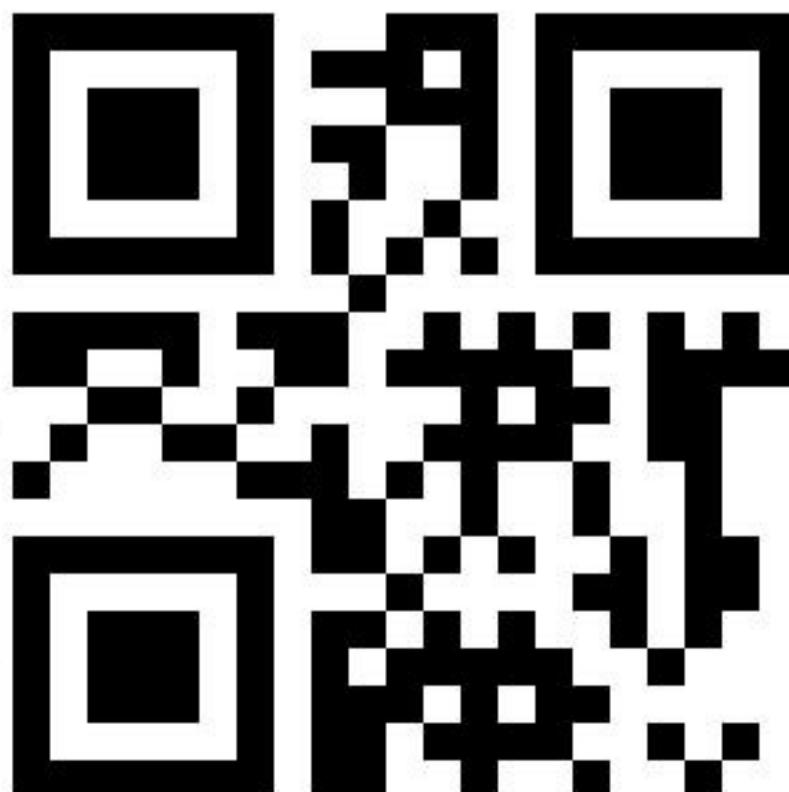



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00343

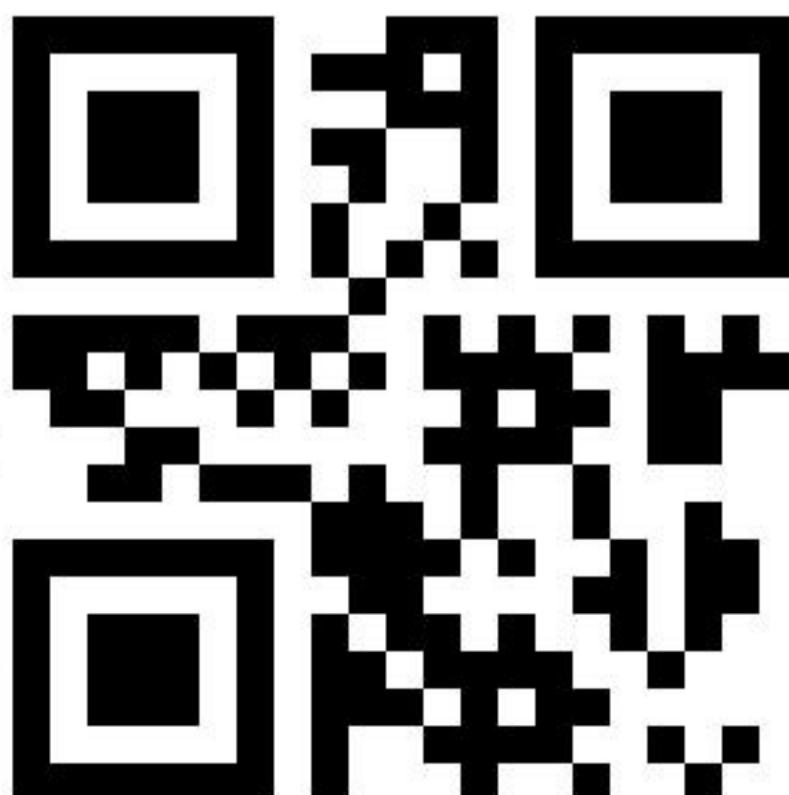



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00344

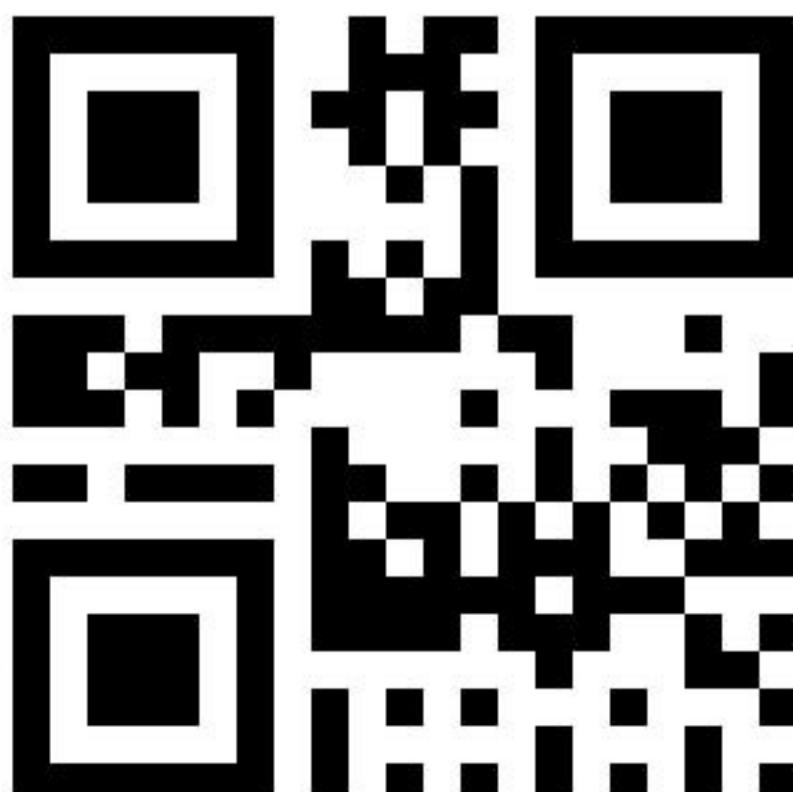



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00345

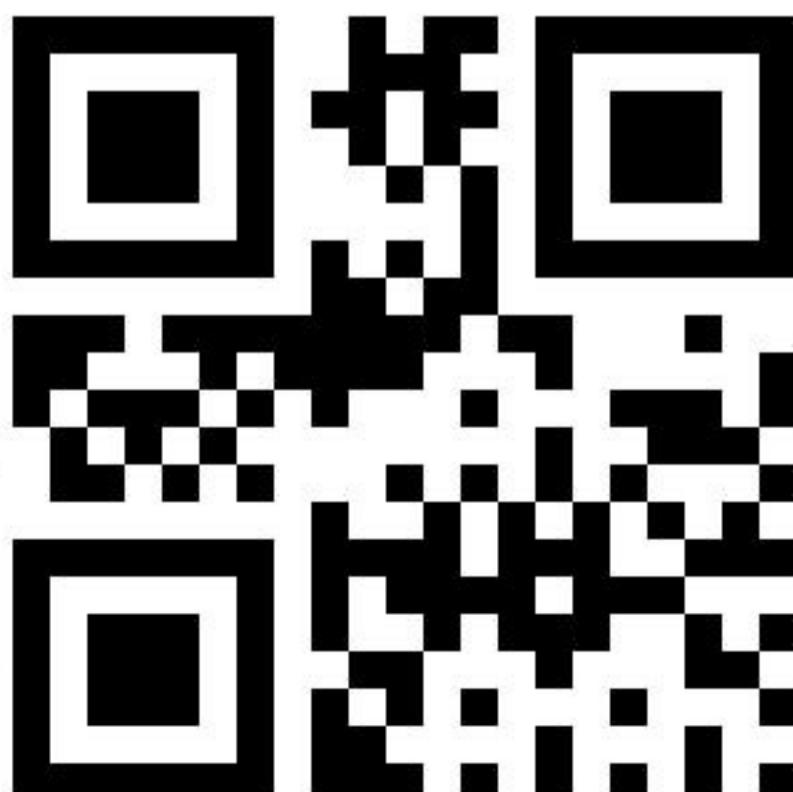



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00346

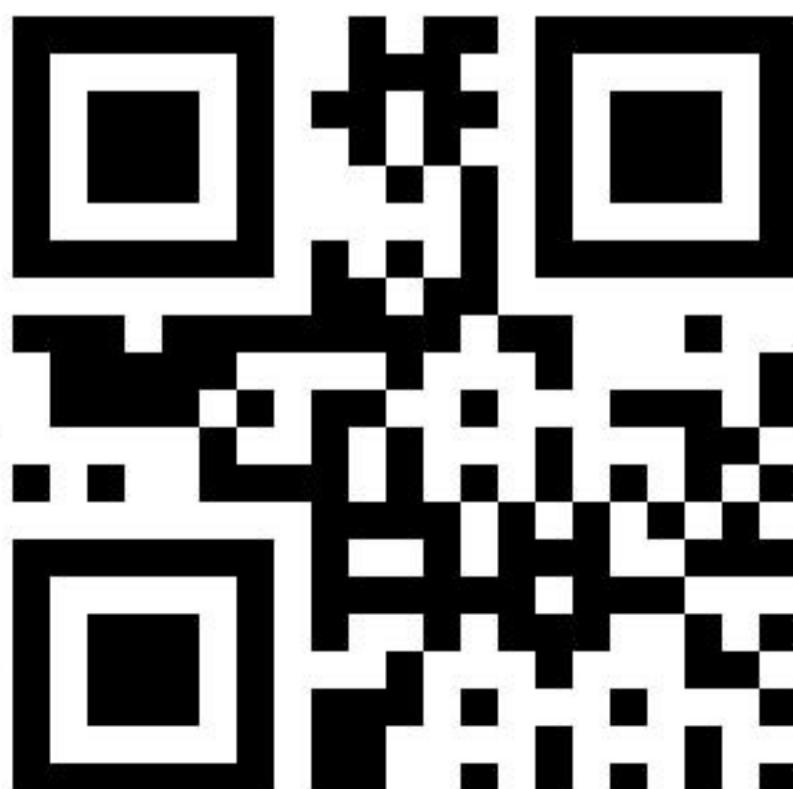



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00347

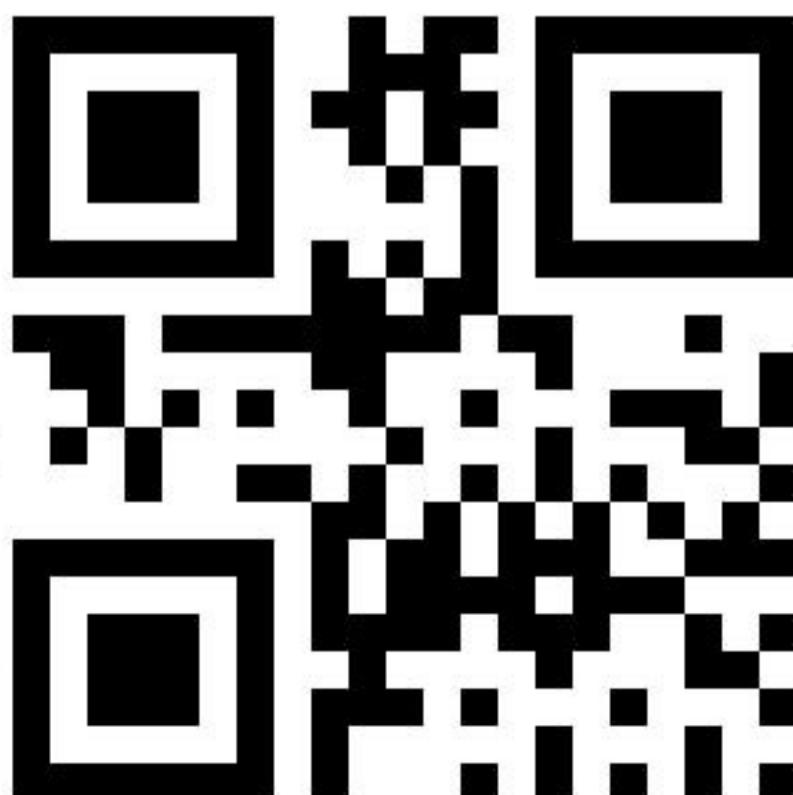



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00348

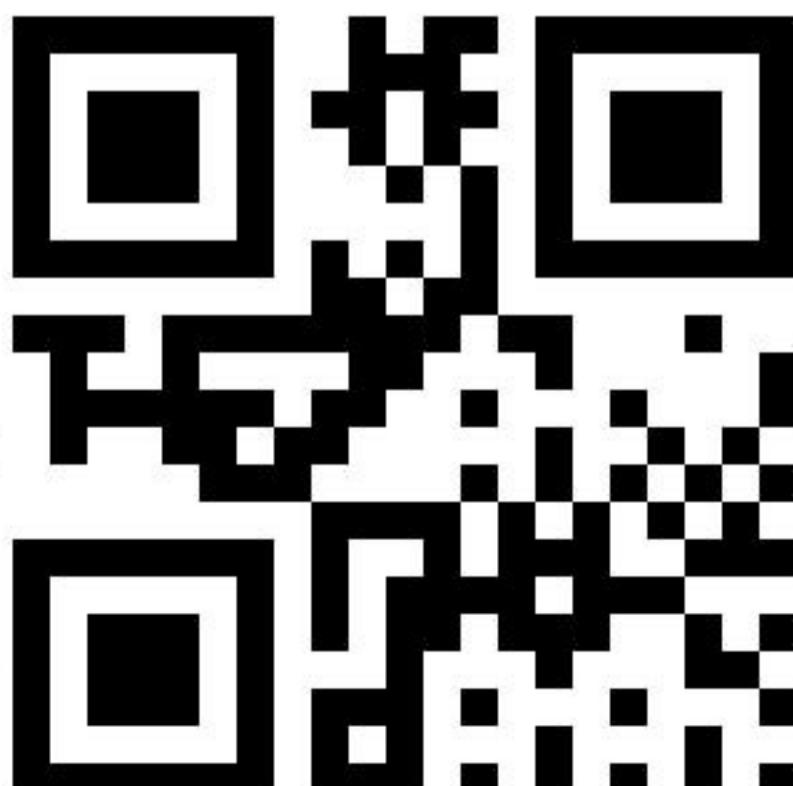



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00349

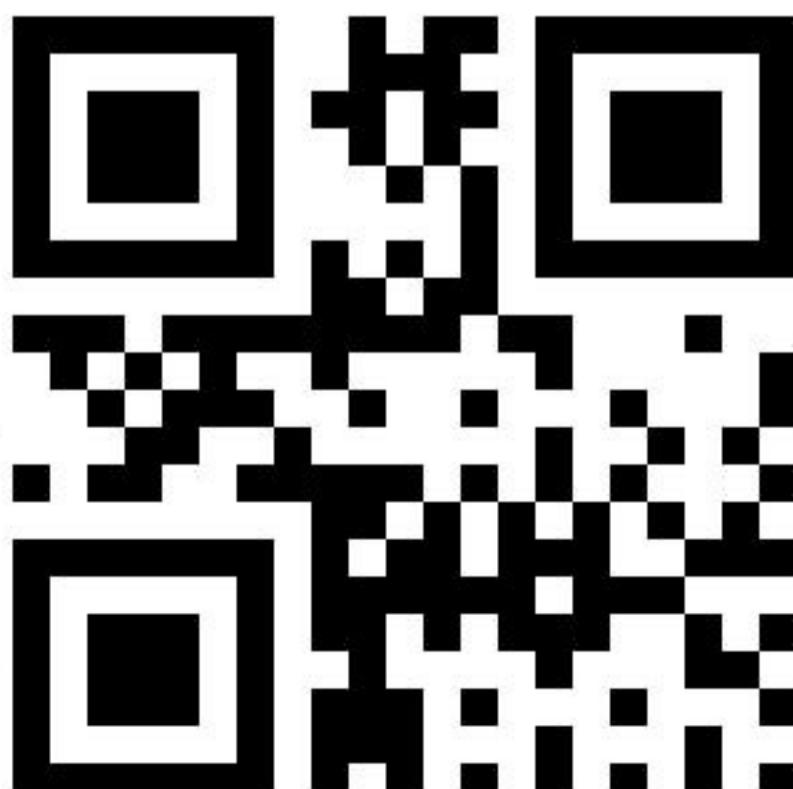



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 000350





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00351

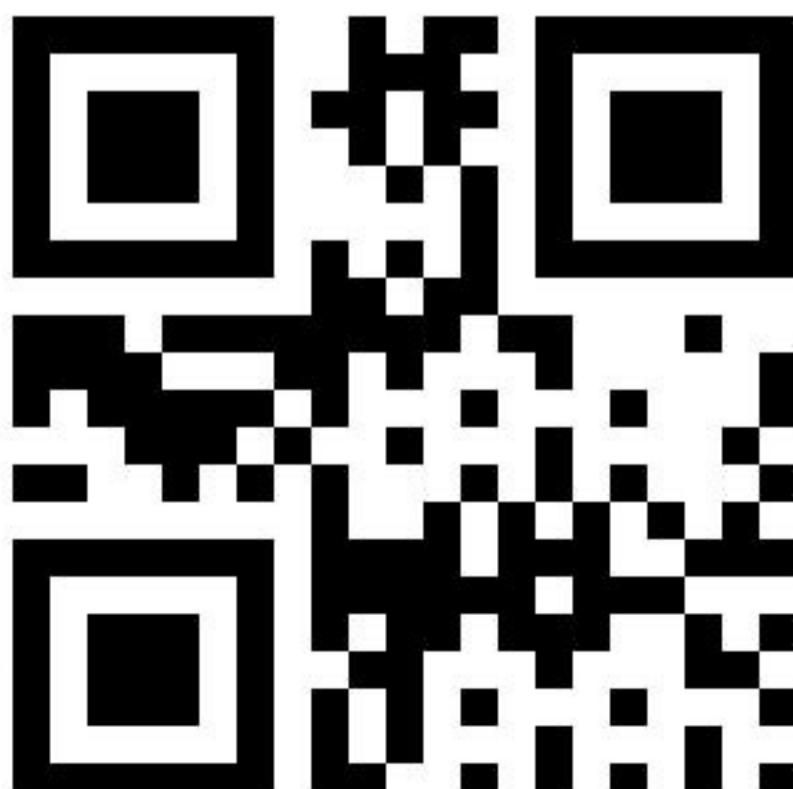



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 00352

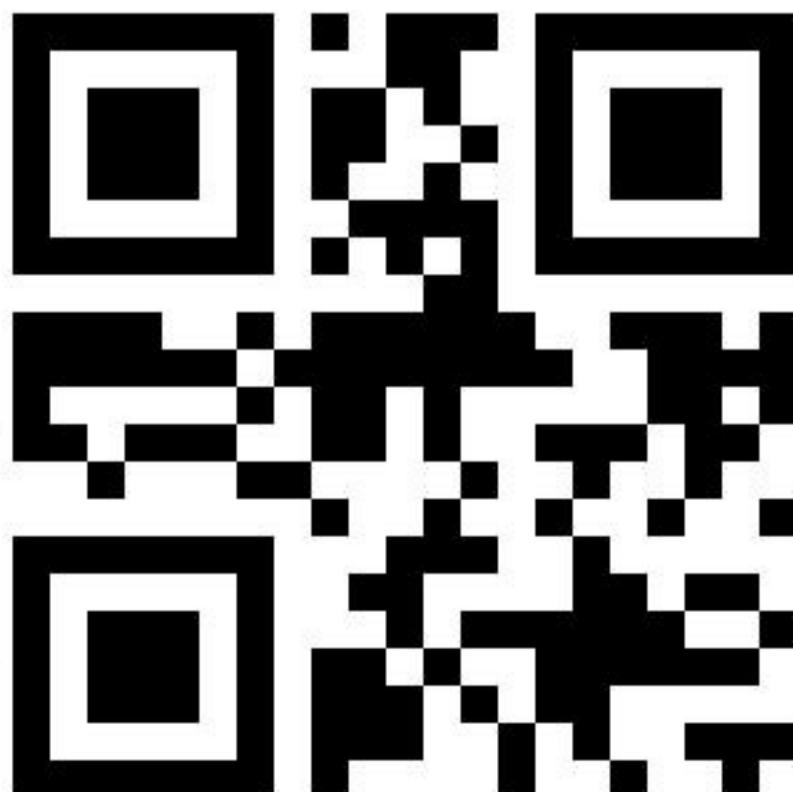



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00353

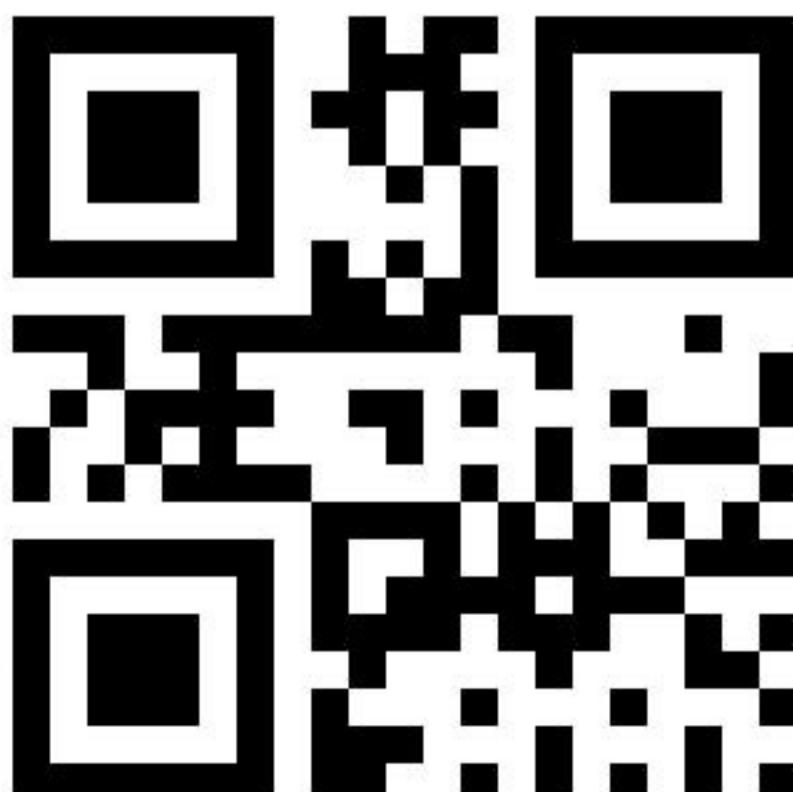



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00354

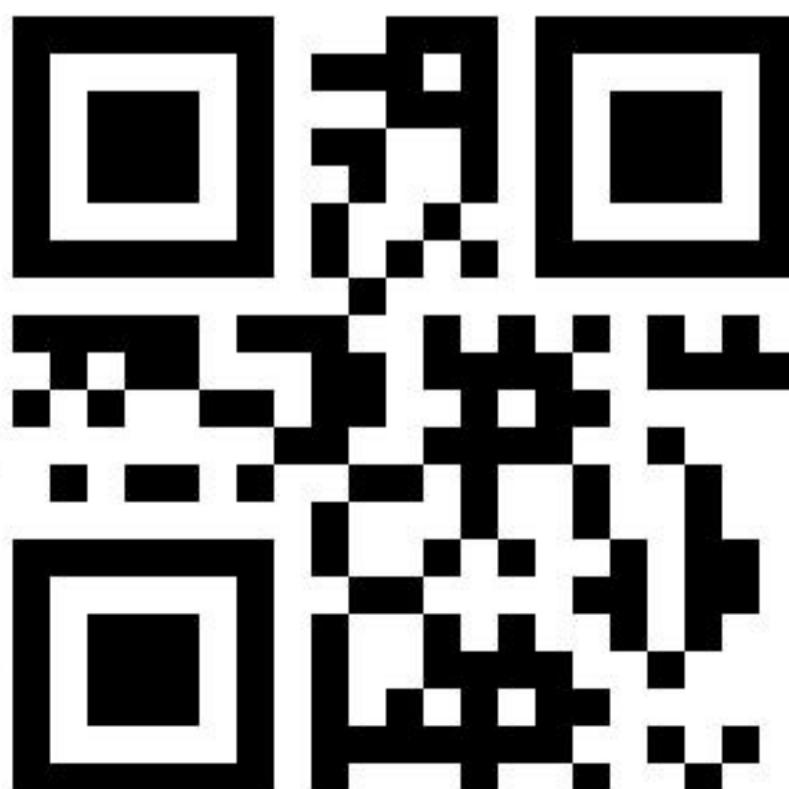



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00355

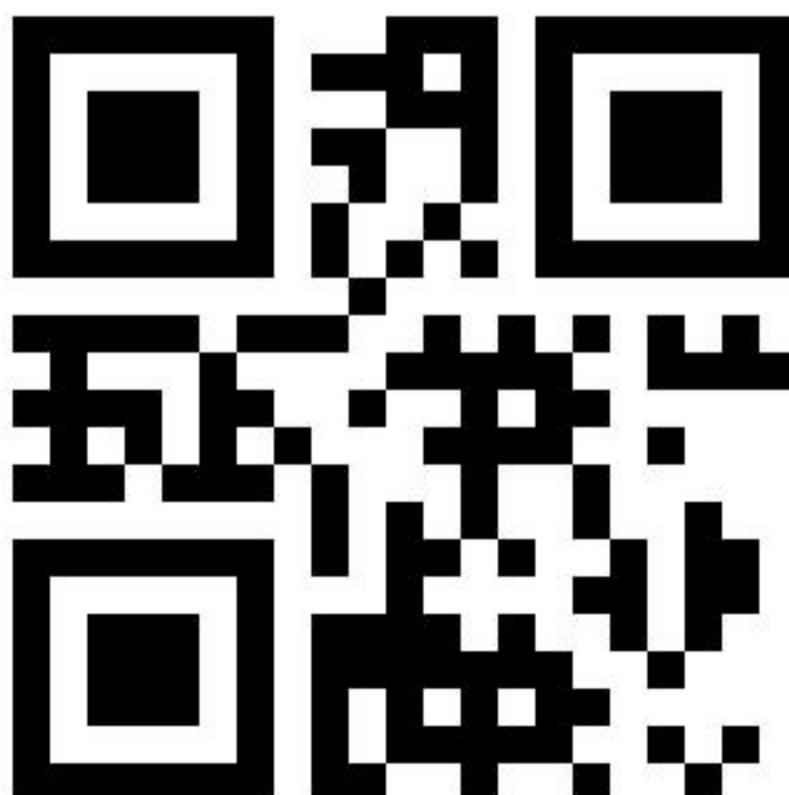



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00356

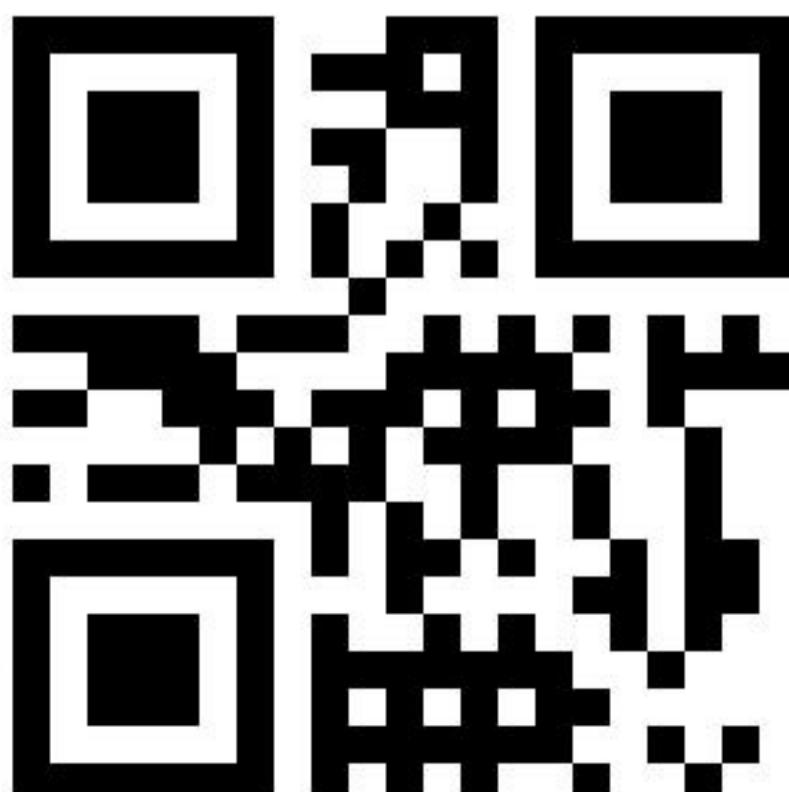



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 000357

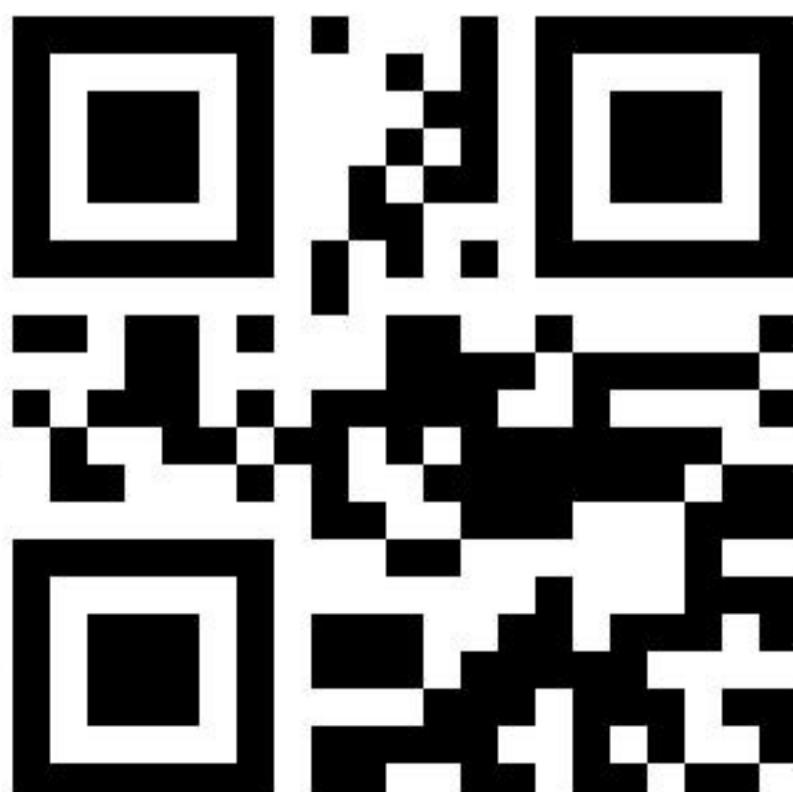



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00358

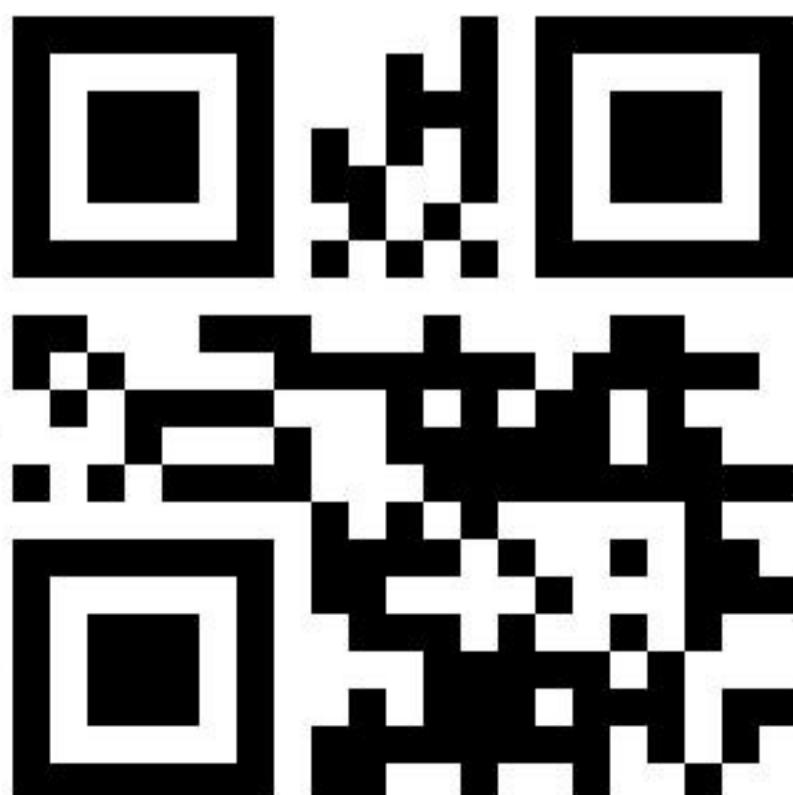



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 000359

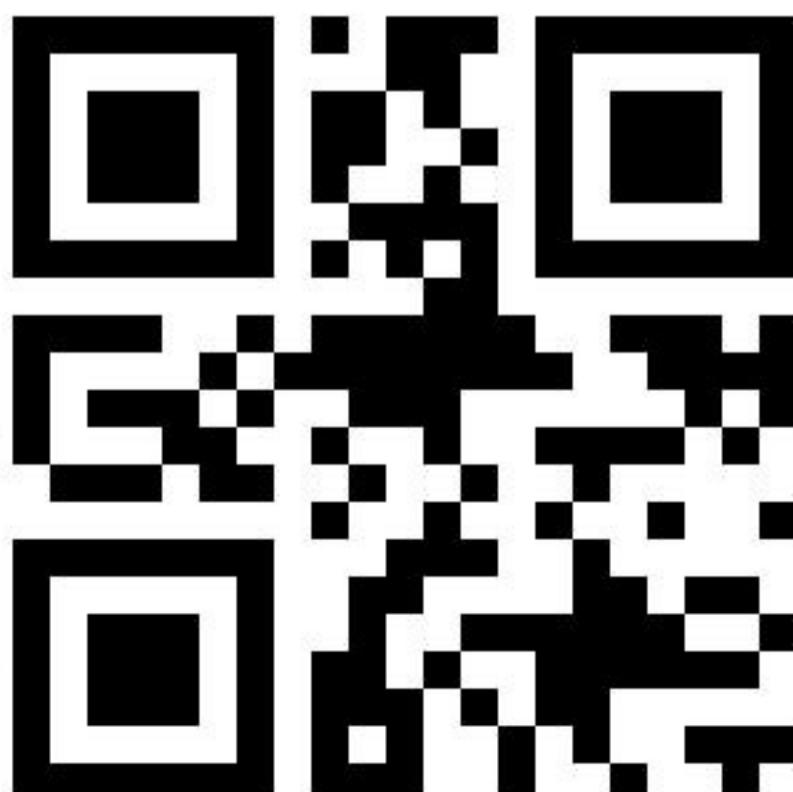



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00360





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00361





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00362

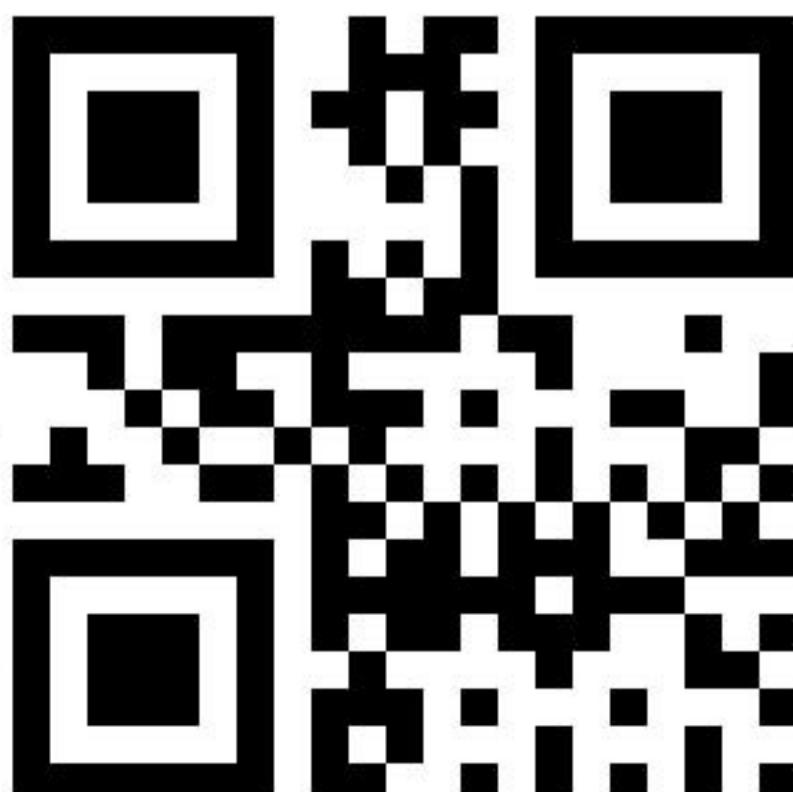



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00363

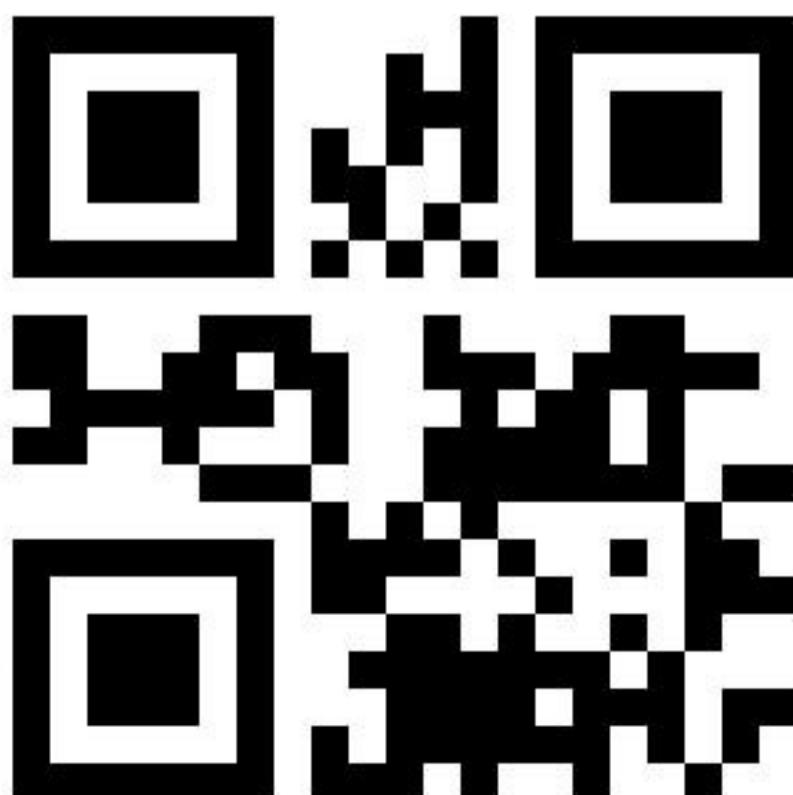



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00364

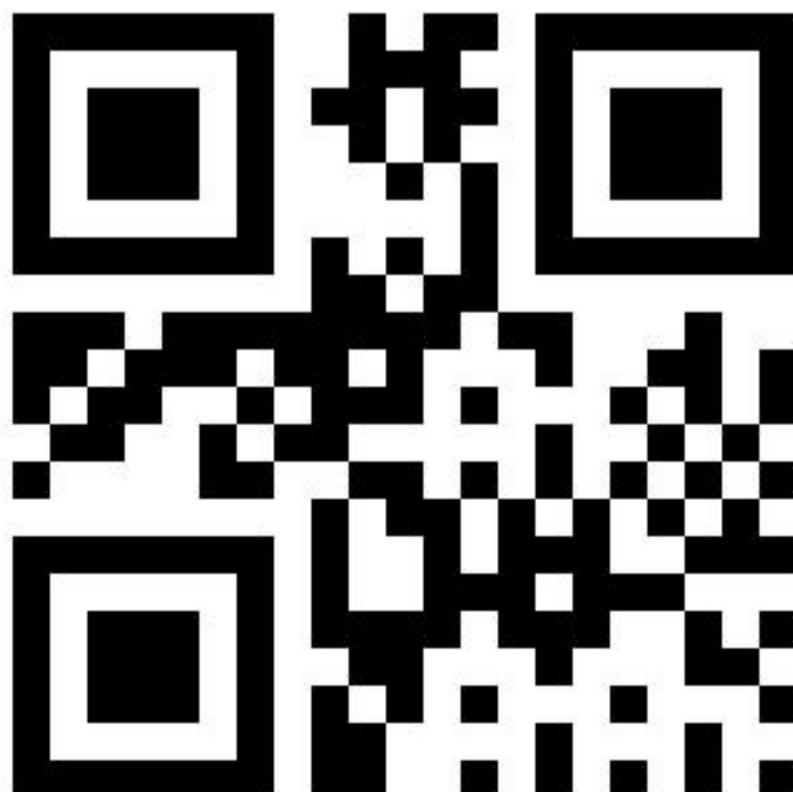



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00365





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00366

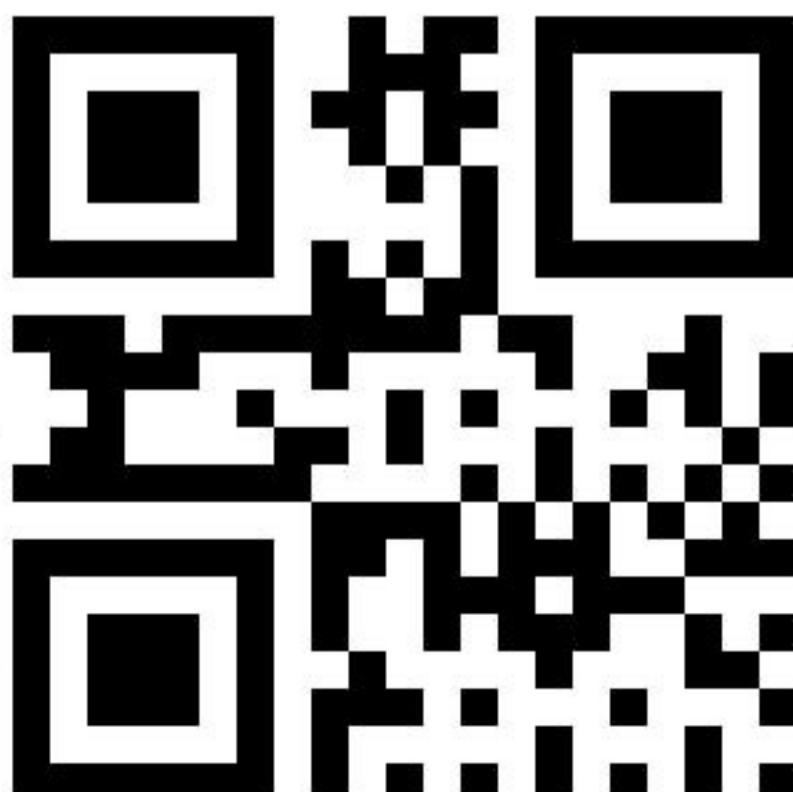



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00367

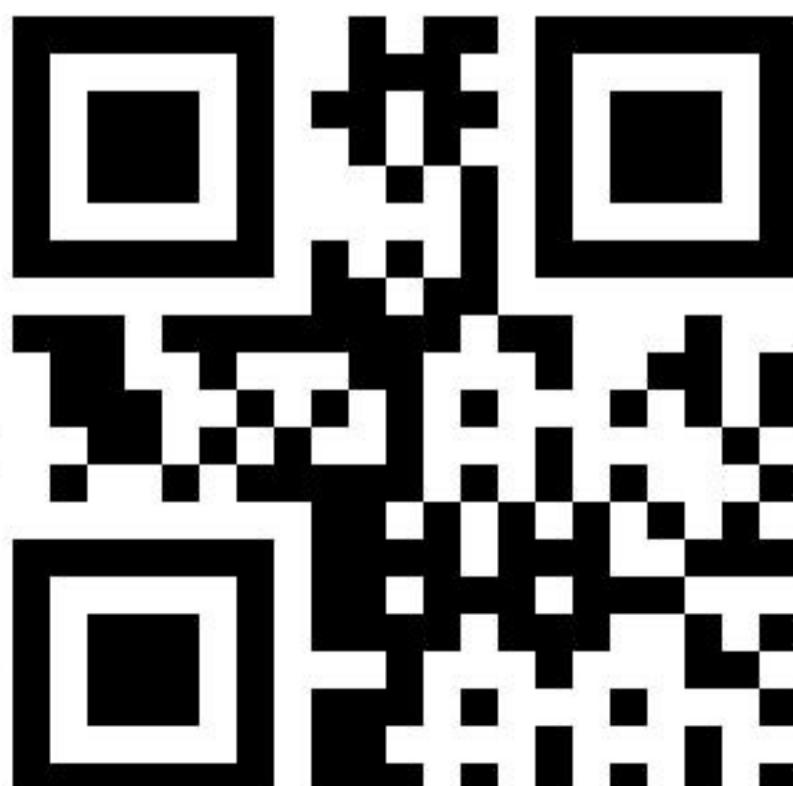



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00368

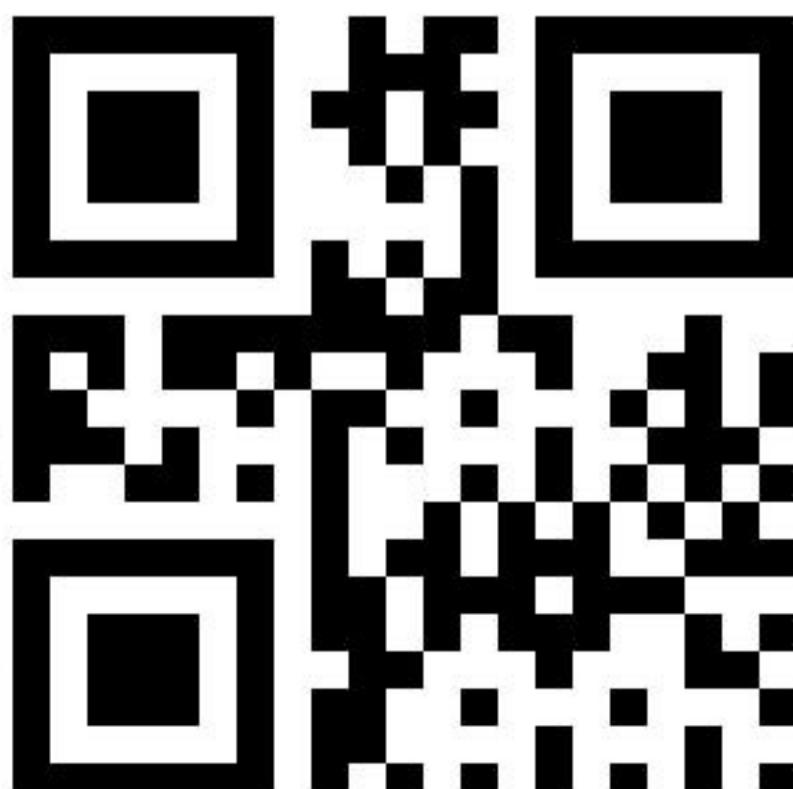



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00369

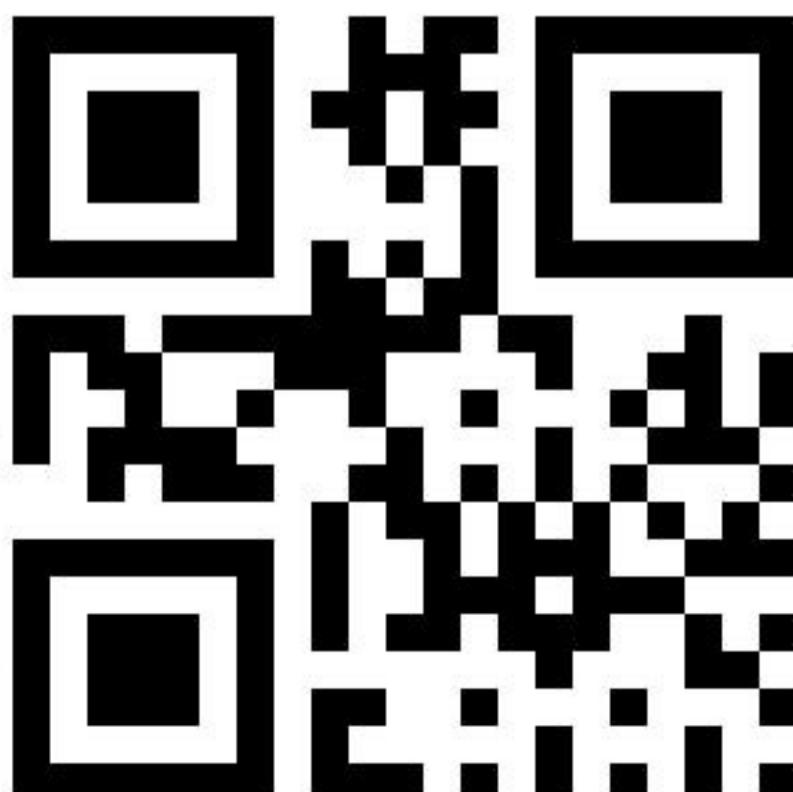



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 00370

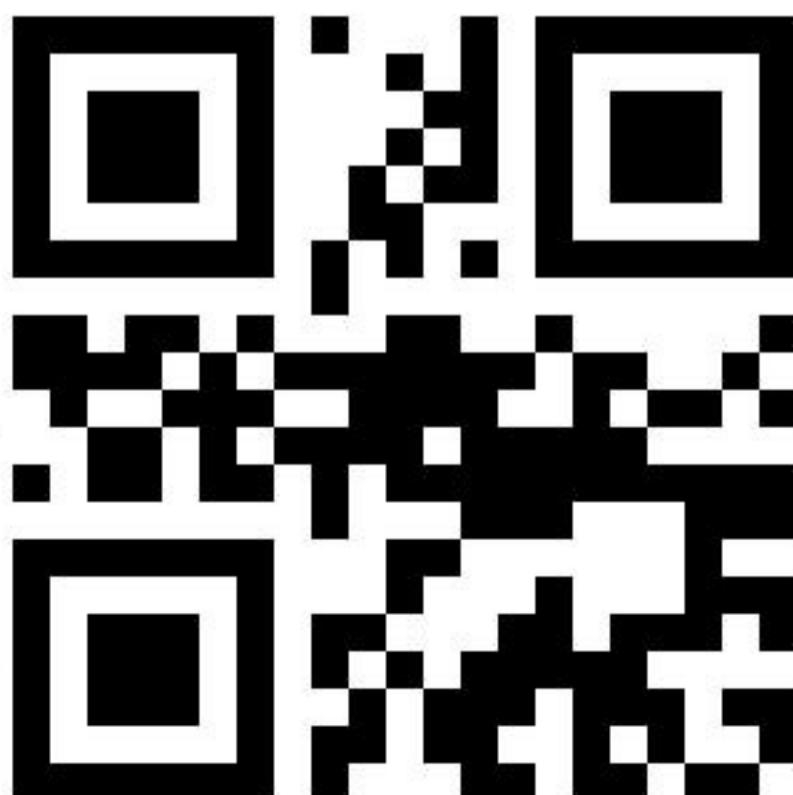



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00371

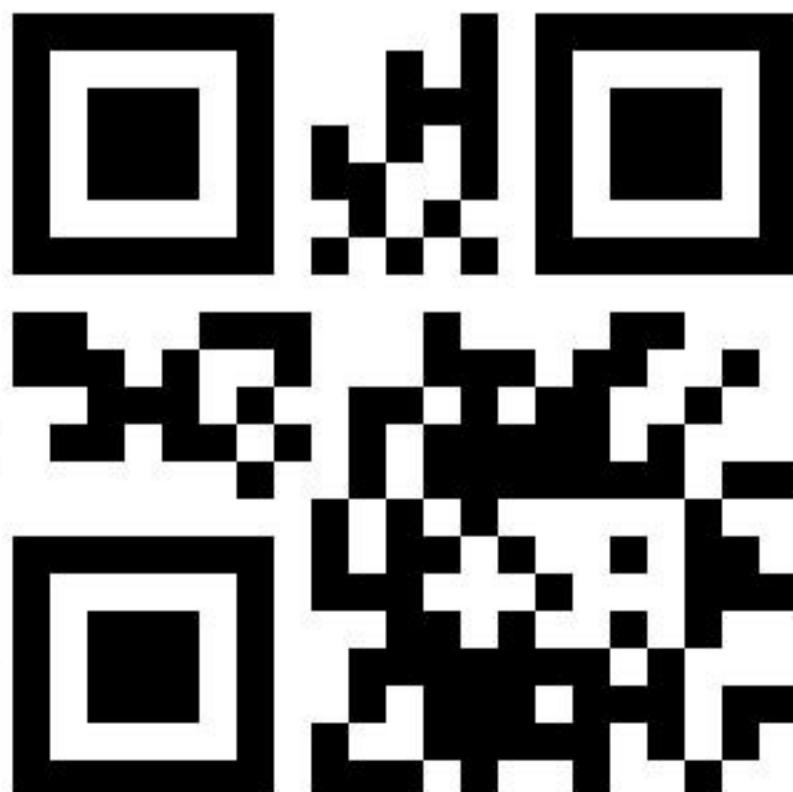



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00372

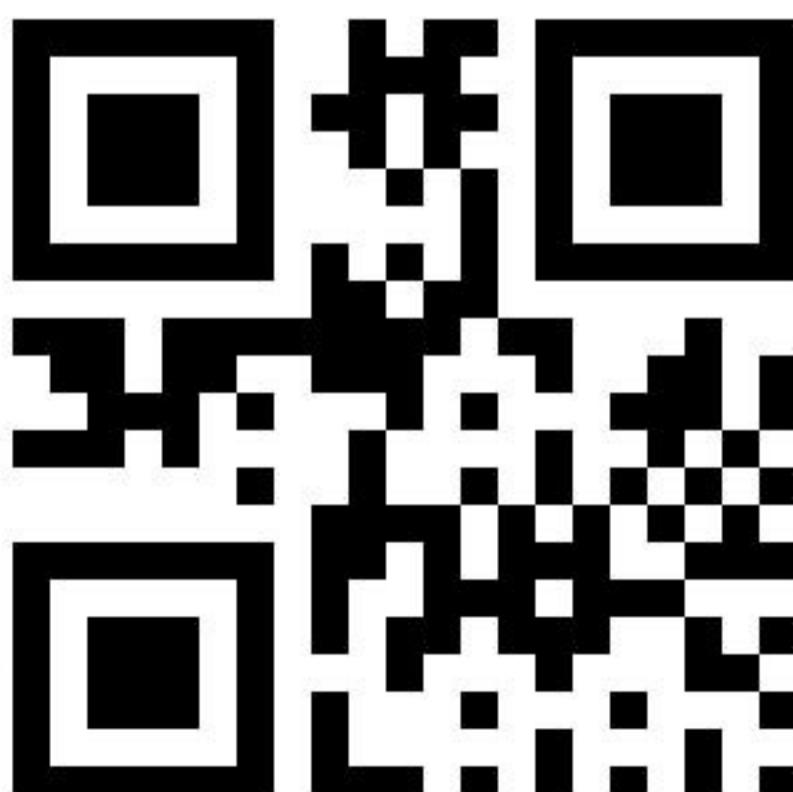



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00373

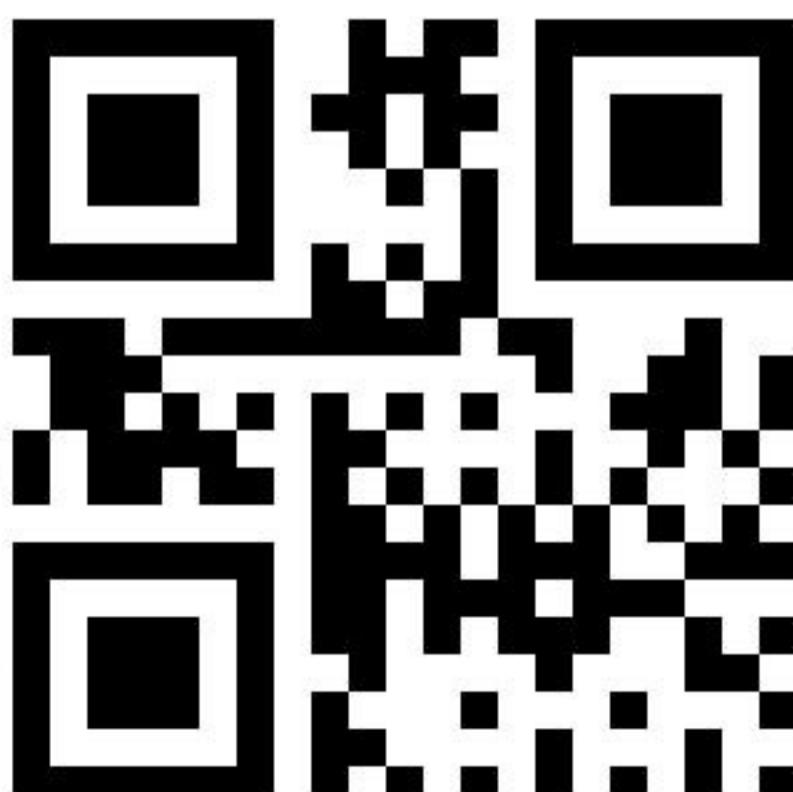



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00374

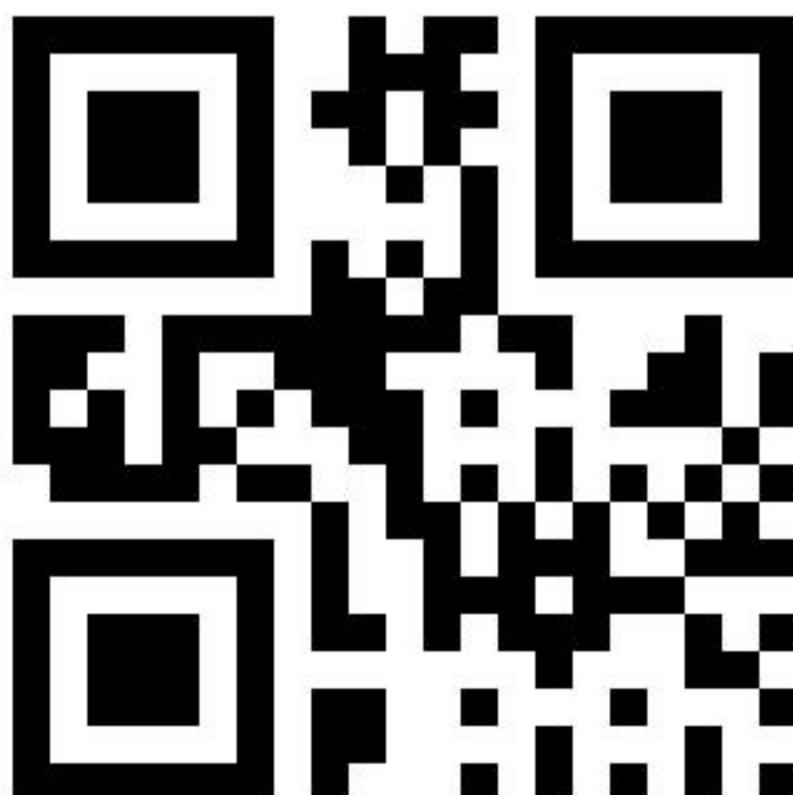



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00375

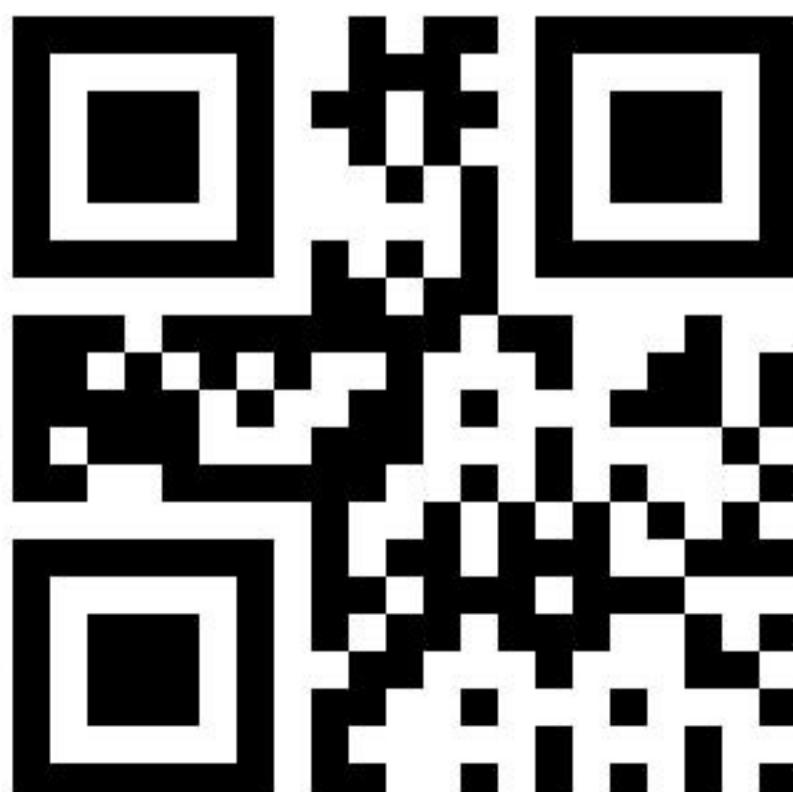



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00376

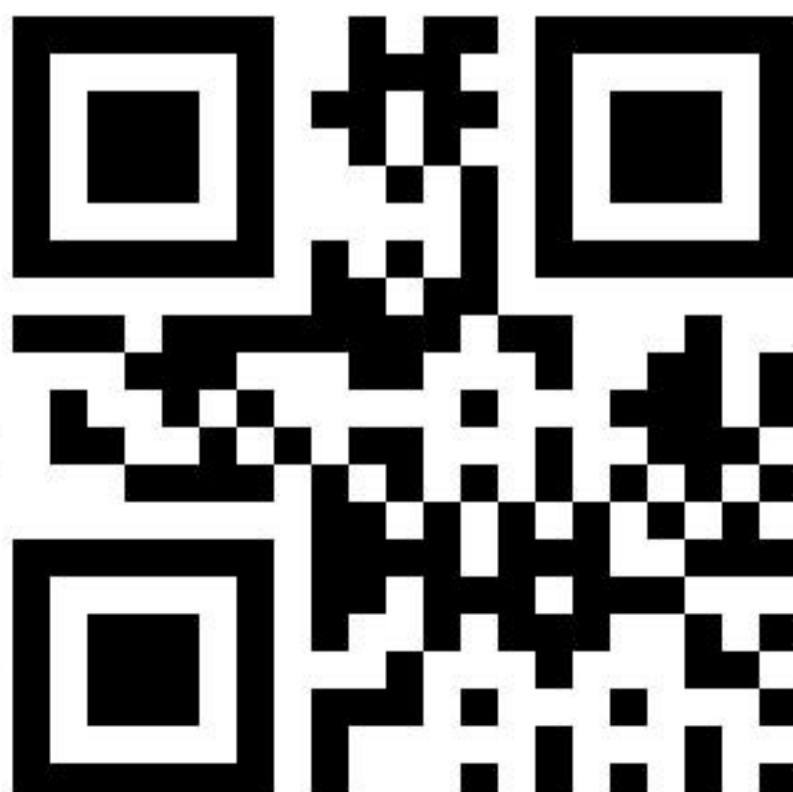



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00377

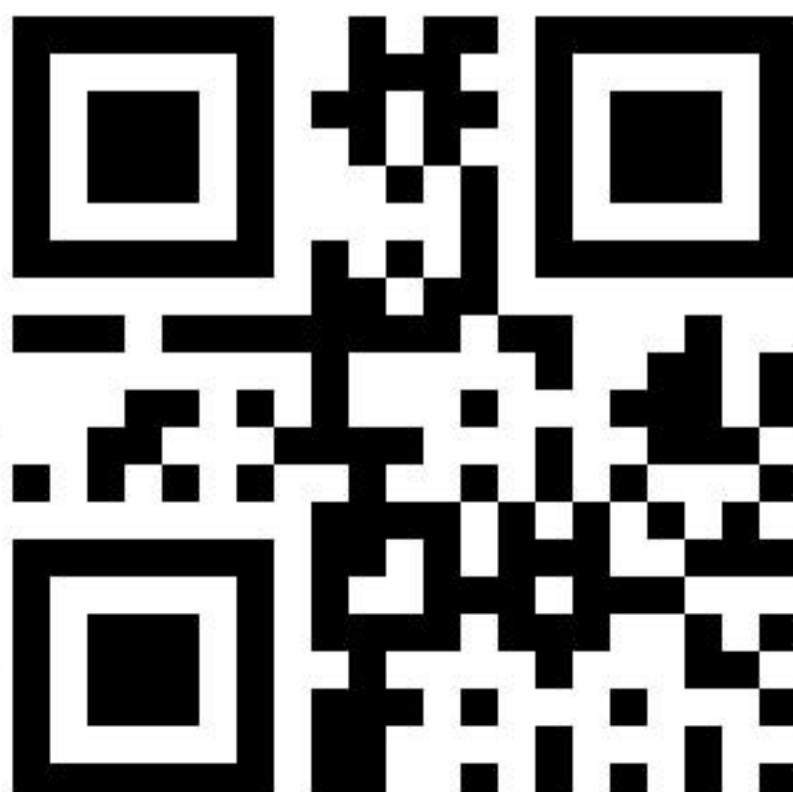



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00378

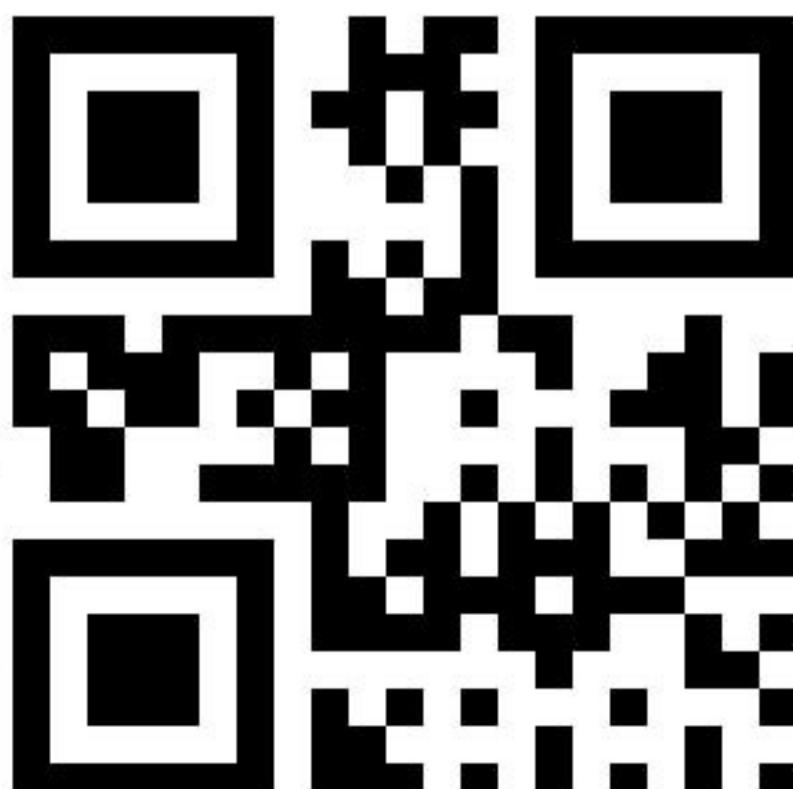



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 000379

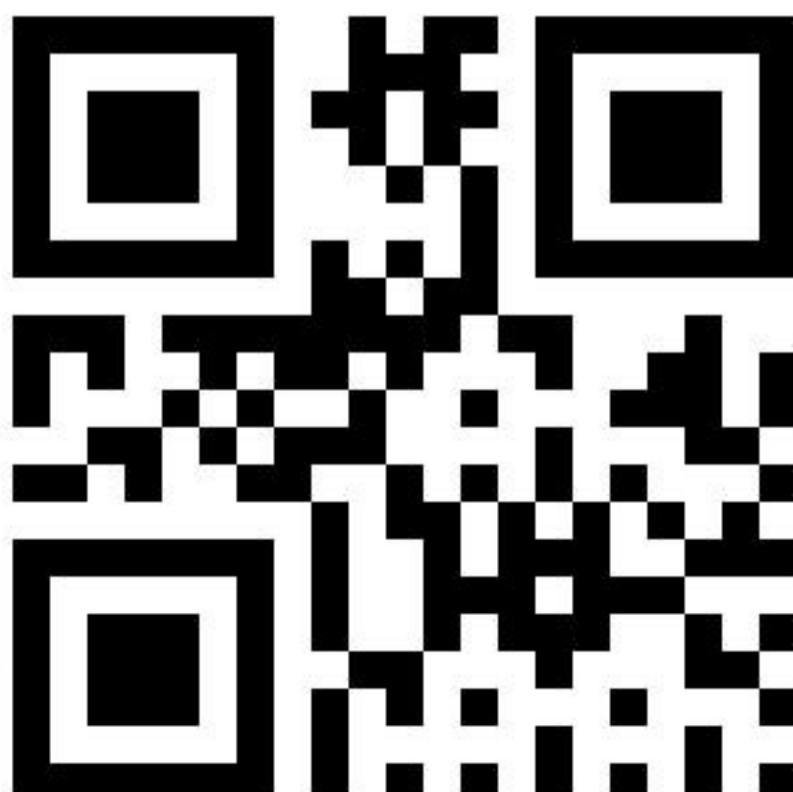



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 00380

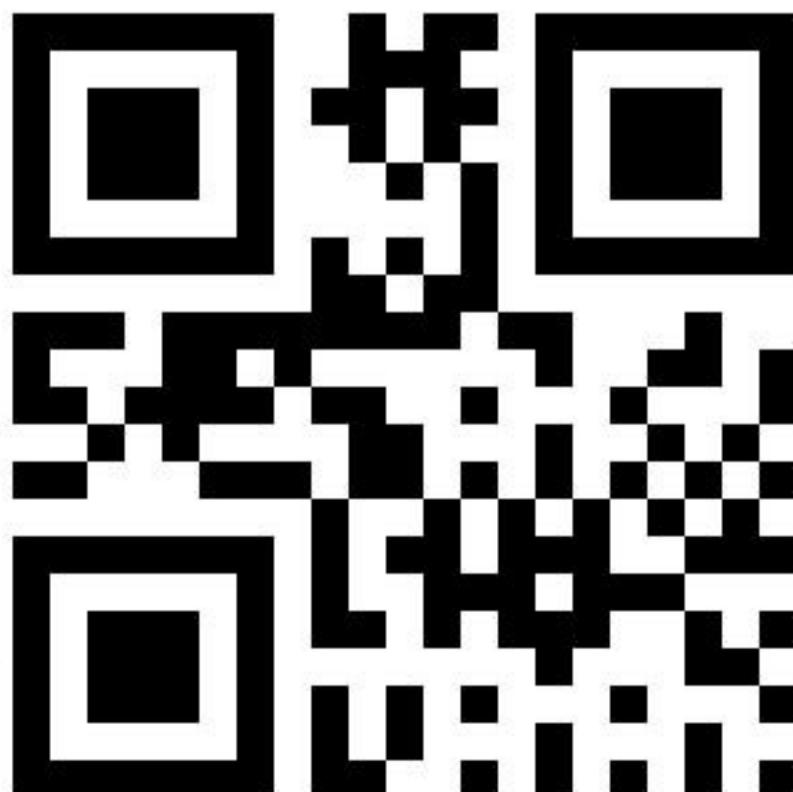



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00381

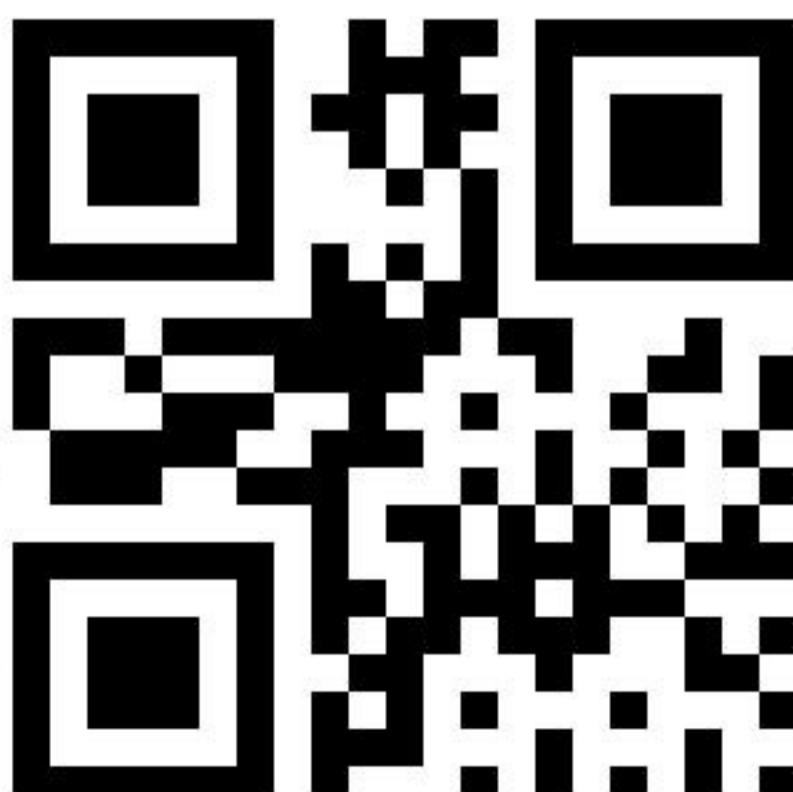



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 00382

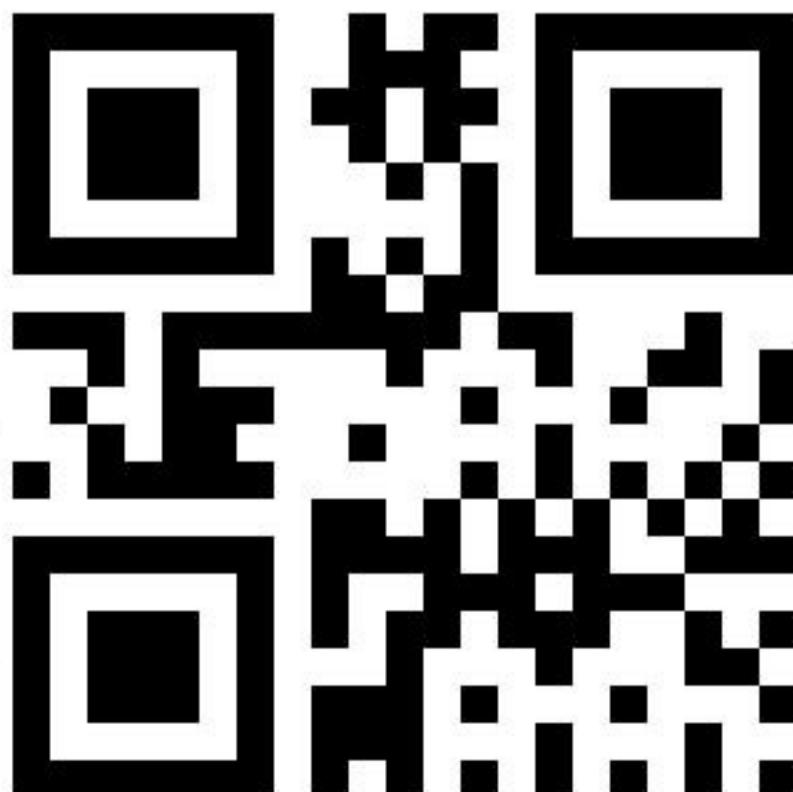



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00383

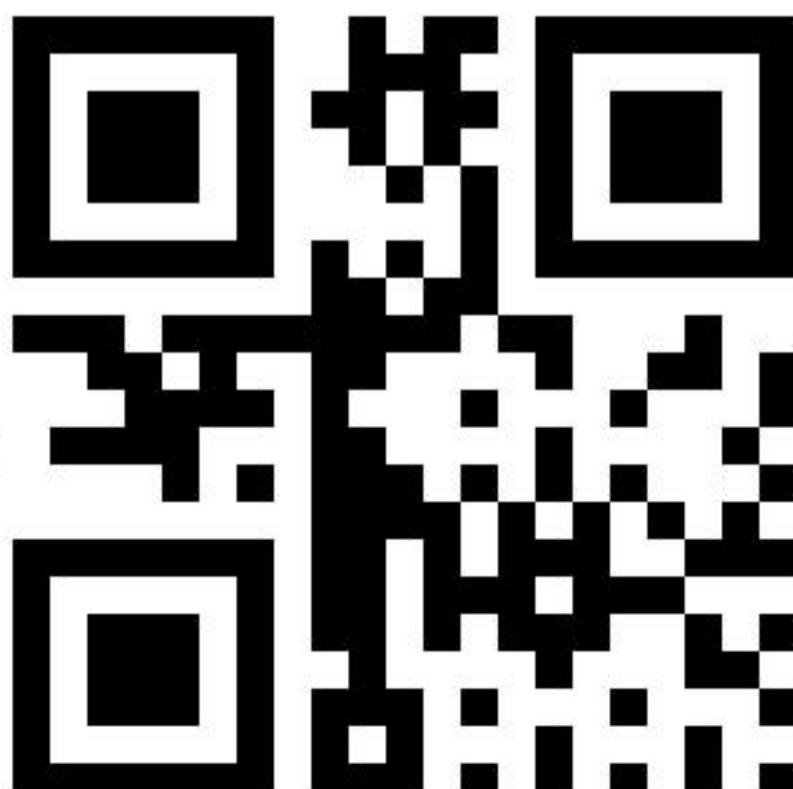



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00384

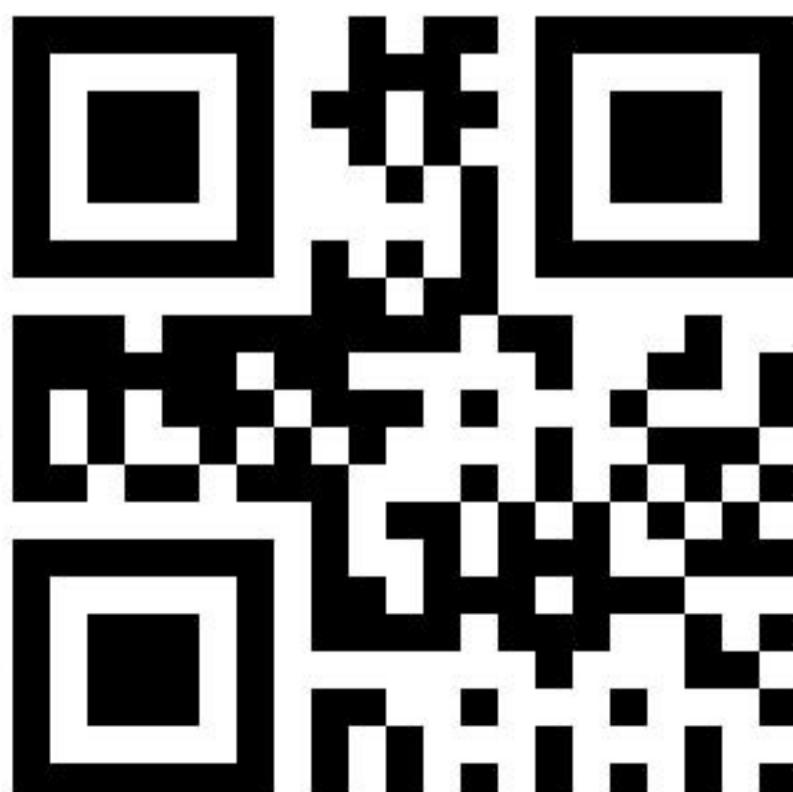



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00385

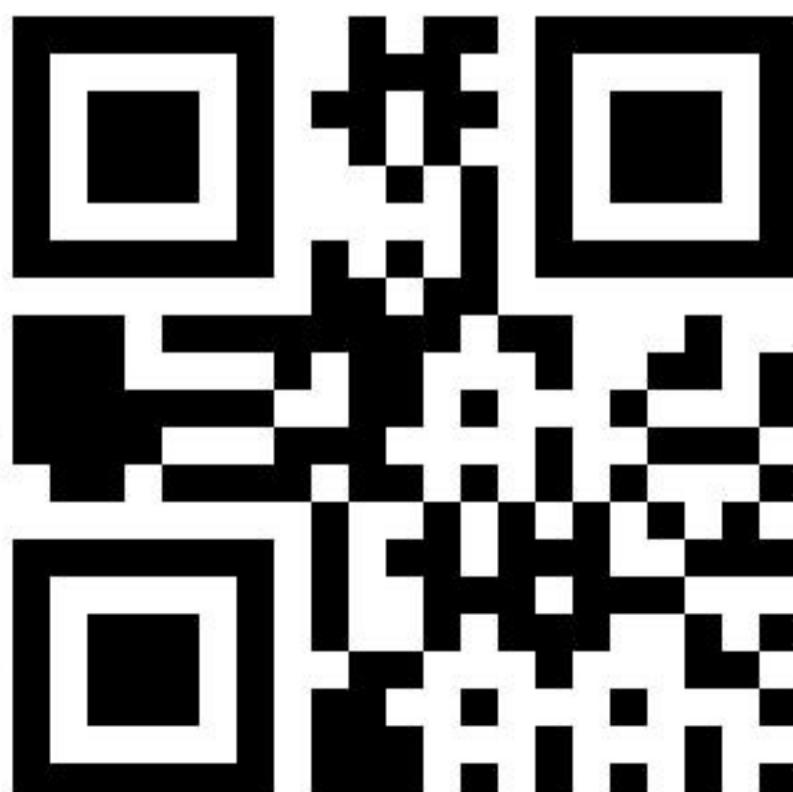



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00386

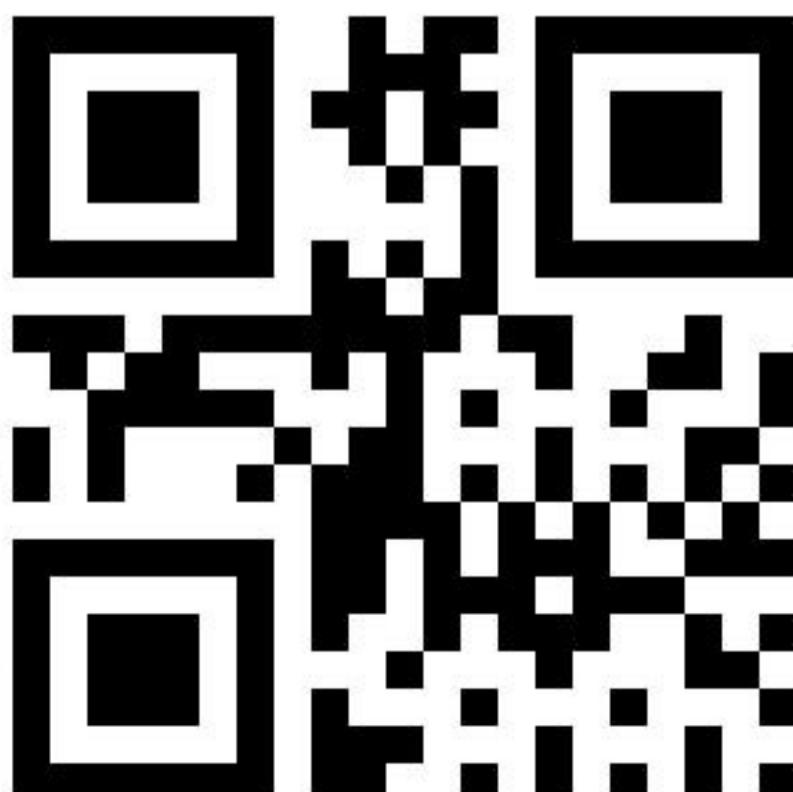



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00387

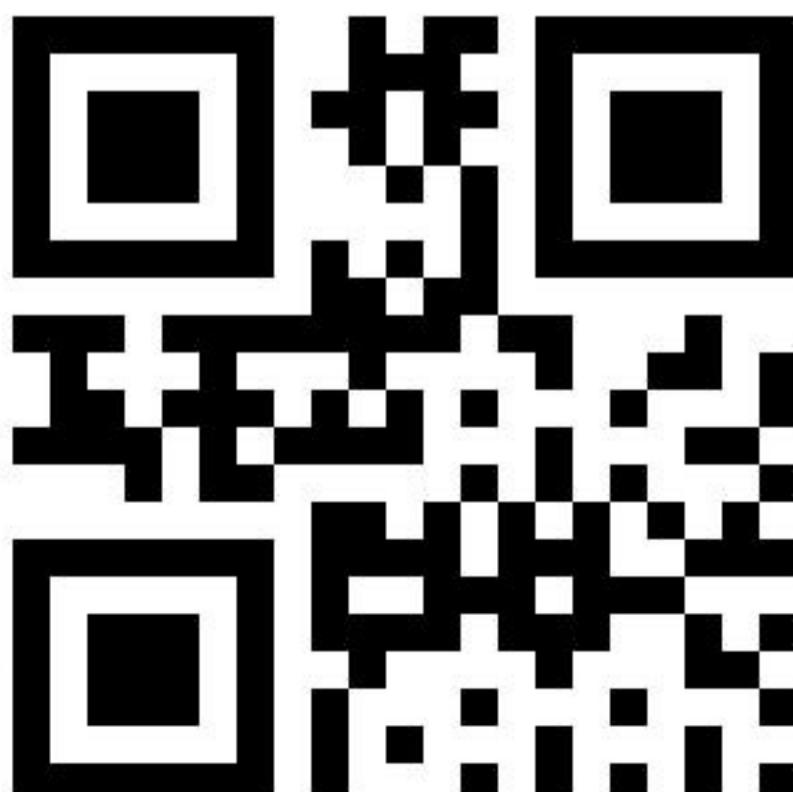



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00388

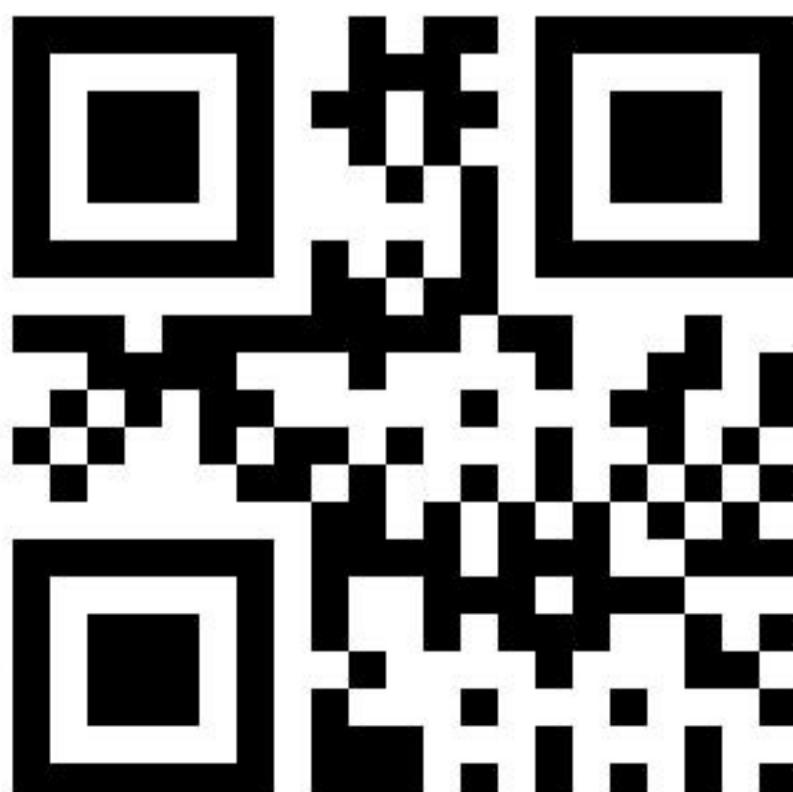



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00389

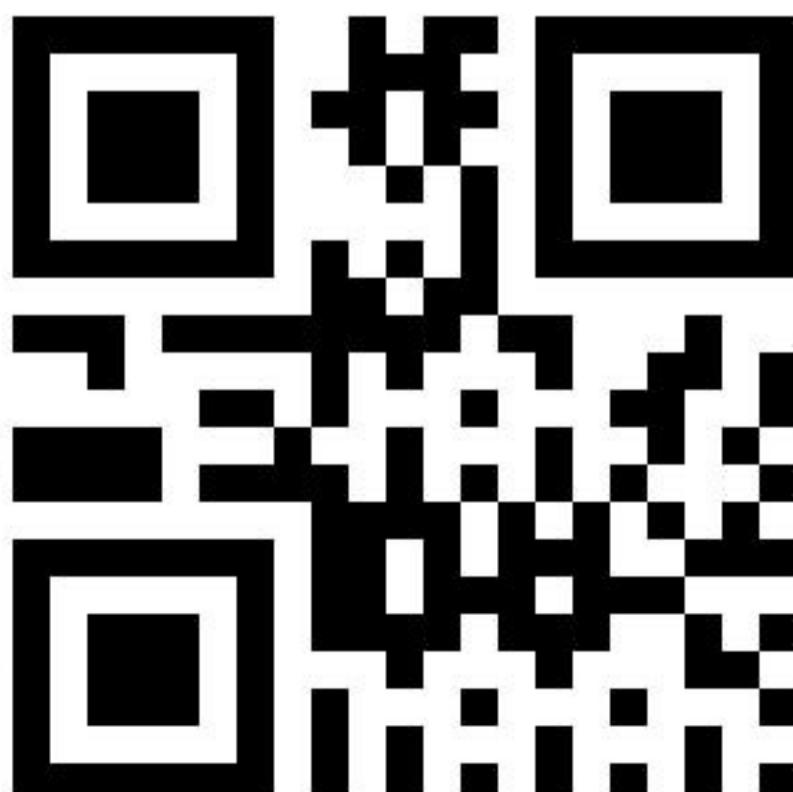



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00390

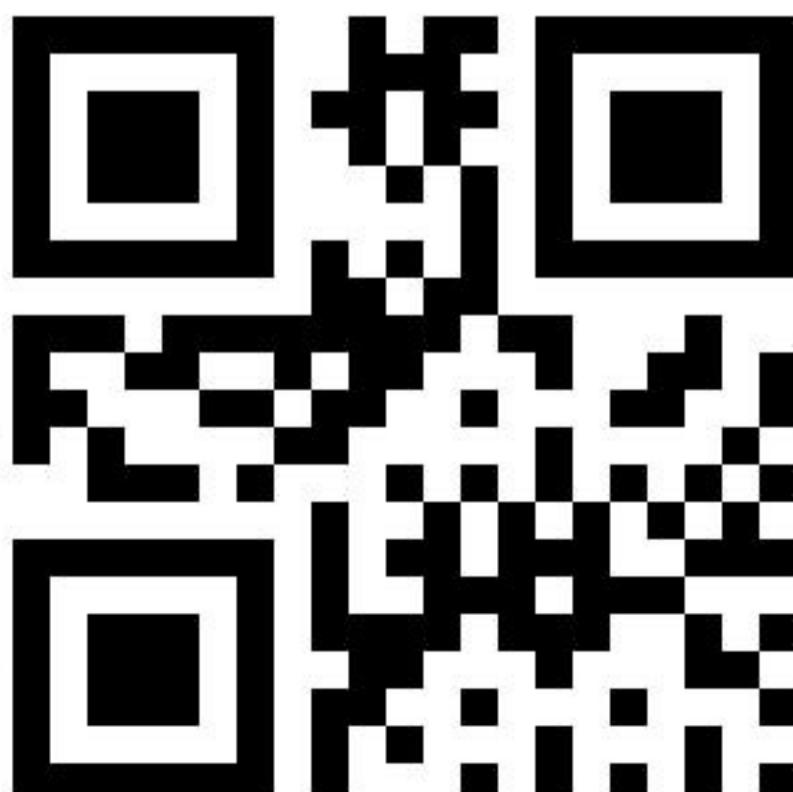



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00391





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00392

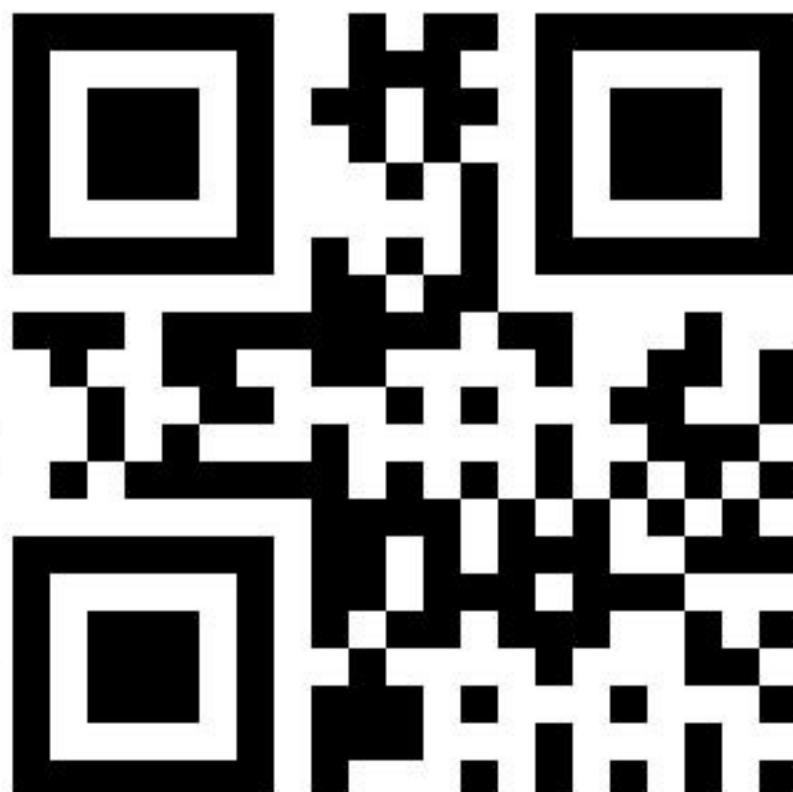



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00393

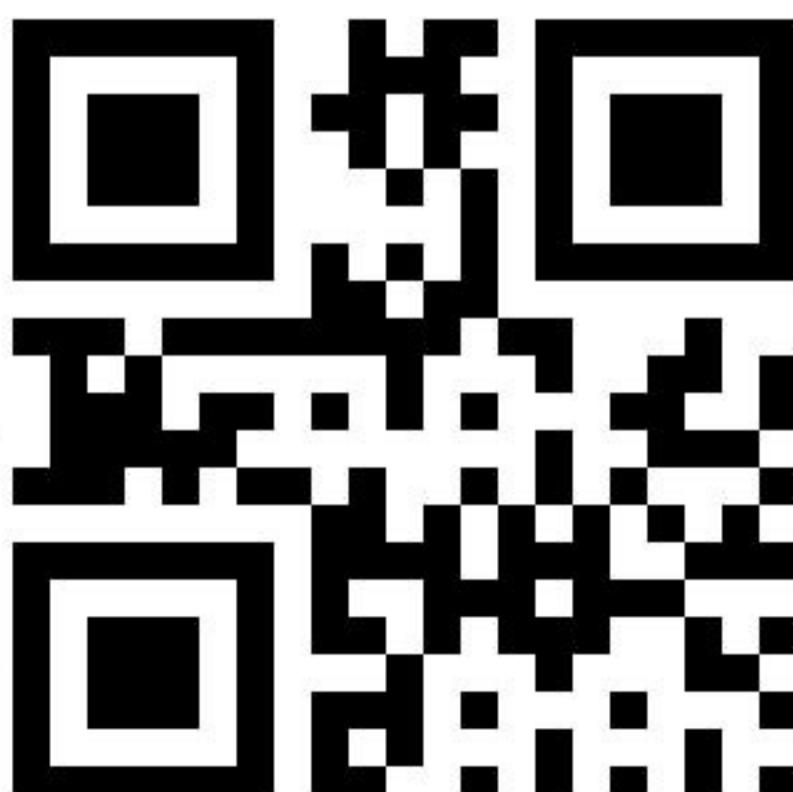



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00394

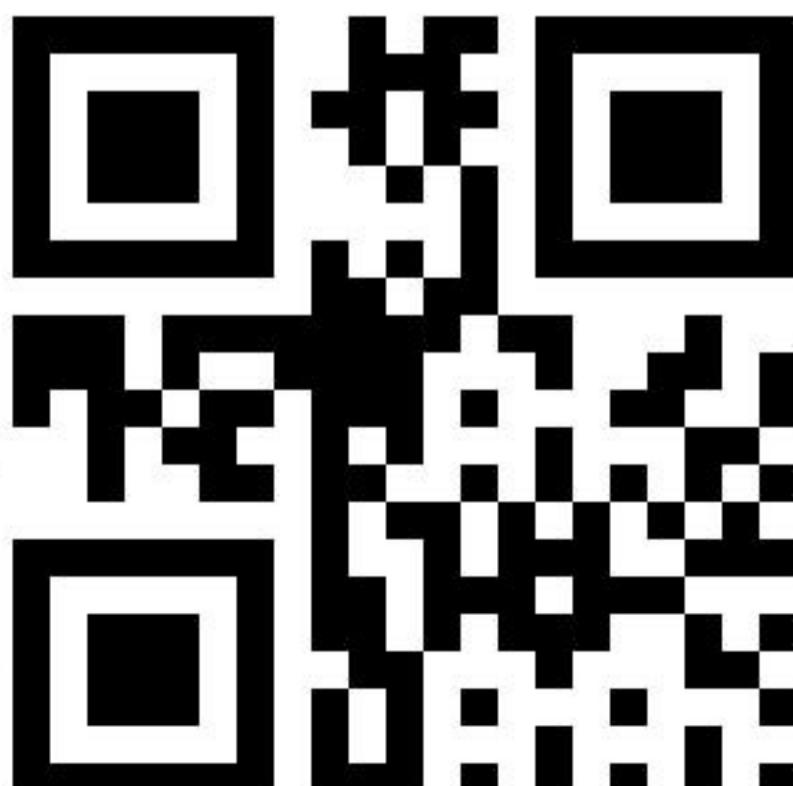



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00395

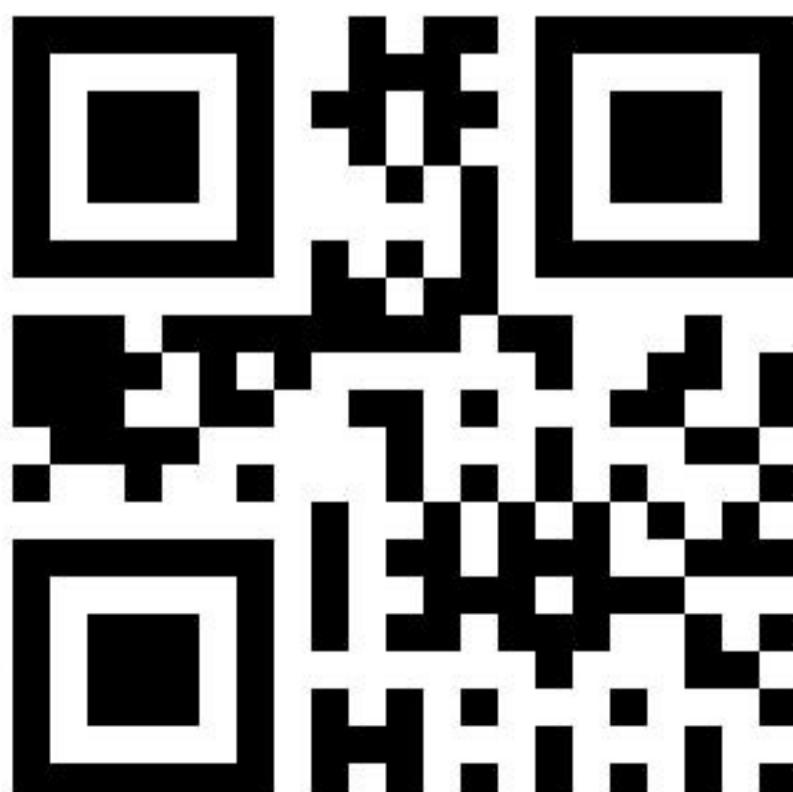



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module

panel\_id 00396

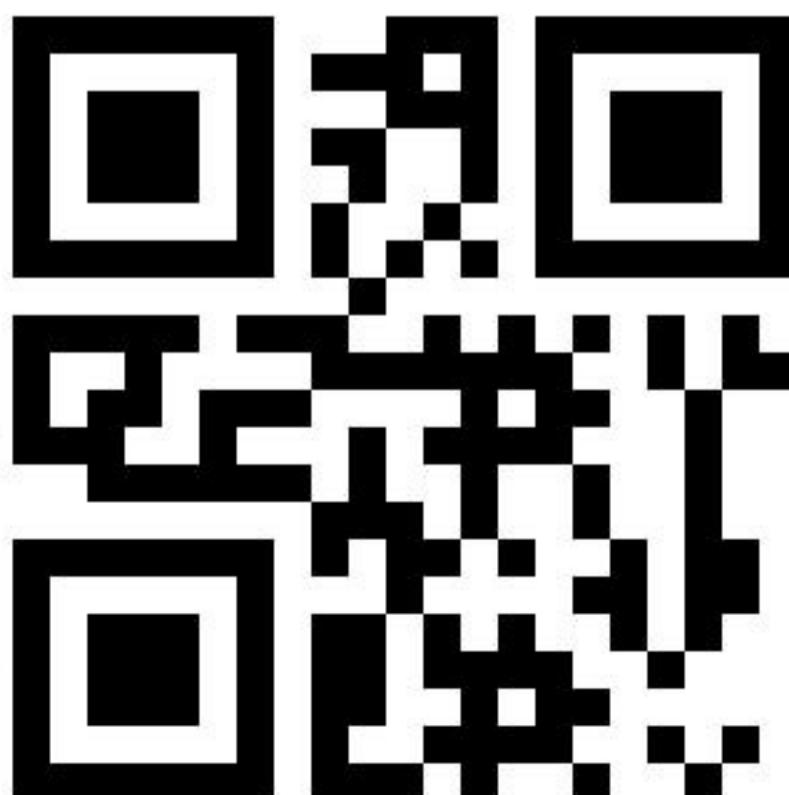



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00397

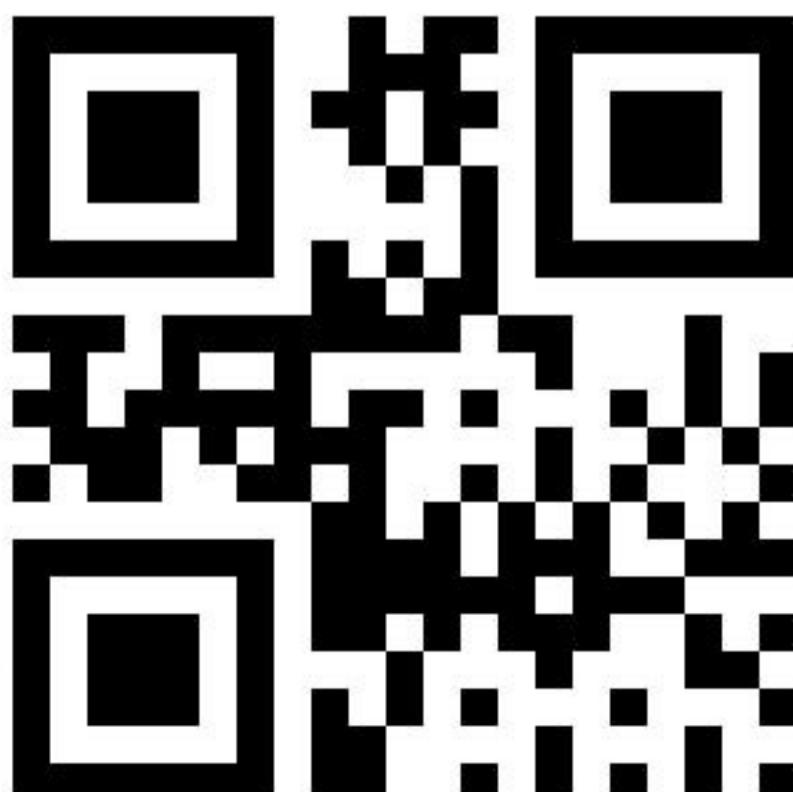



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 000398

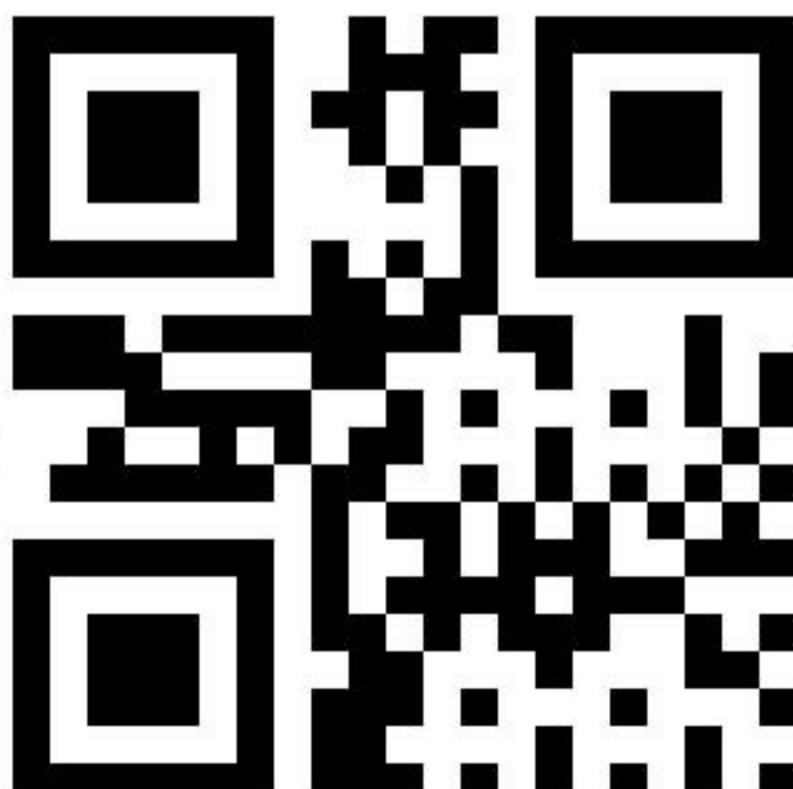



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 000399





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00400

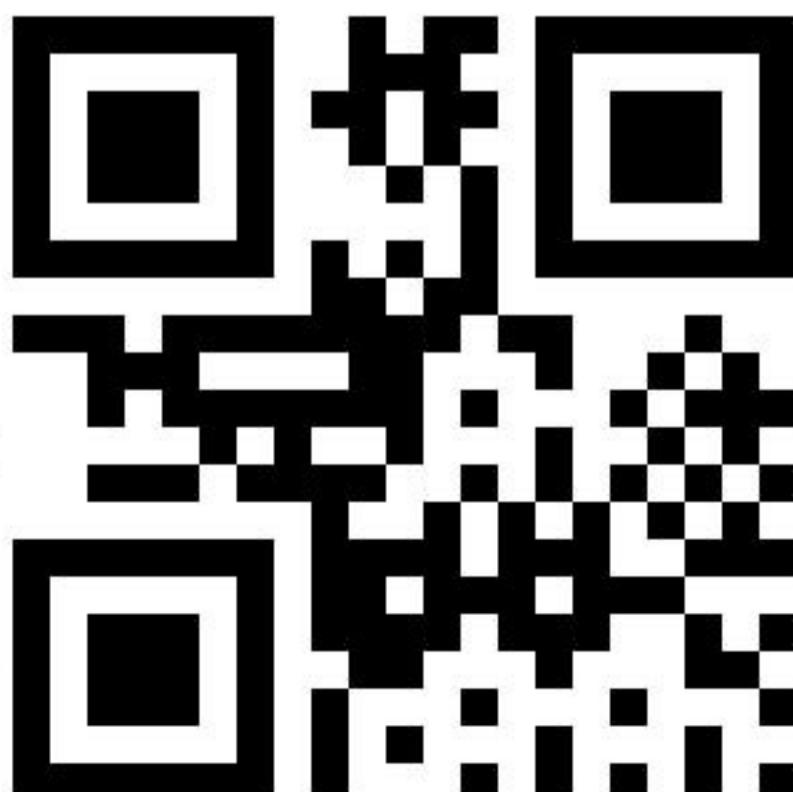



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00401

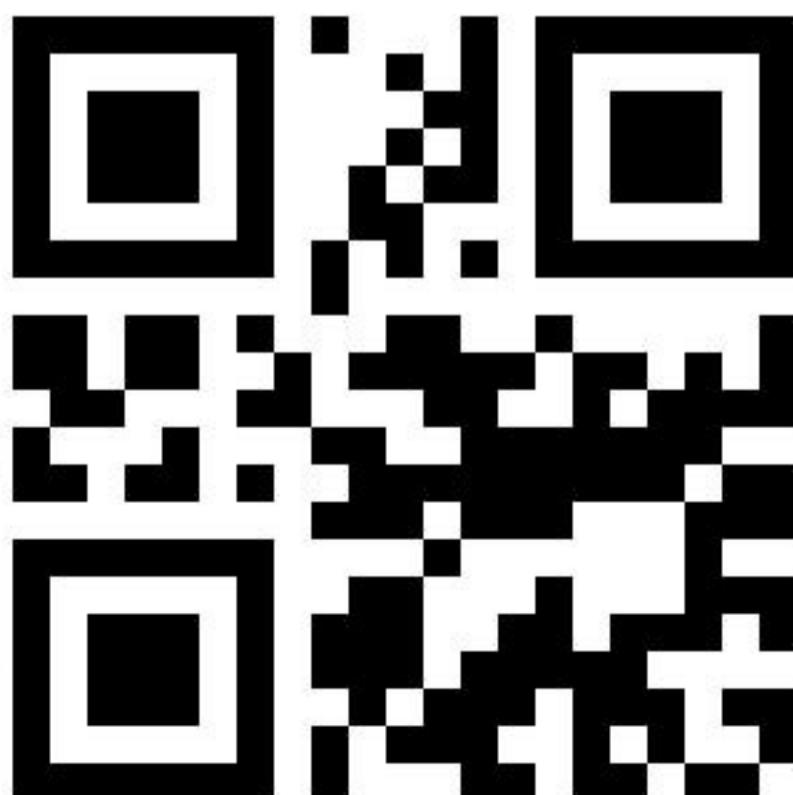



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00402

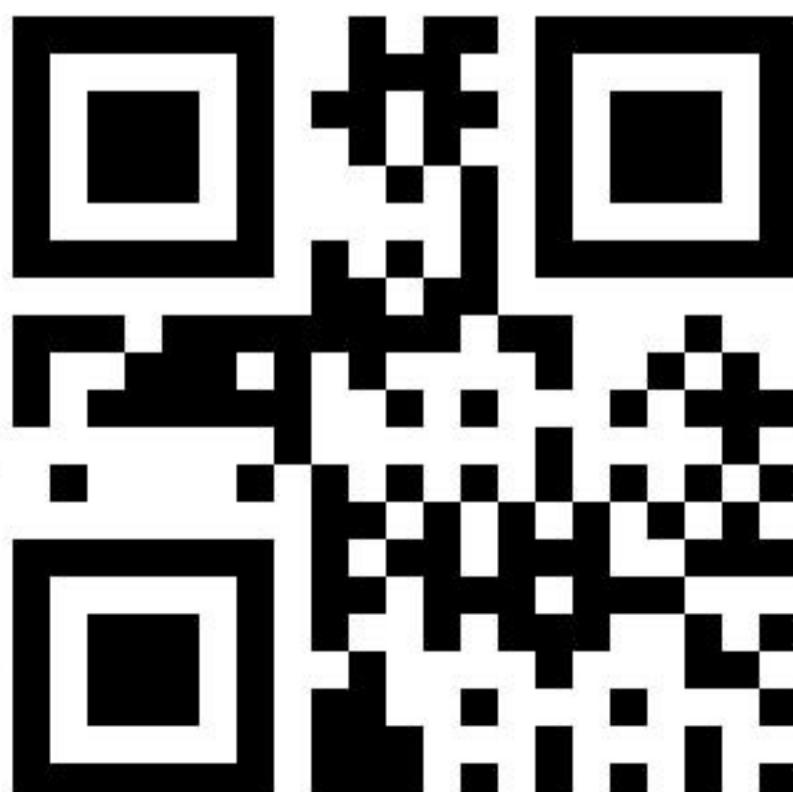



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00403

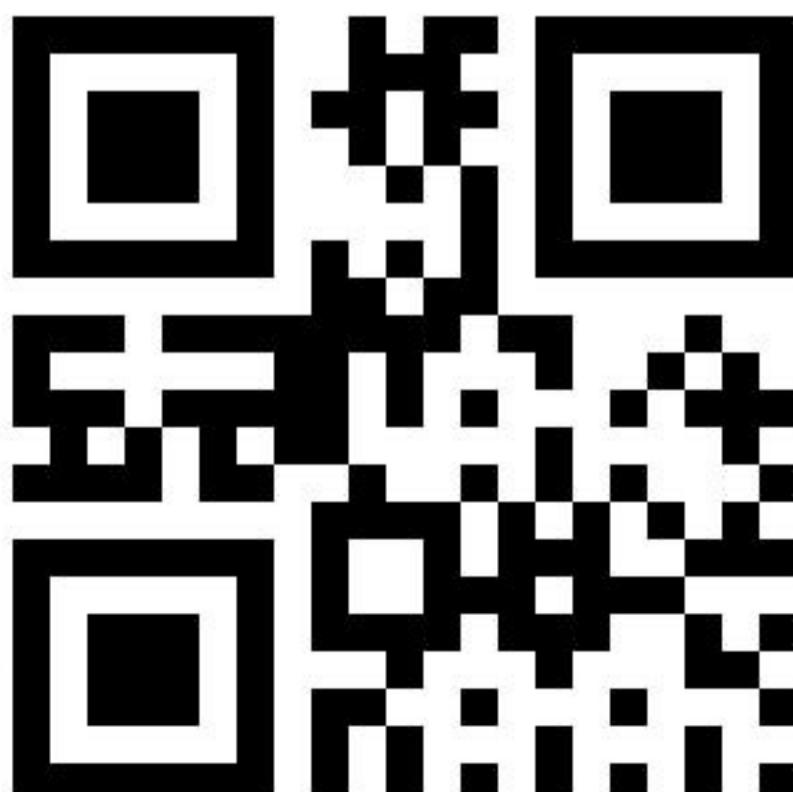



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00404

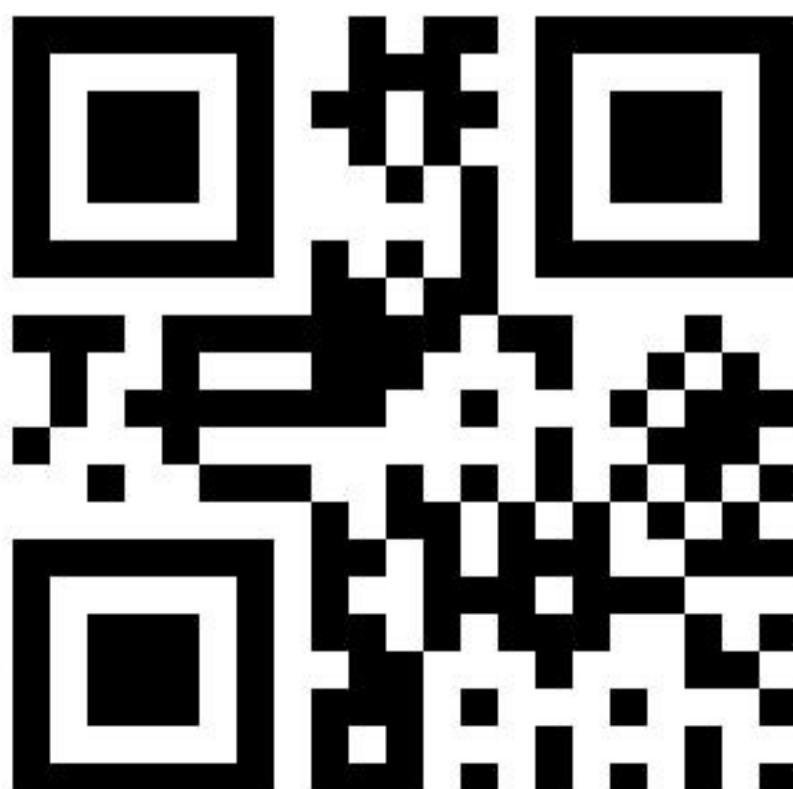



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00405

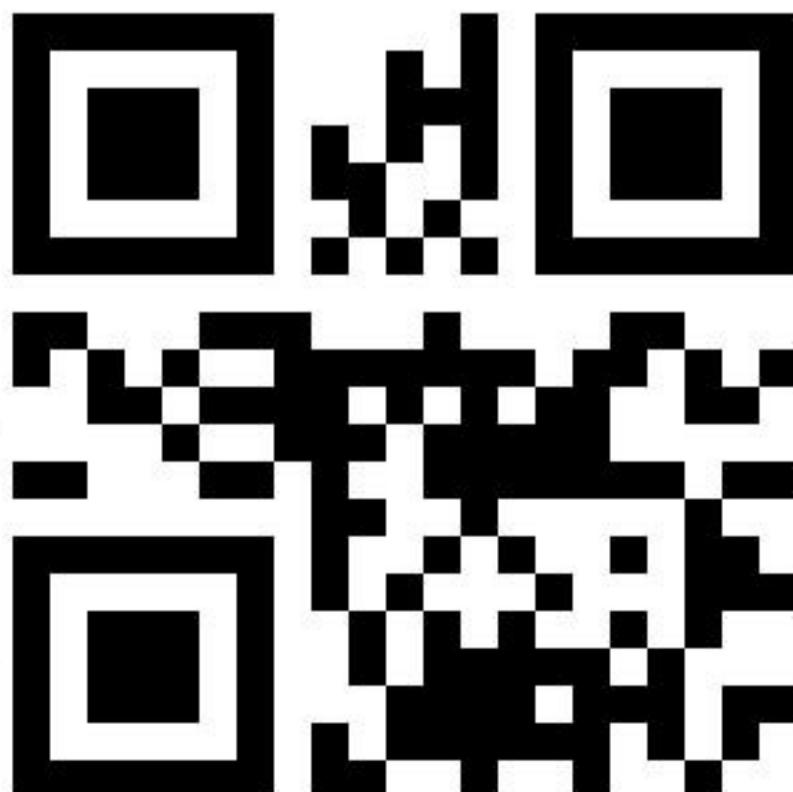



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00406

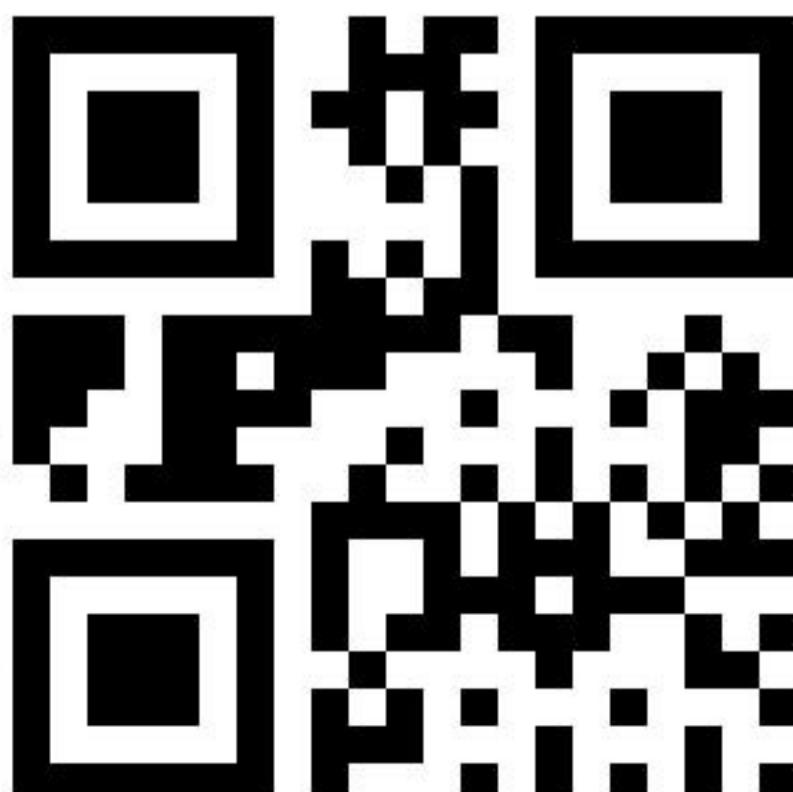



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00407

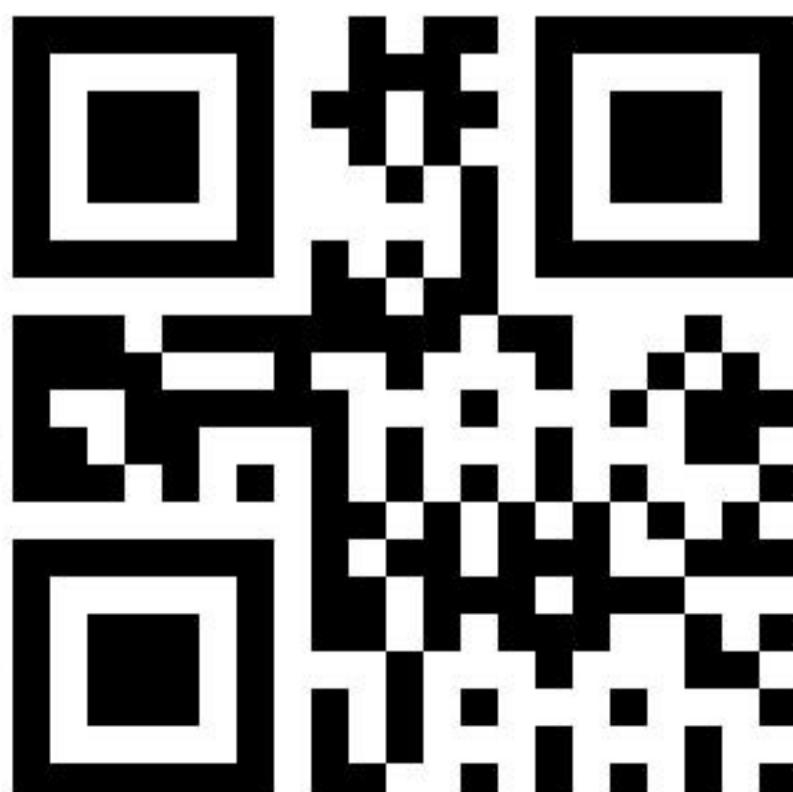



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00408

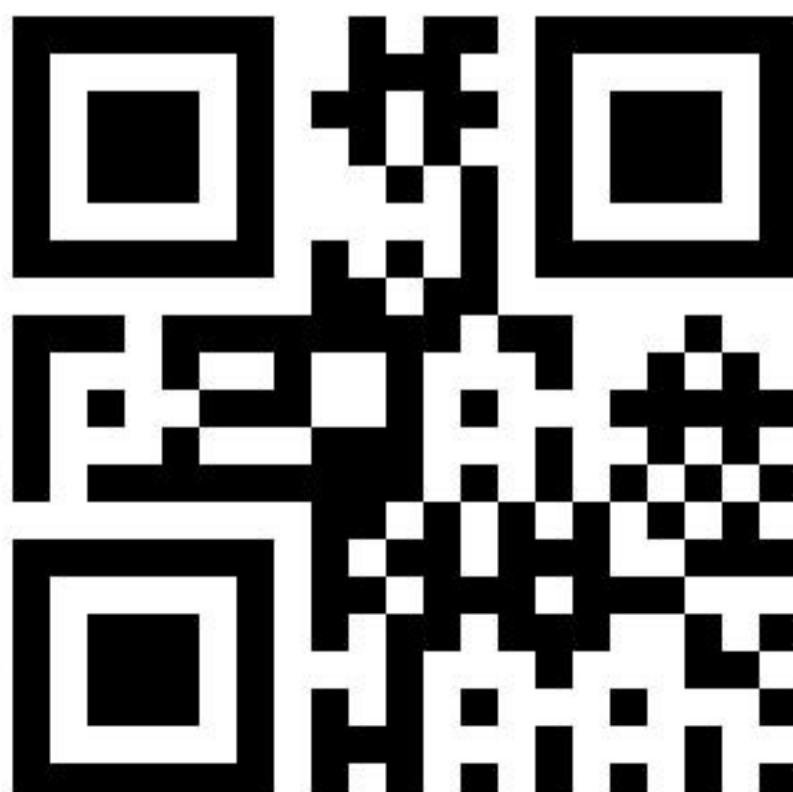



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00409

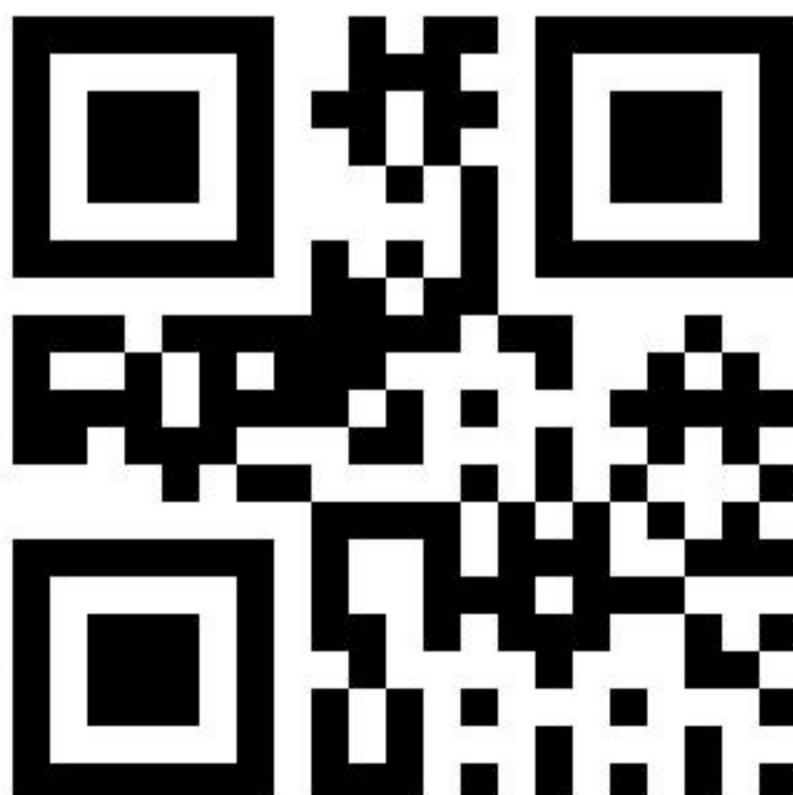



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00410

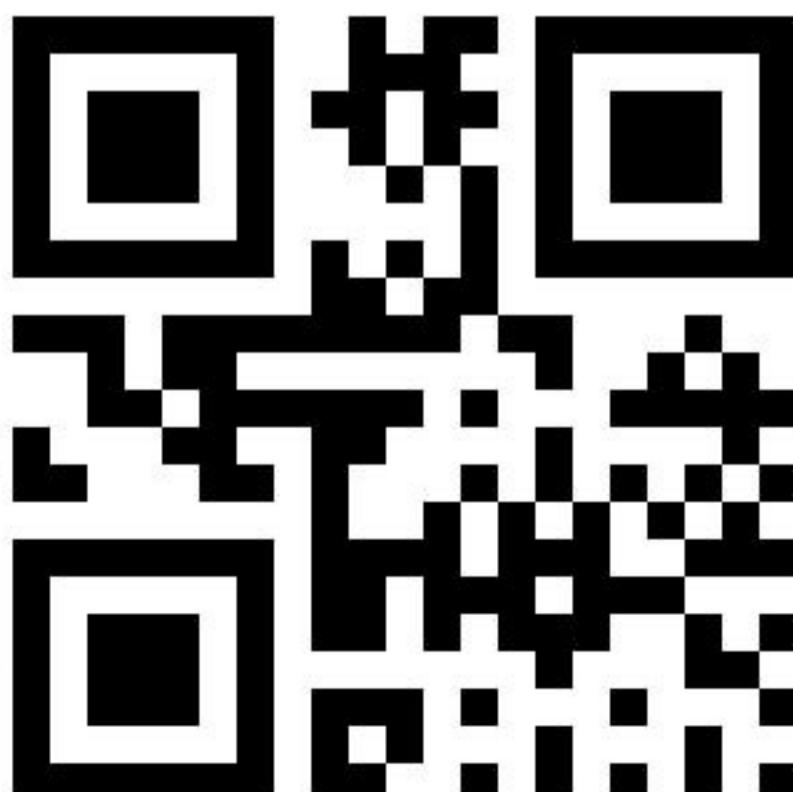



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00411

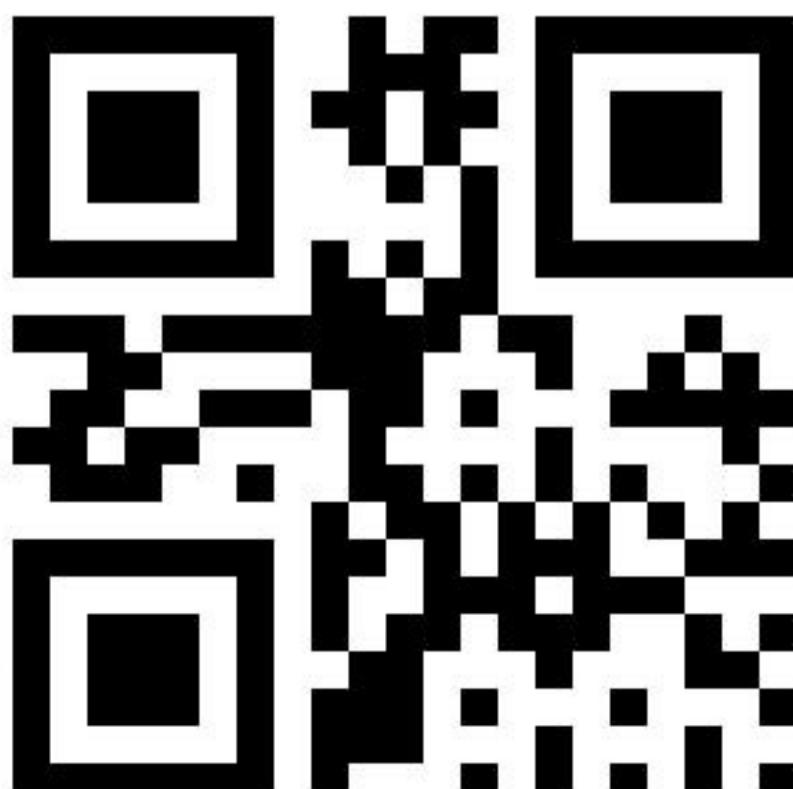



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00412

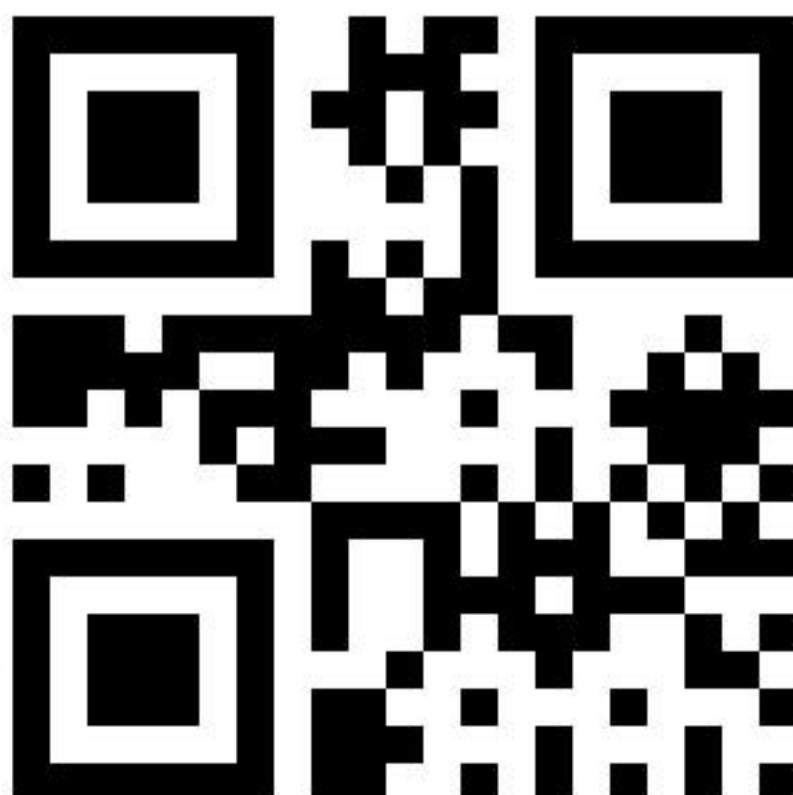



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00413

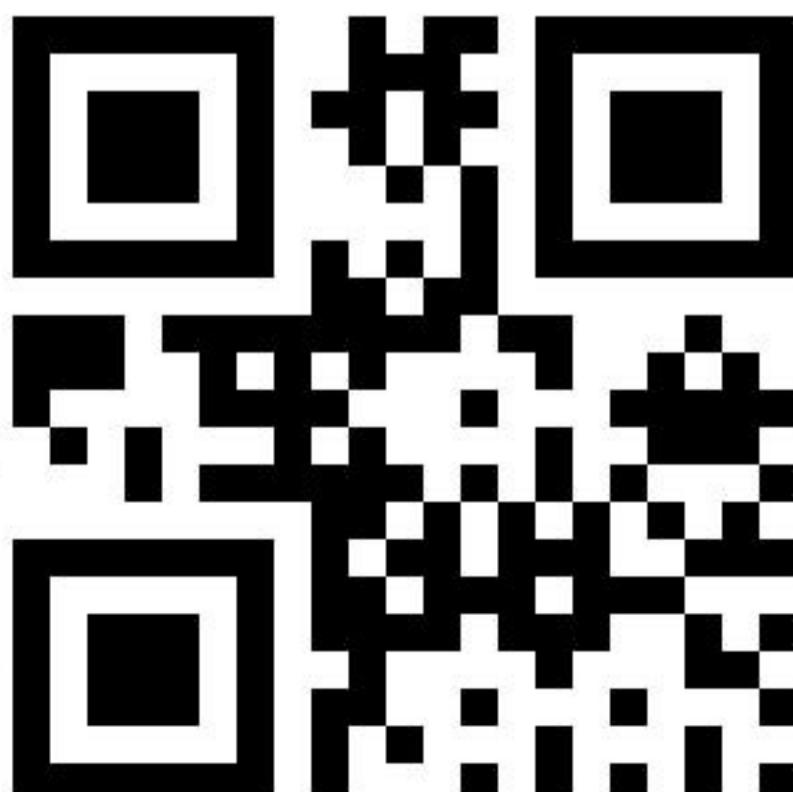



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00414





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00415





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00416





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00417





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00418

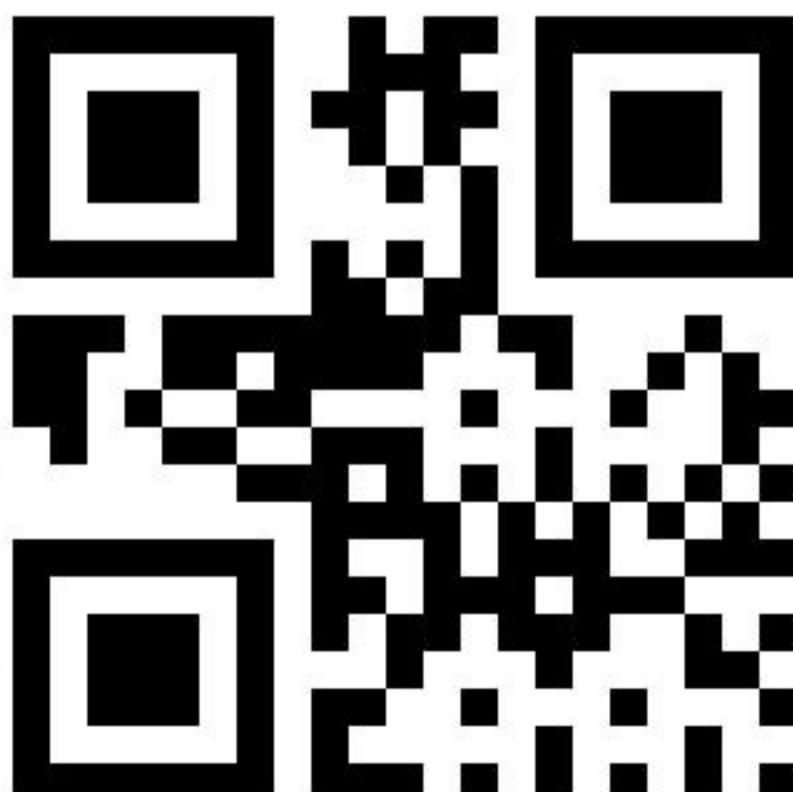



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00419

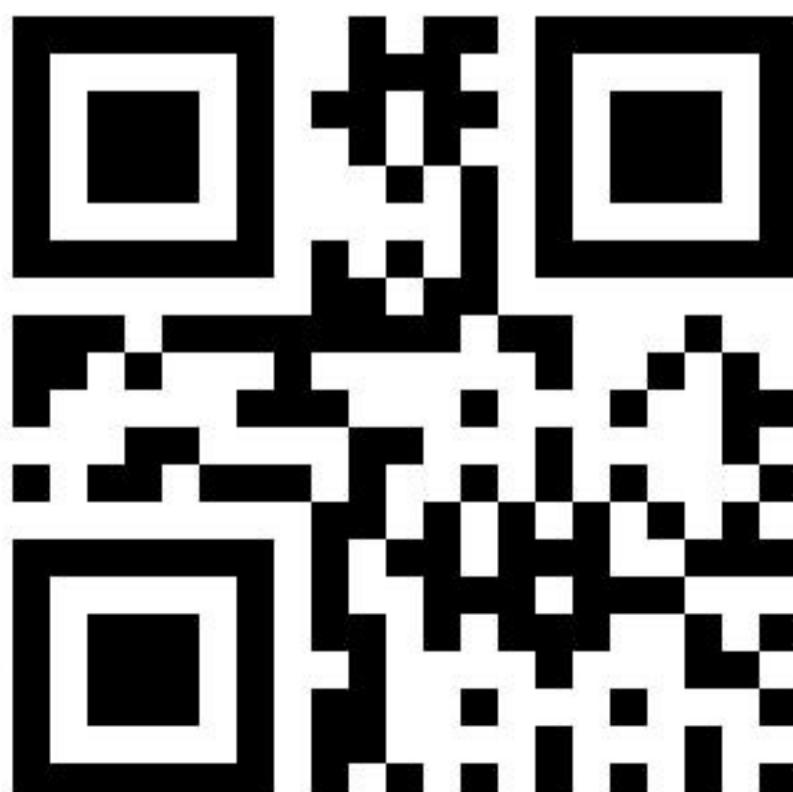



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00420

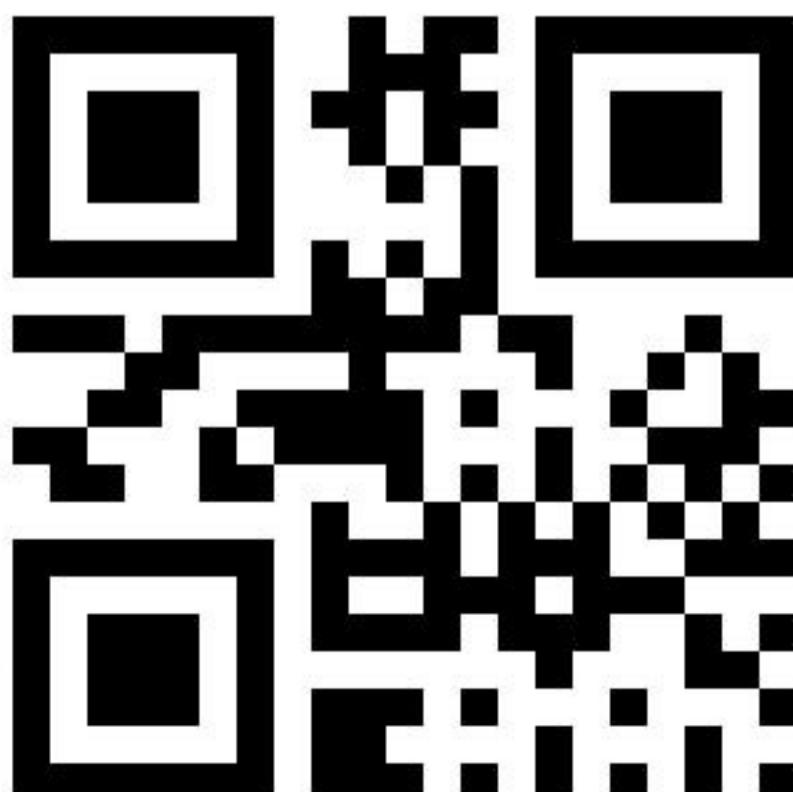



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00421





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00422

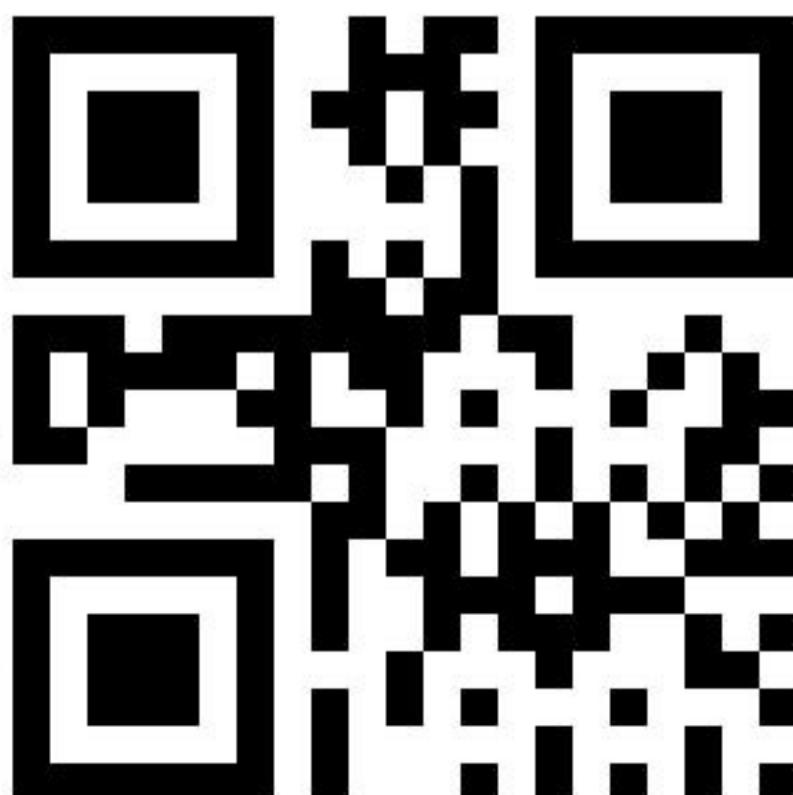



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00423

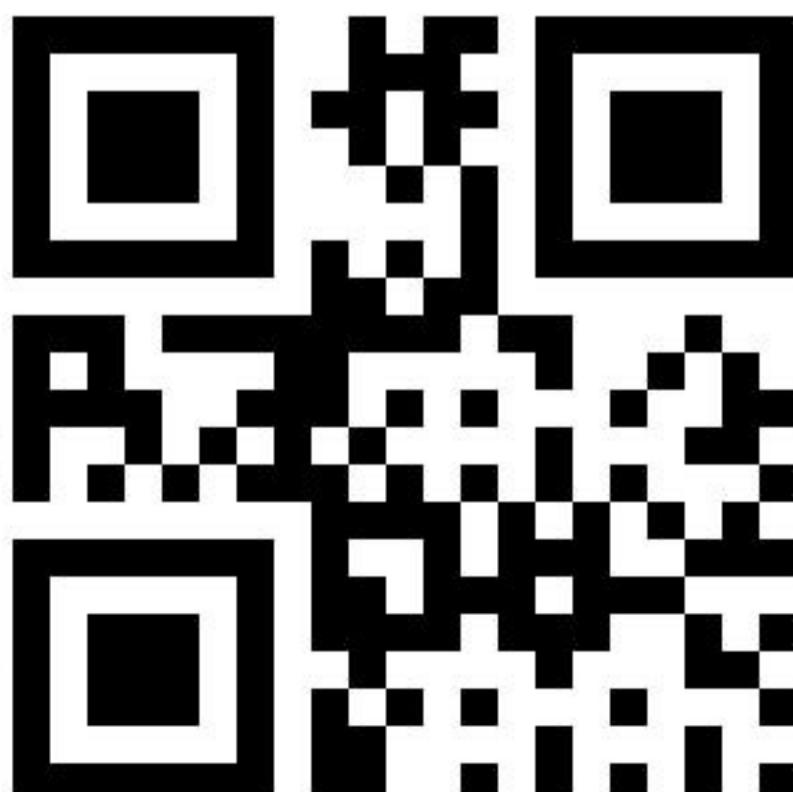



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00424

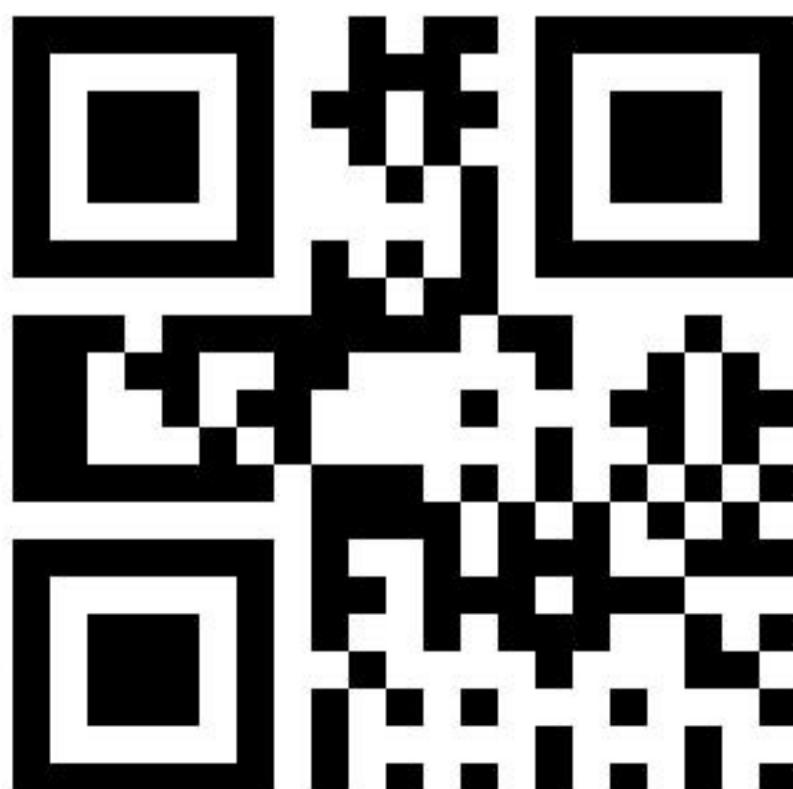



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00425

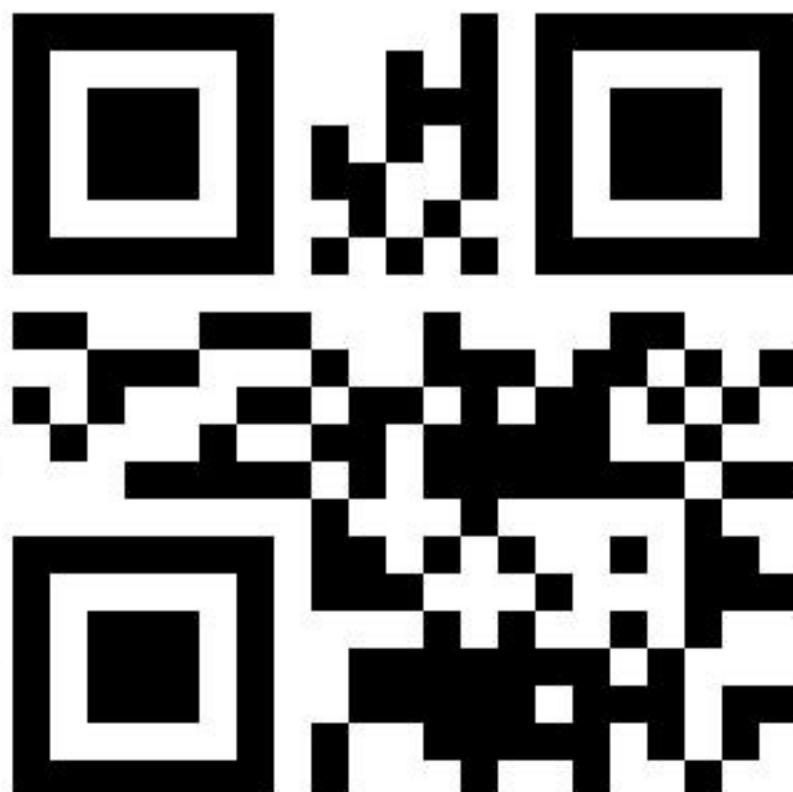



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00426

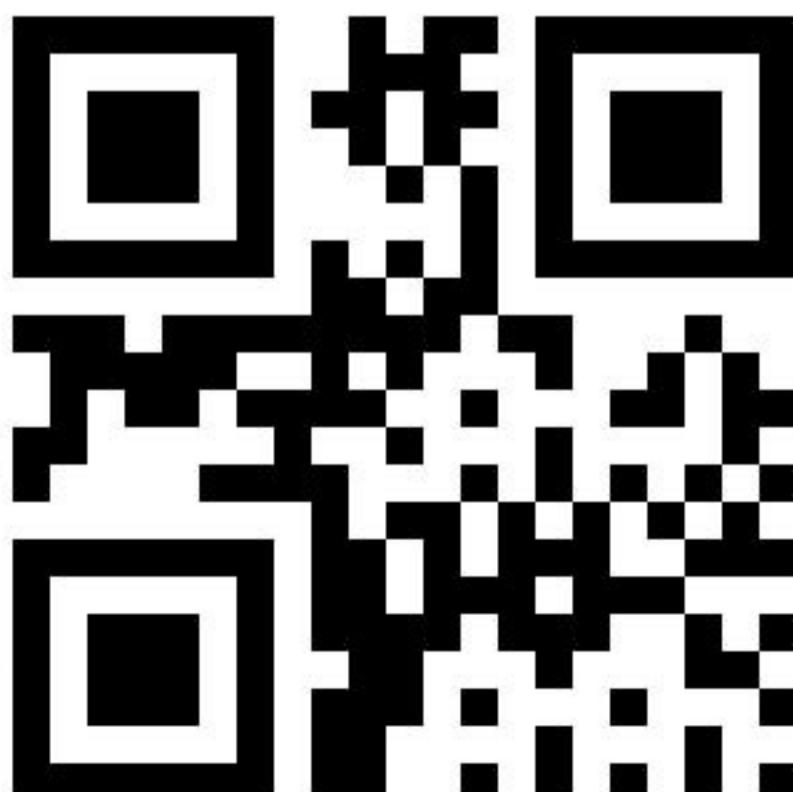



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00427





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00428

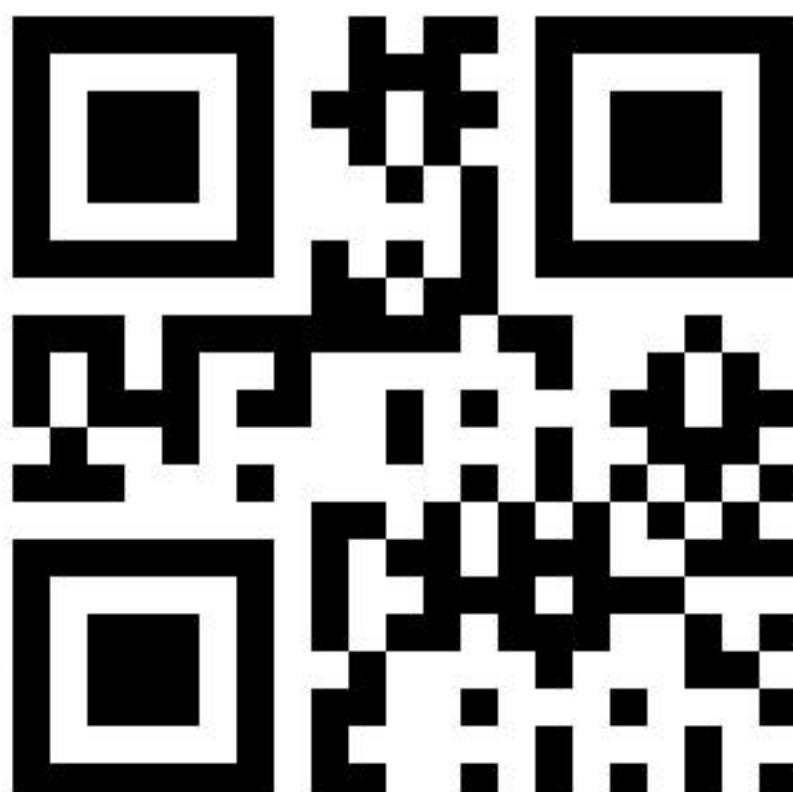



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00429

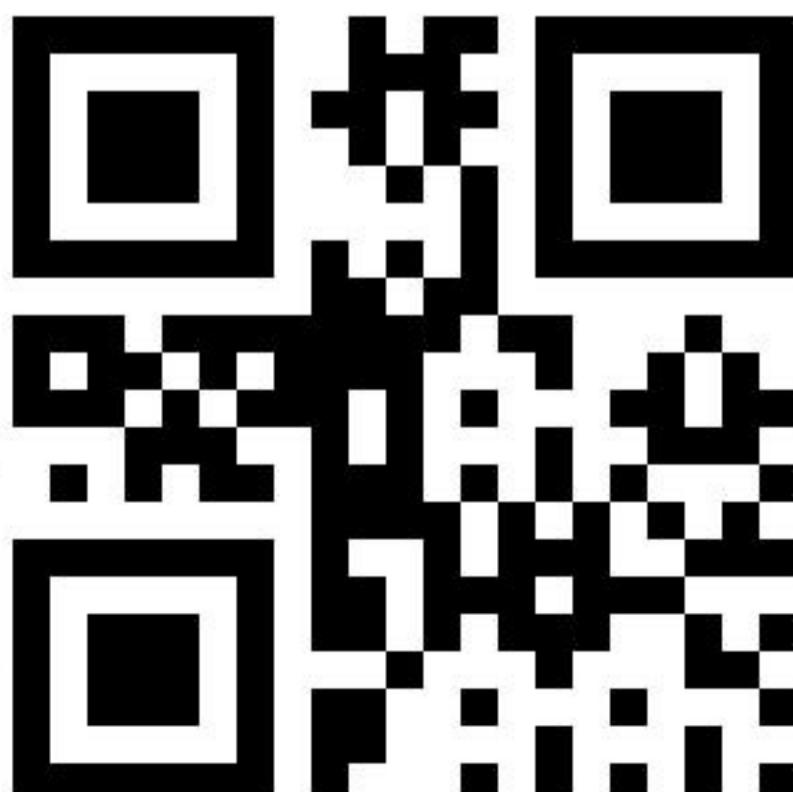



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00430

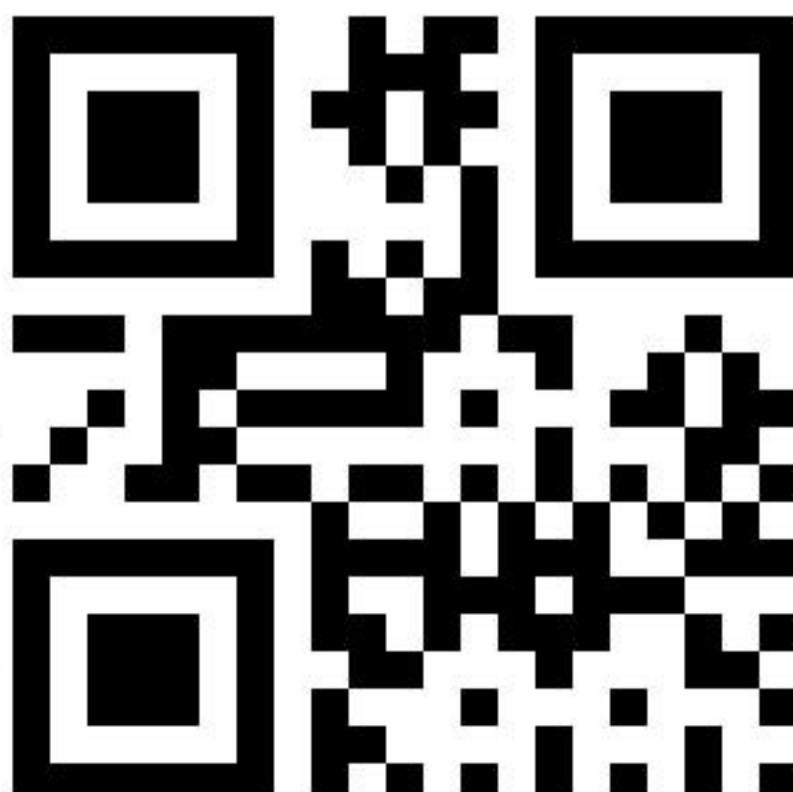



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00431





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00432





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00433





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00434

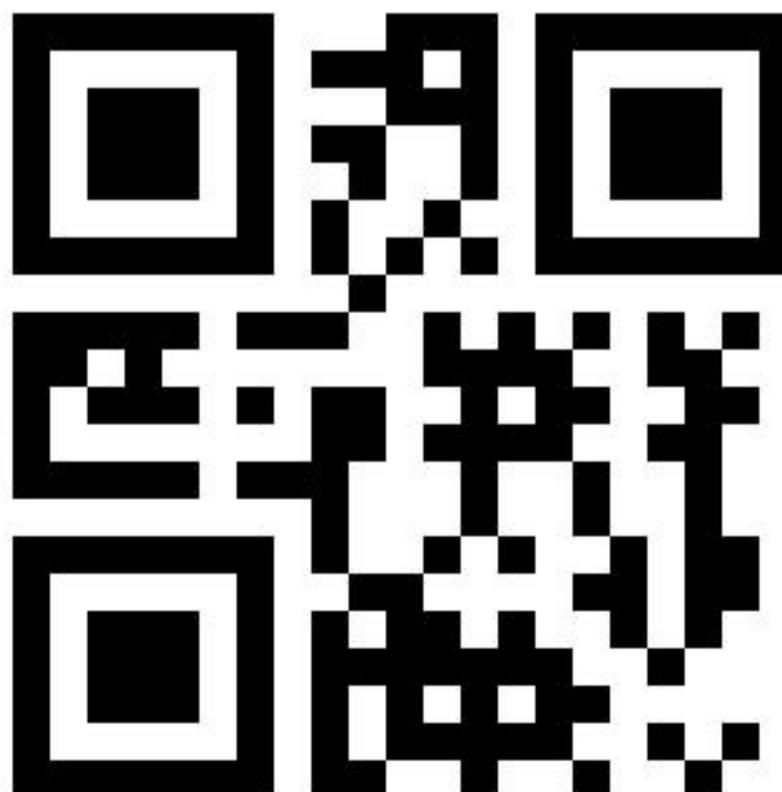



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00435





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00436





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00437

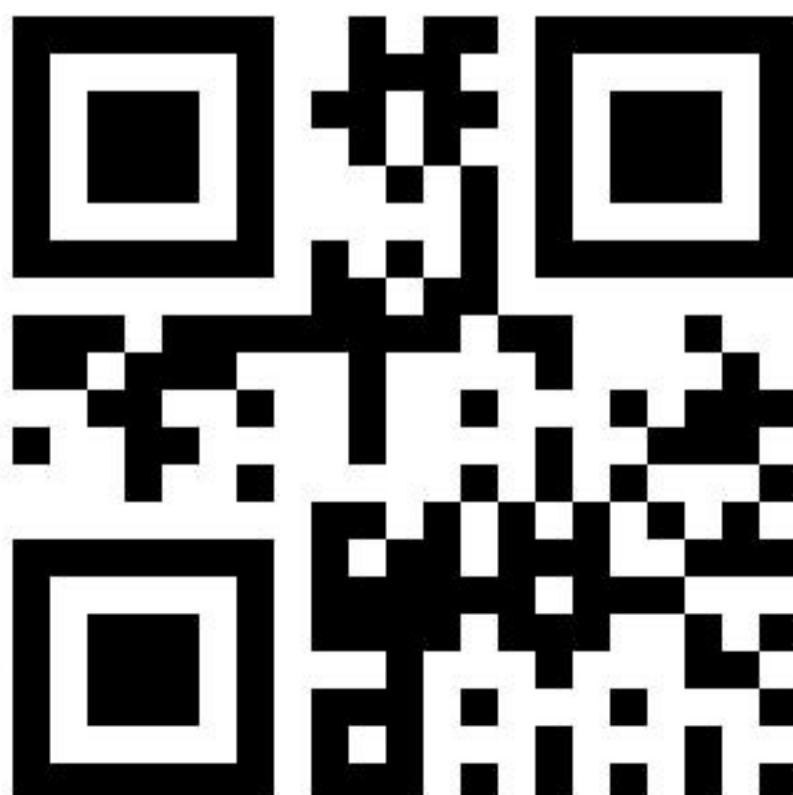



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00438

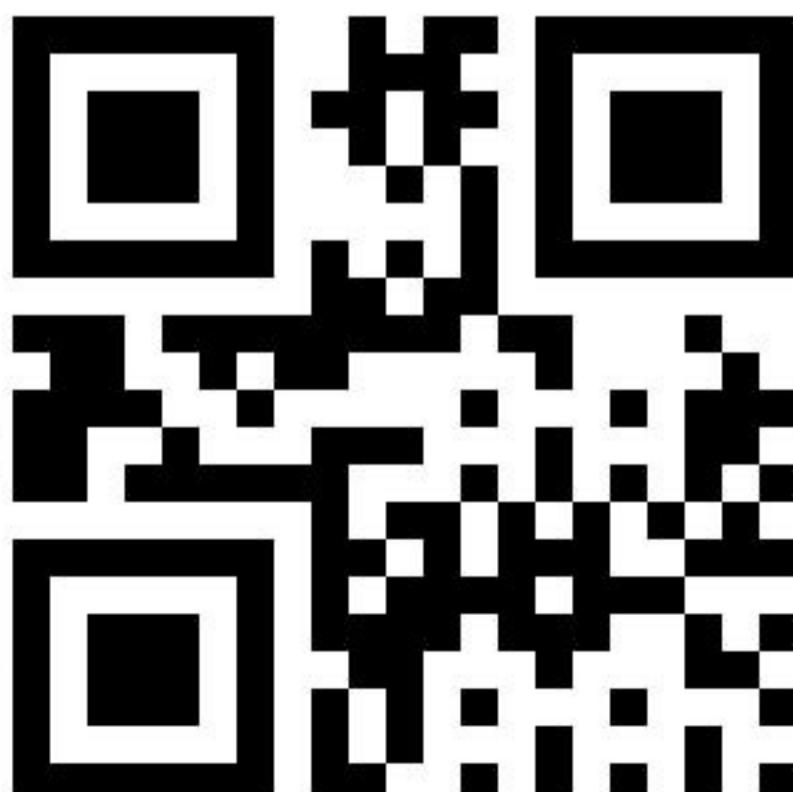



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00439





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00440





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00441

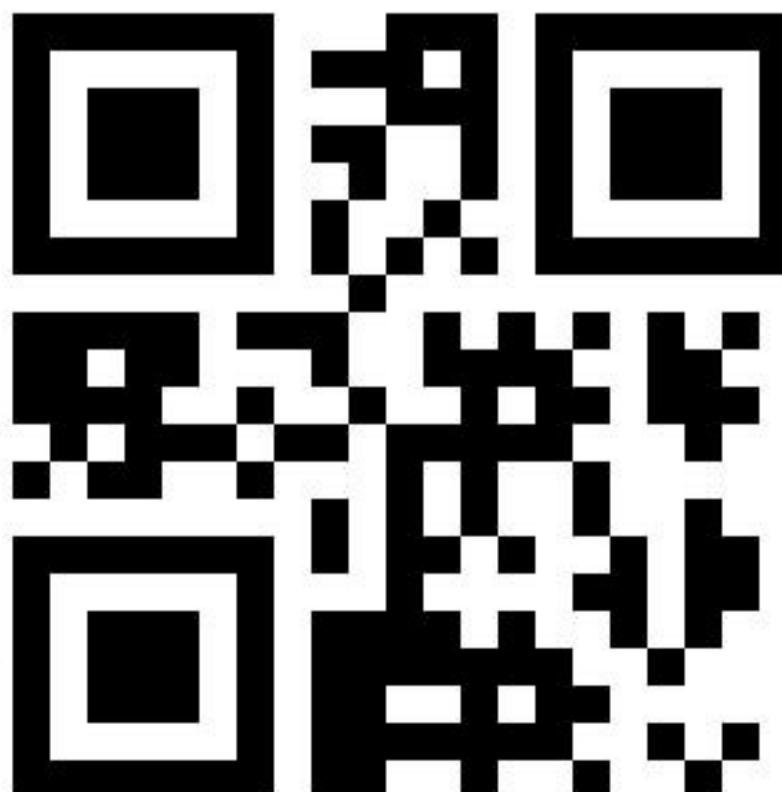



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00442

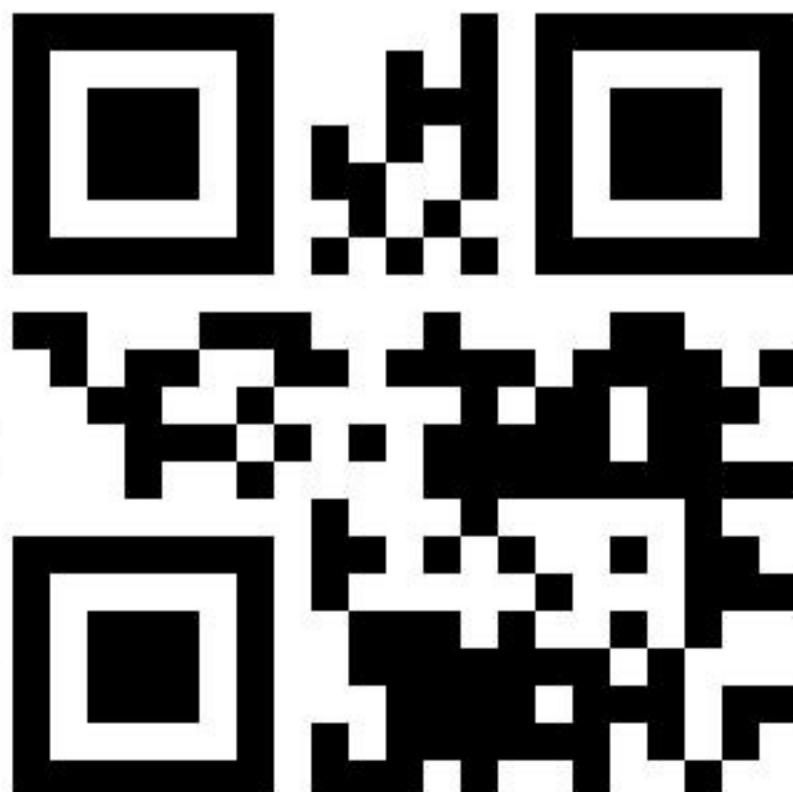



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00443

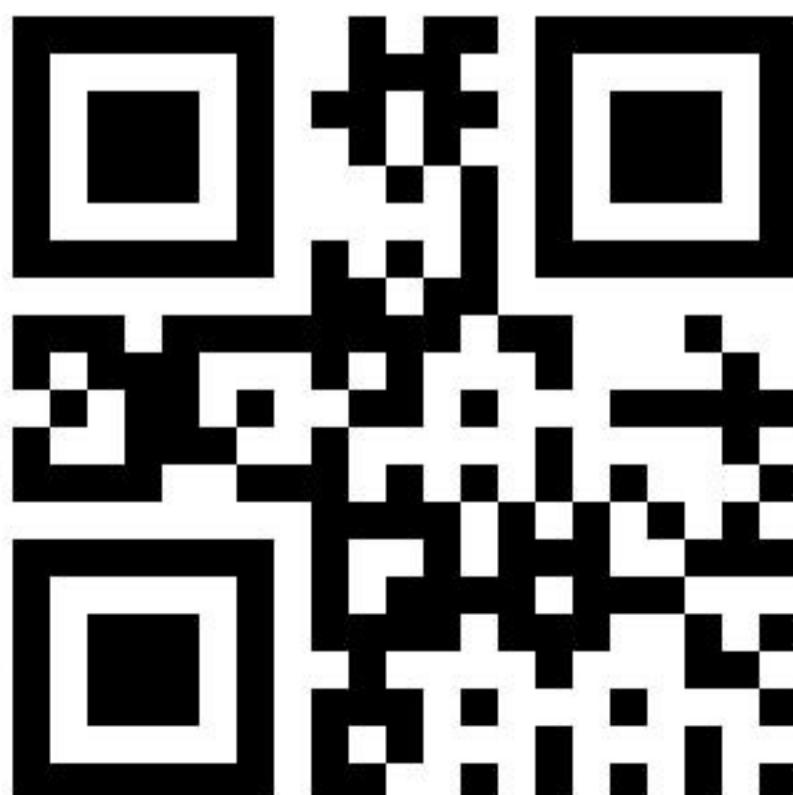



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00444

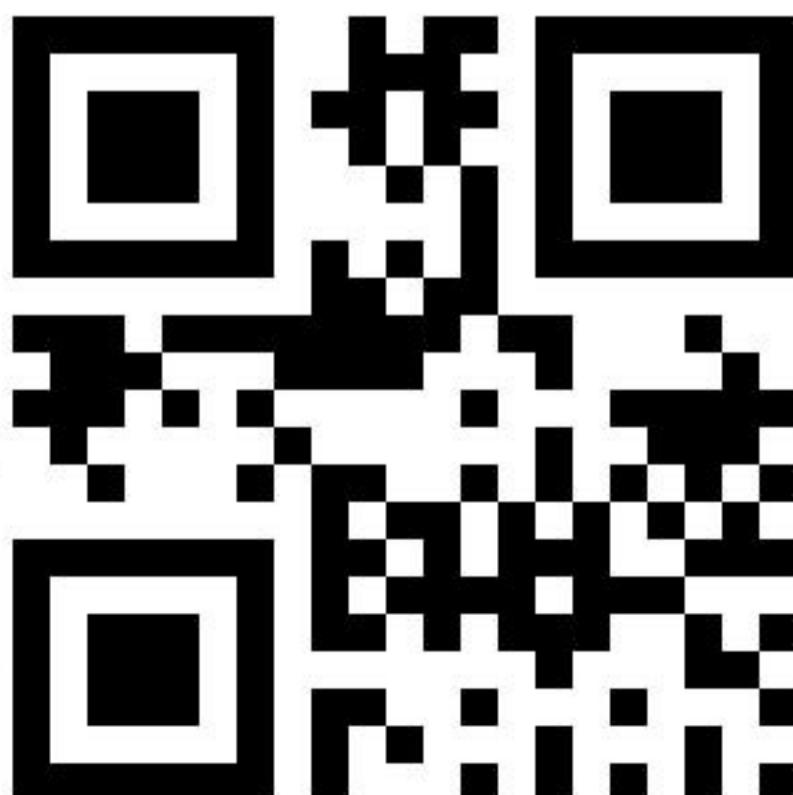



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00445

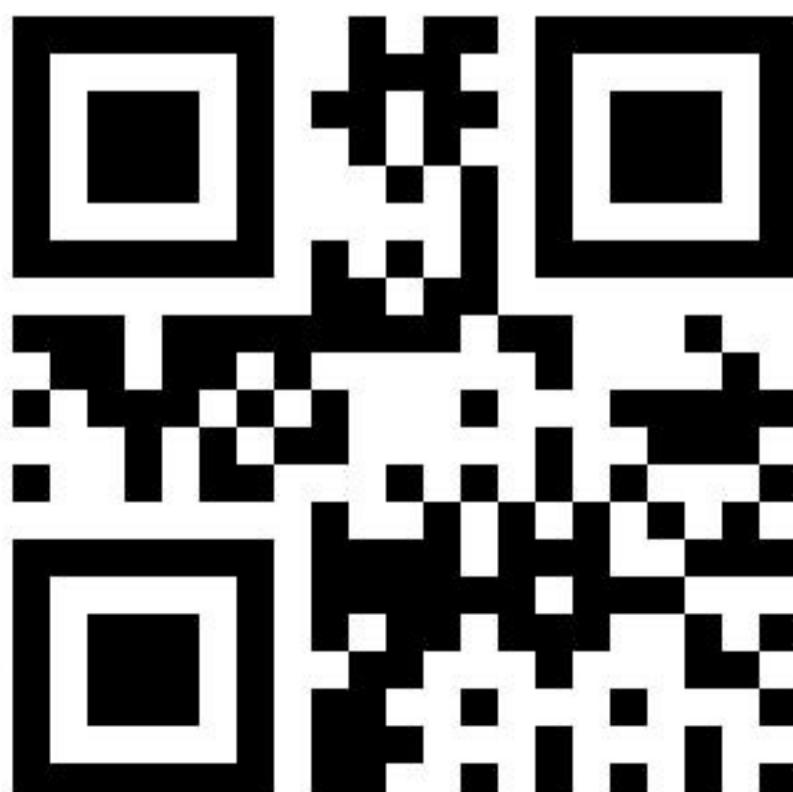



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00446

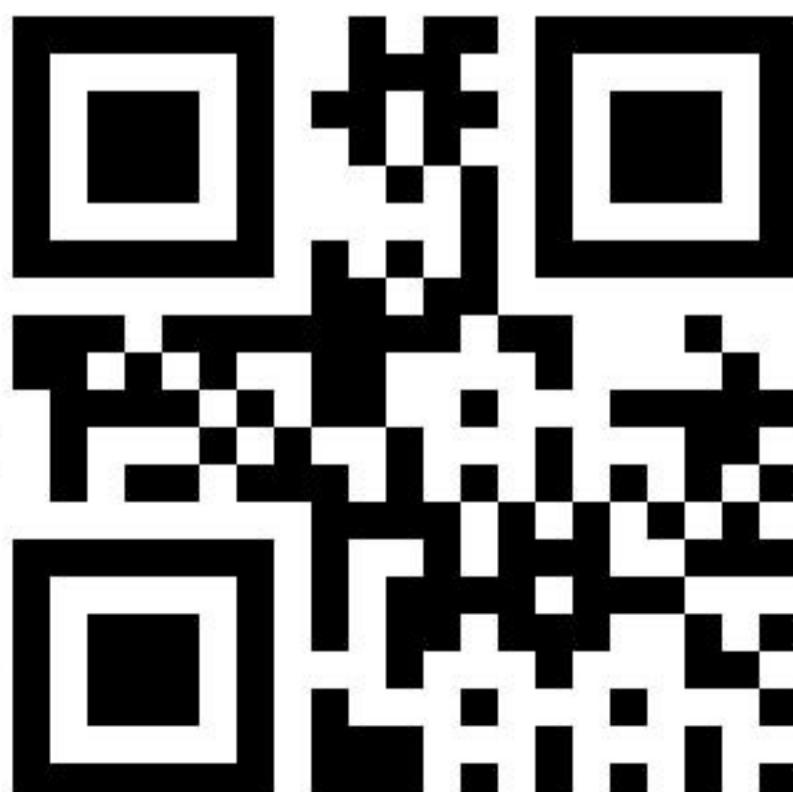



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00447

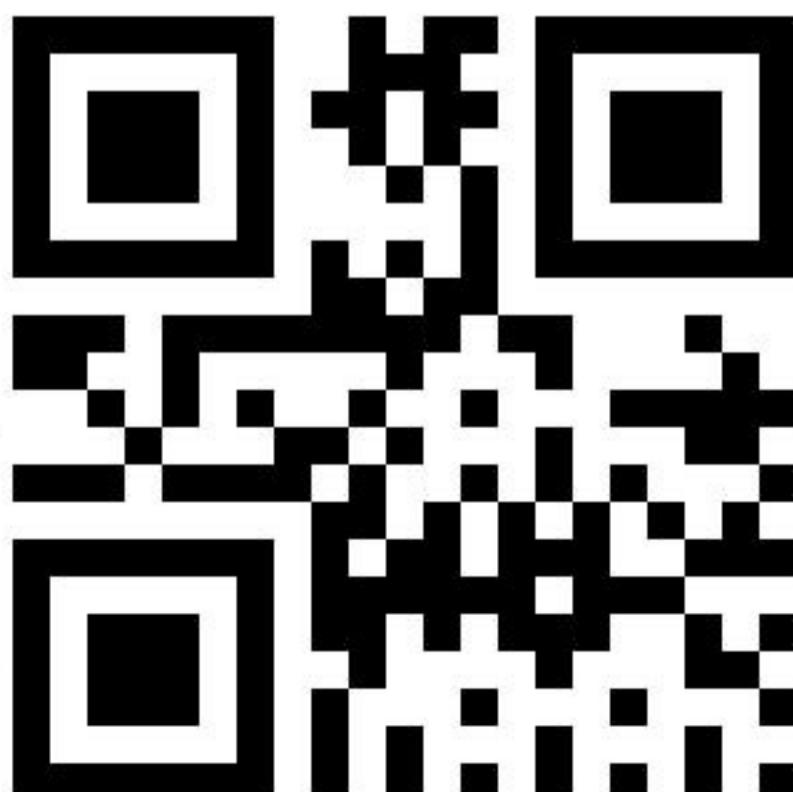



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00448





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00449

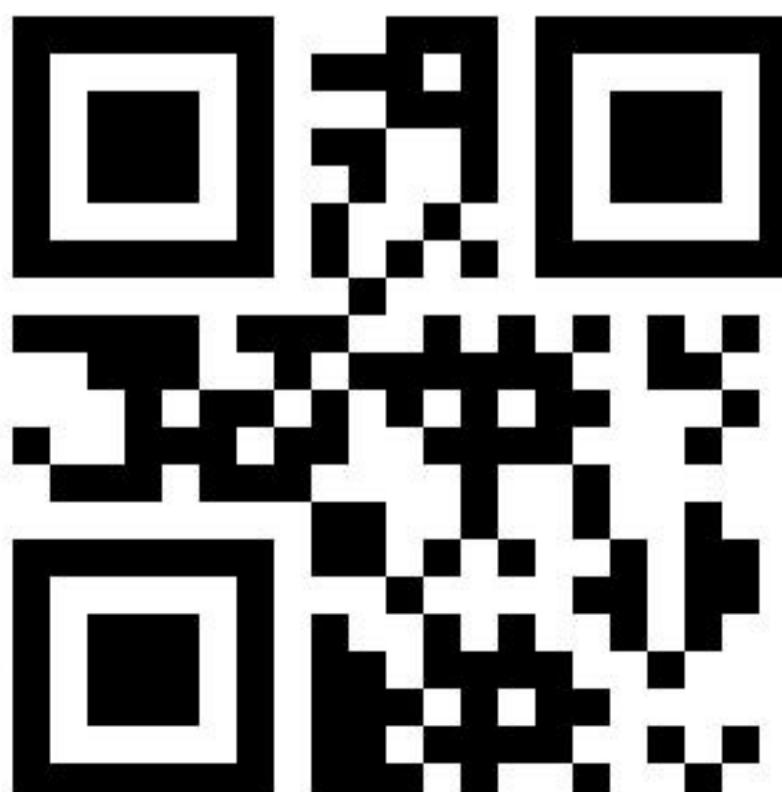



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00450





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00451

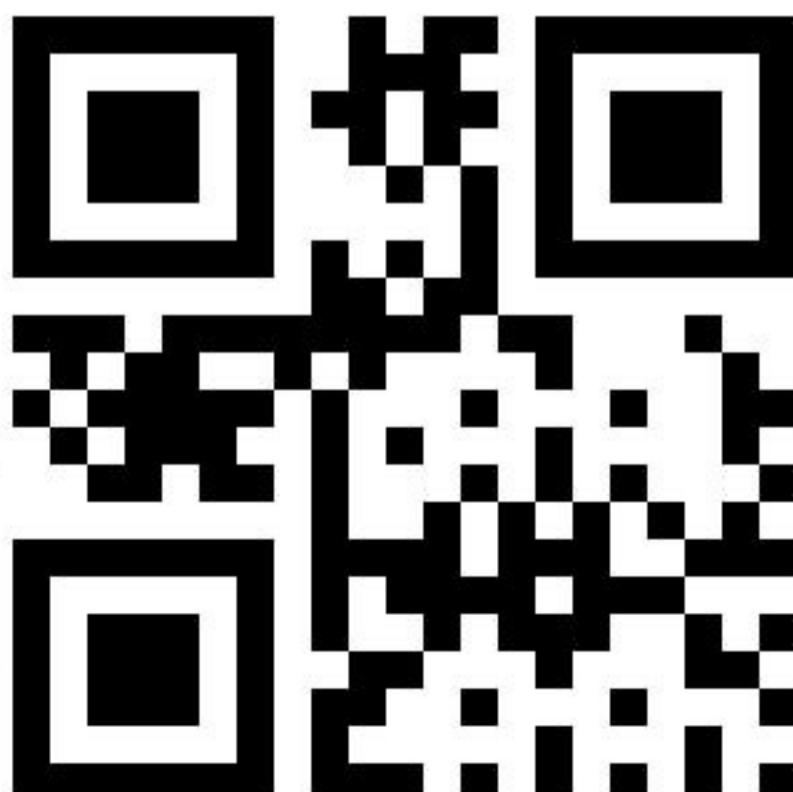



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00452

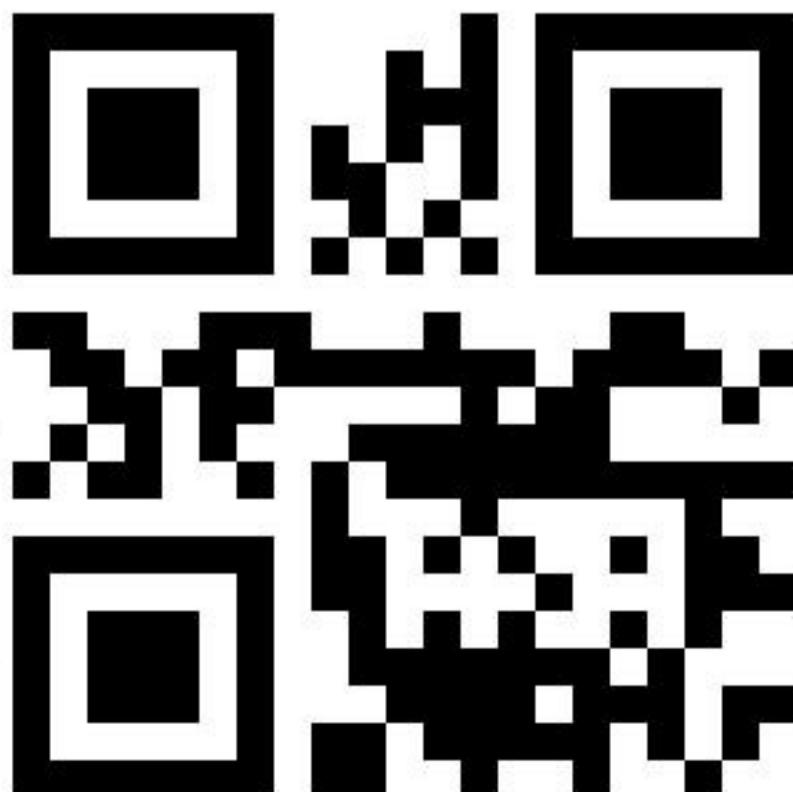



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00453

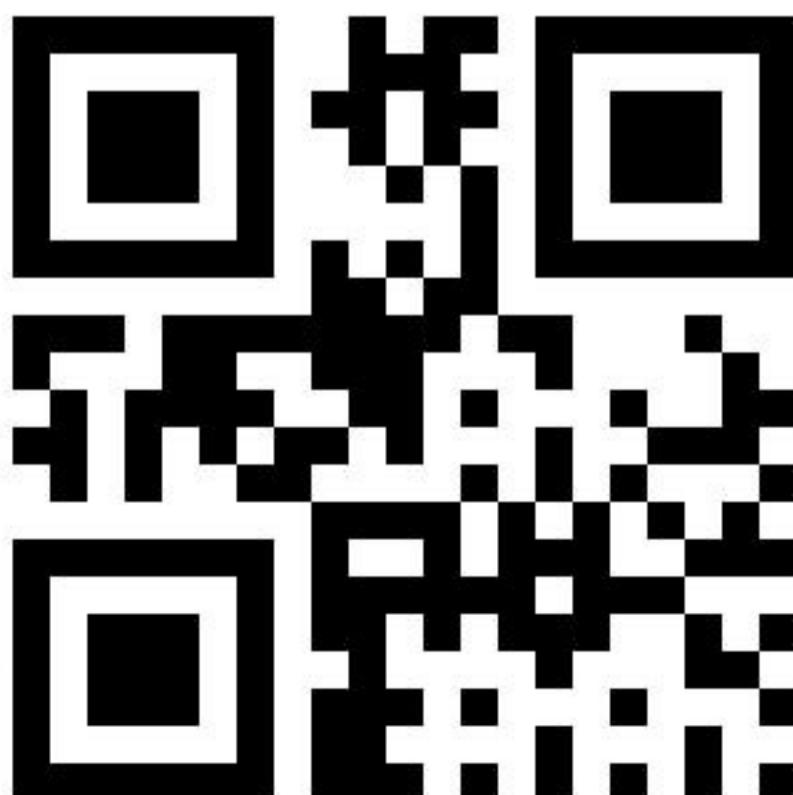



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00454





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00455





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00456

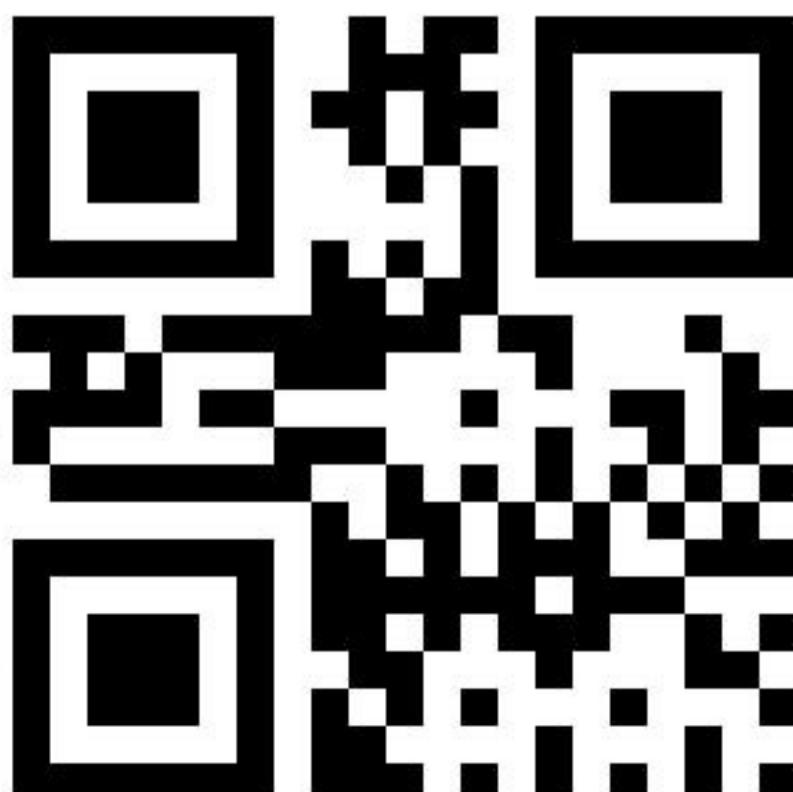



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00457





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00458

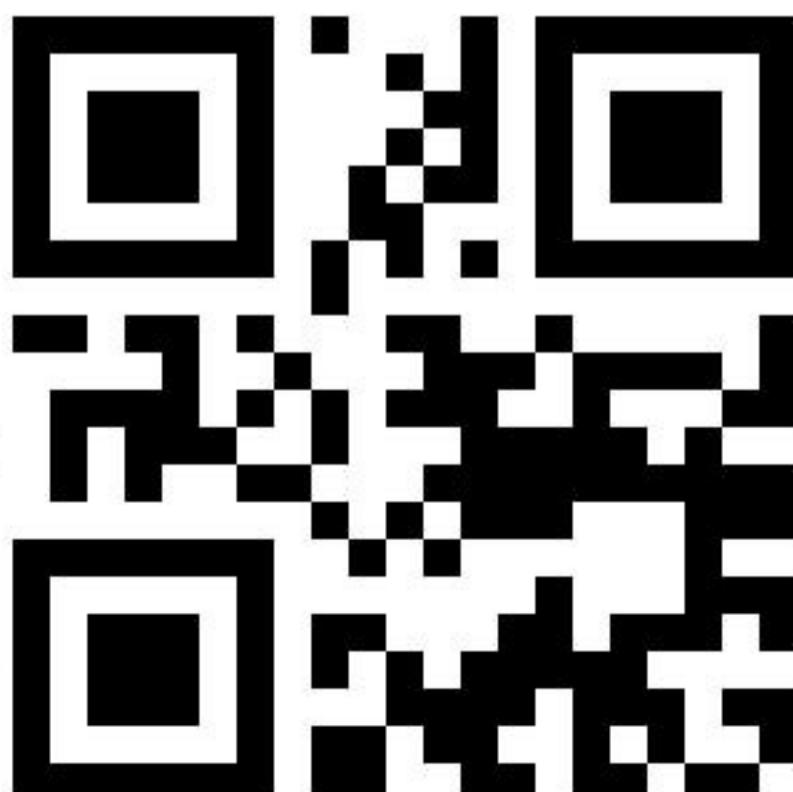



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00459

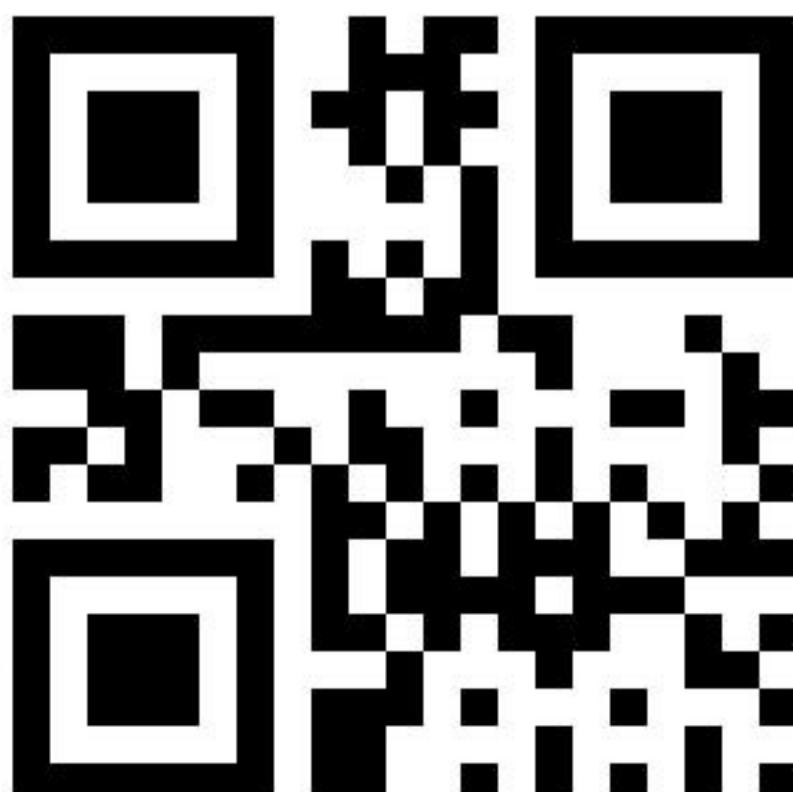



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00460

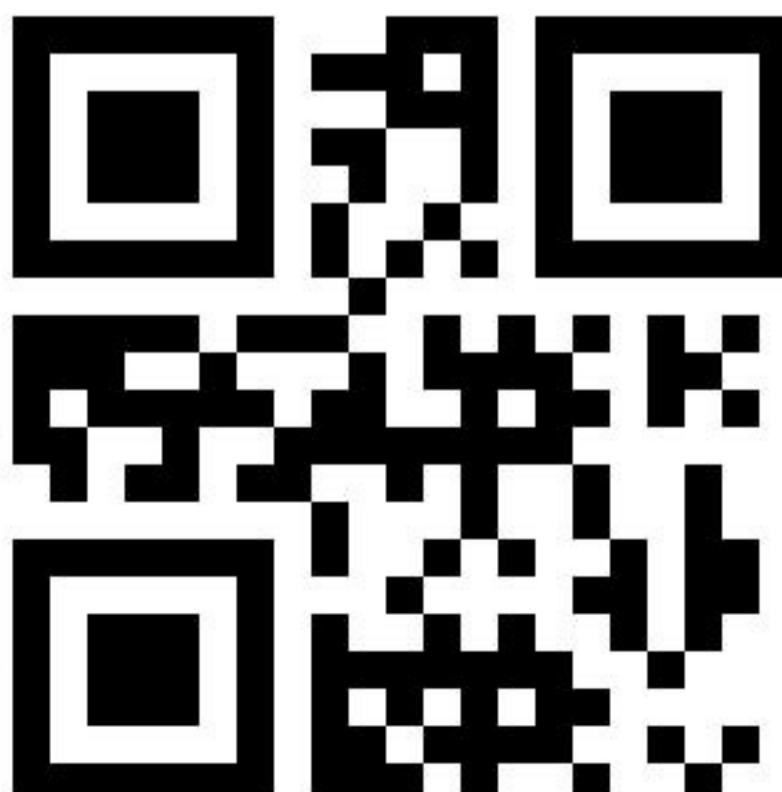



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00461

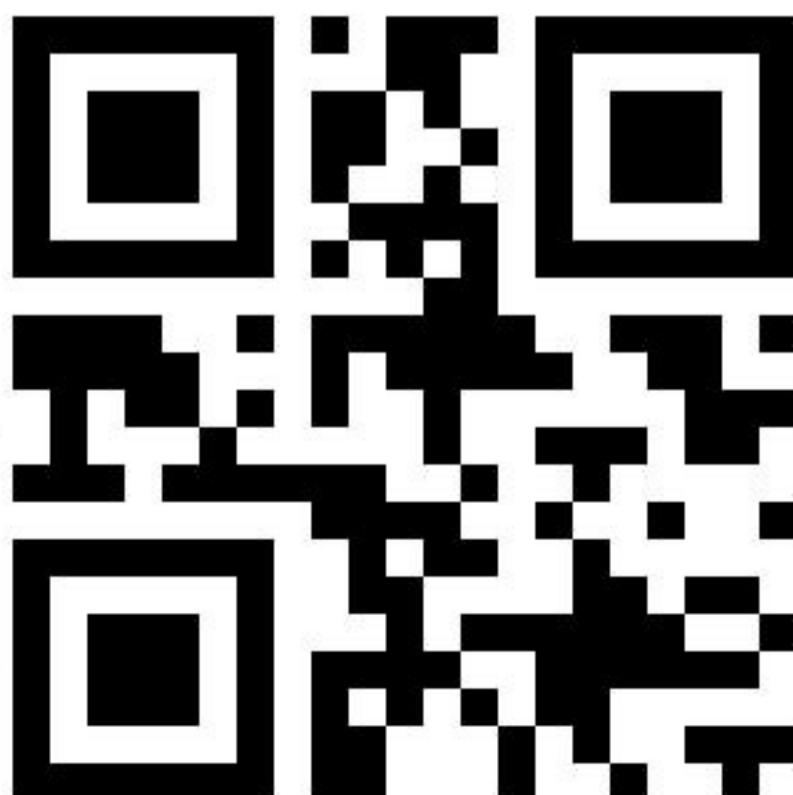



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00462

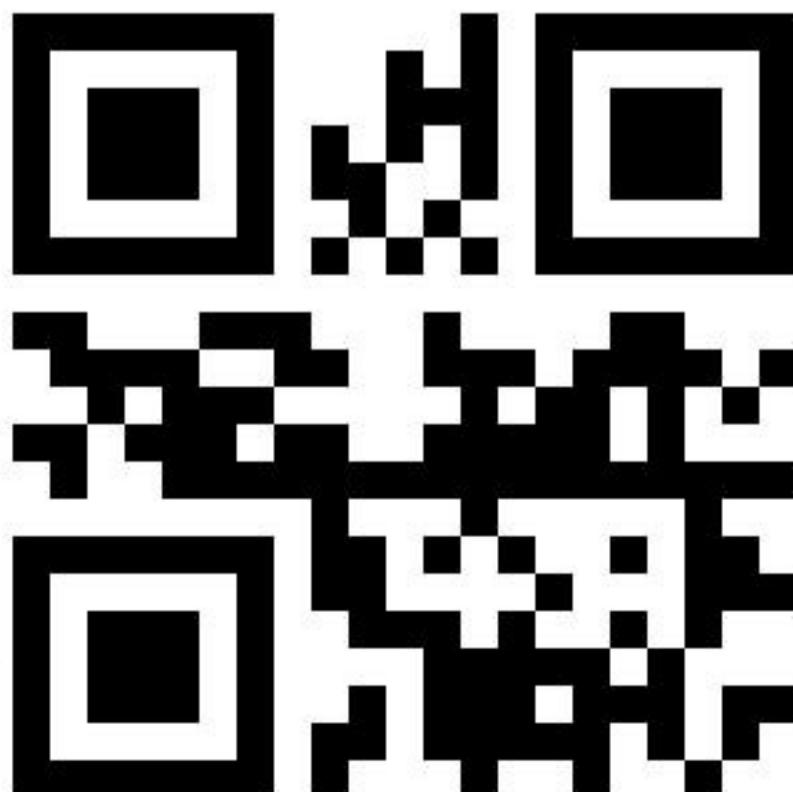



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00463





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00464

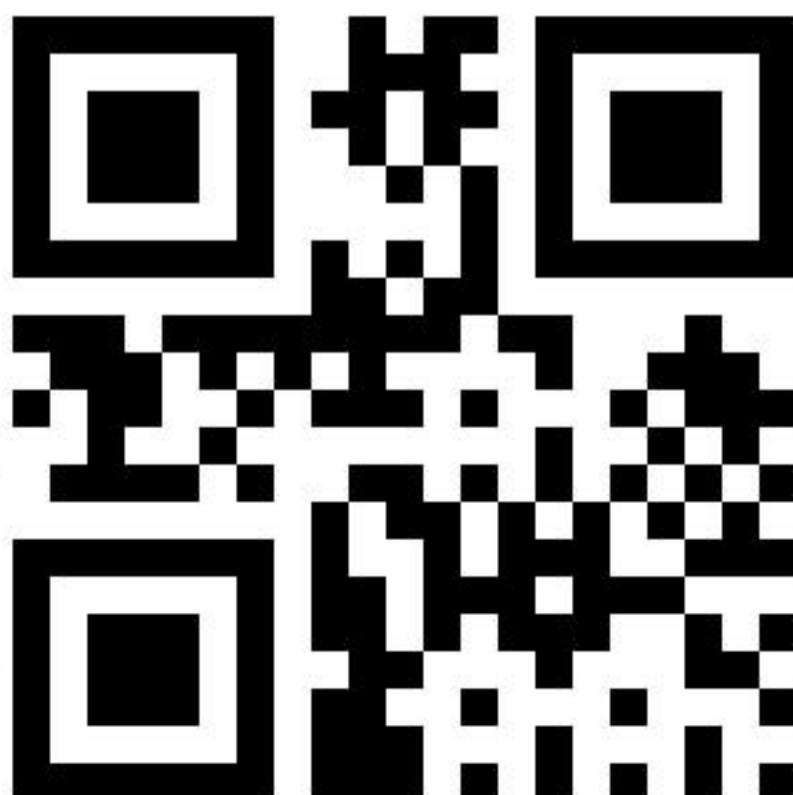



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00465

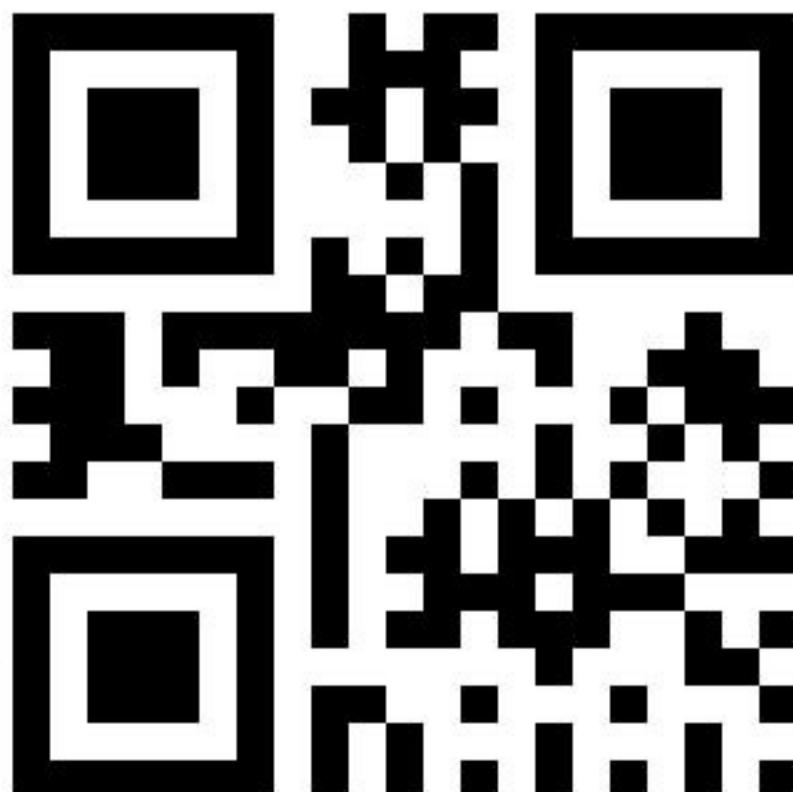



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00466

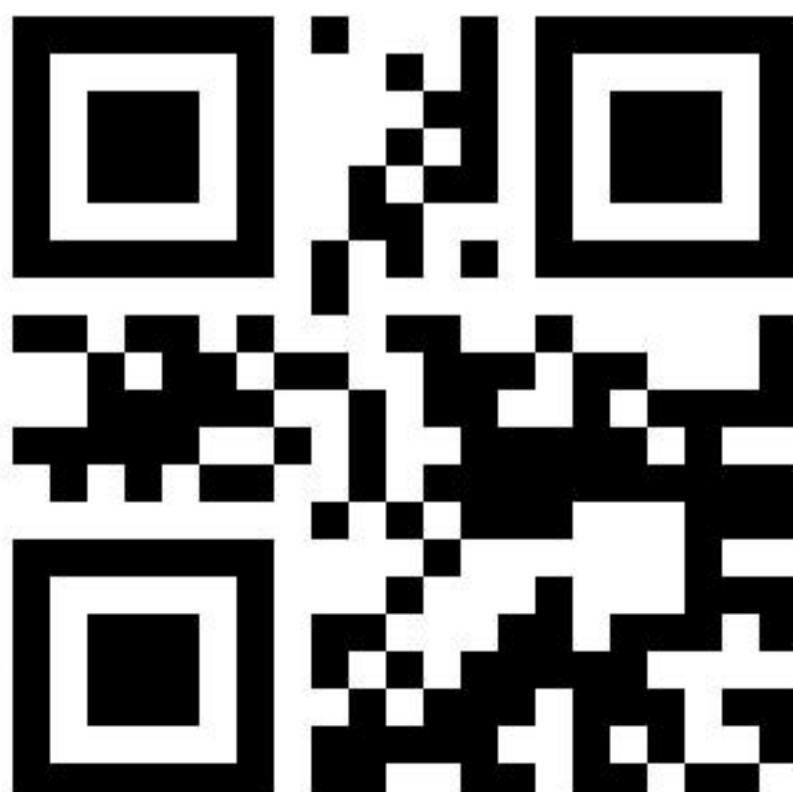



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00467

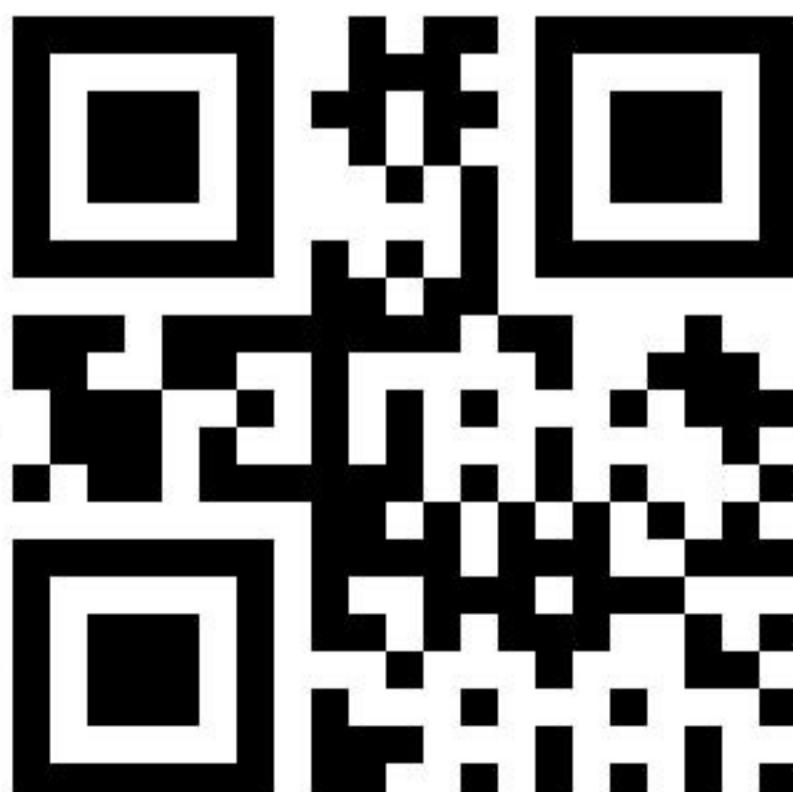



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00468

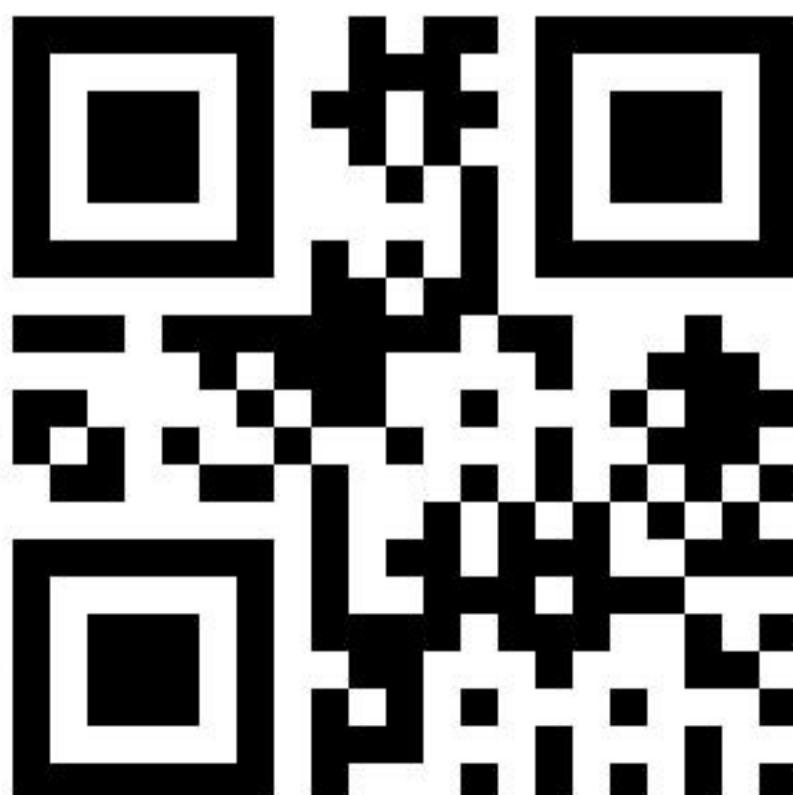



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00469

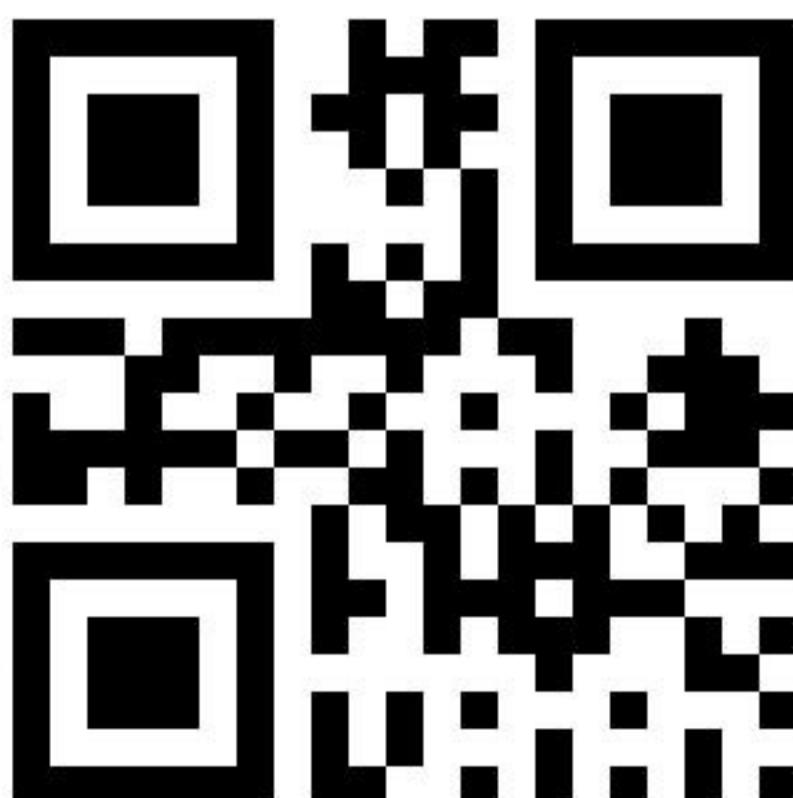



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00470

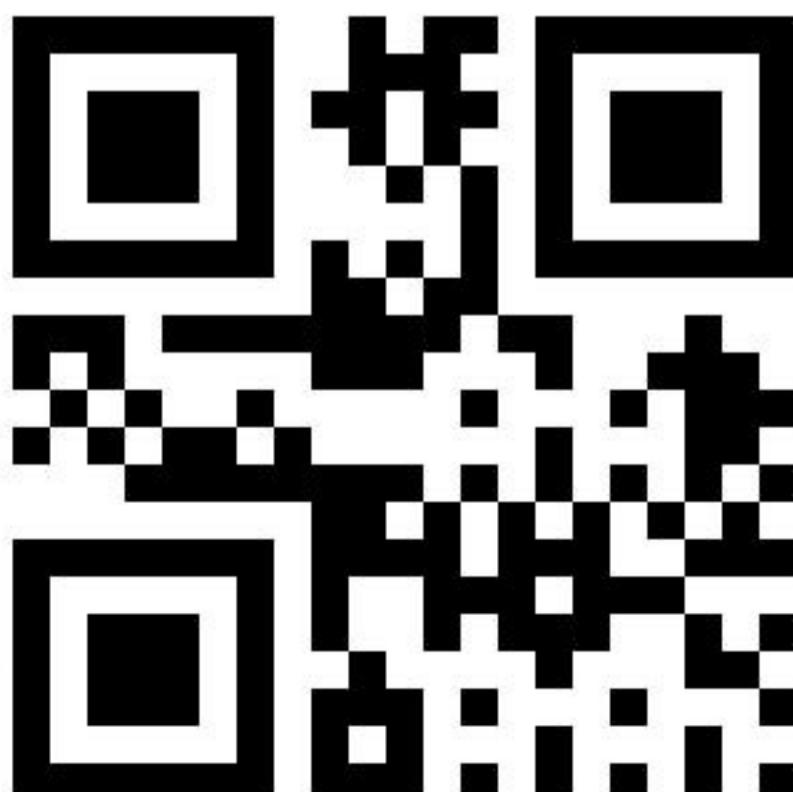



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00471

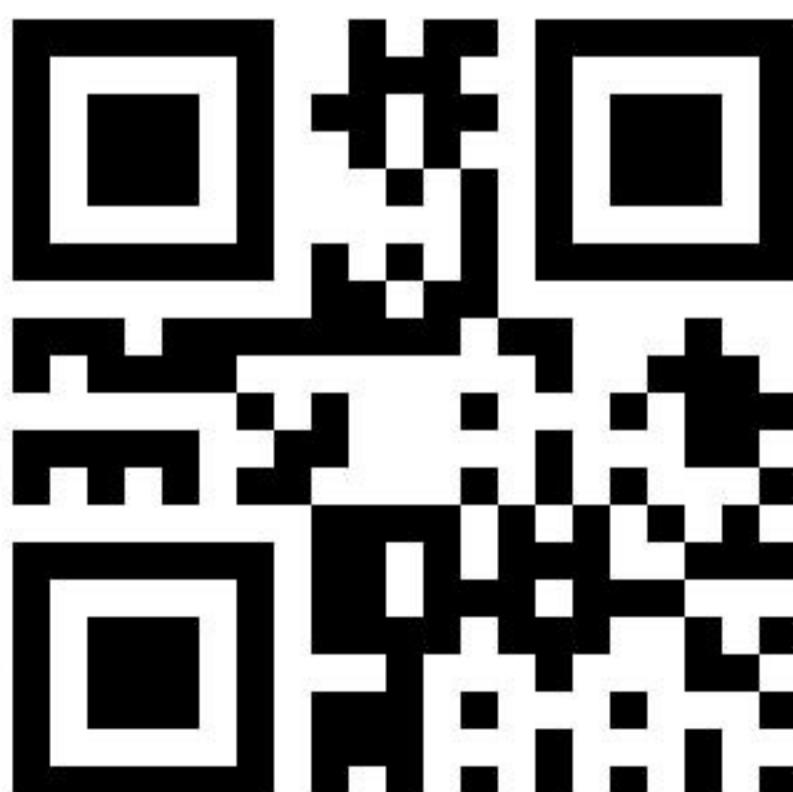



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00472

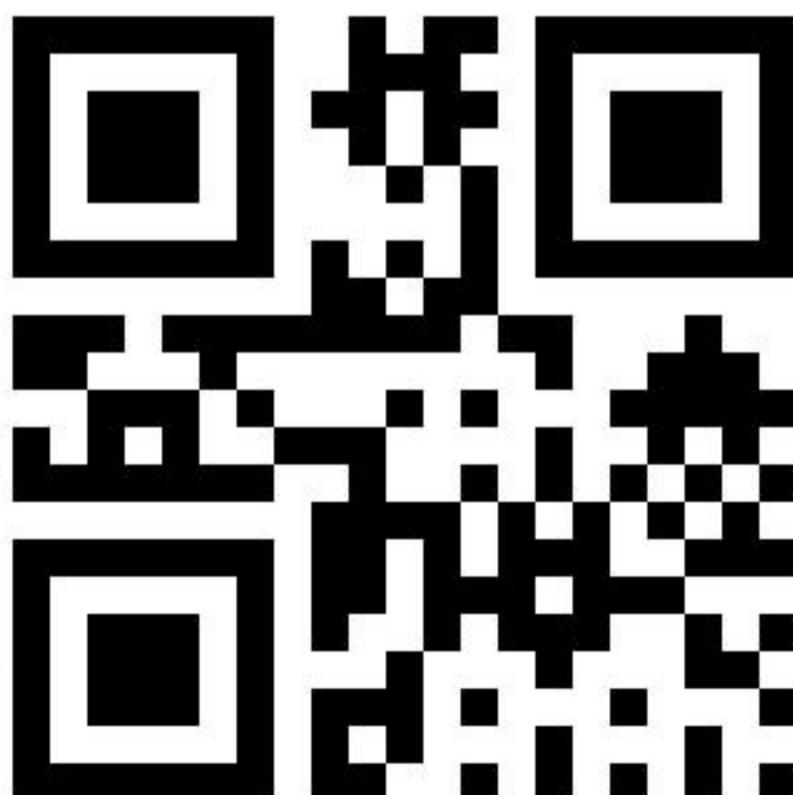



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00473

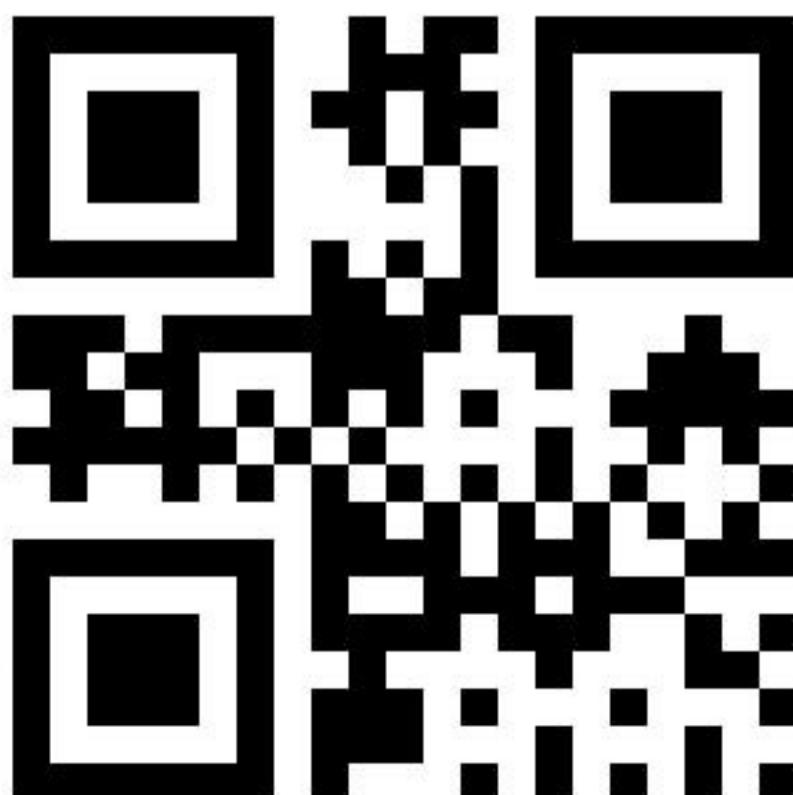



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00474

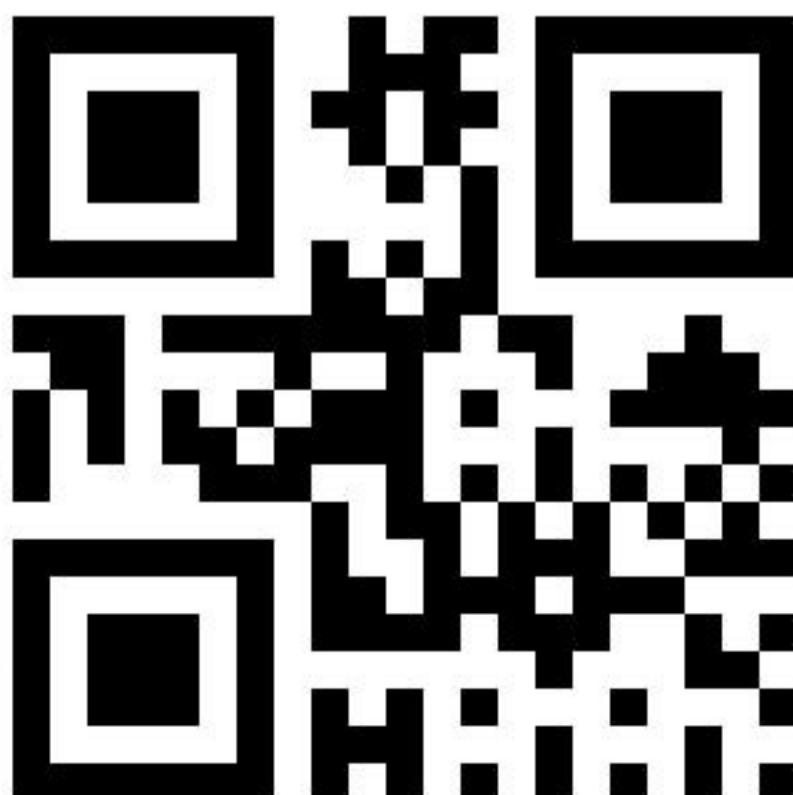



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00475

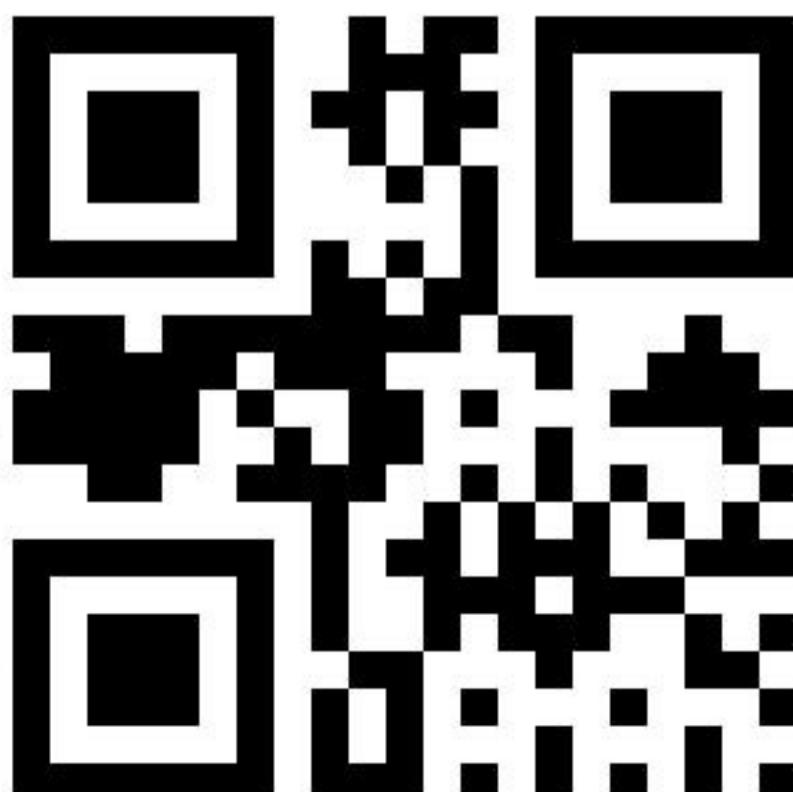



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00476

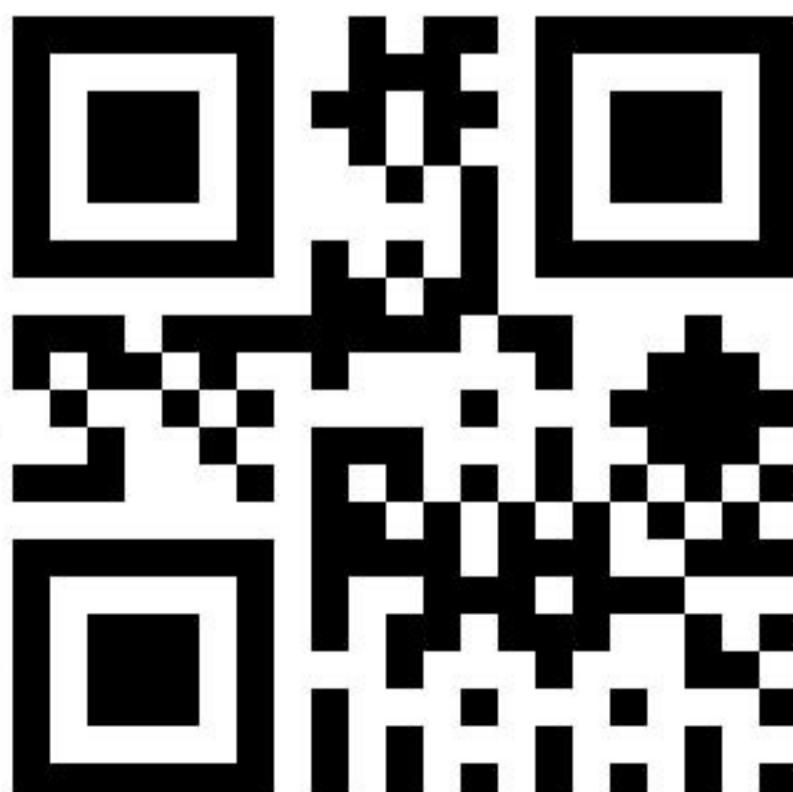



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00477

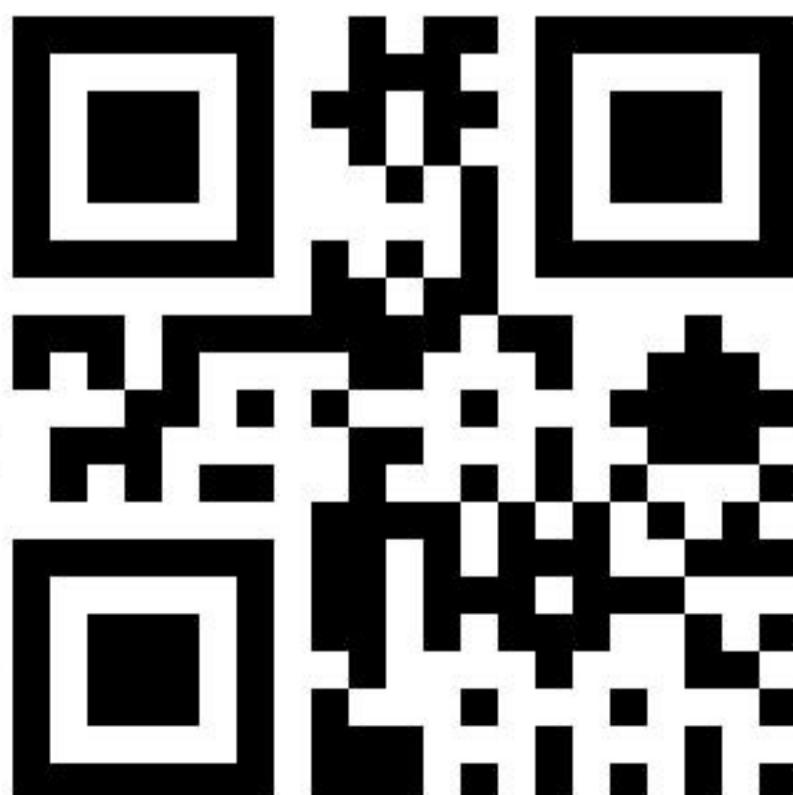



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00478

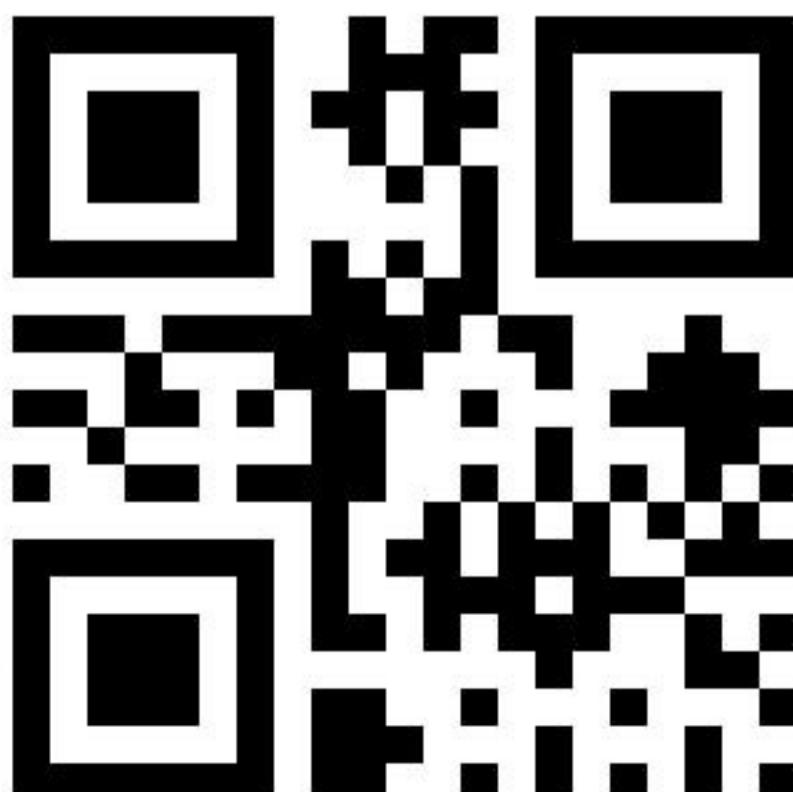



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00479

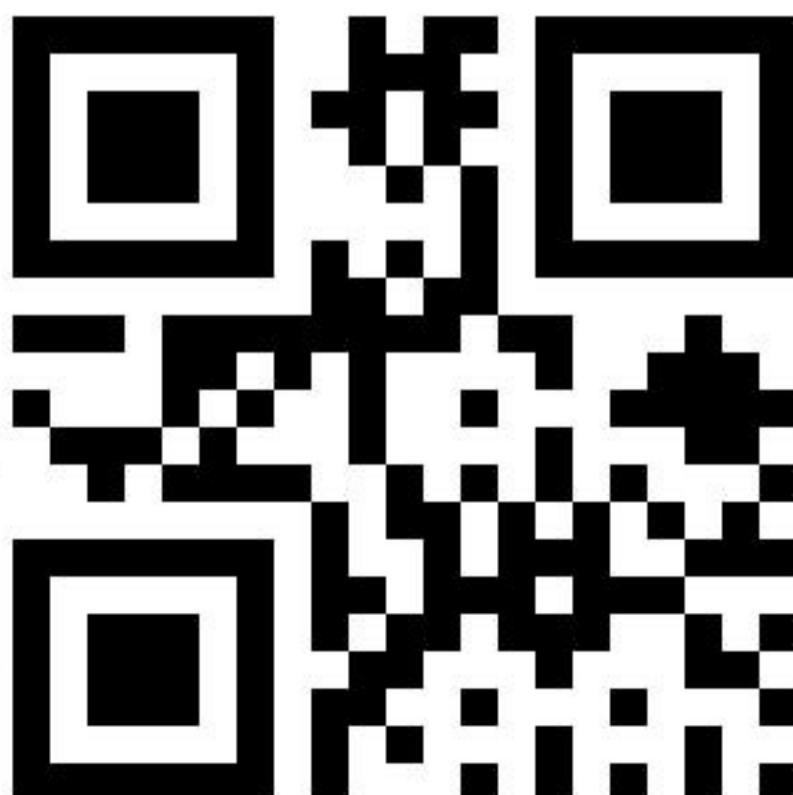



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00480





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00481

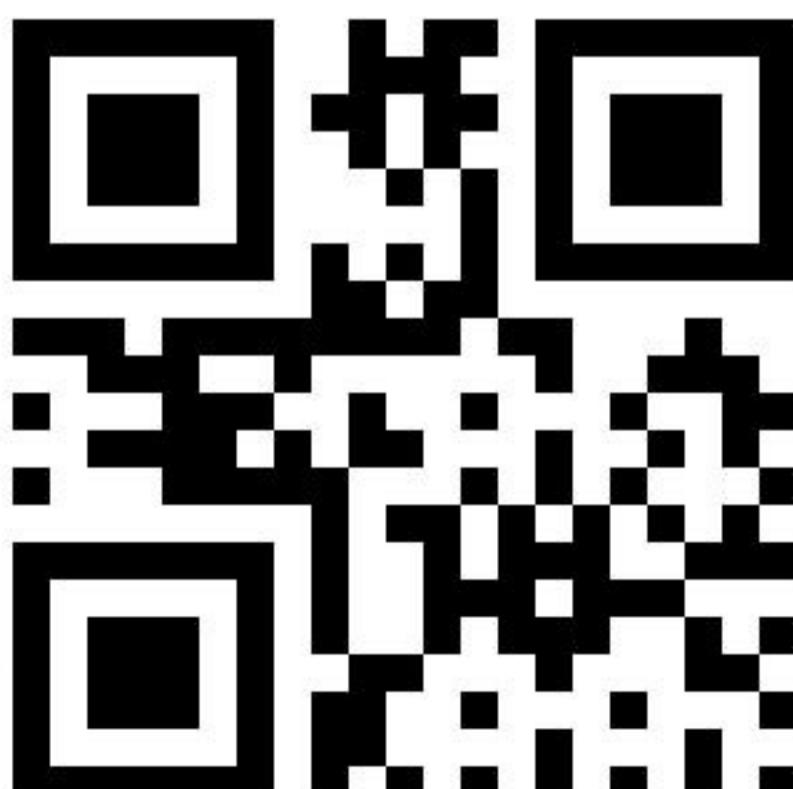



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00482





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00483

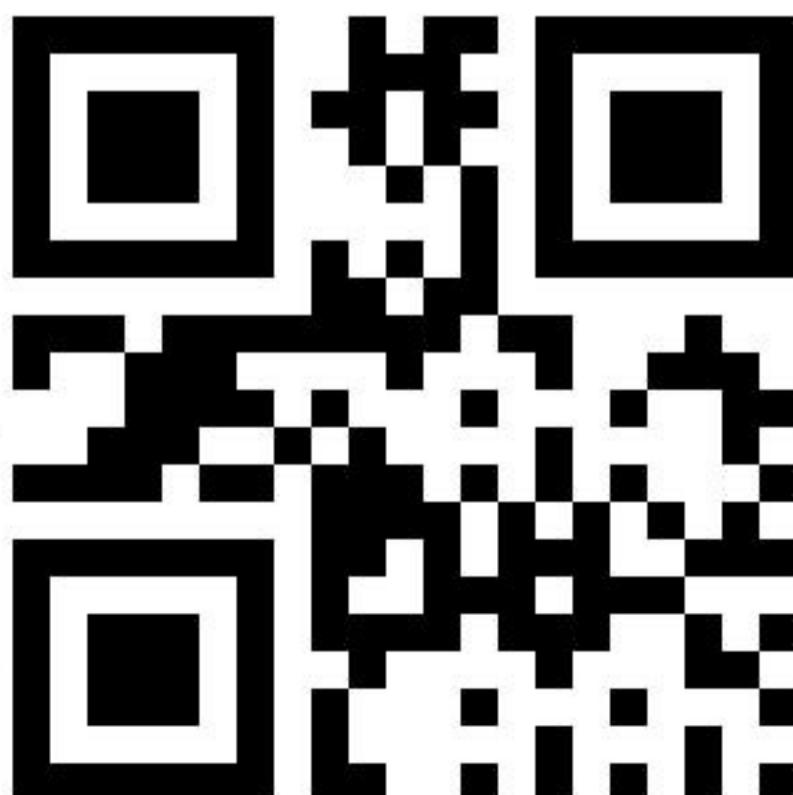



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00484

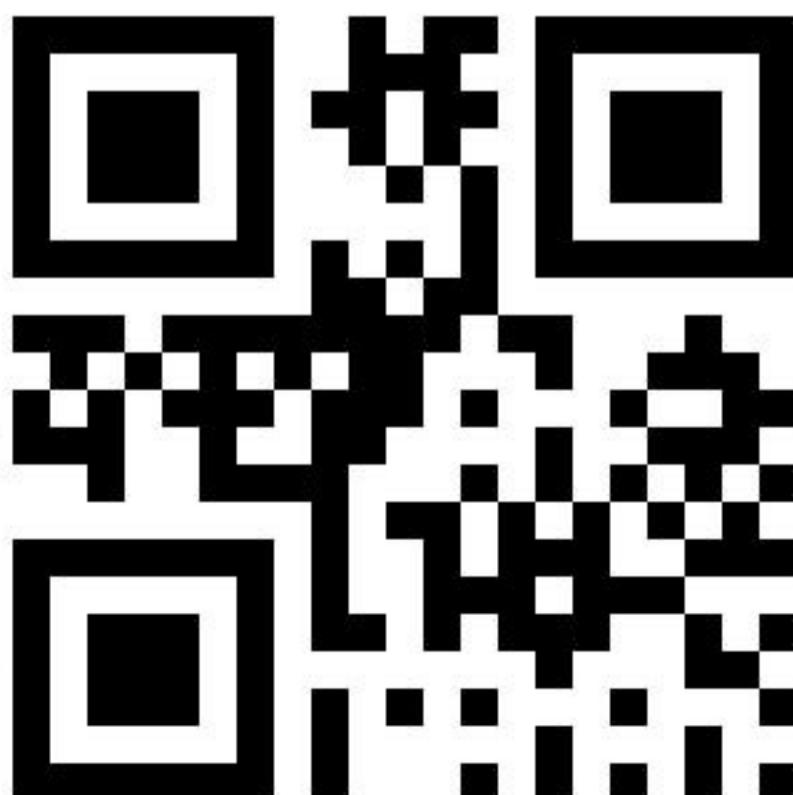



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00485

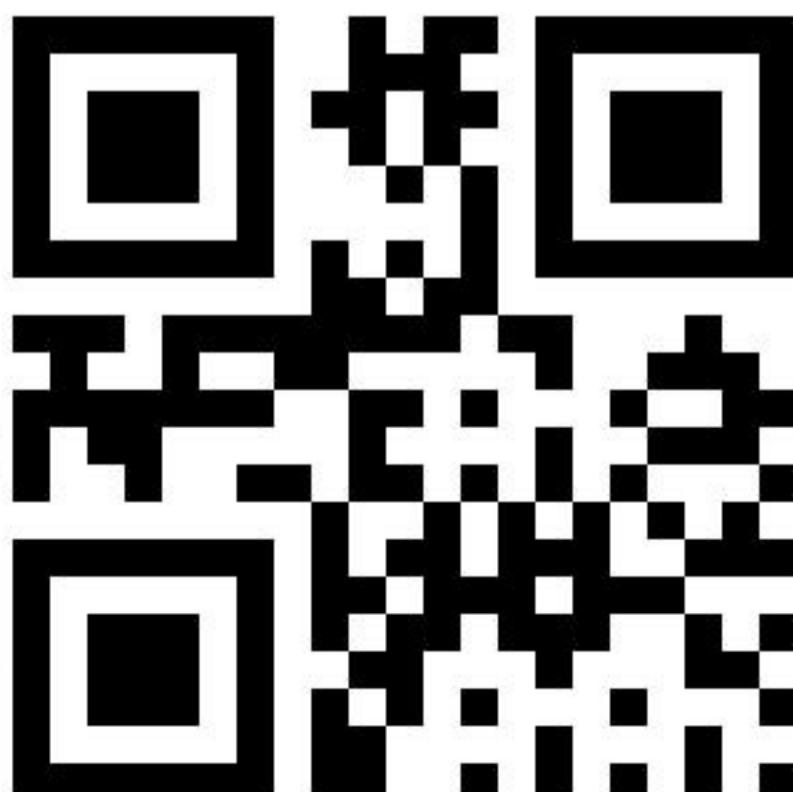



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00486

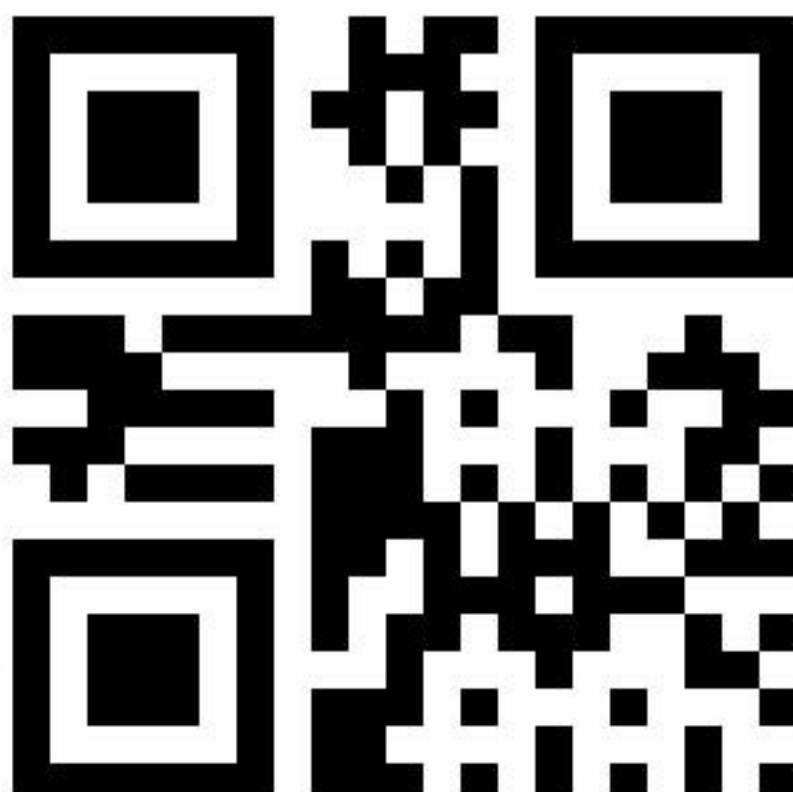



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00487

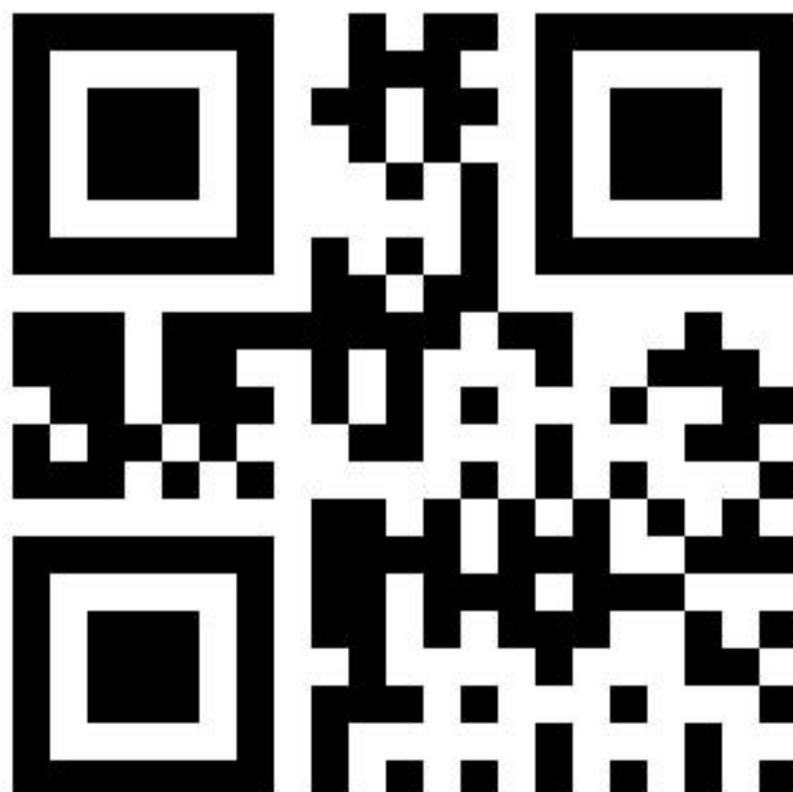



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00488

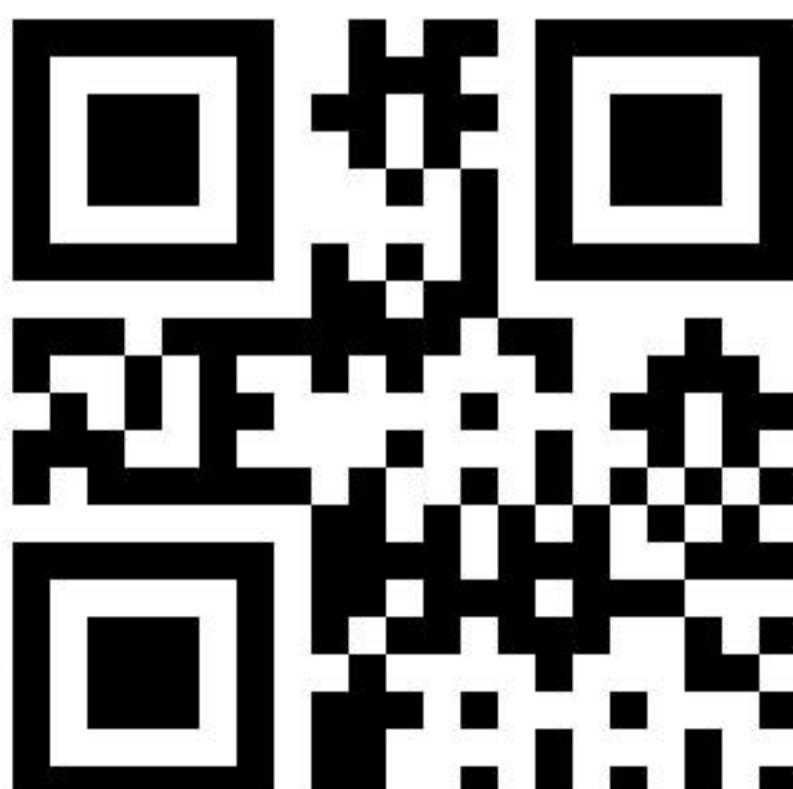



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00489

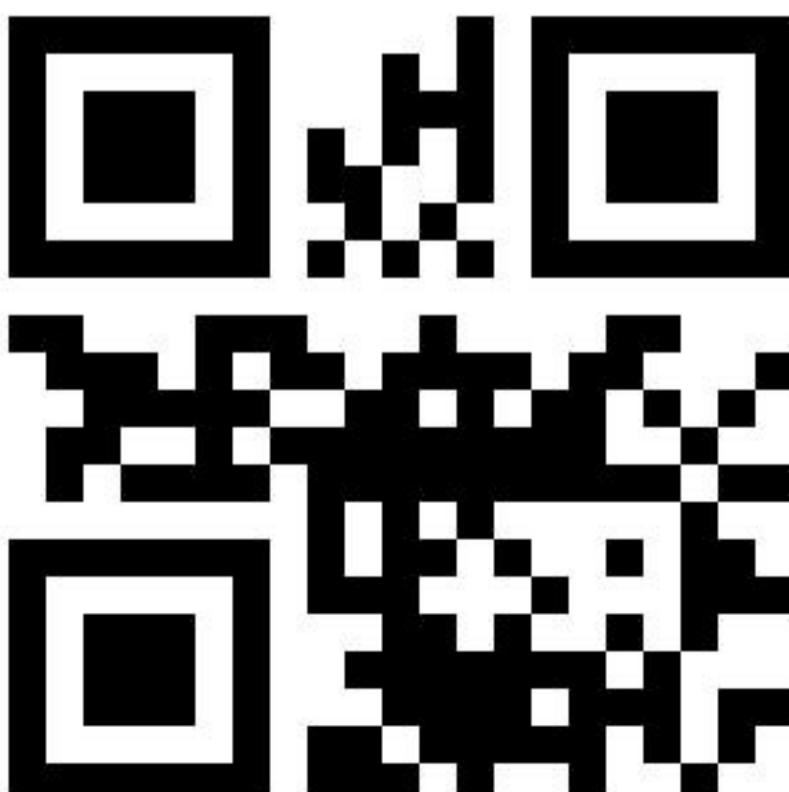



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00490





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00491

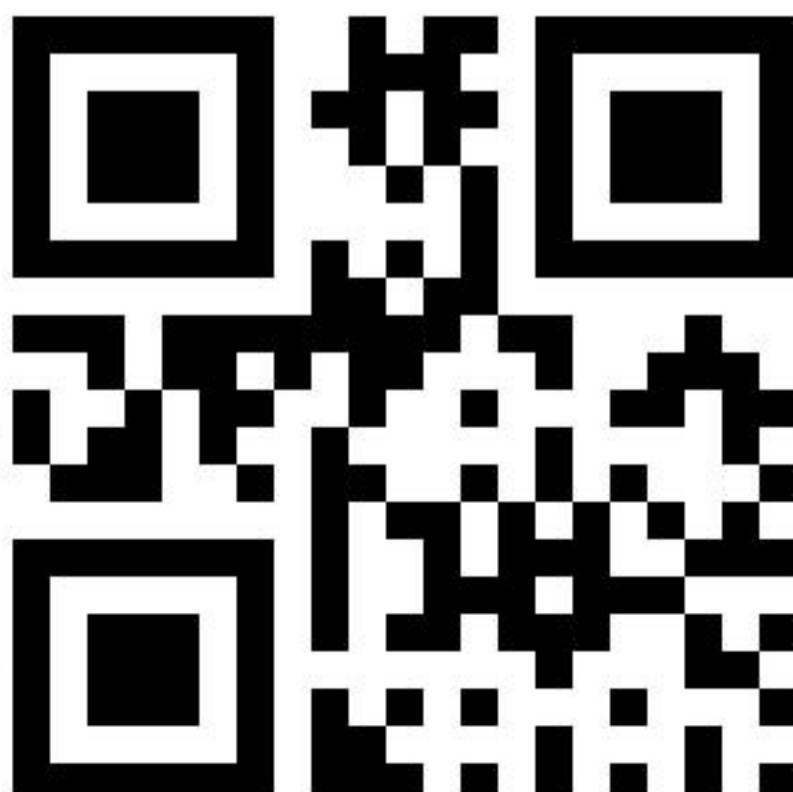



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00492

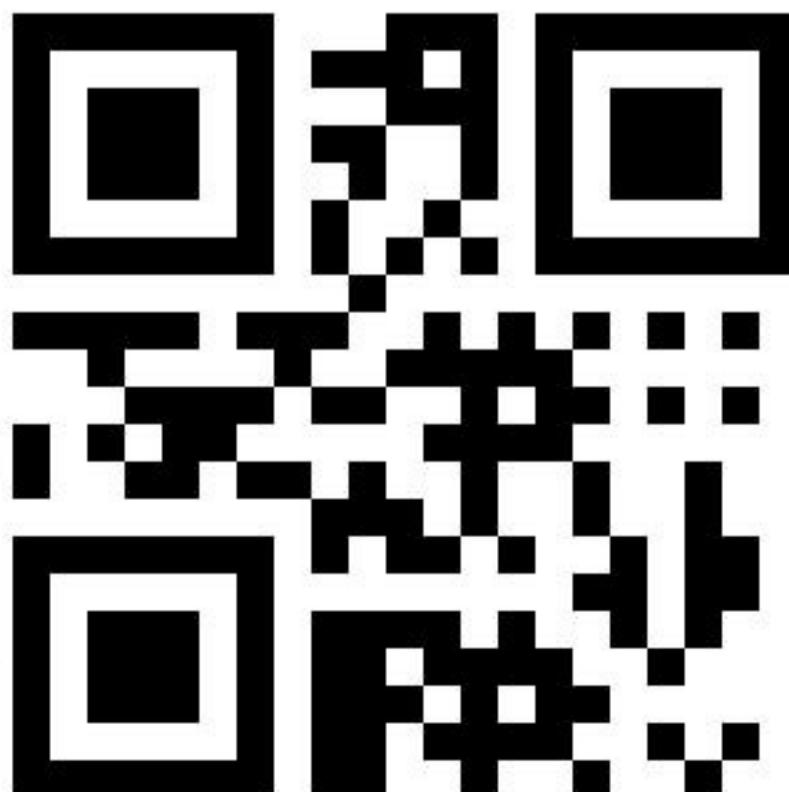



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00493

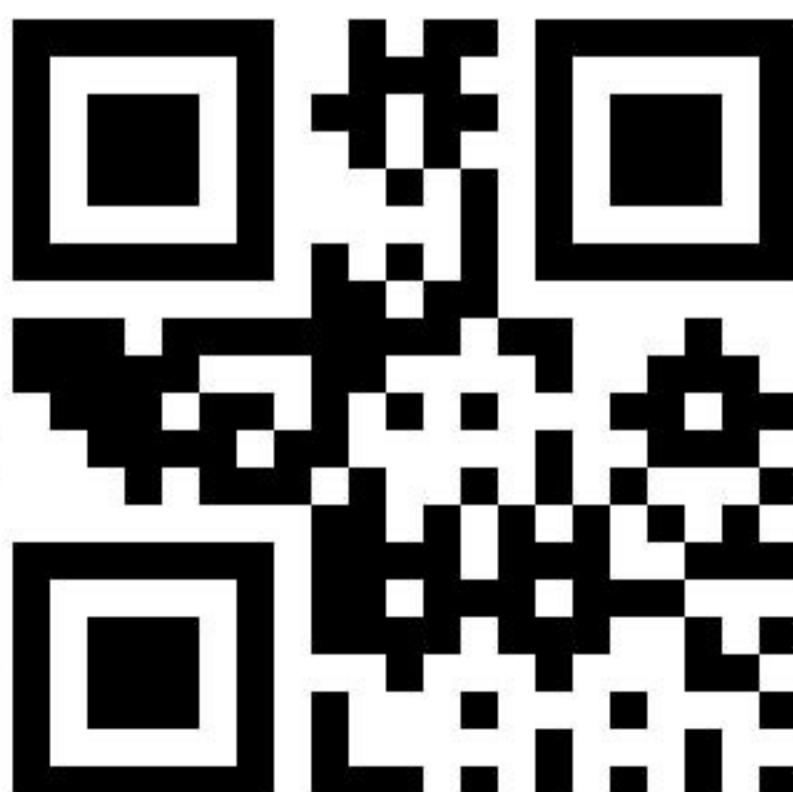



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00494

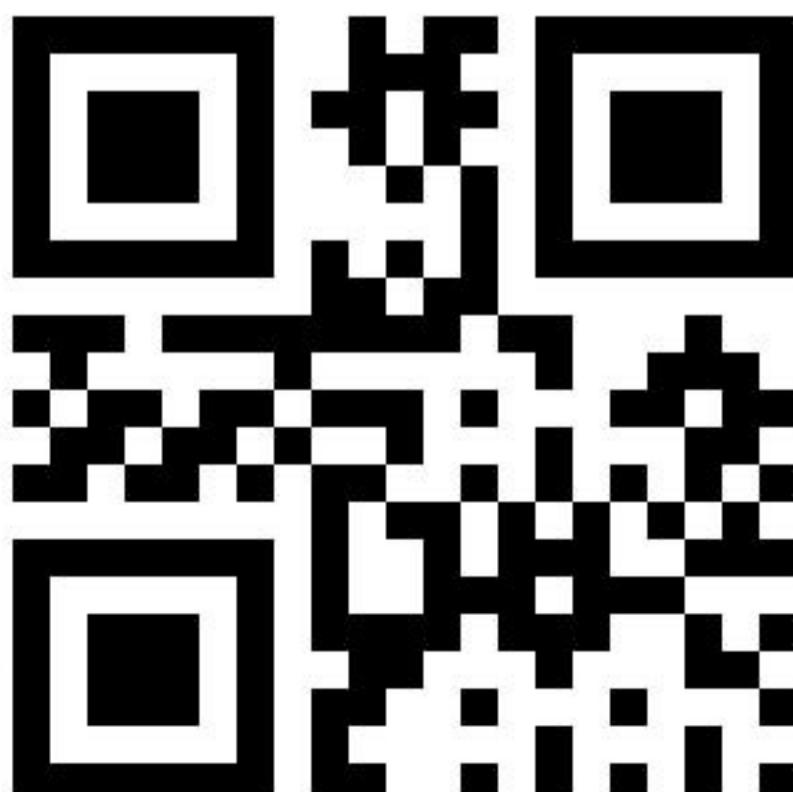



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00495

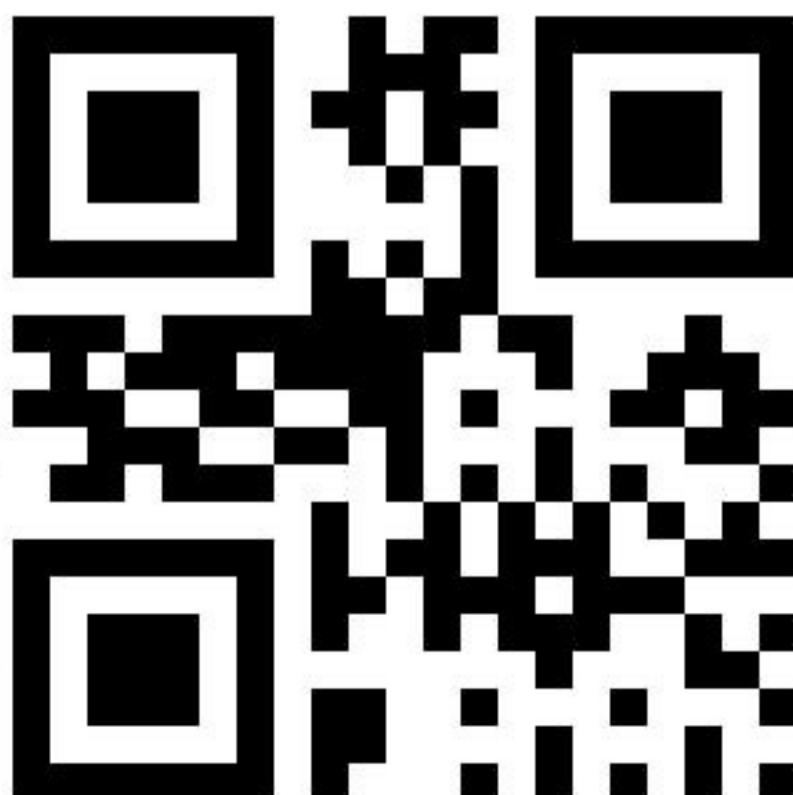



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00496

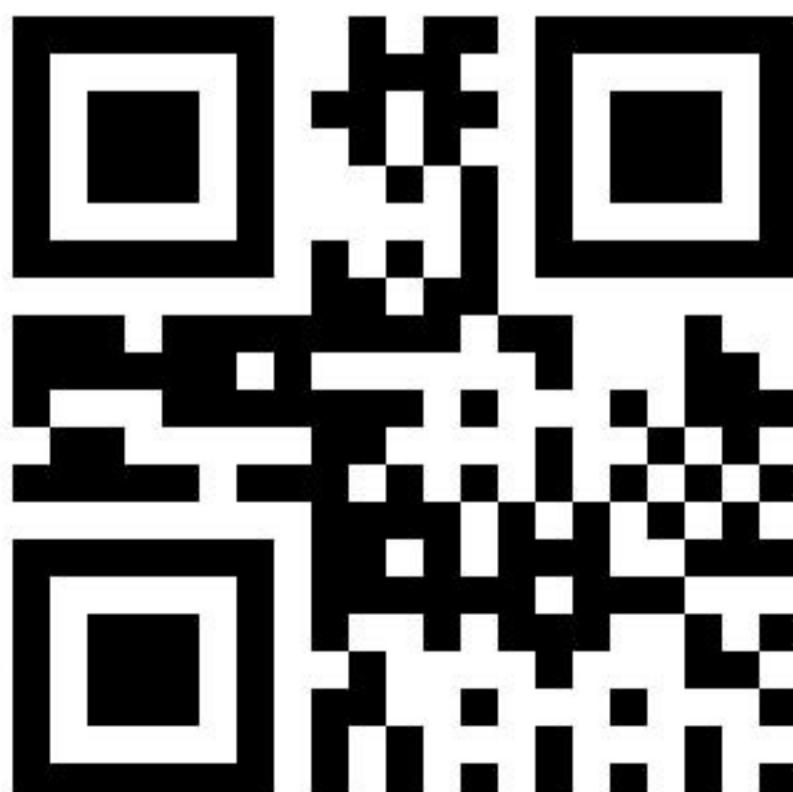



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00497

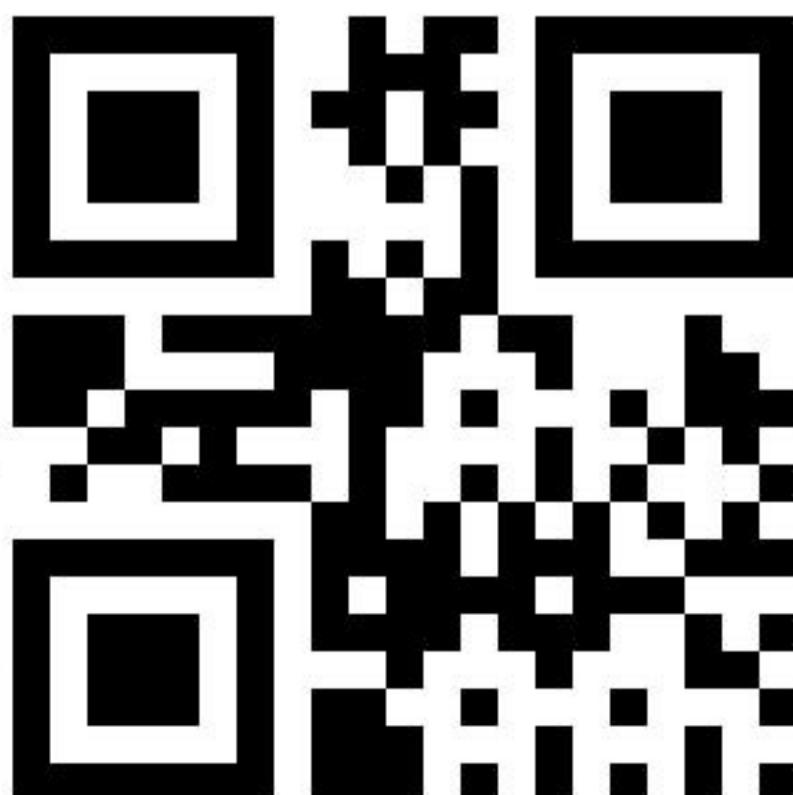



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00498

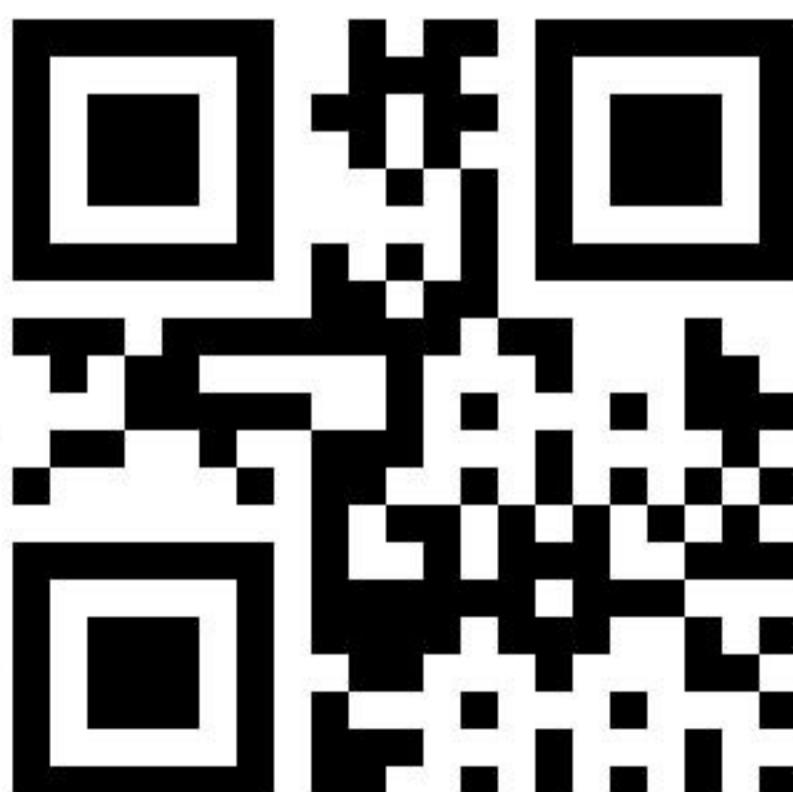



# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 00499





# PHOTOVOLTAIC MODULE

Made in Iran

## Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



**ONLY** qualified personnel should install or perform maintenance work on these modules

**BE AWARE** of dangerous high DC voltage when connecting modules

**DO NOT** damage or scratch the rear surface of the module



panel\_id 000500

