



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000501

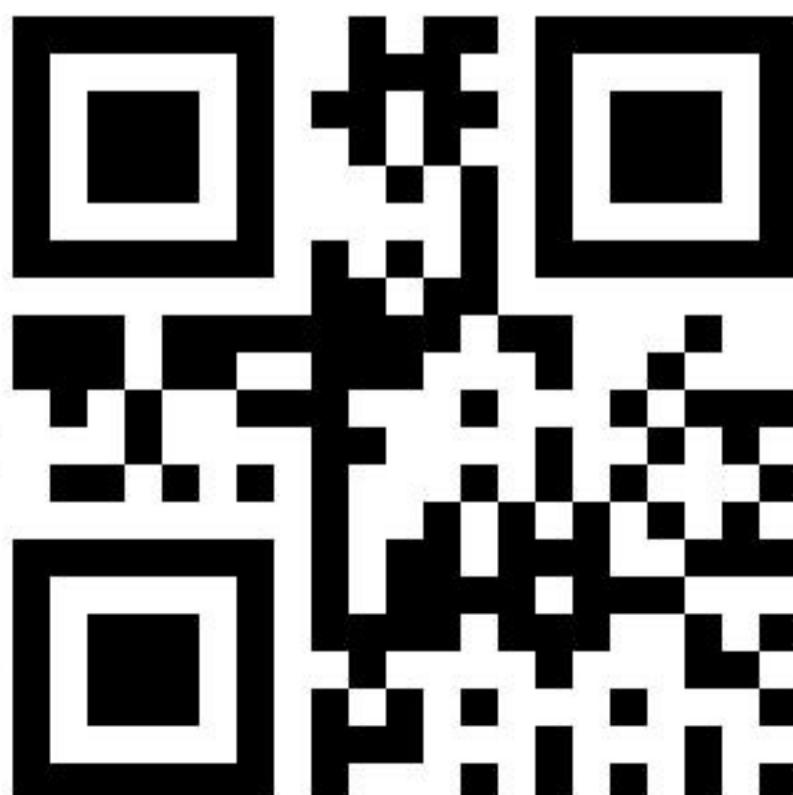



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00502

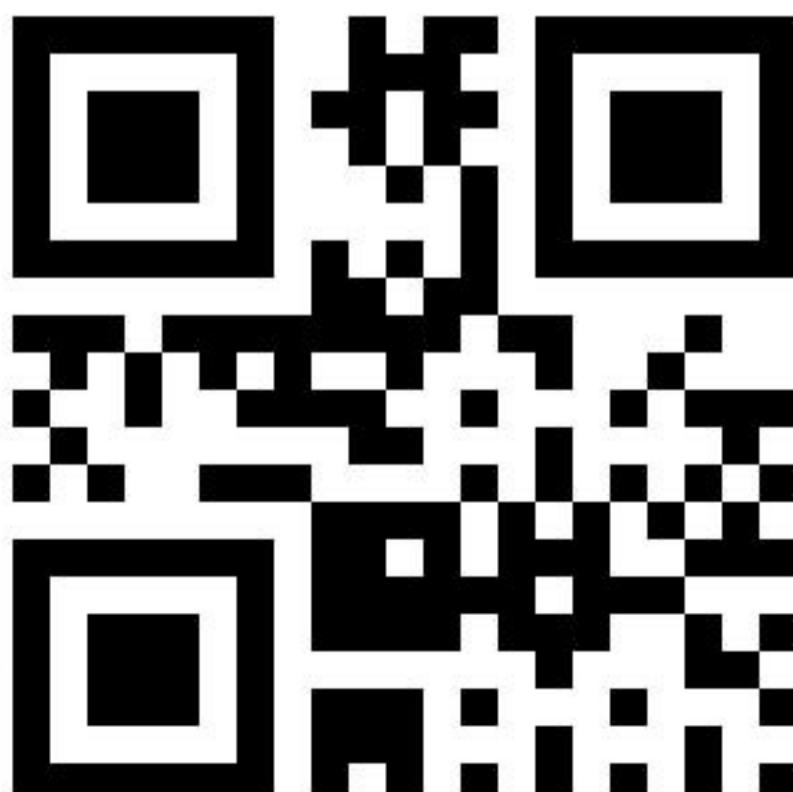



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000503

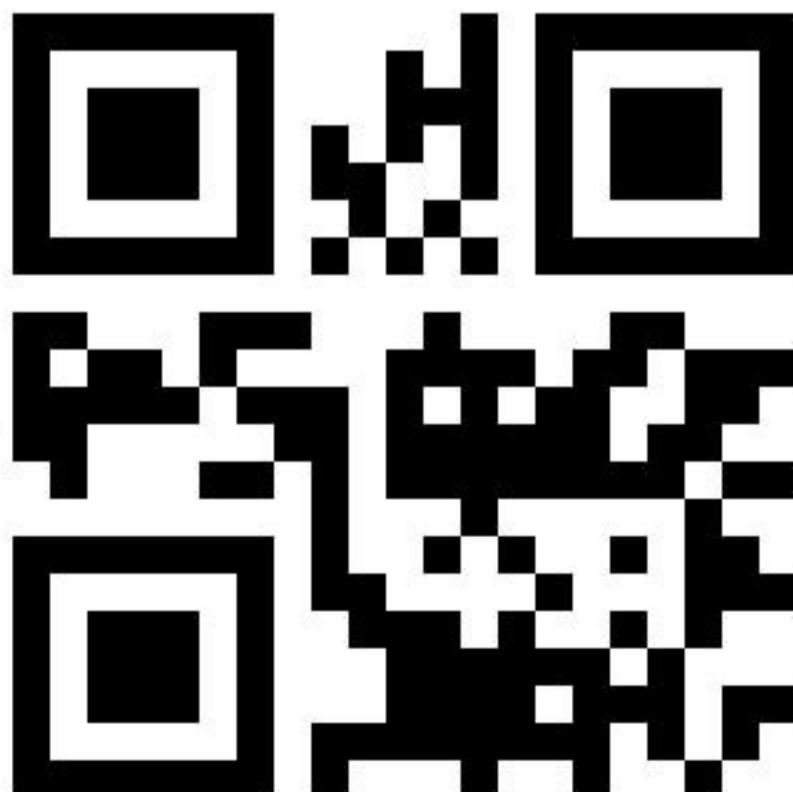



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00504

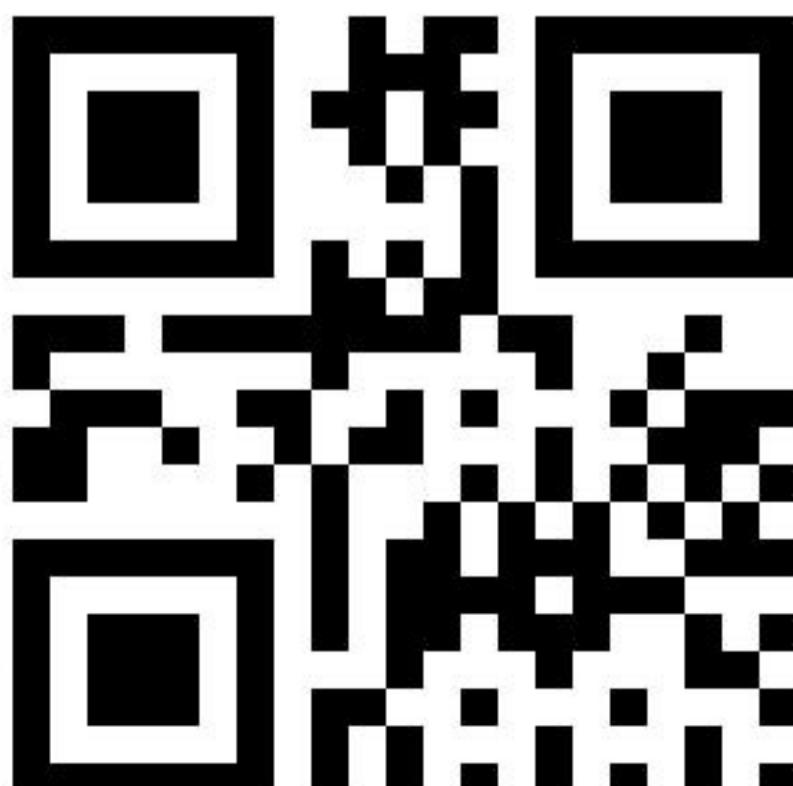



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000505

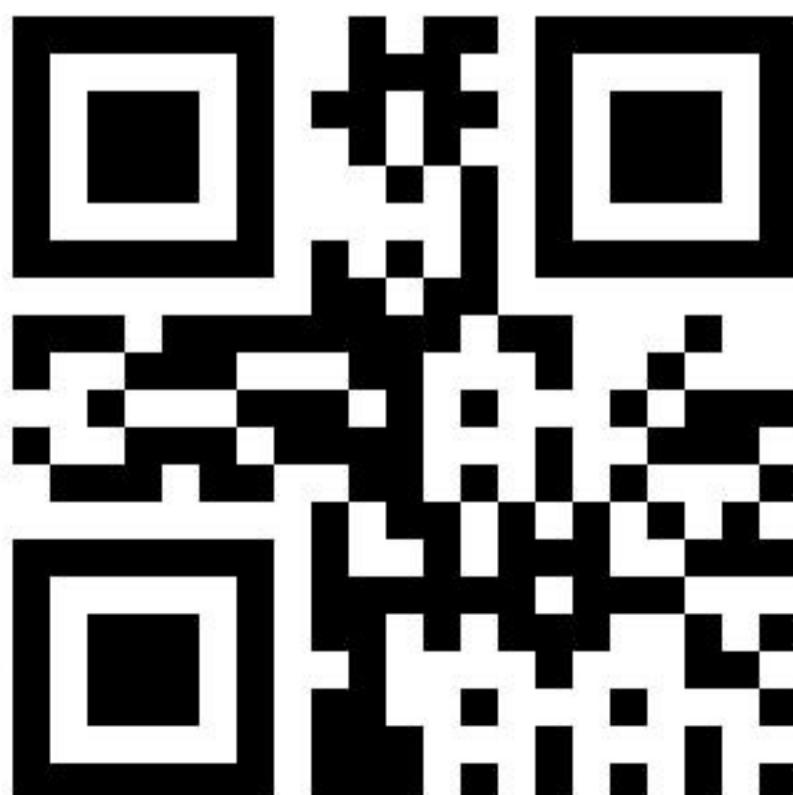



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 0005006

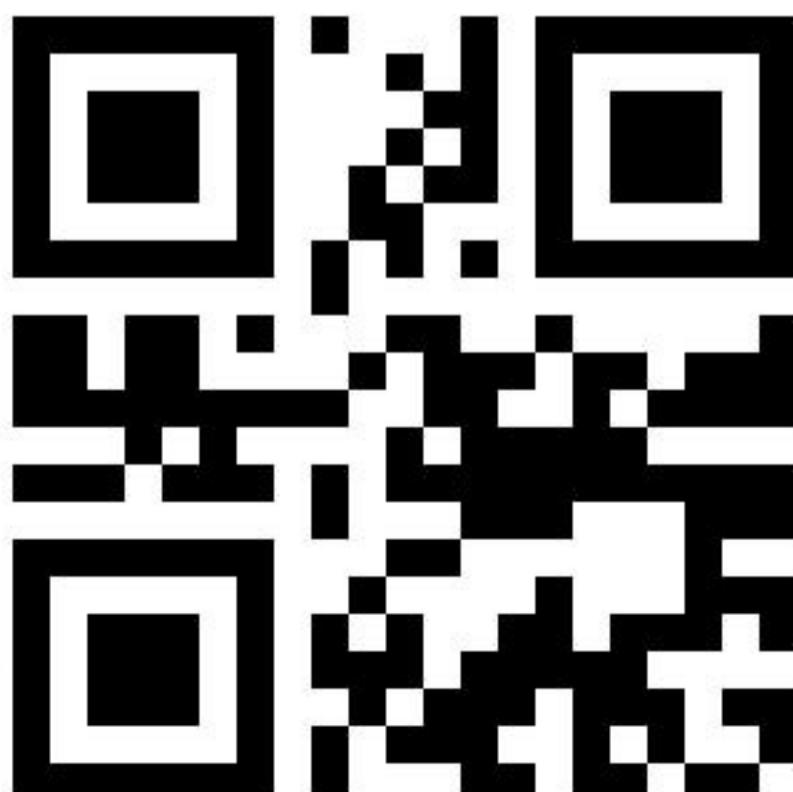



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000507

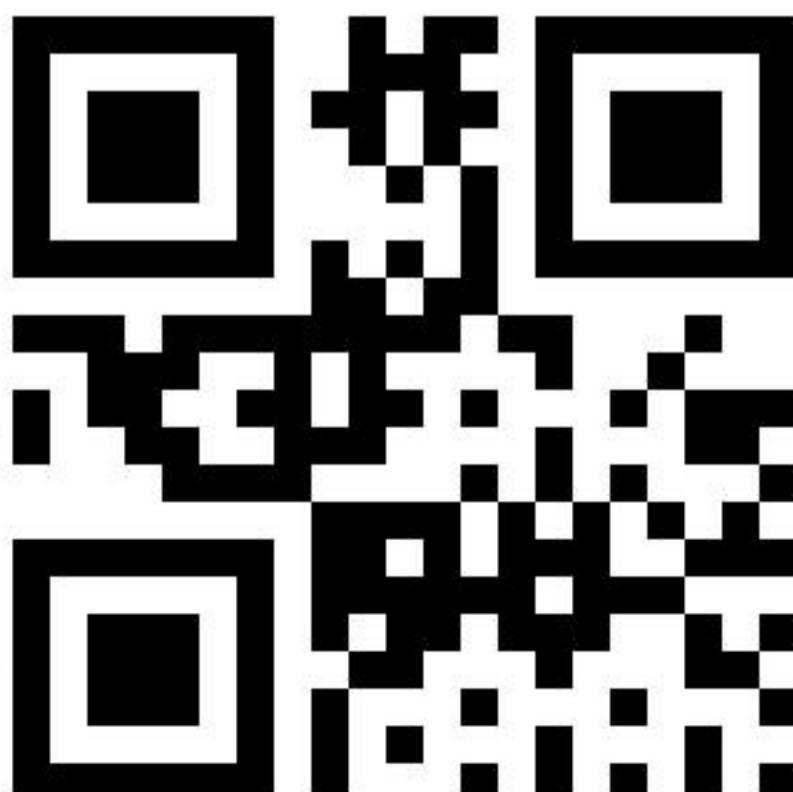



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000508





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000509

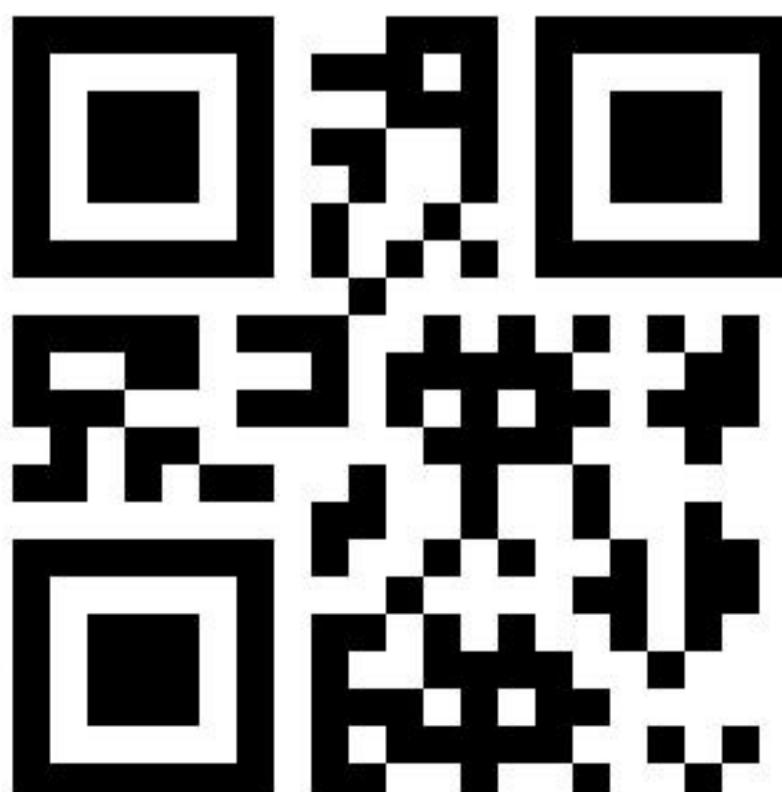



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00510

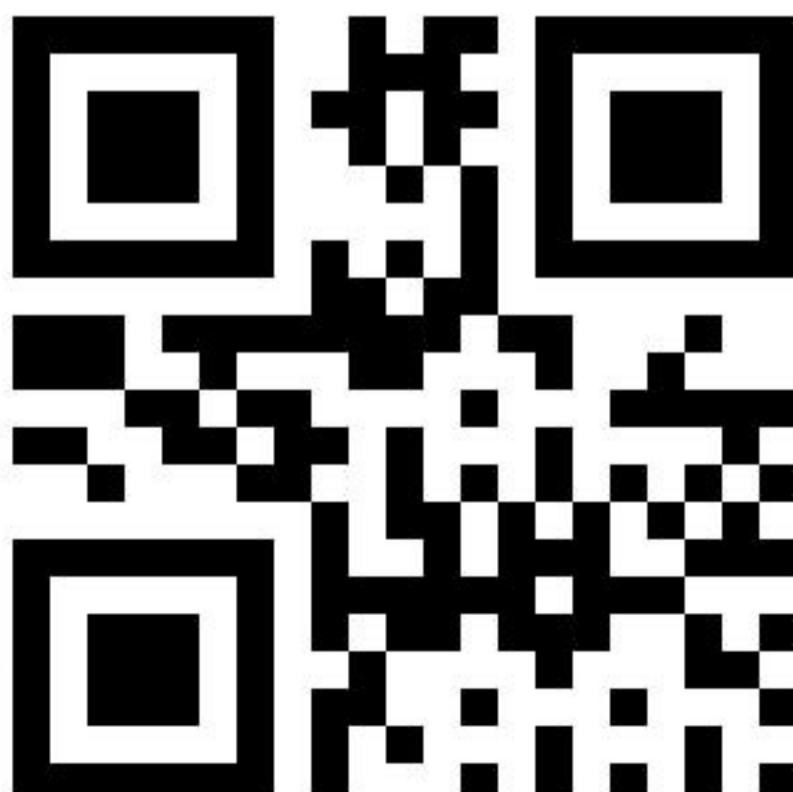



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00511

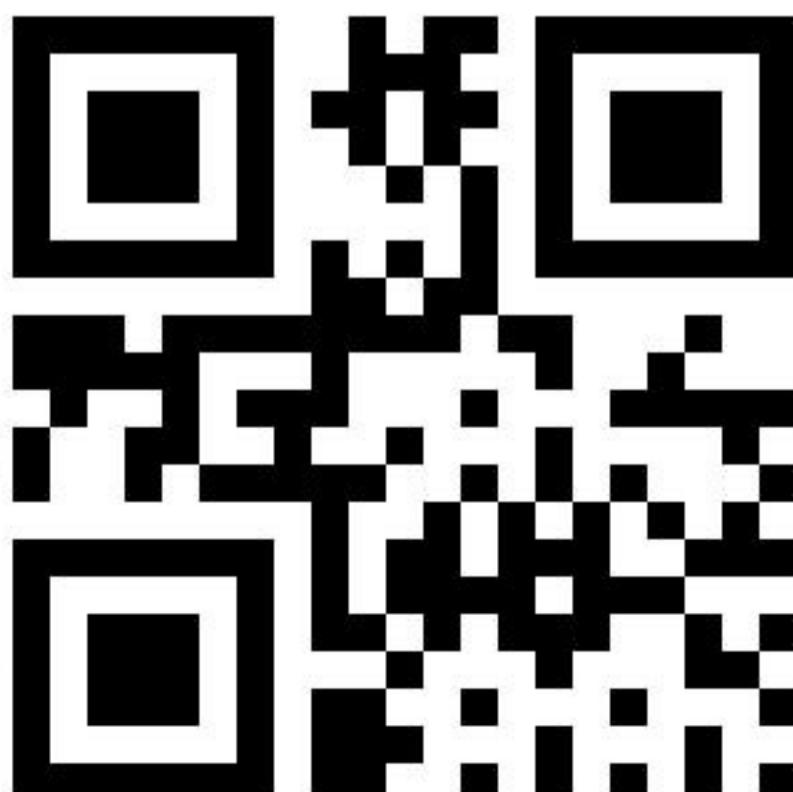



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00512

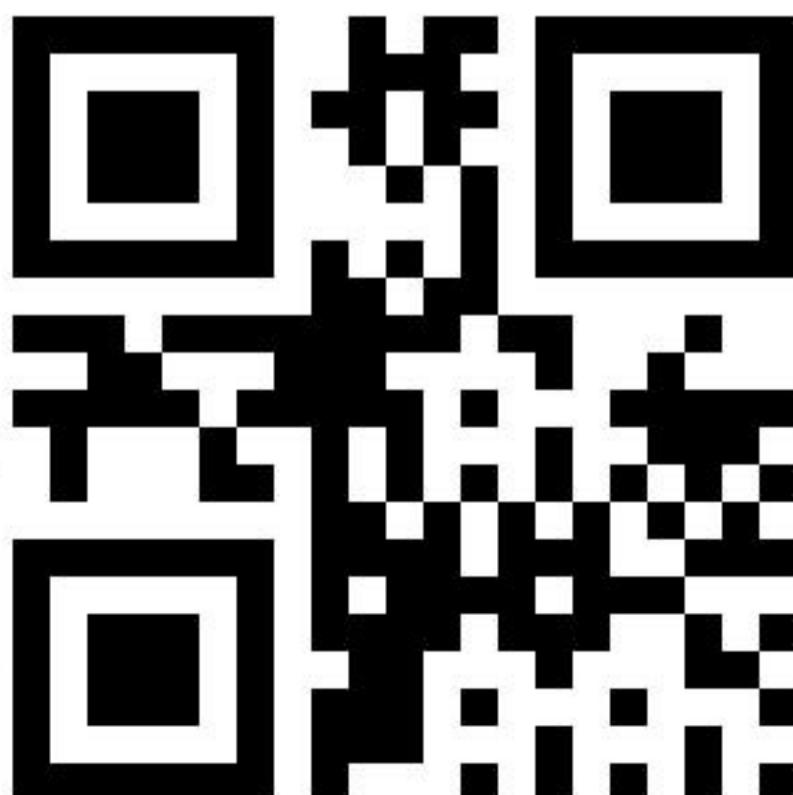



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00513

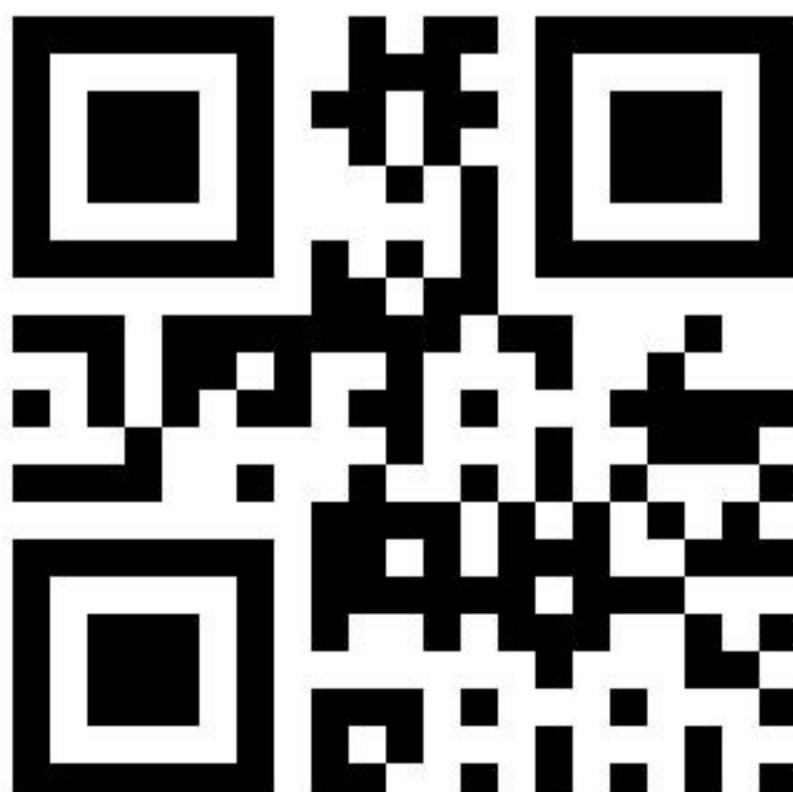



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00514

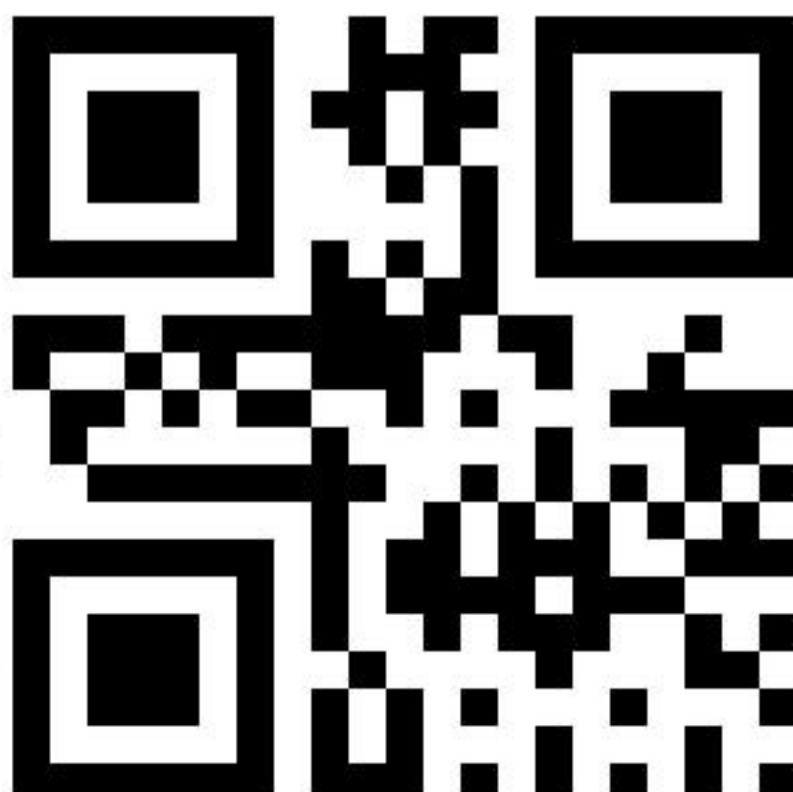



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00515

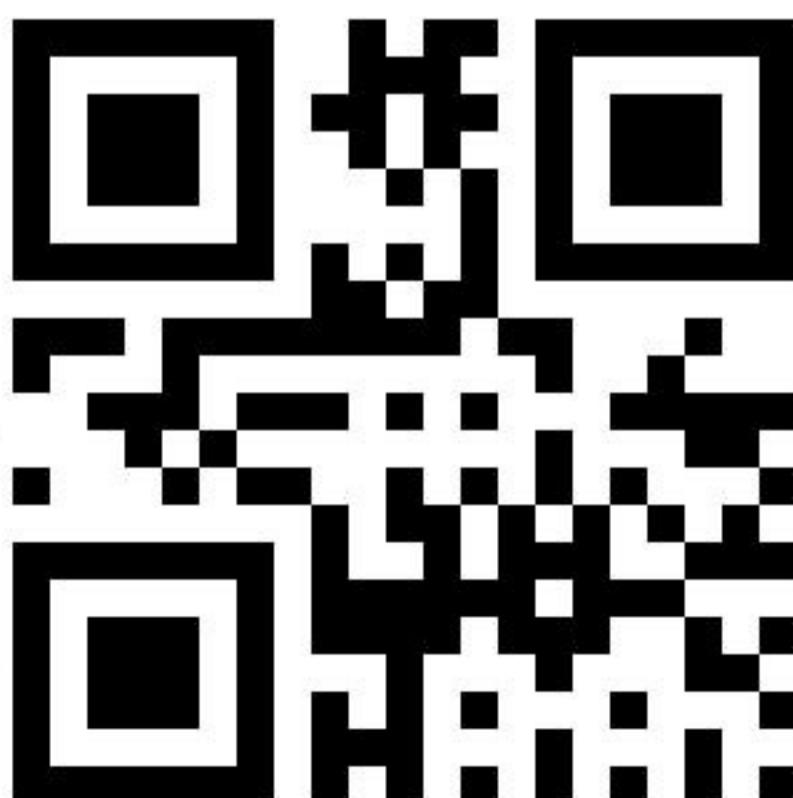



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00516

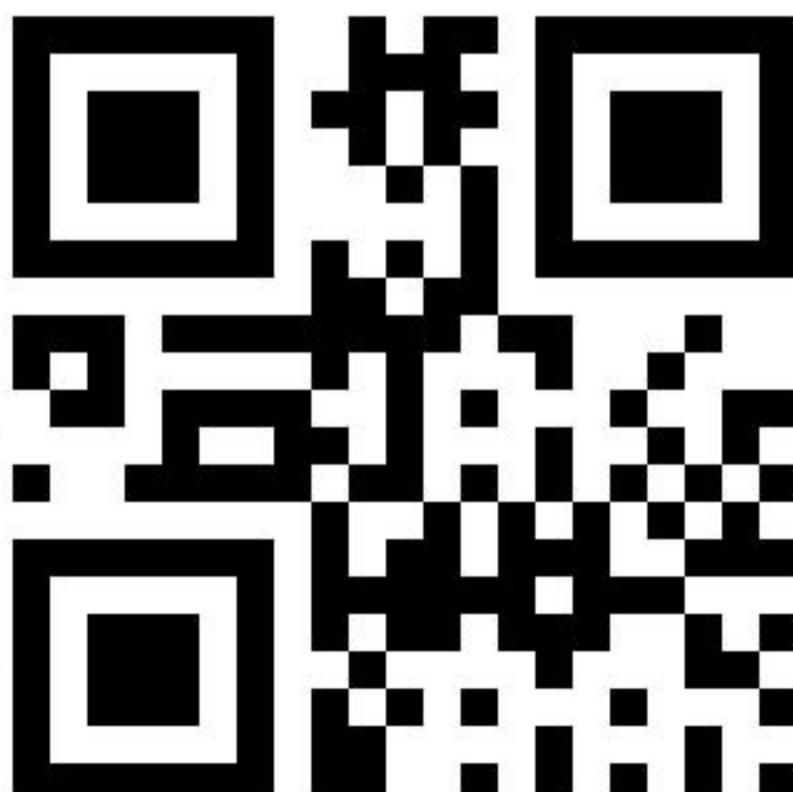



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00517

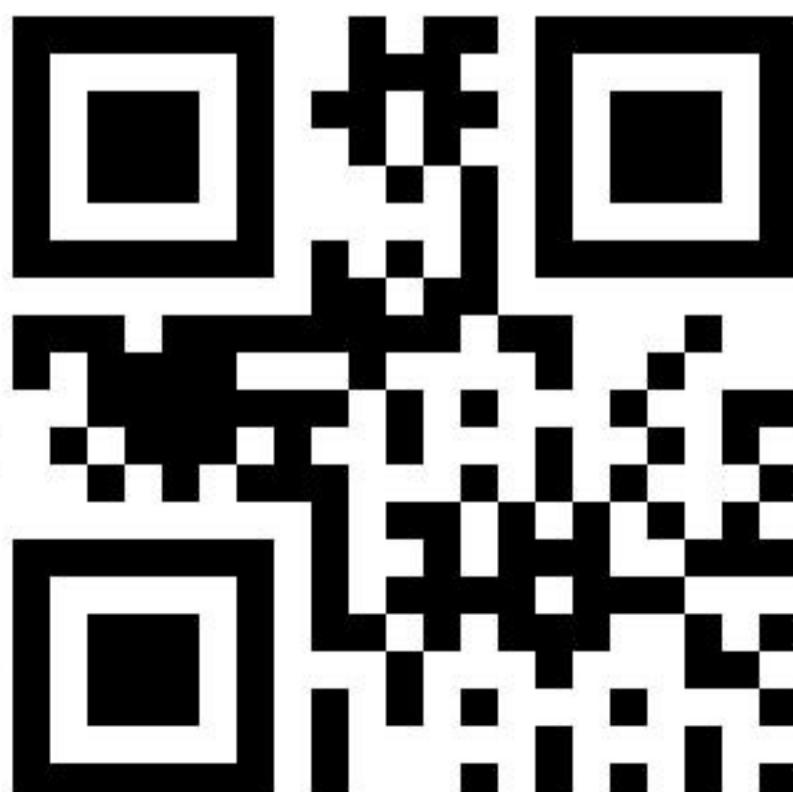



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00518

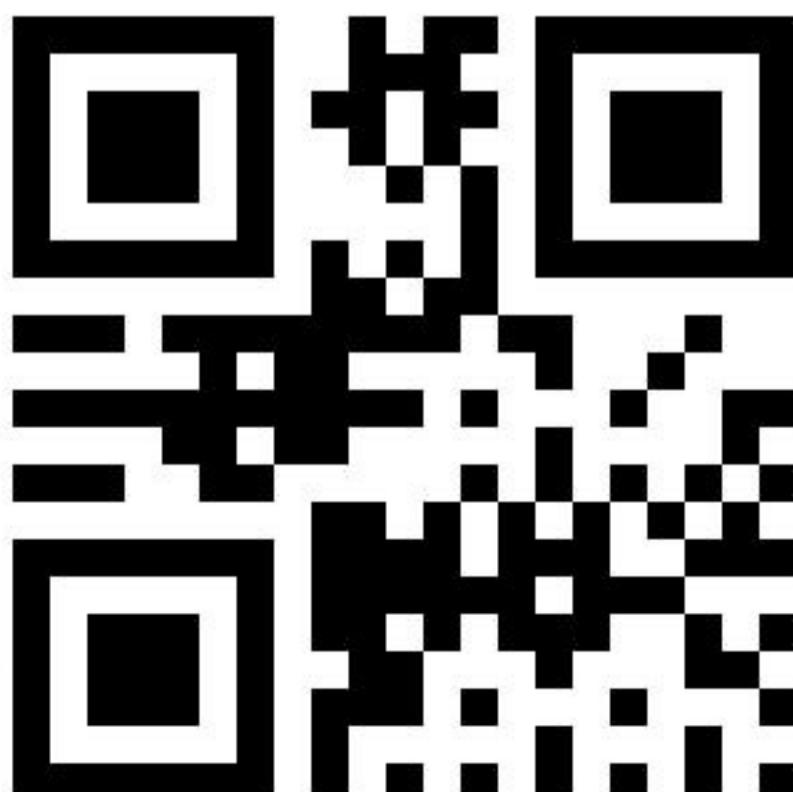



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000519

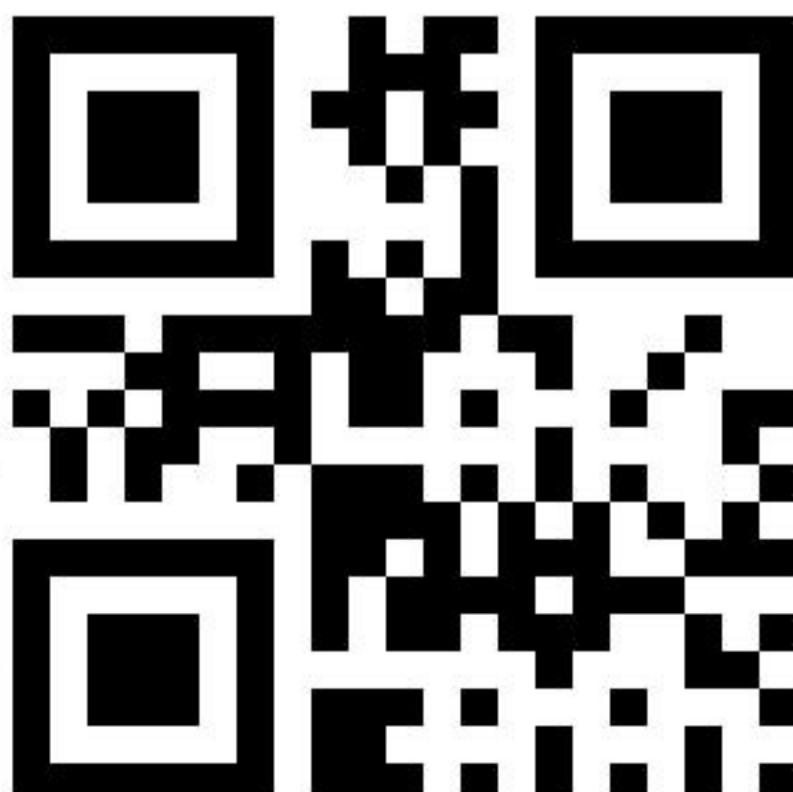



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000520

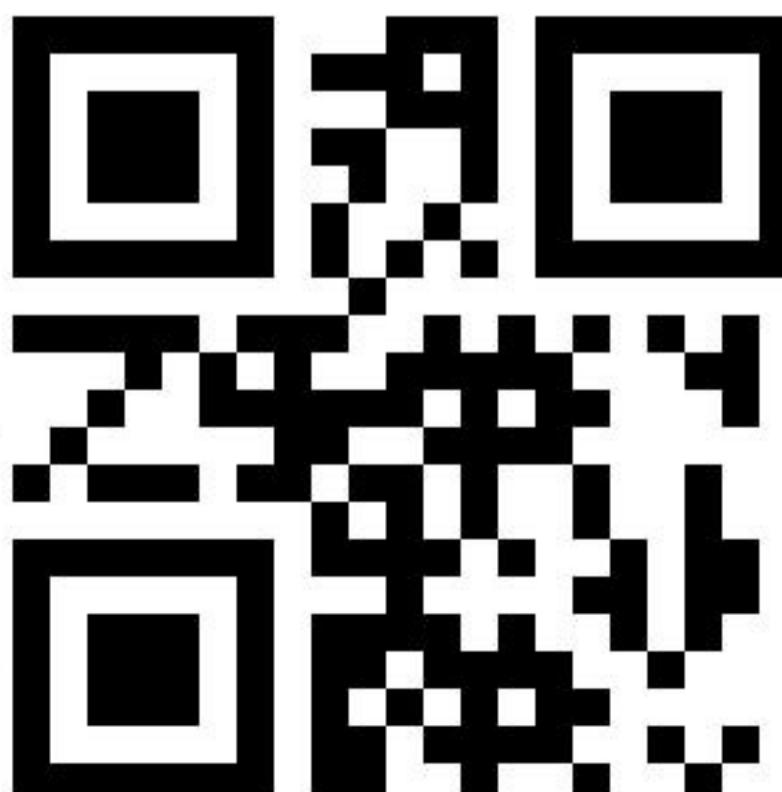



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000521

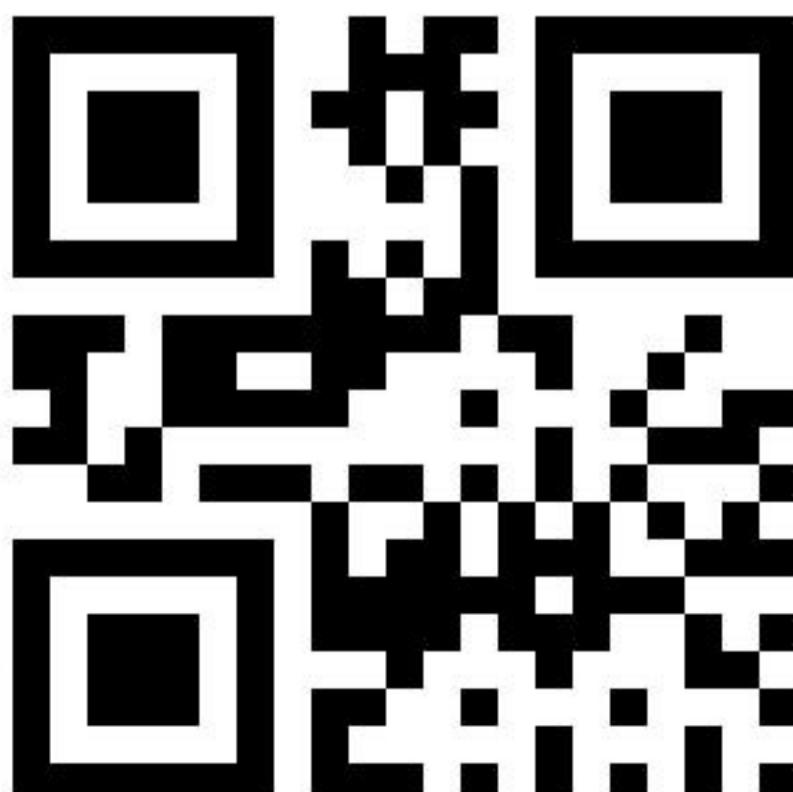



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000522

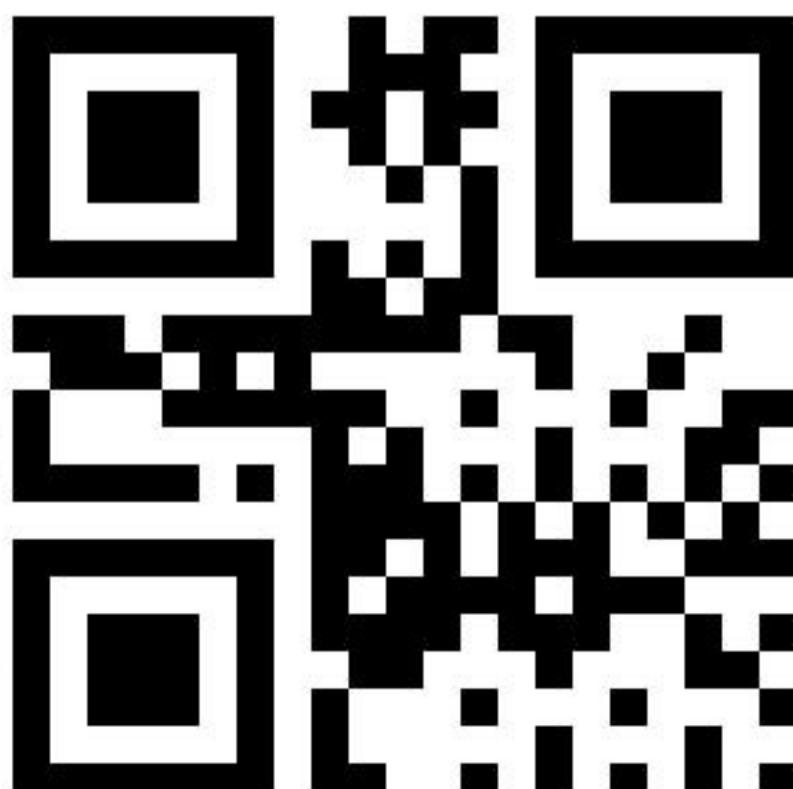



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000523

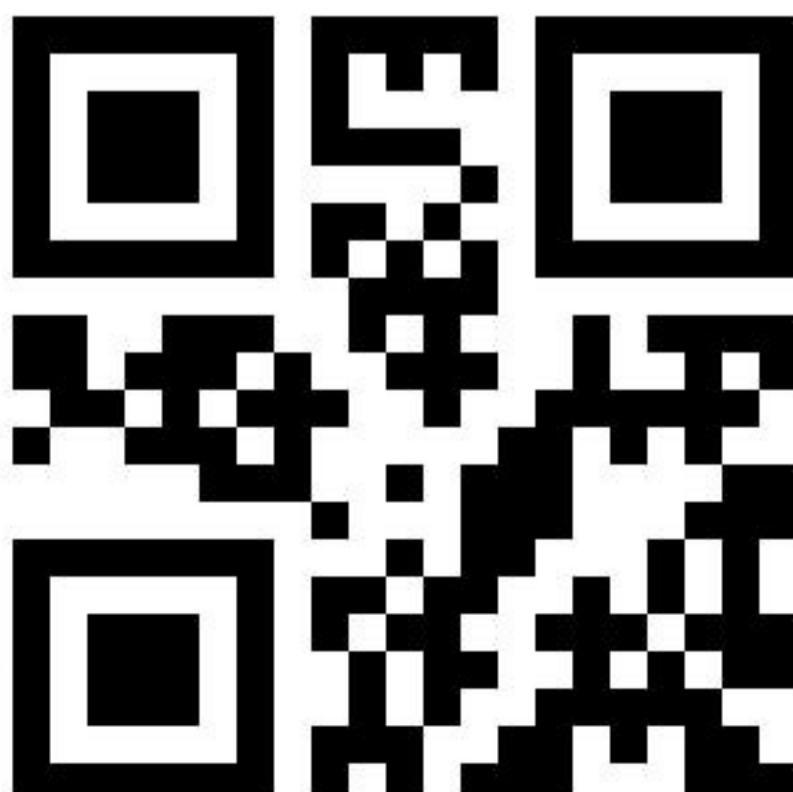



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000524

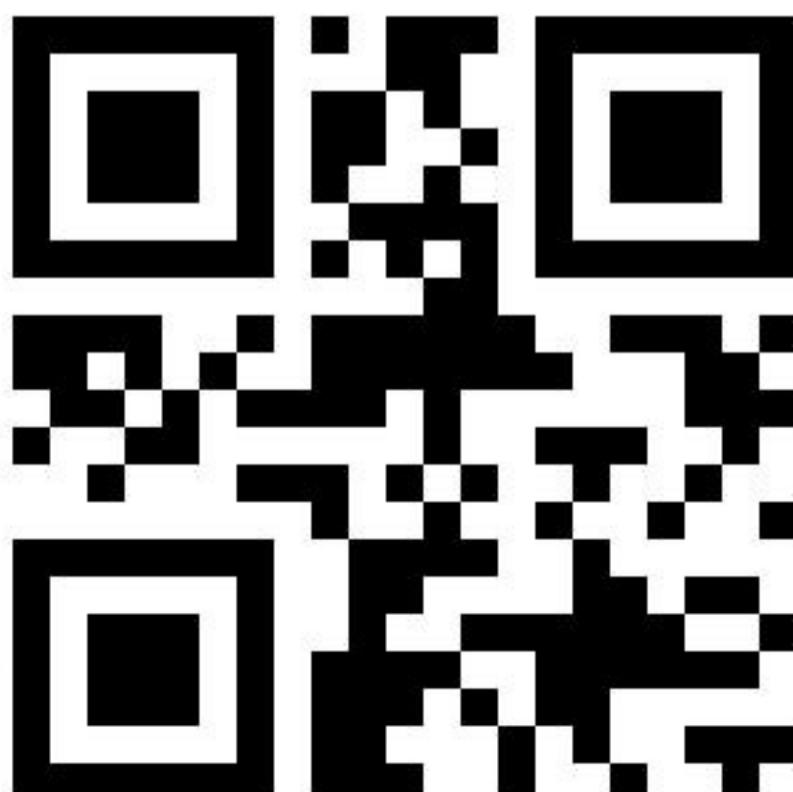



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000525





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000526

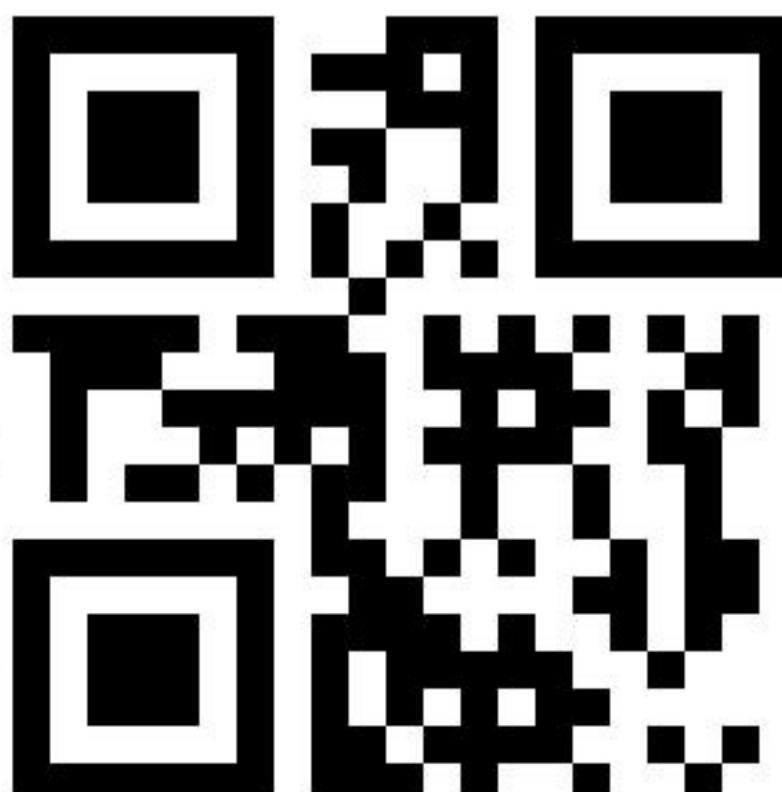



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000527

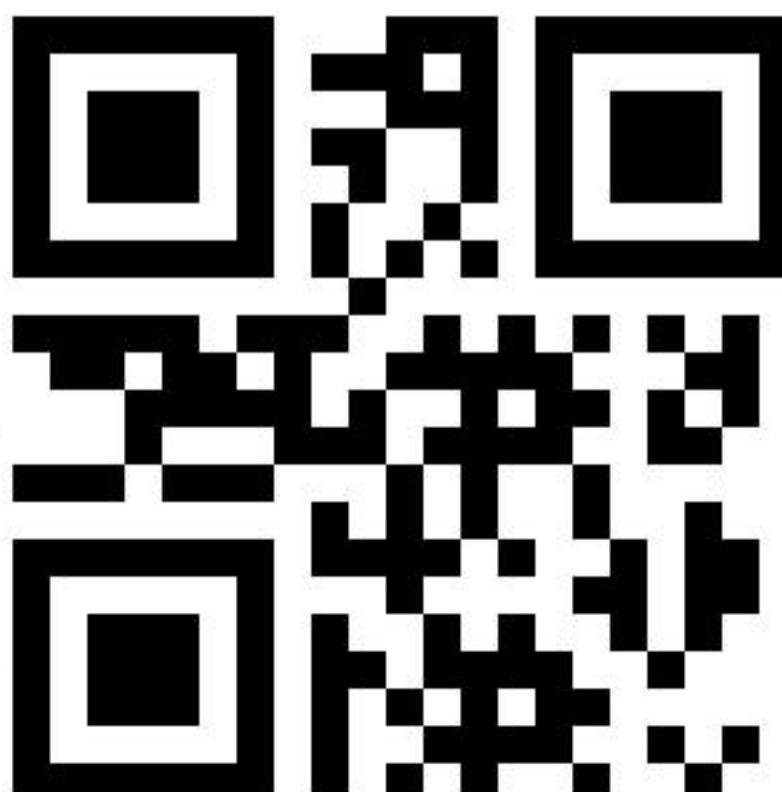



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000528

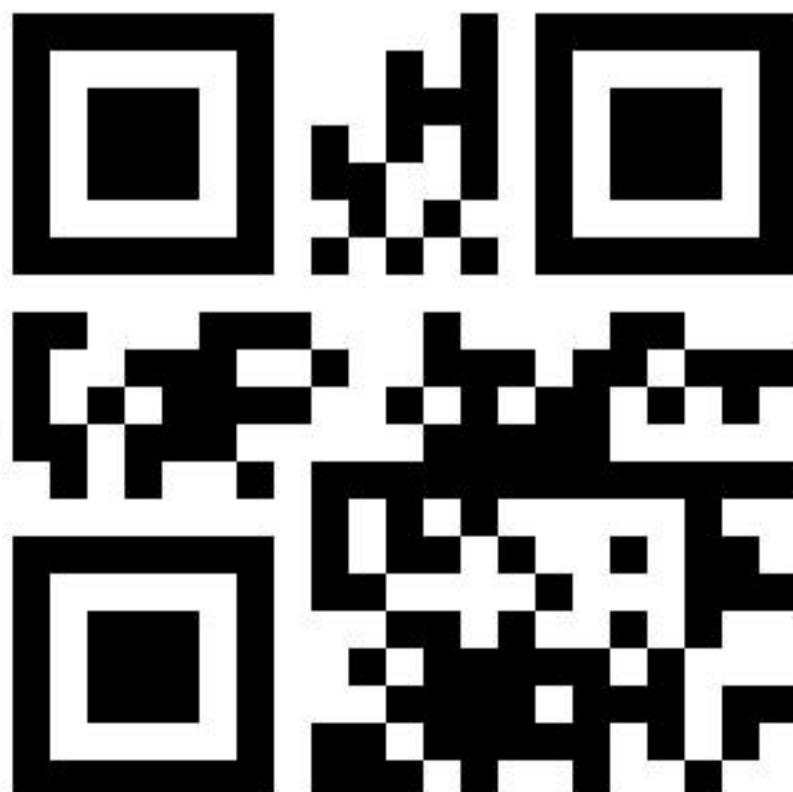



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000529

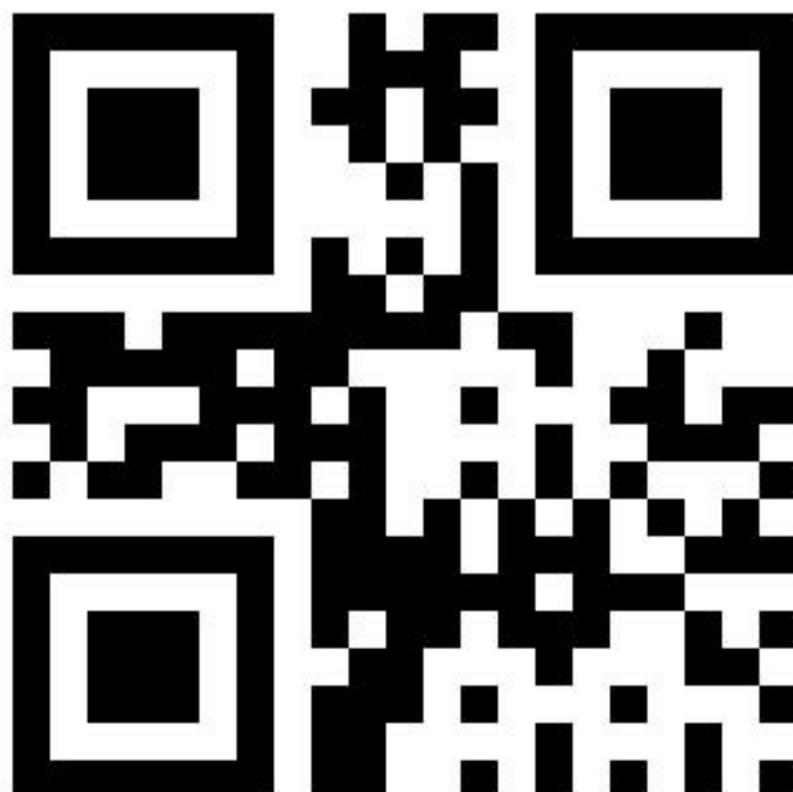



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000530

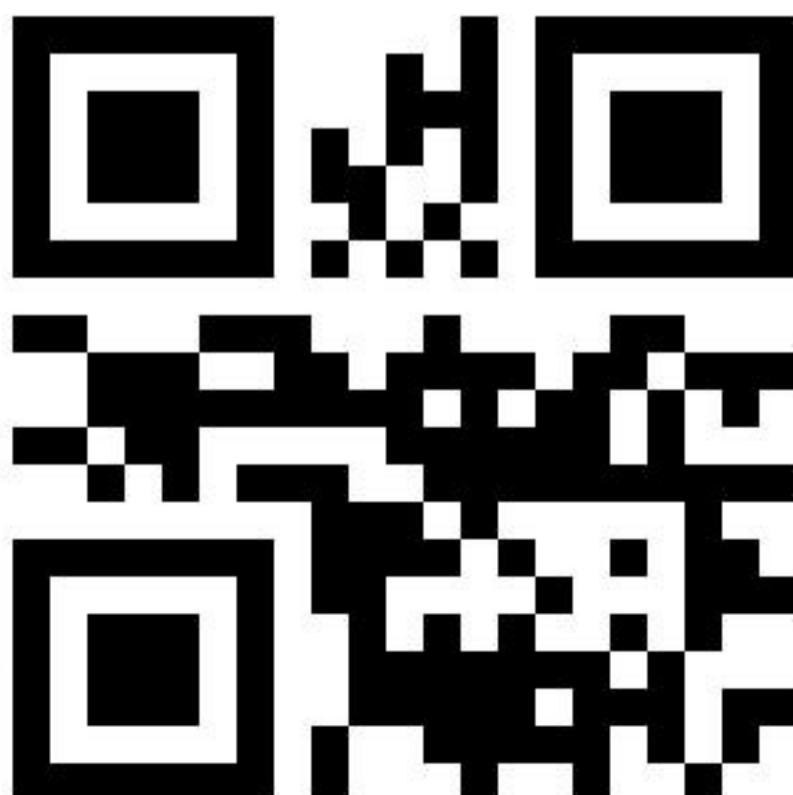



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00531

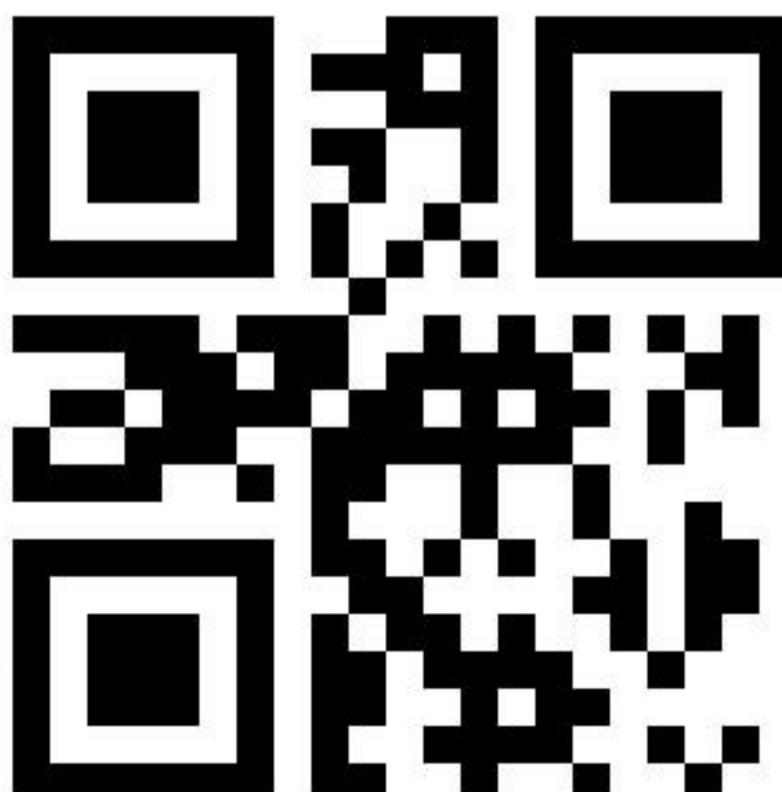



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00532

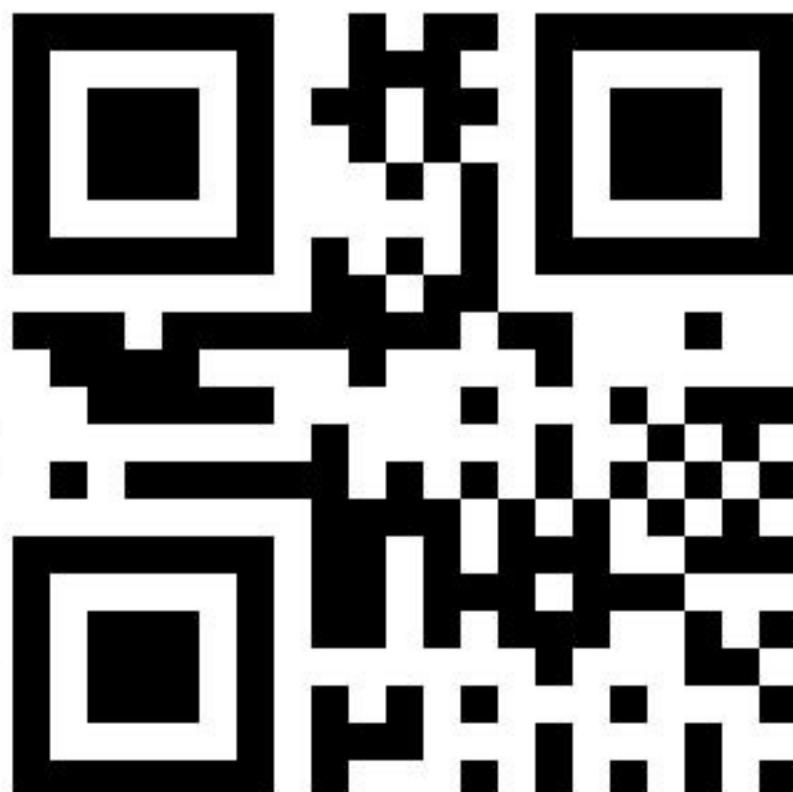



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00533

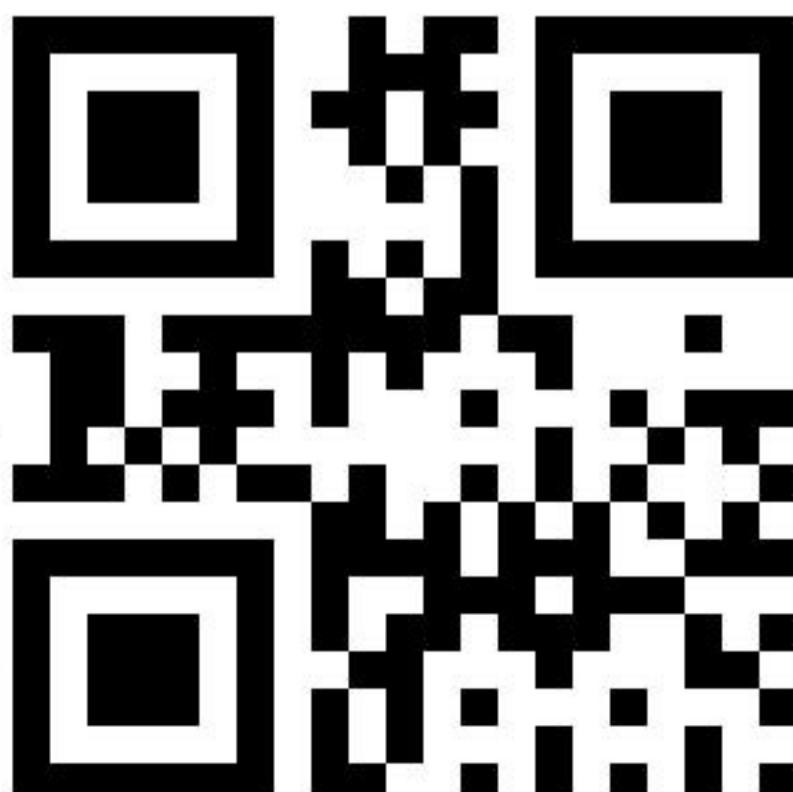



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00534

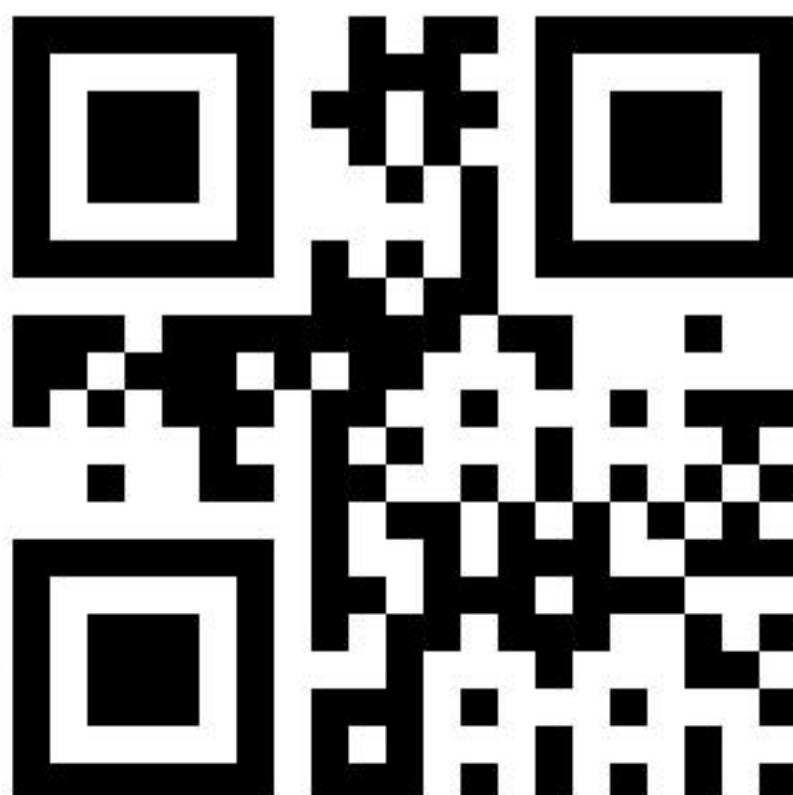



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00535

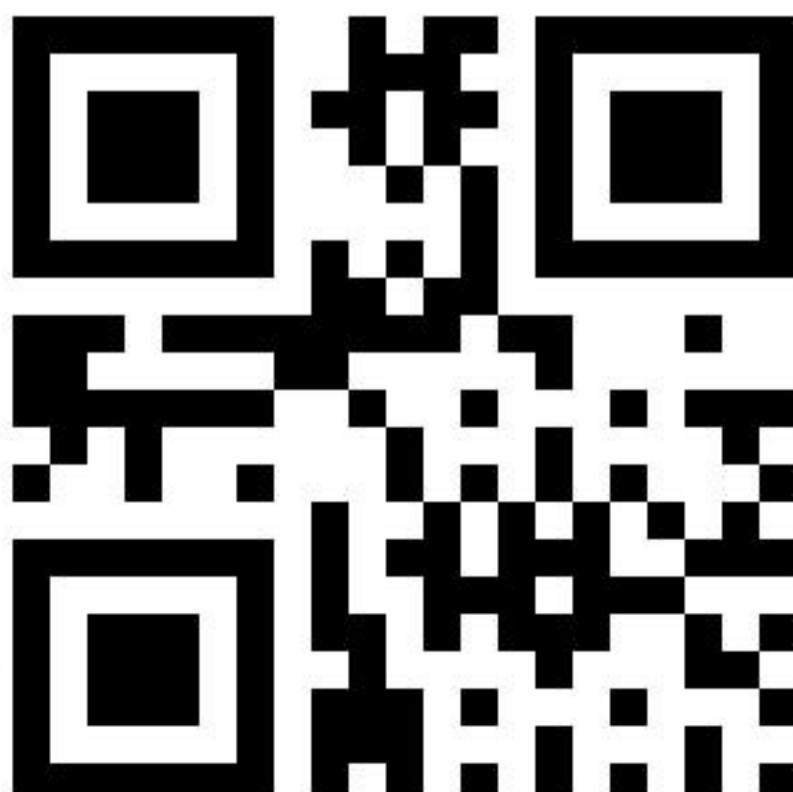



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00536

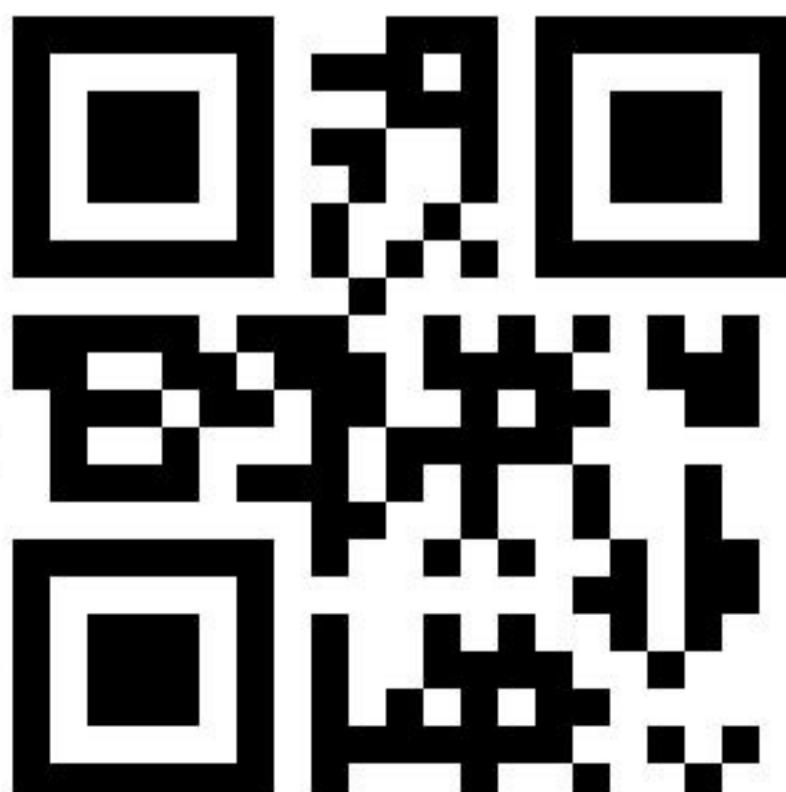



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00537

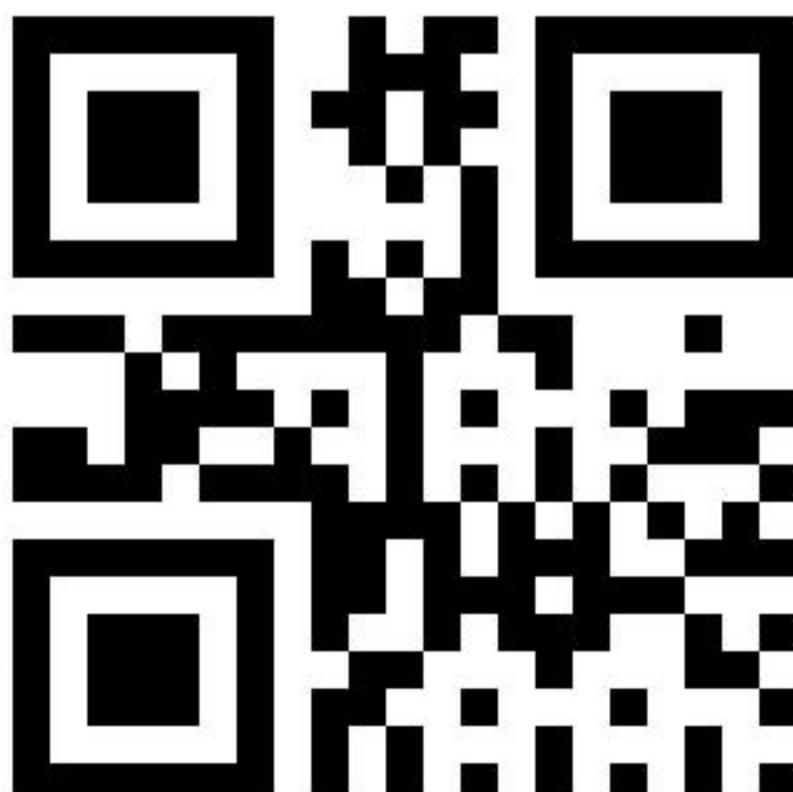



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00538





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000539

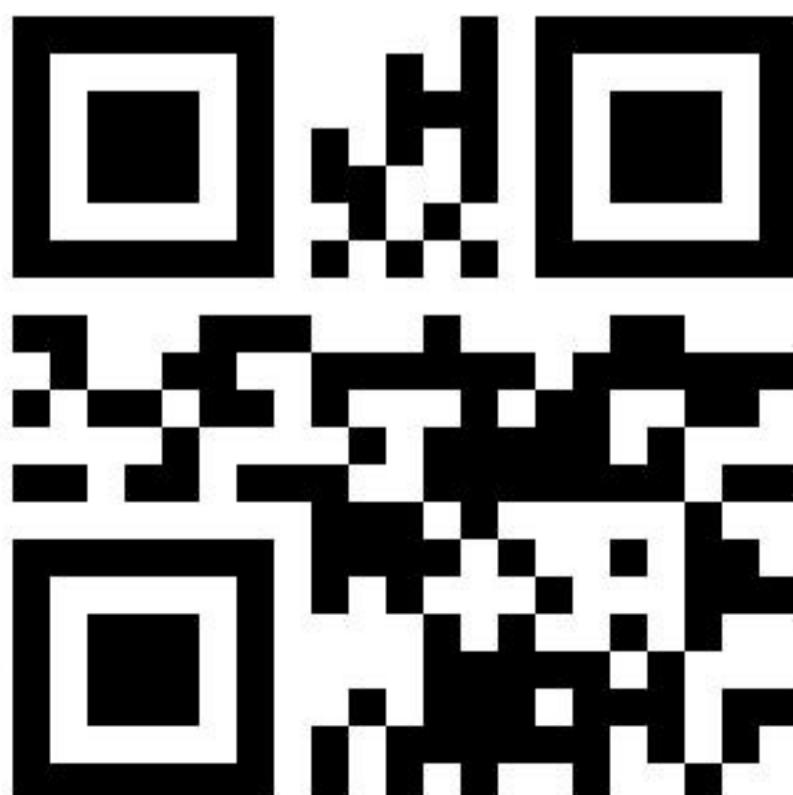



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00540

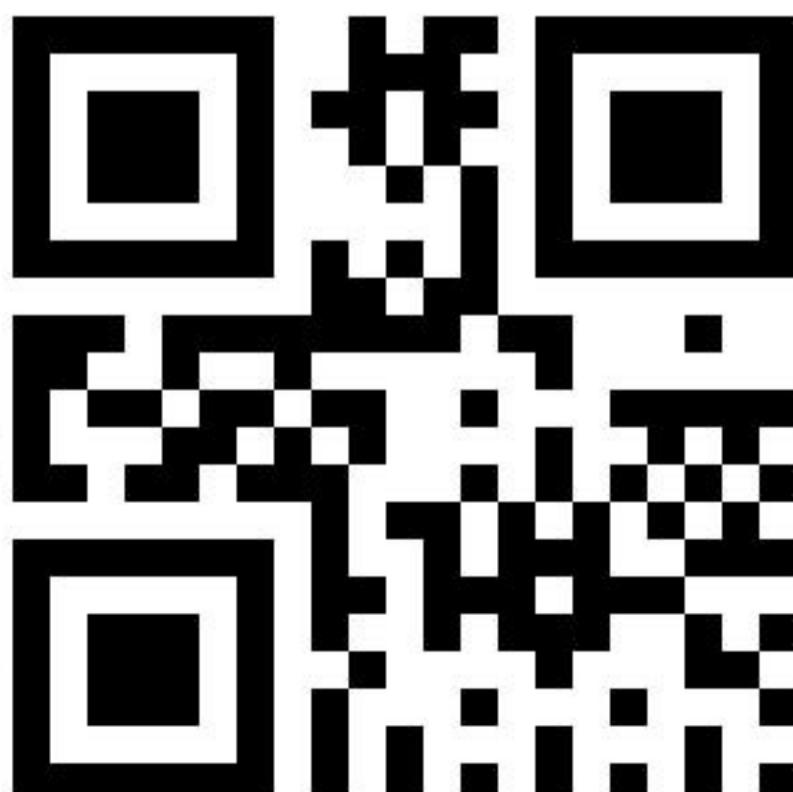



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00541

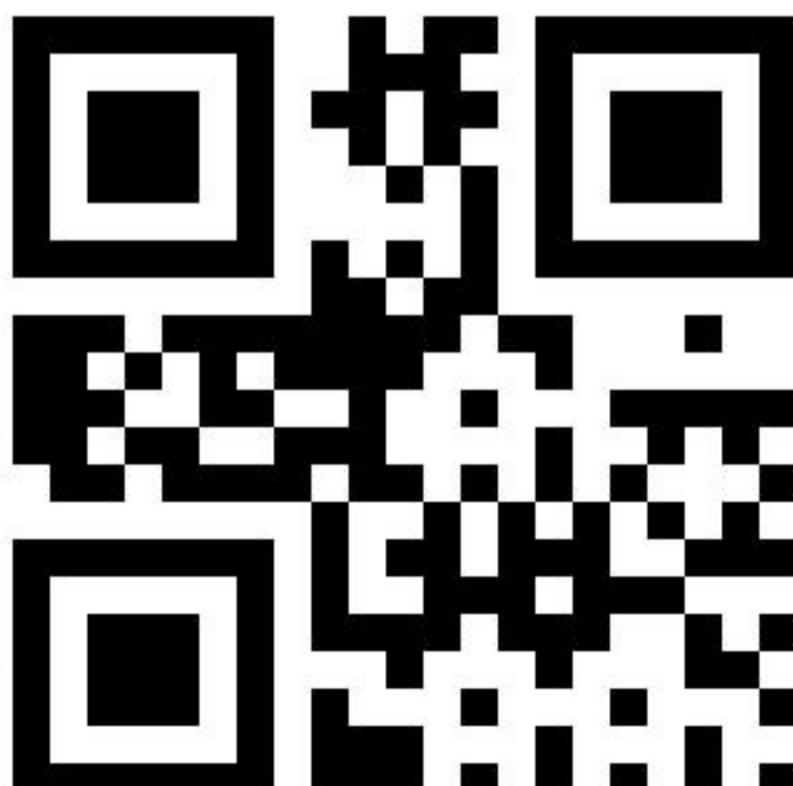



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00542

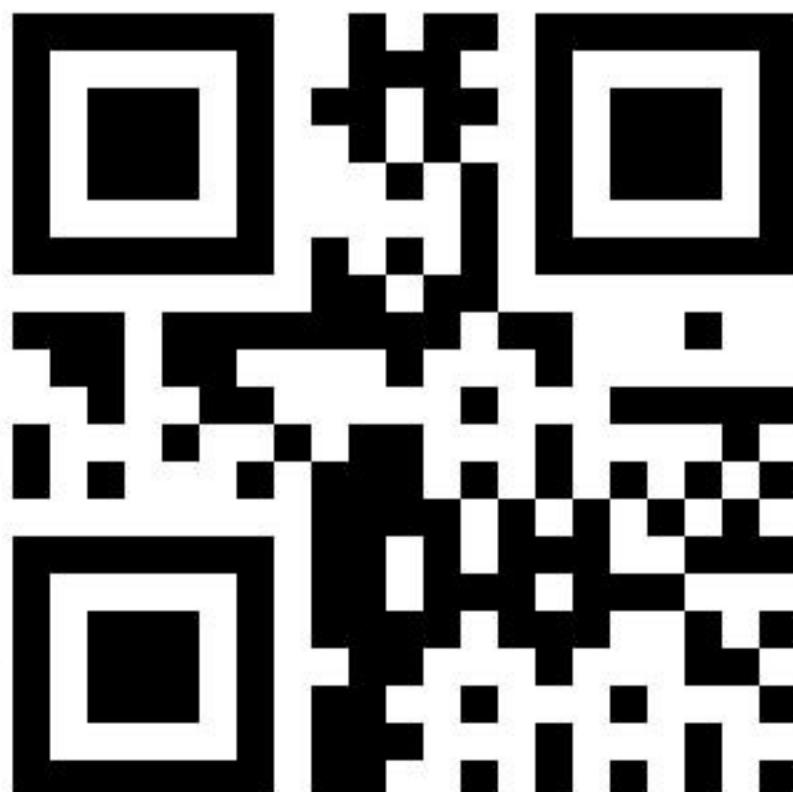



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00543

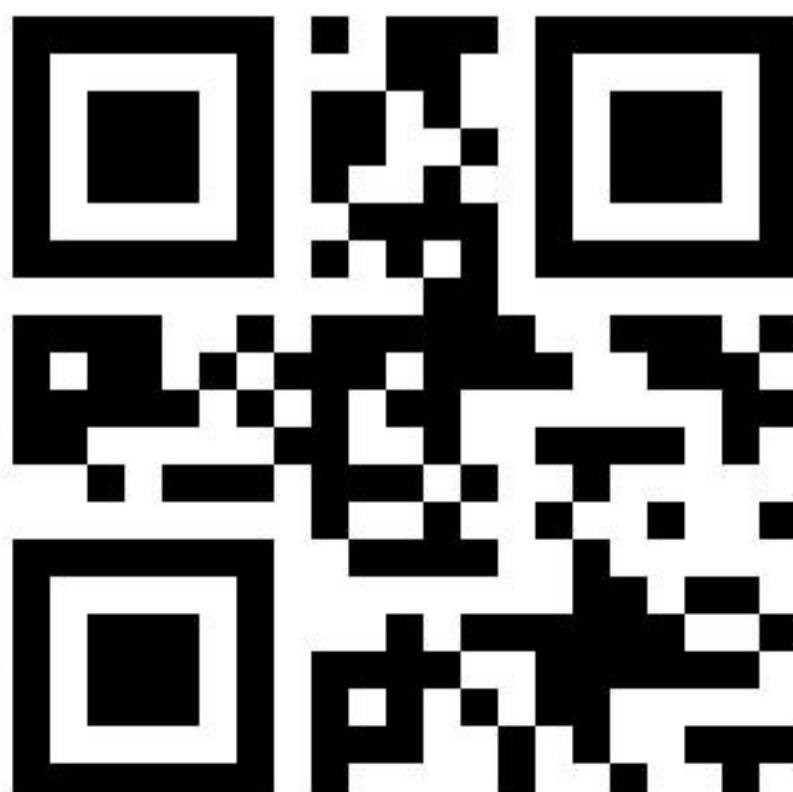



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00544

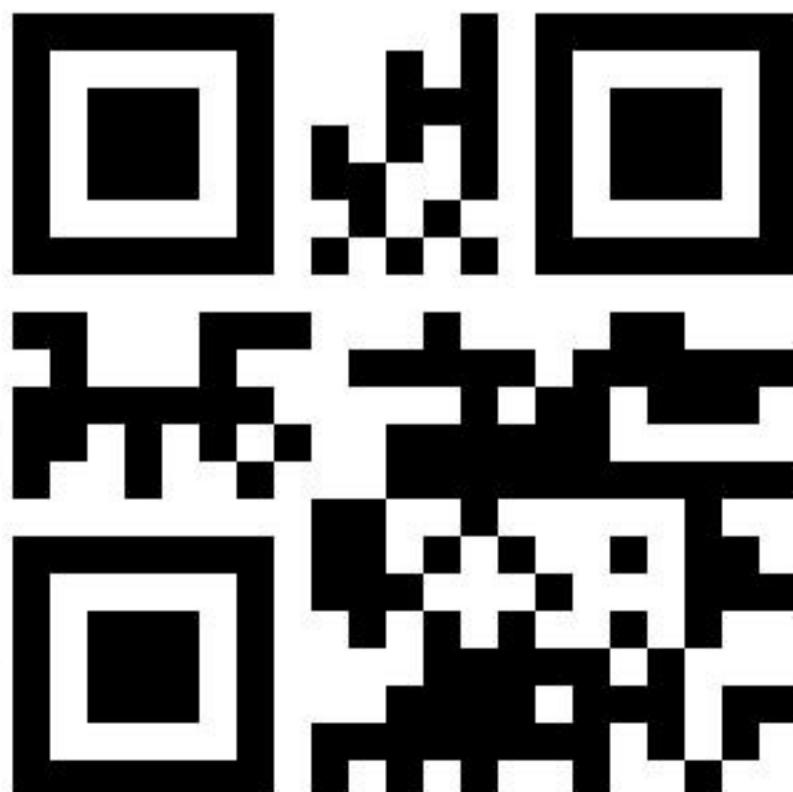



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00545

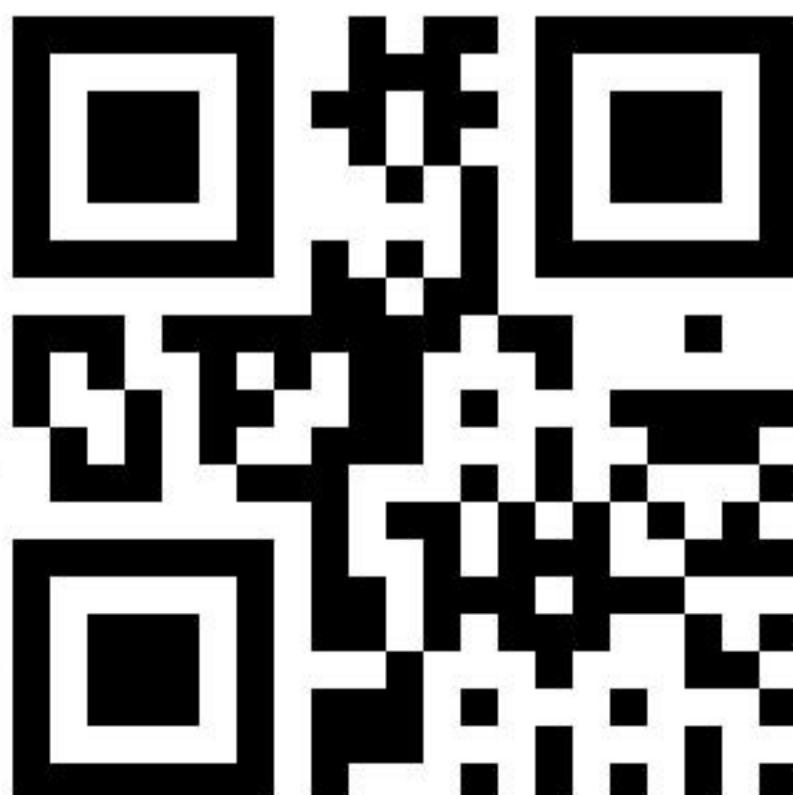



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00546

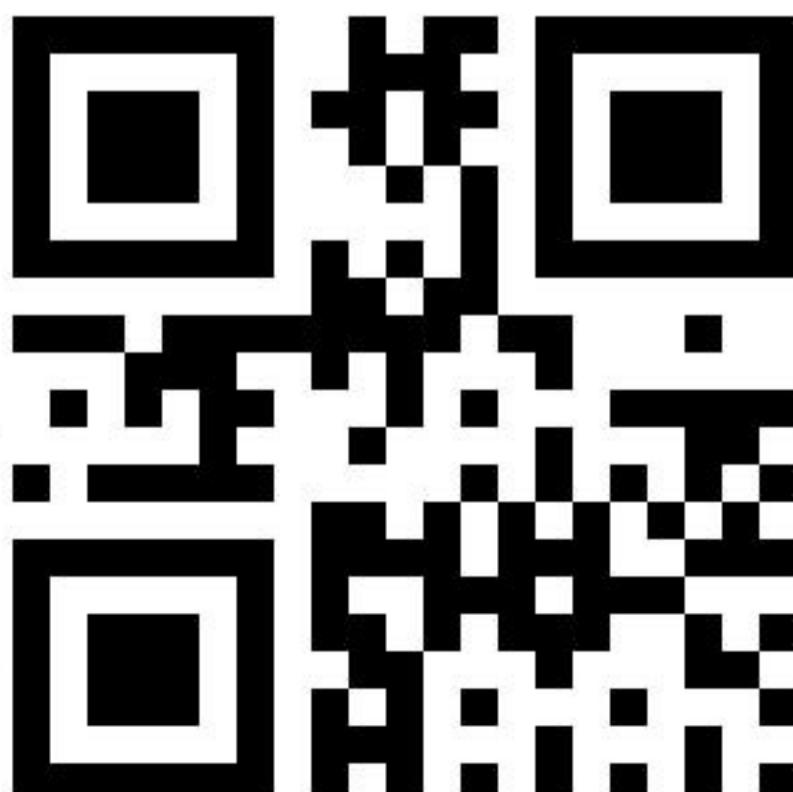



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00547

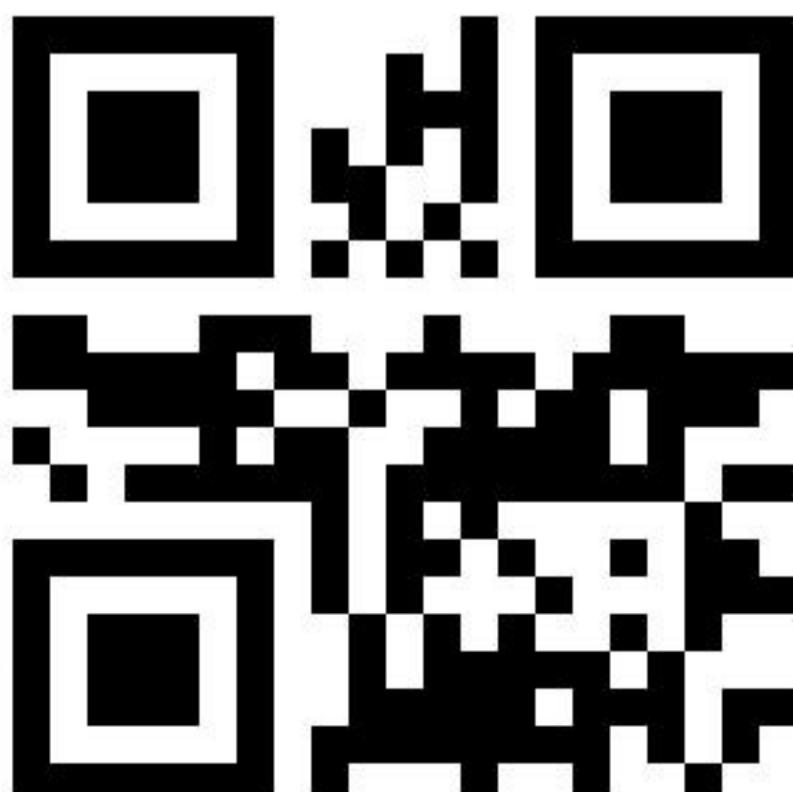



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00548

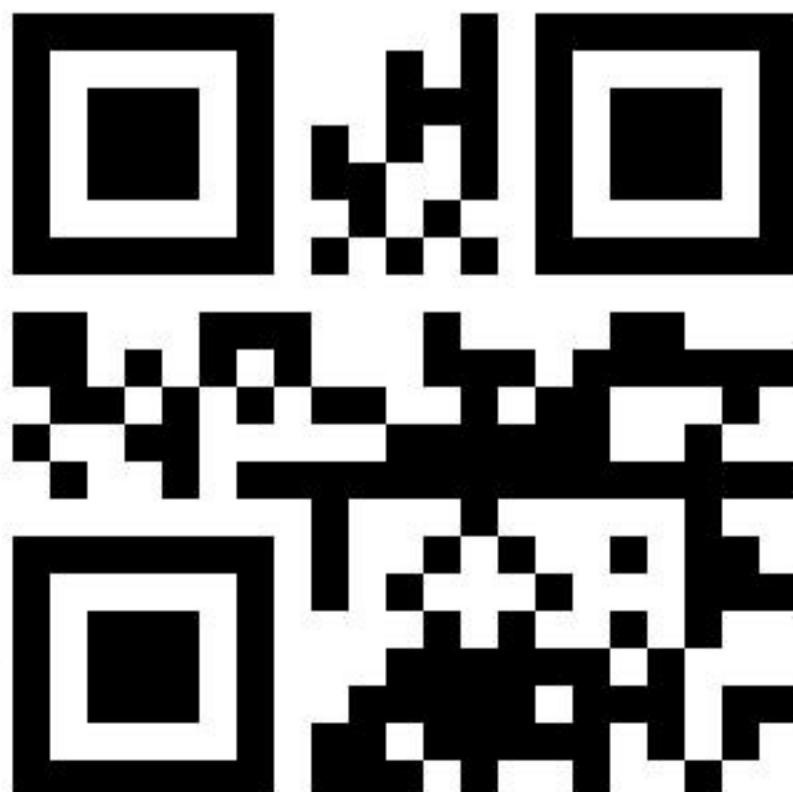



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00549





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00550

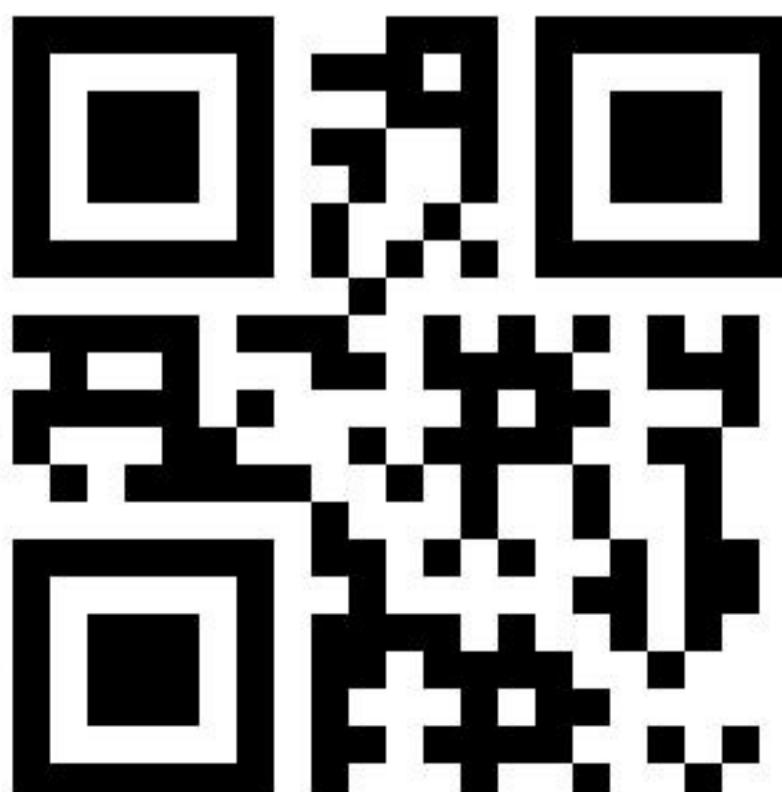



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 005551

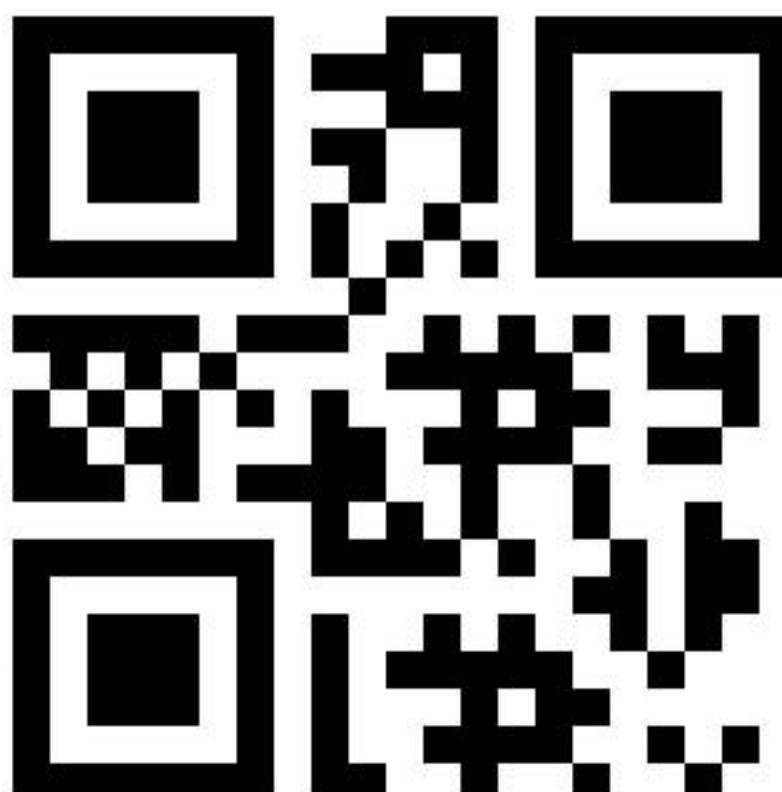



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00552





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00553





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00554

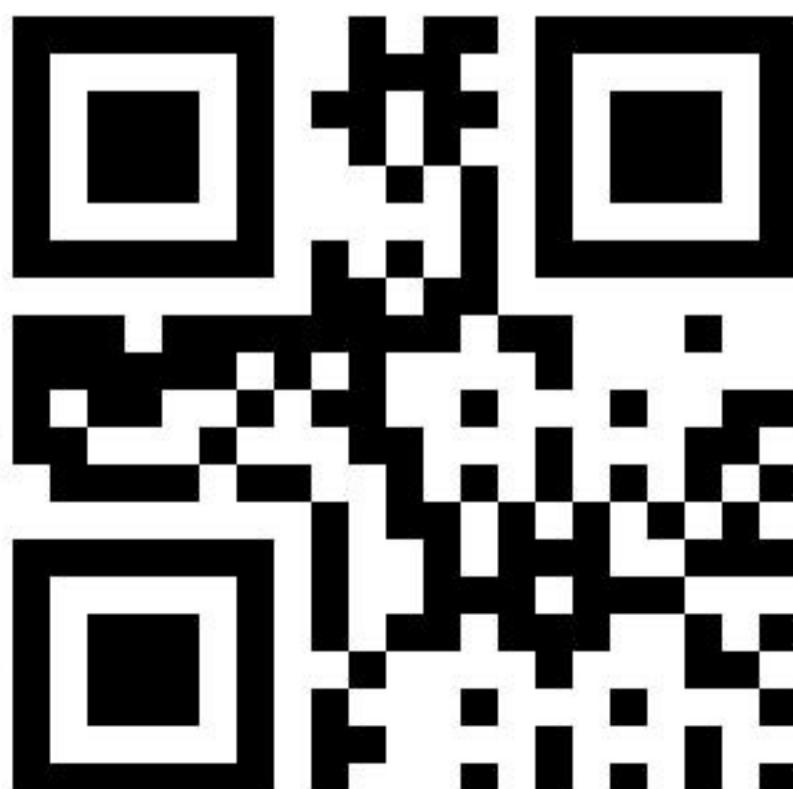



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 005555

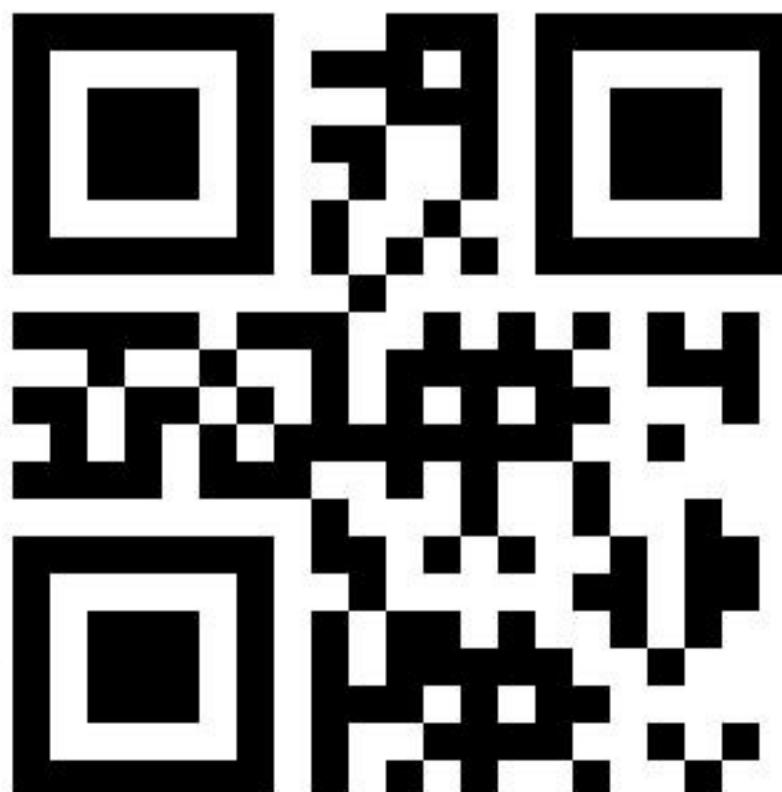



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 005556





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 005557

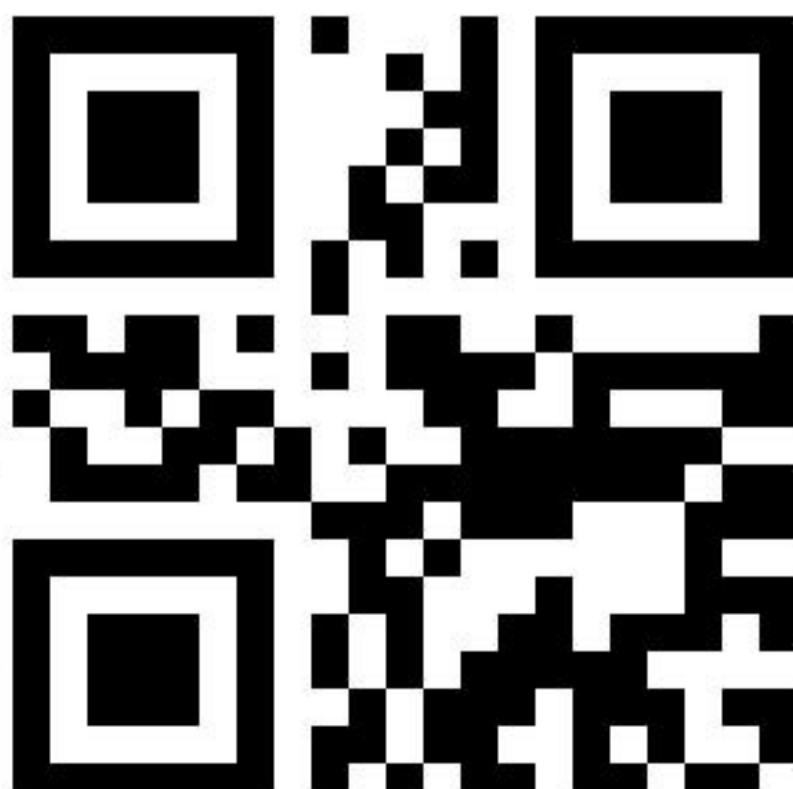



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 005558

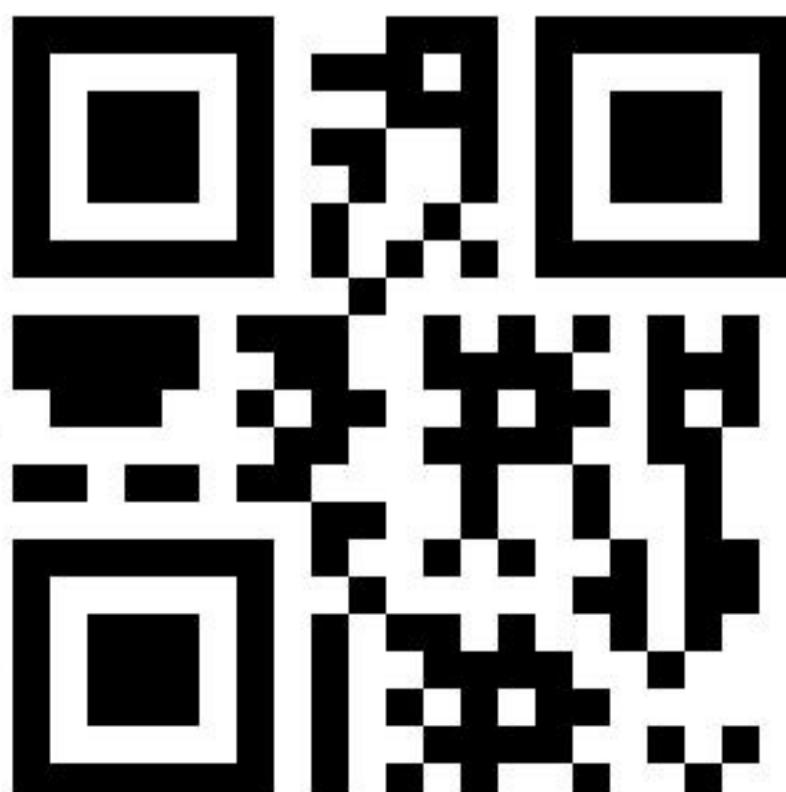



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00559

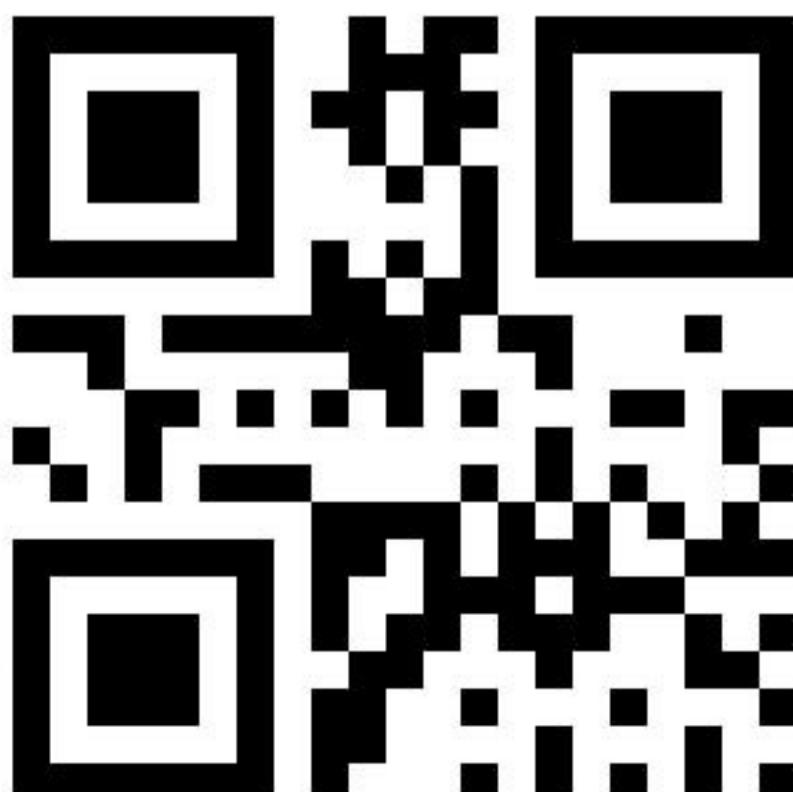



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00560

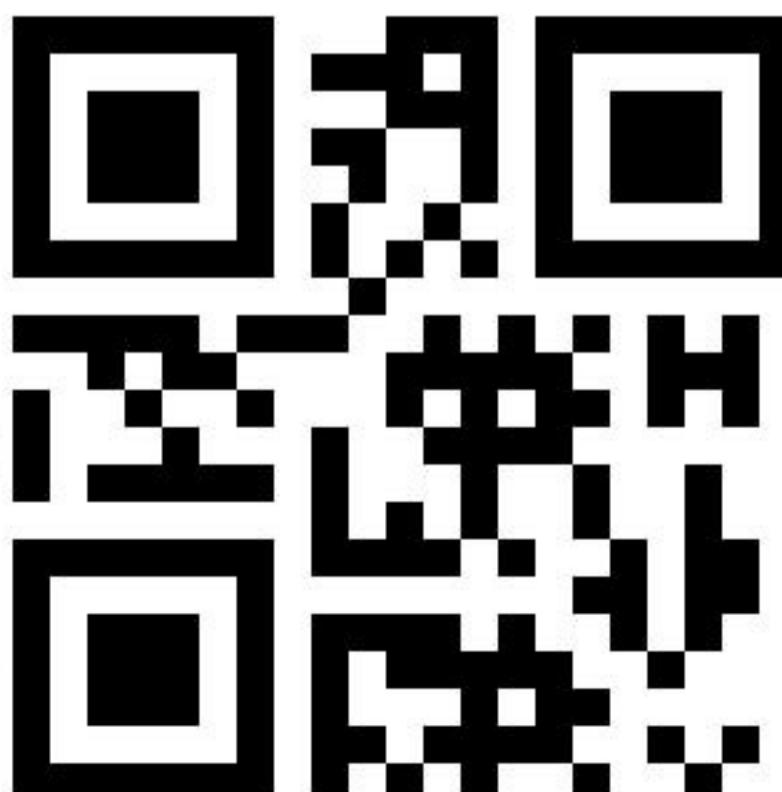



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00561

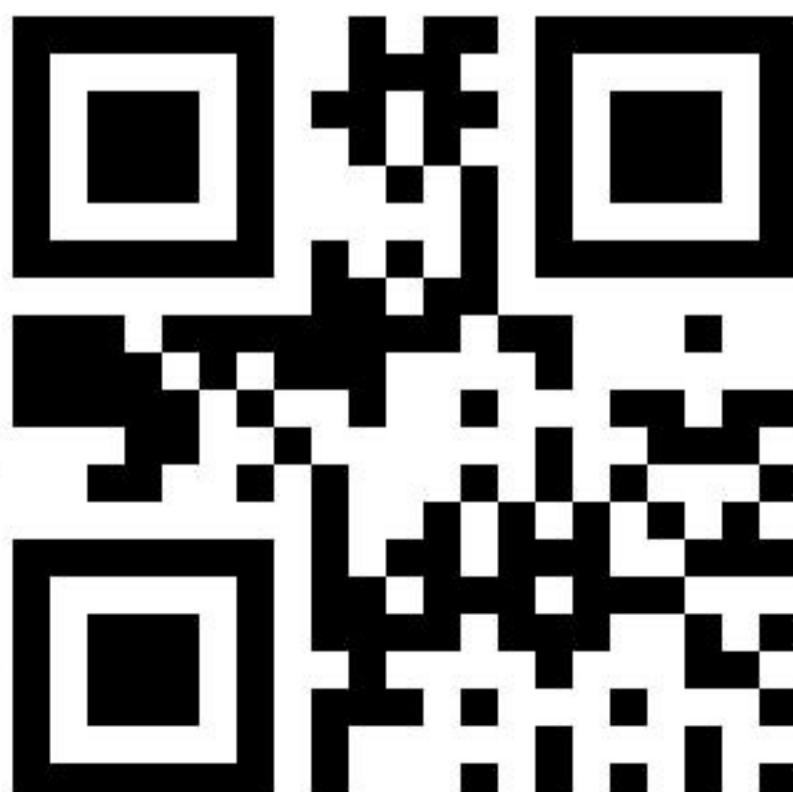



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00562

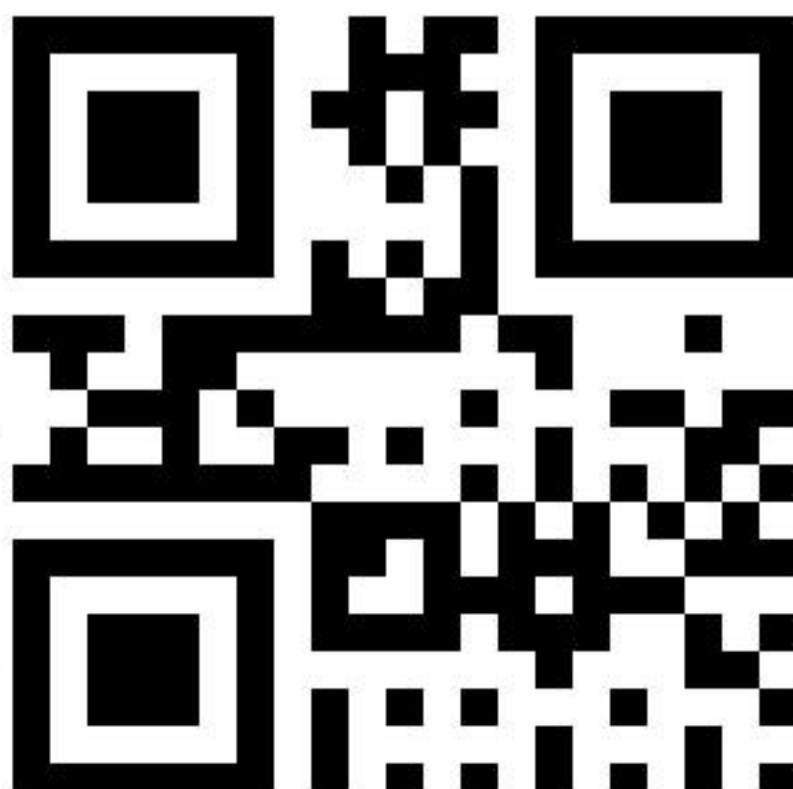



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00563

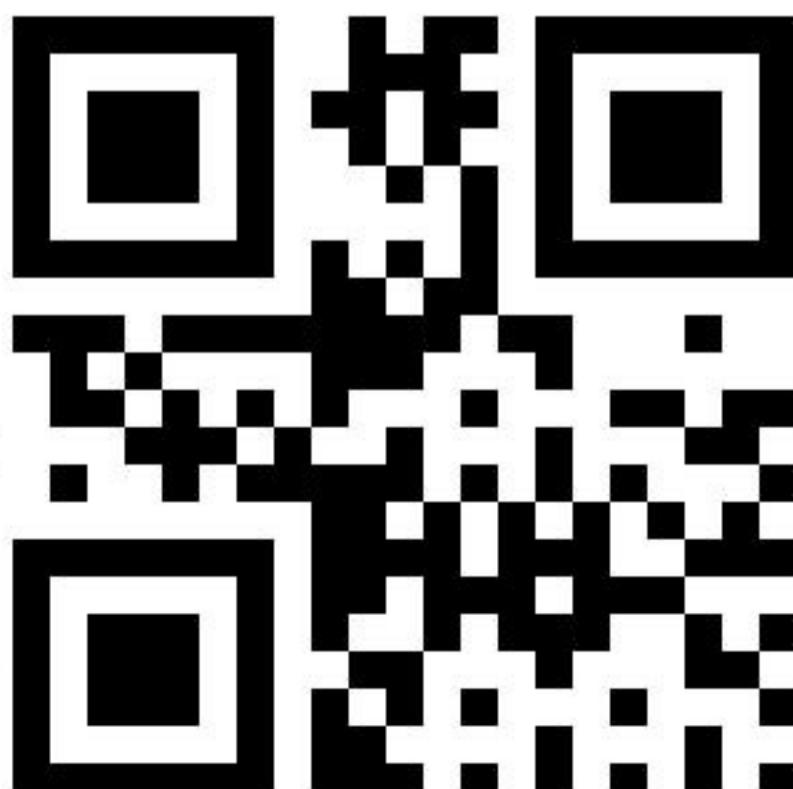



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00564

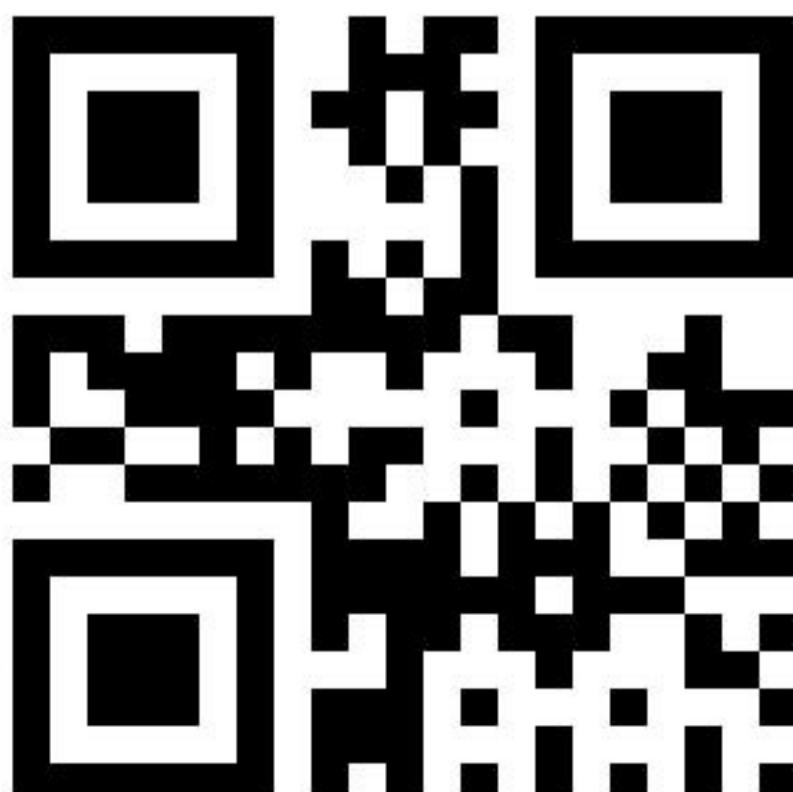



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00565

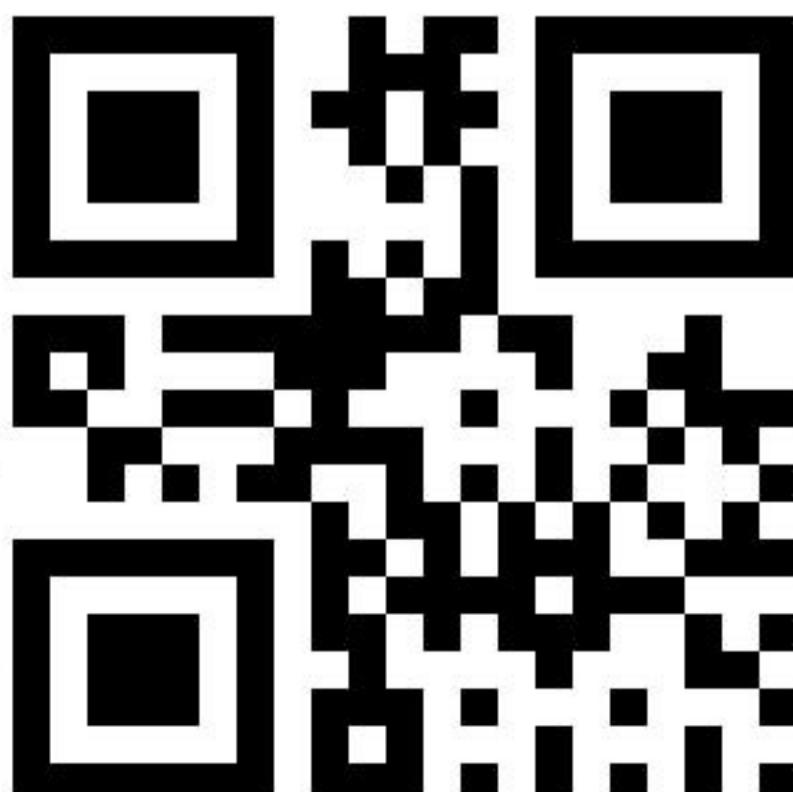



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00566

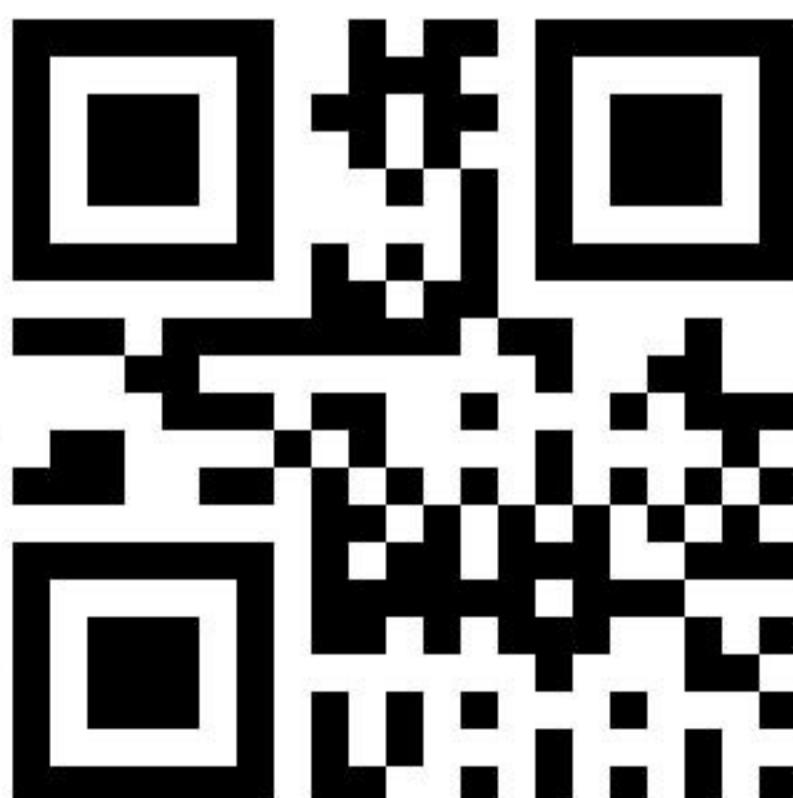



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00567

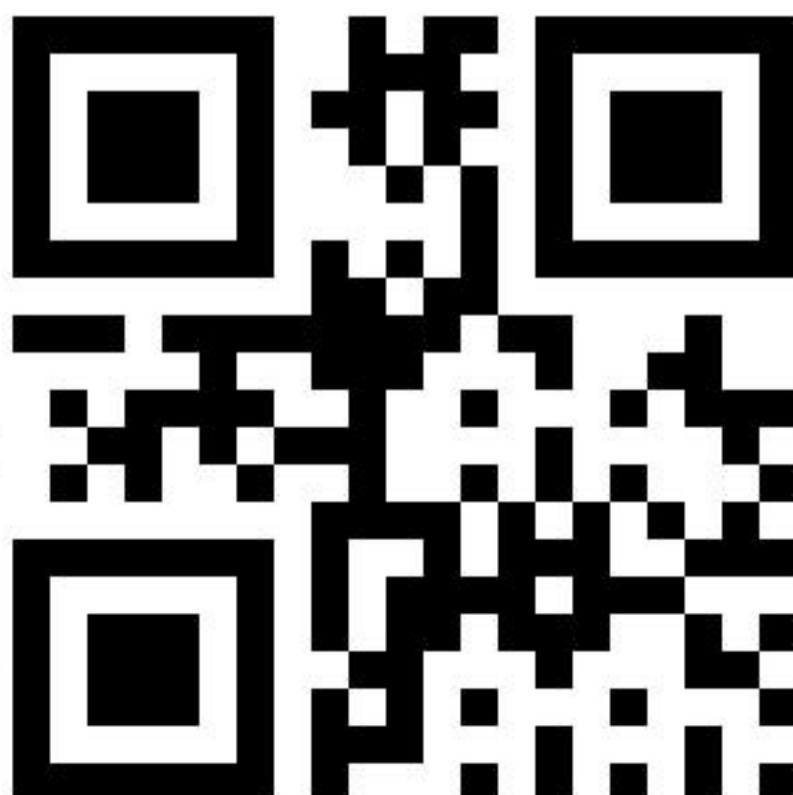



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000568

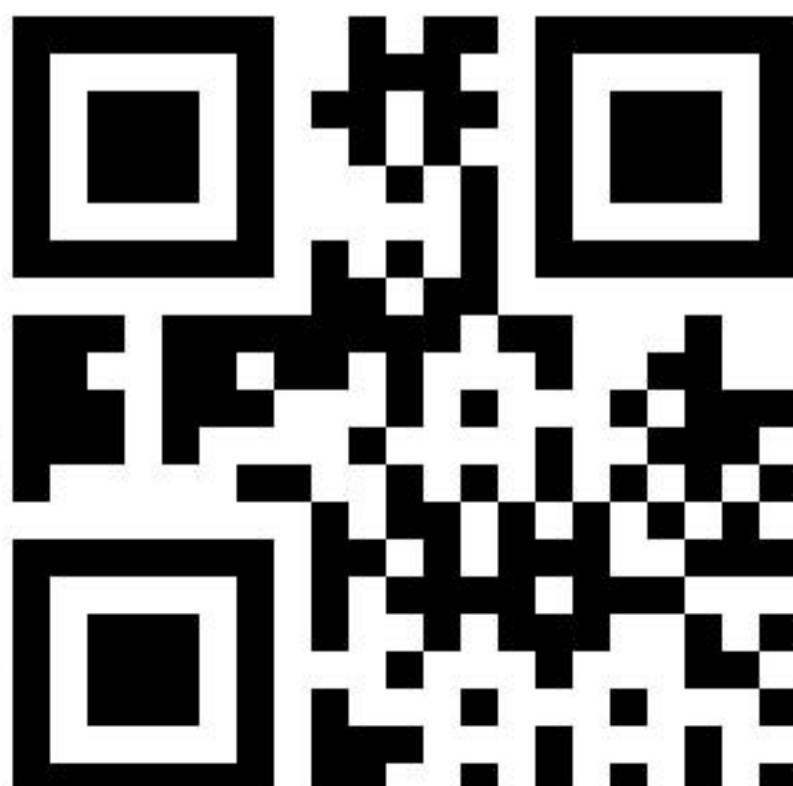



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000569

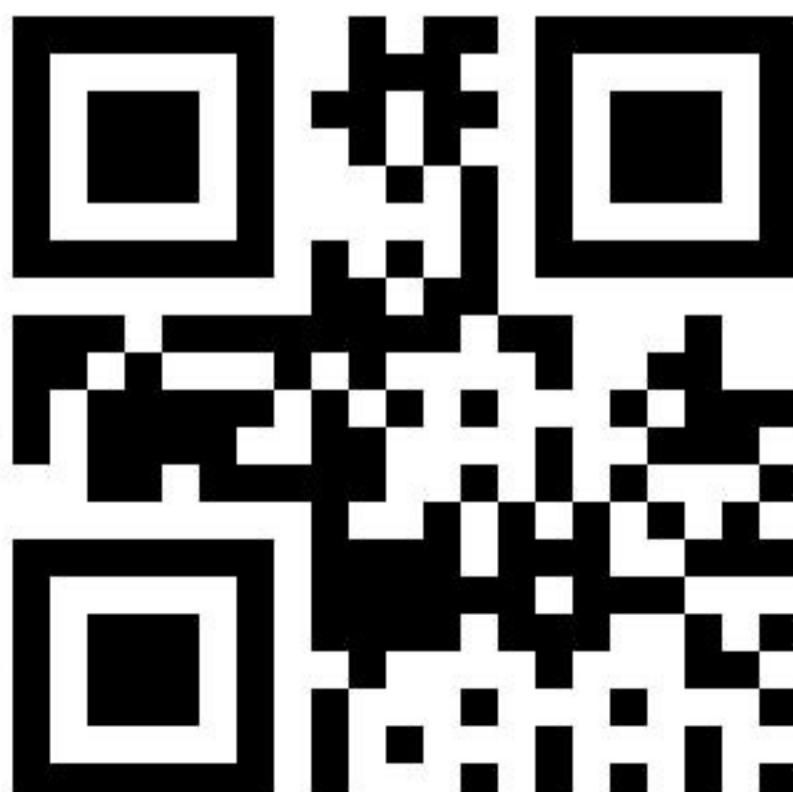



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000570

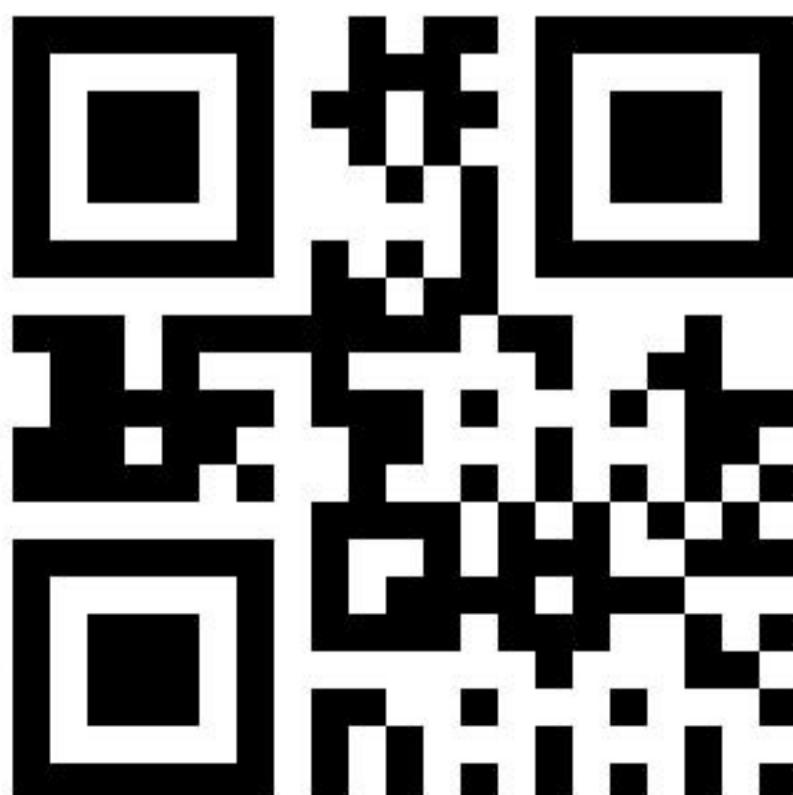



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000571

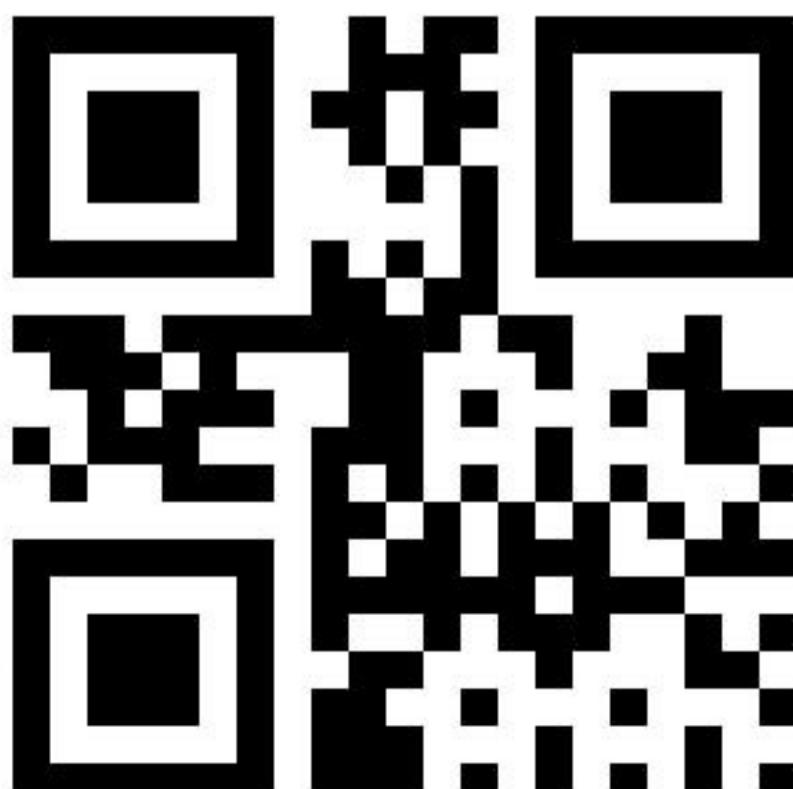



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000572

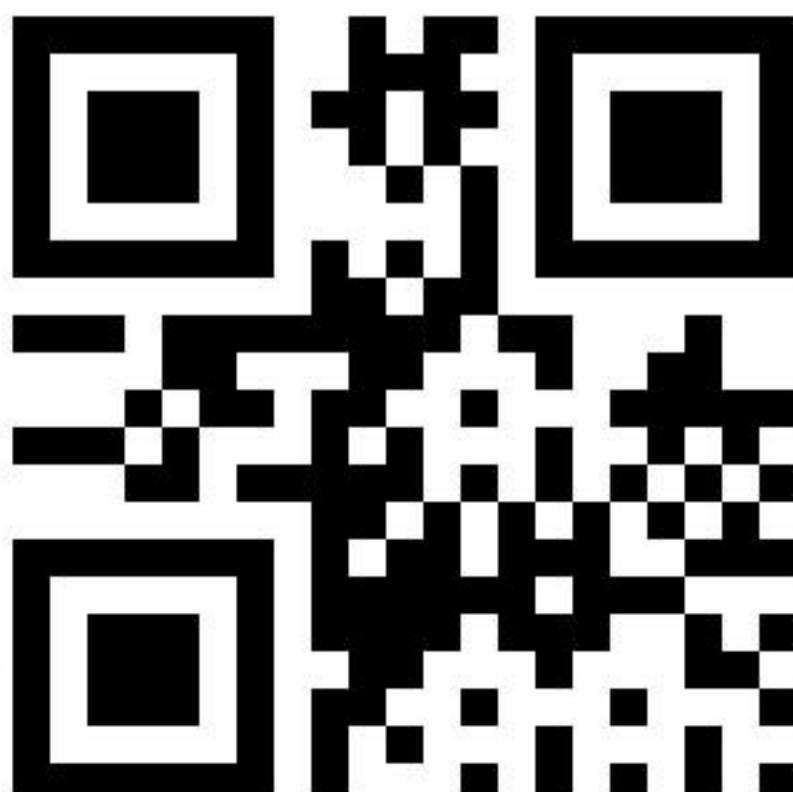



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000573





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000574





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000575

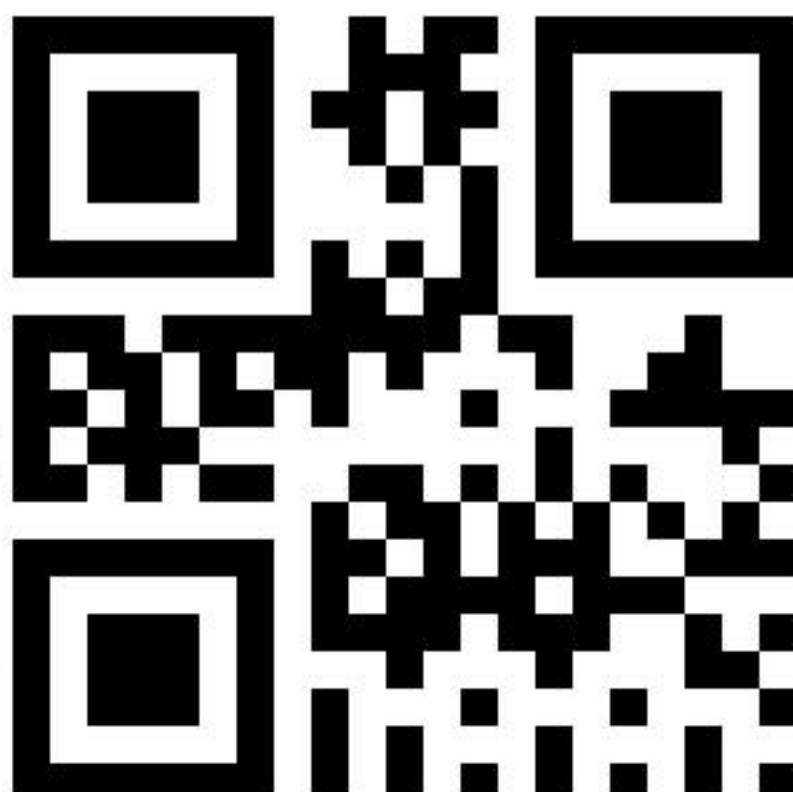



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000576

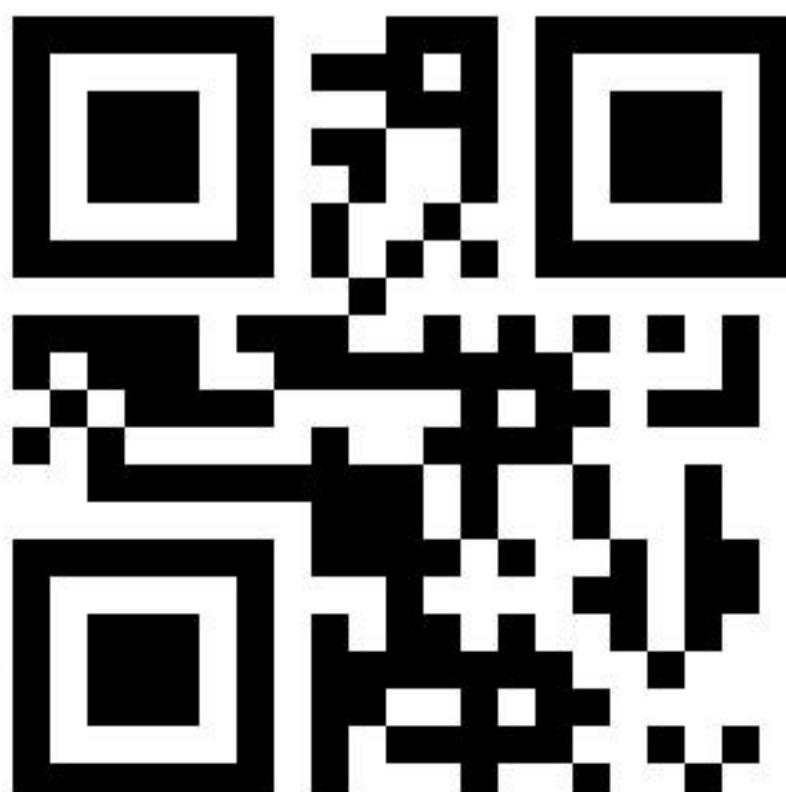



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000577





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000578

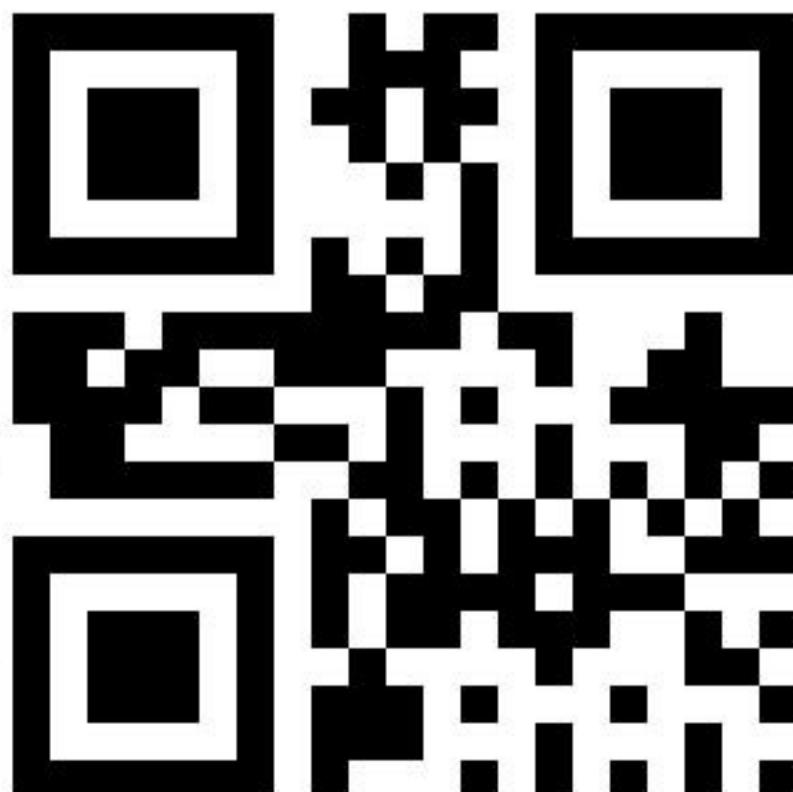



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000579

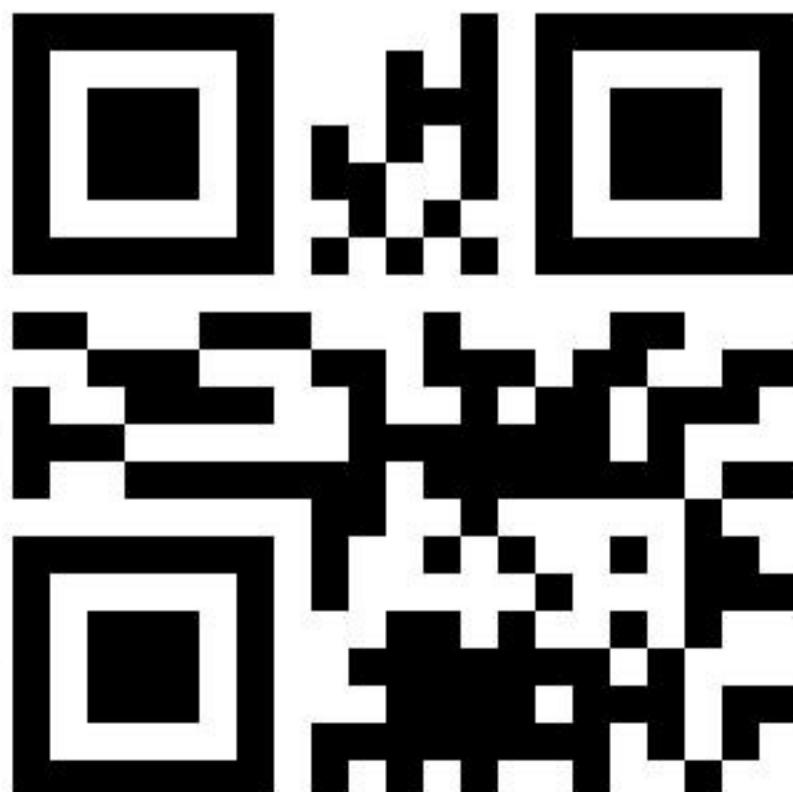



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00580

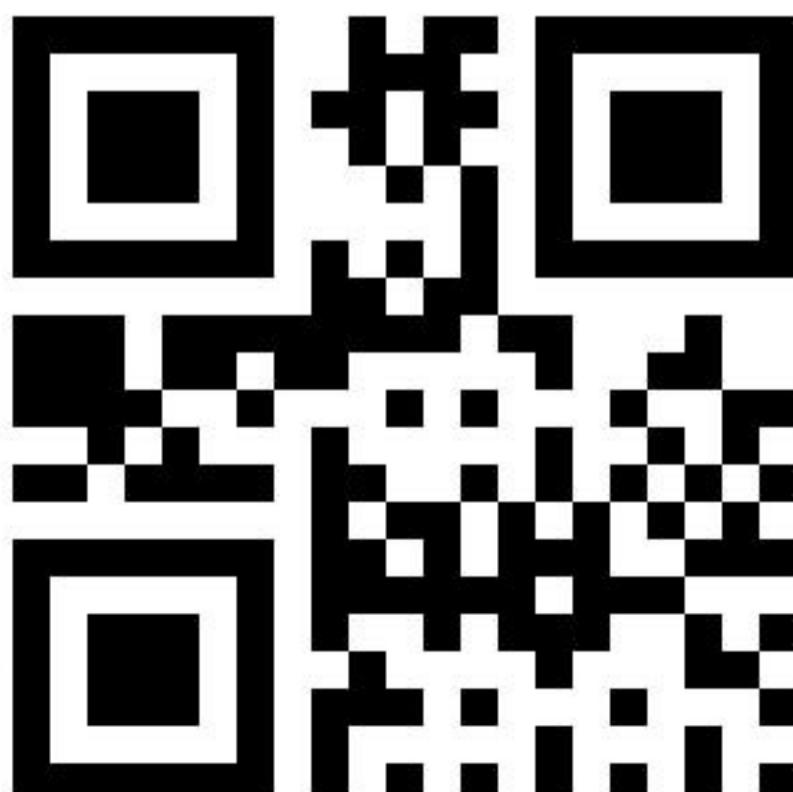



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00581

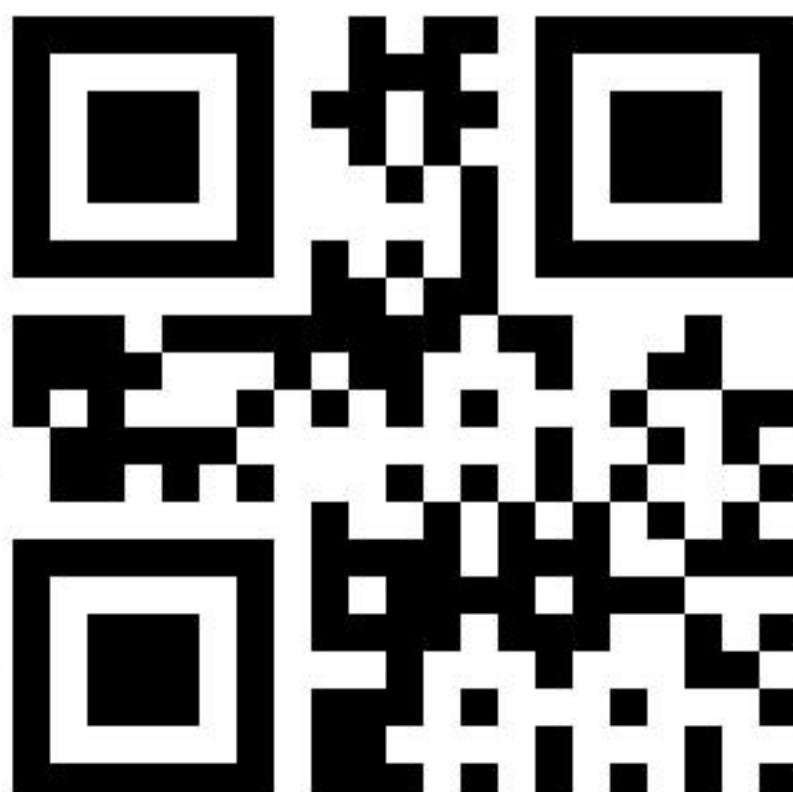



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00582

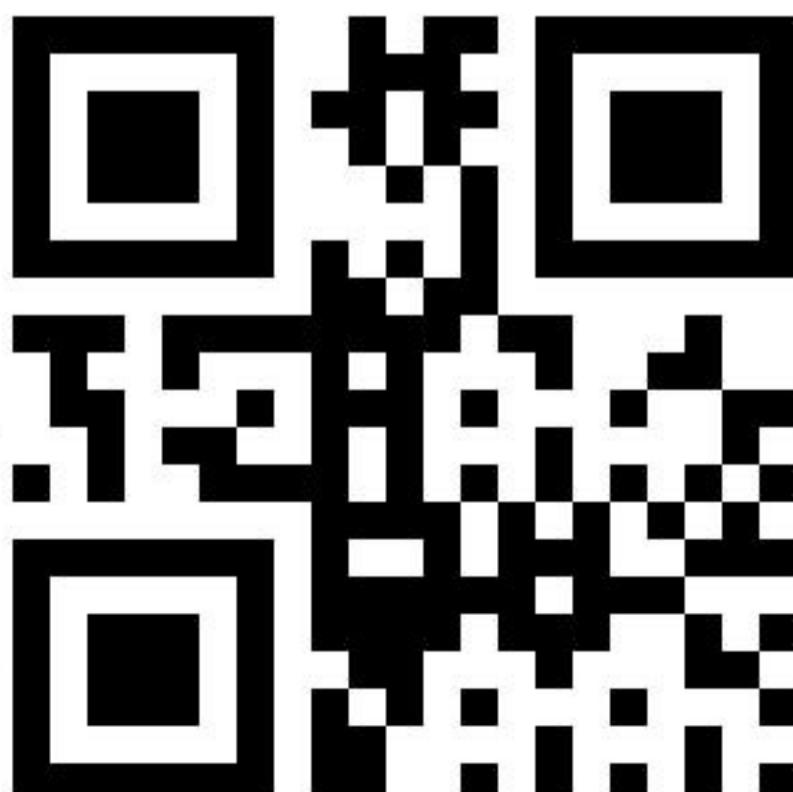



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00583

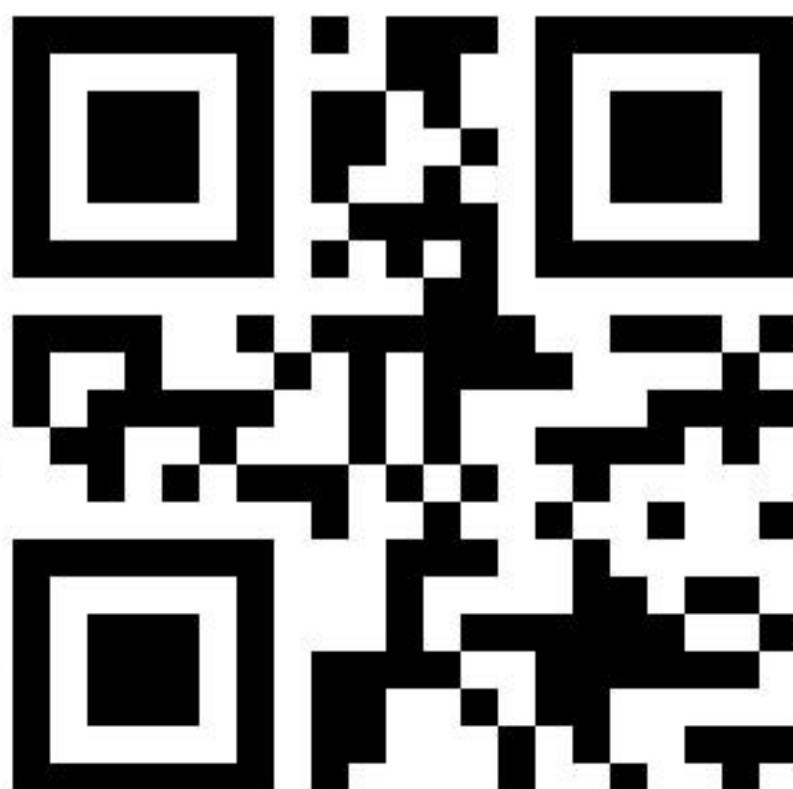



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00584

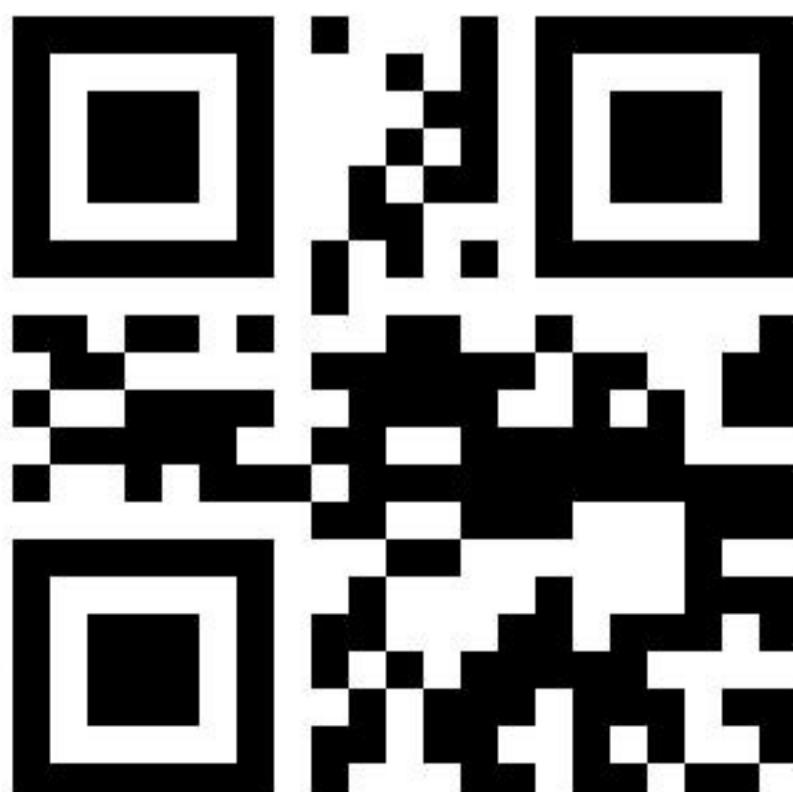



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00585

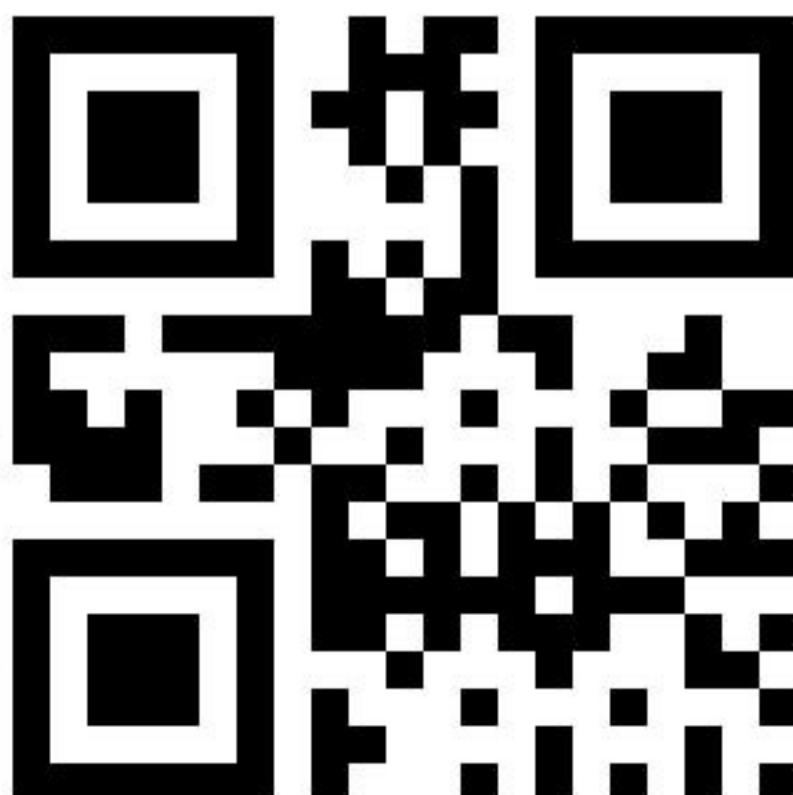



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00586

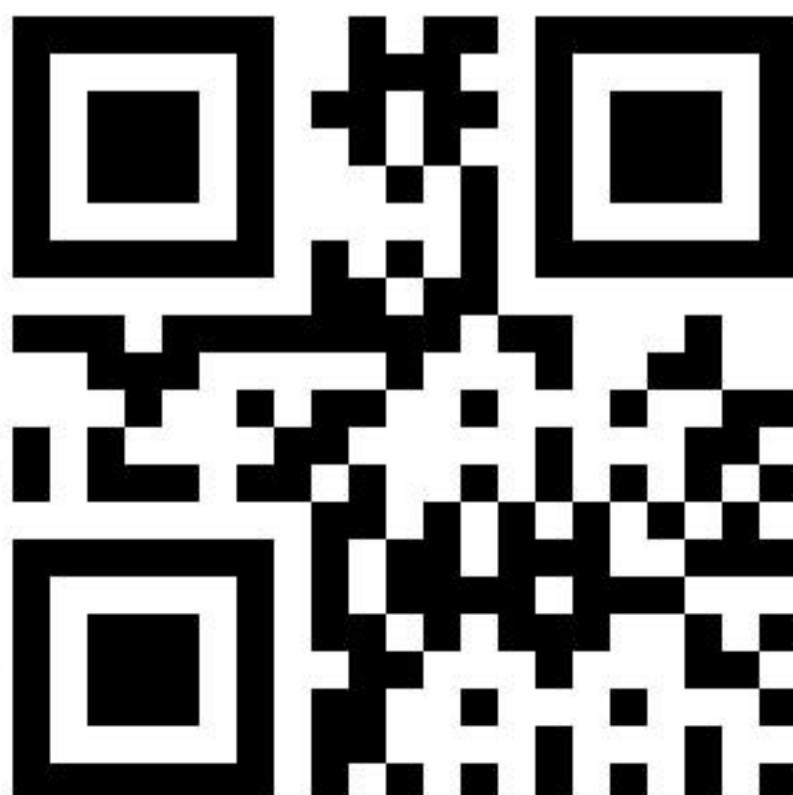



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00587

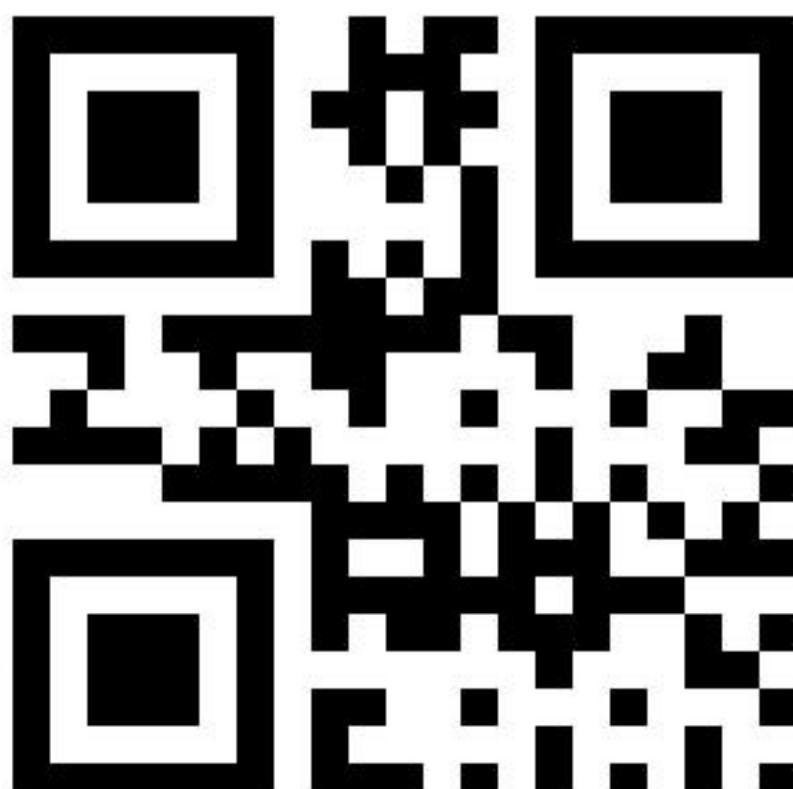



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00588

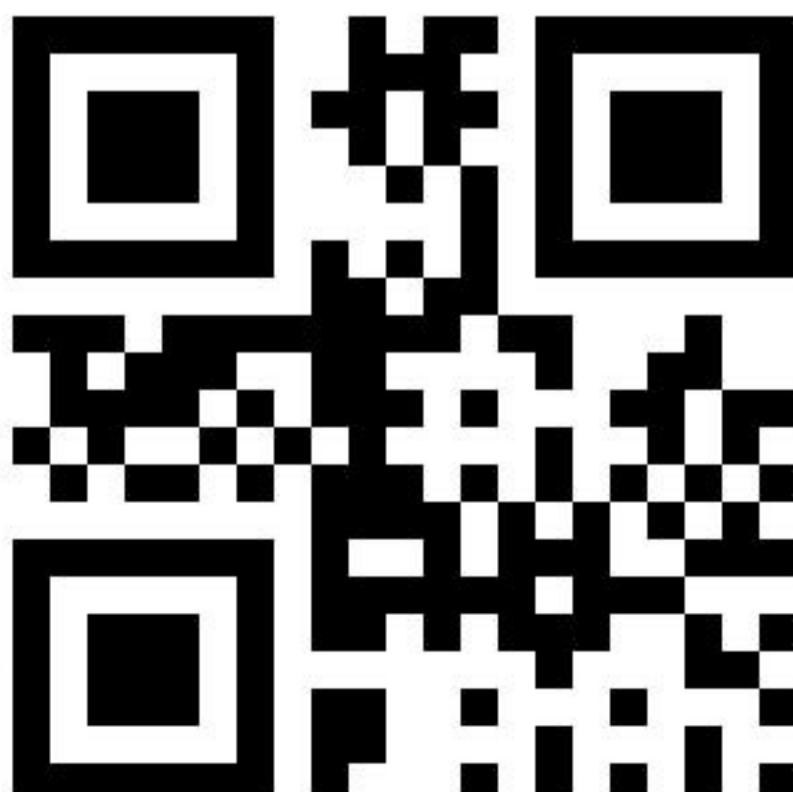



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000589

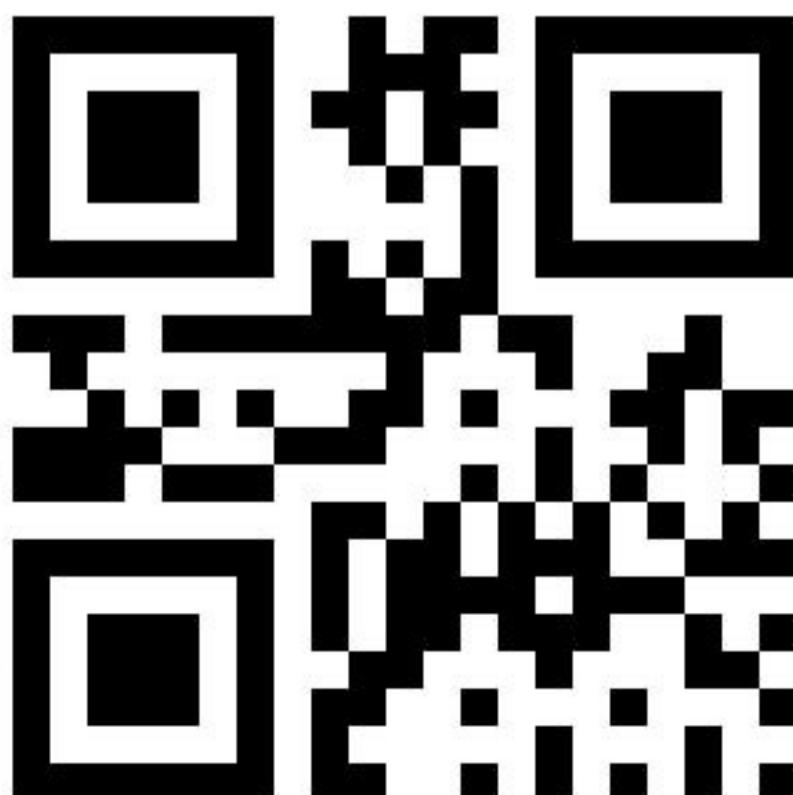



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000590

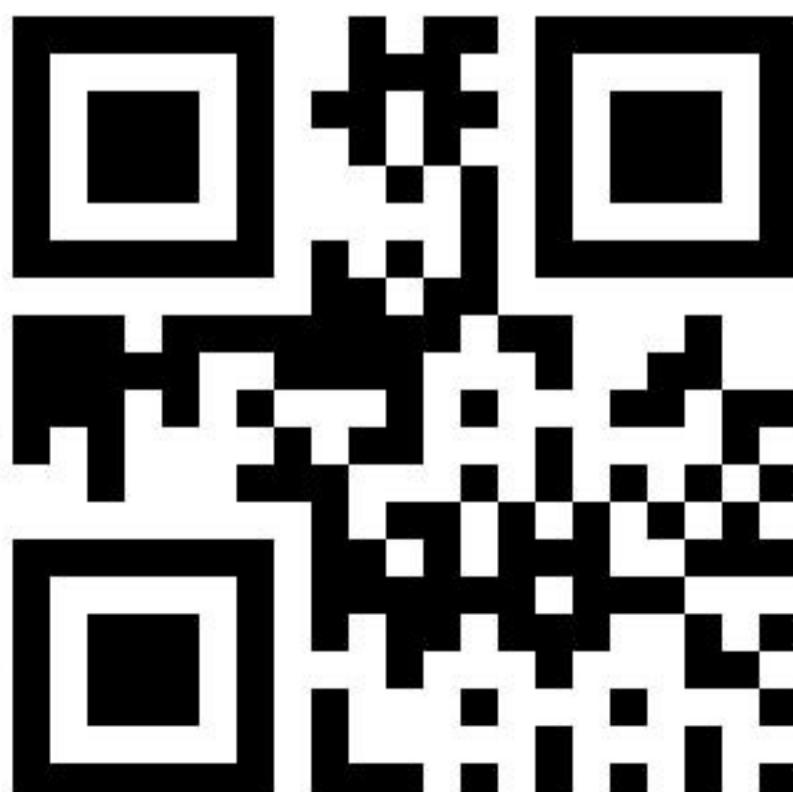



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000591

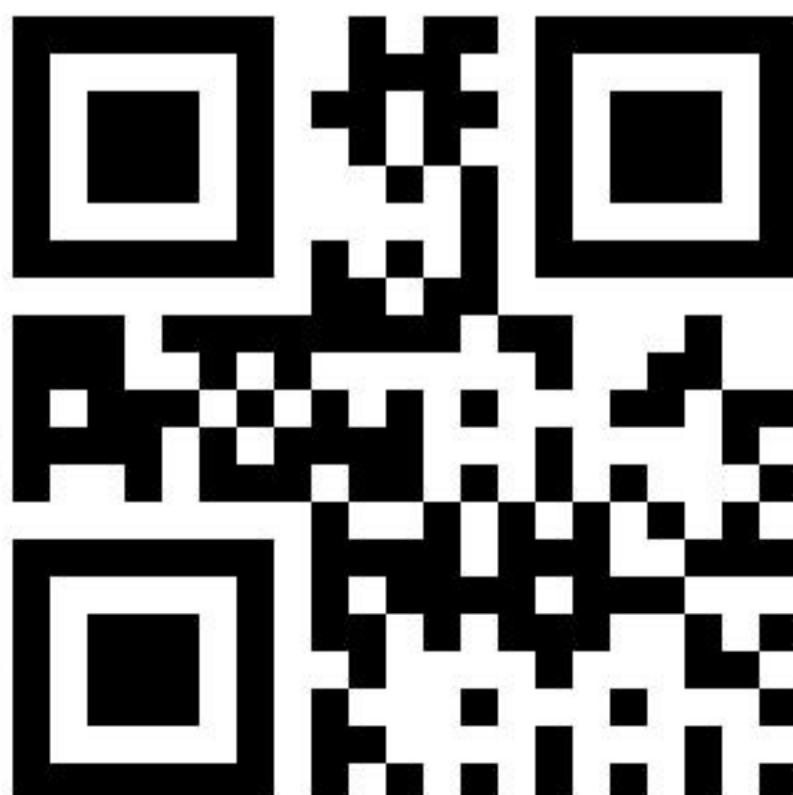



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000592

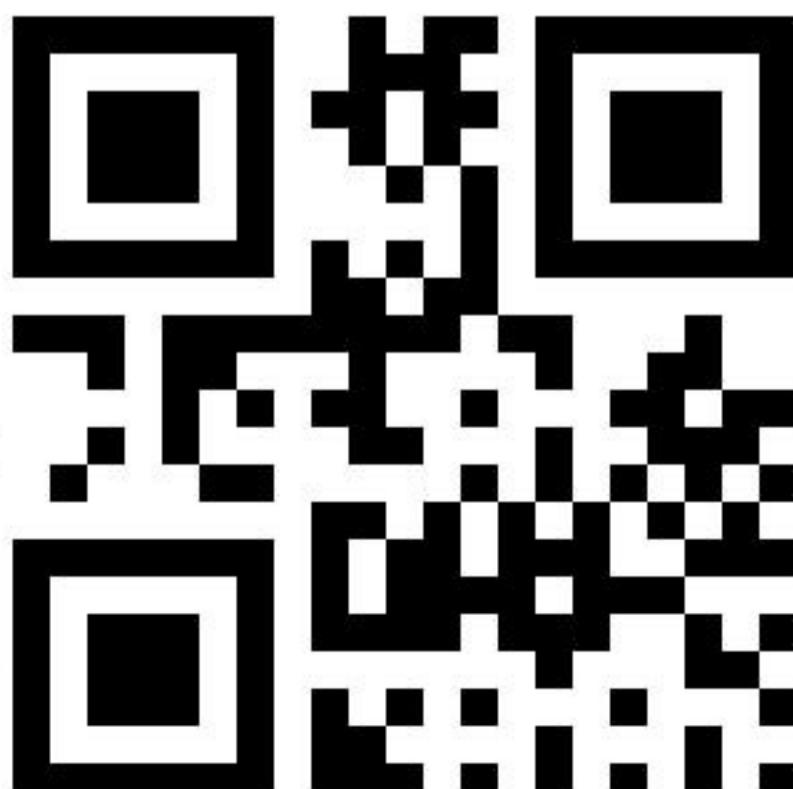



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00593

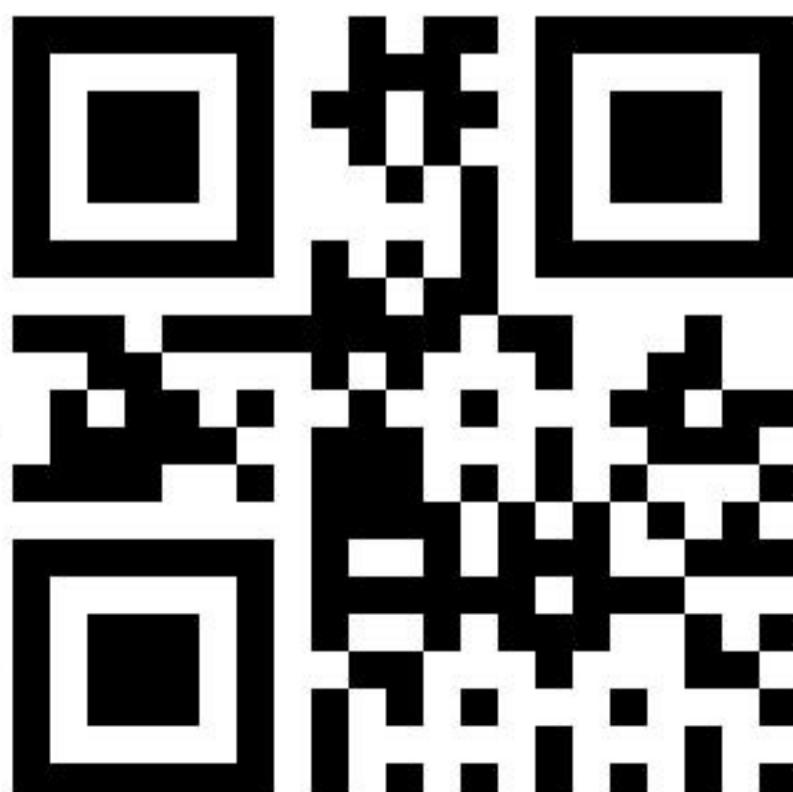



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000594

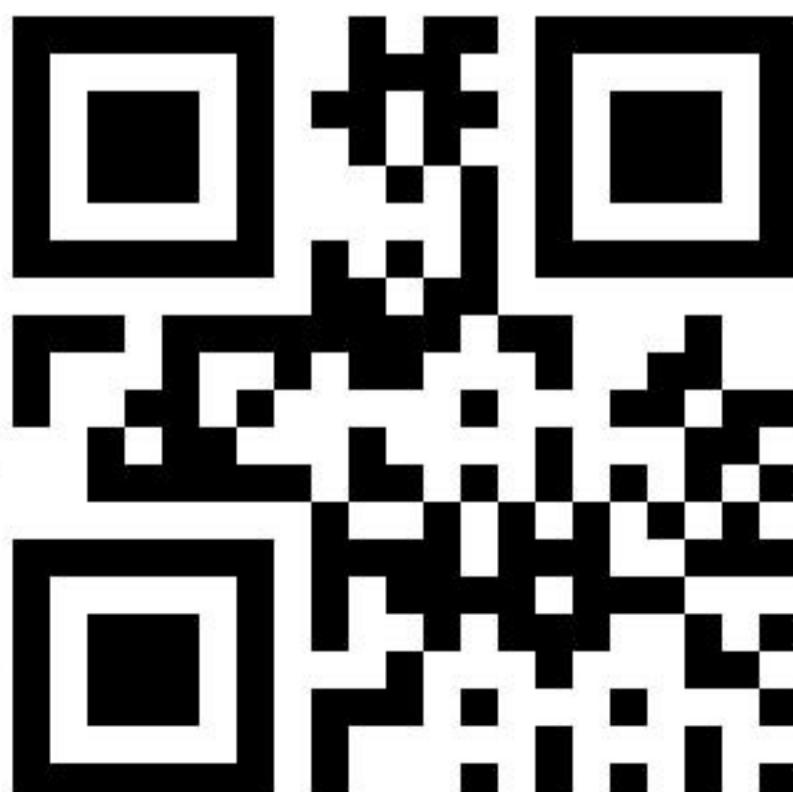



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000595

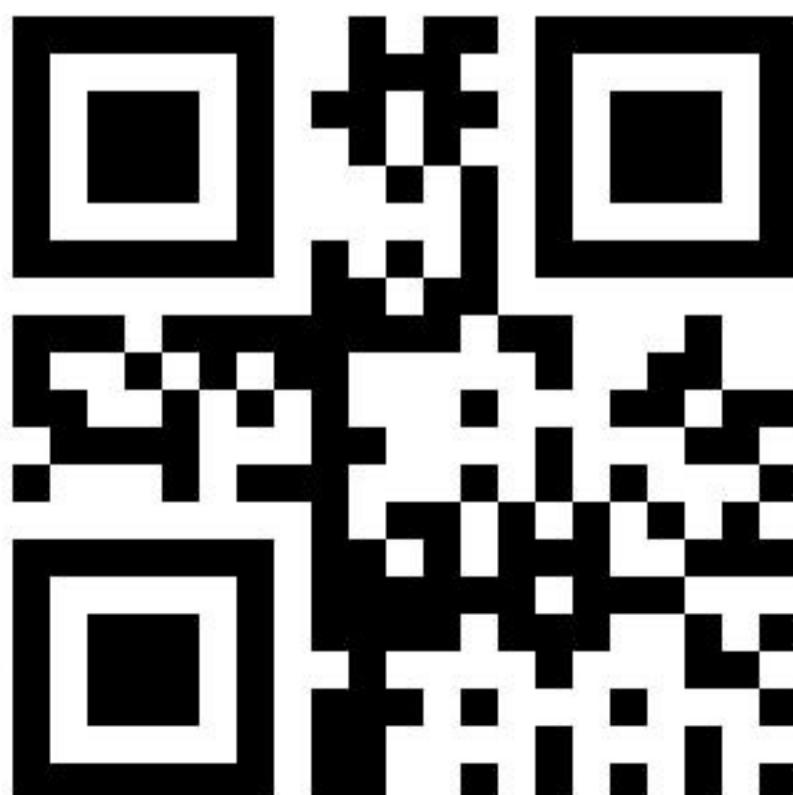



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00596

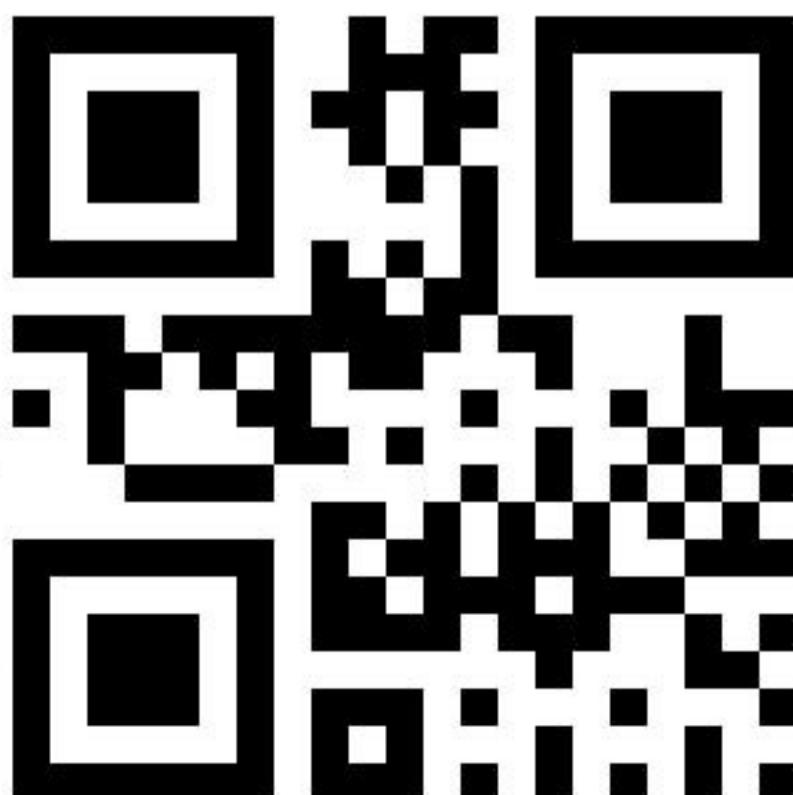



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00597

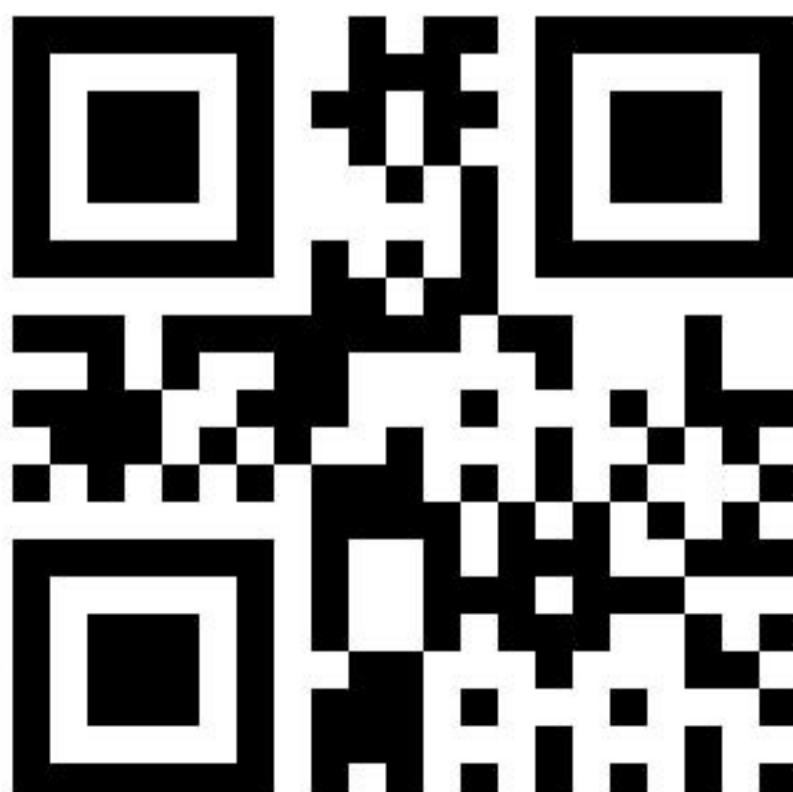



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000598





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000599

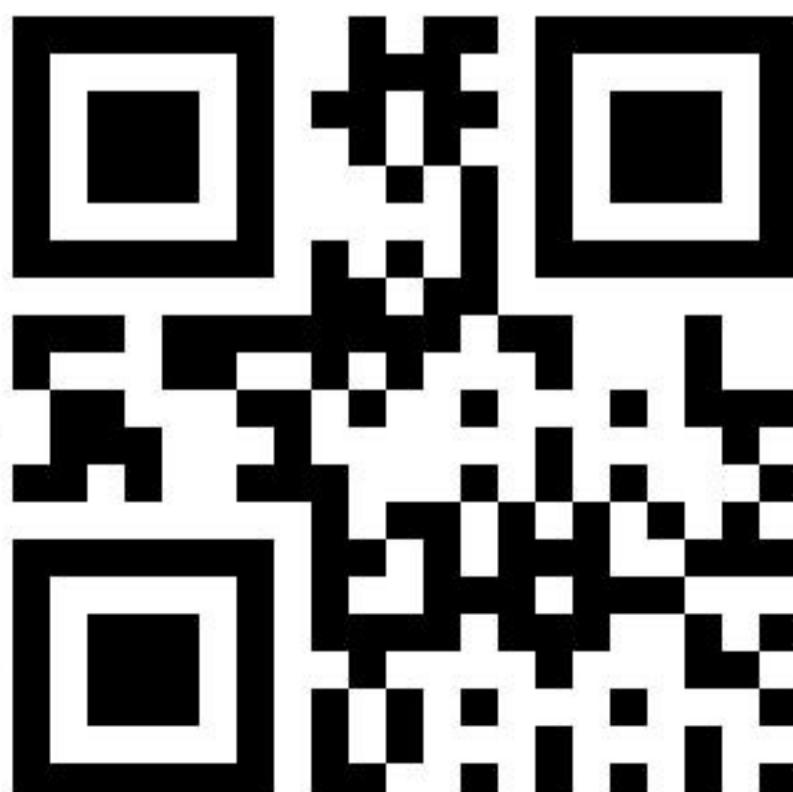



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000600

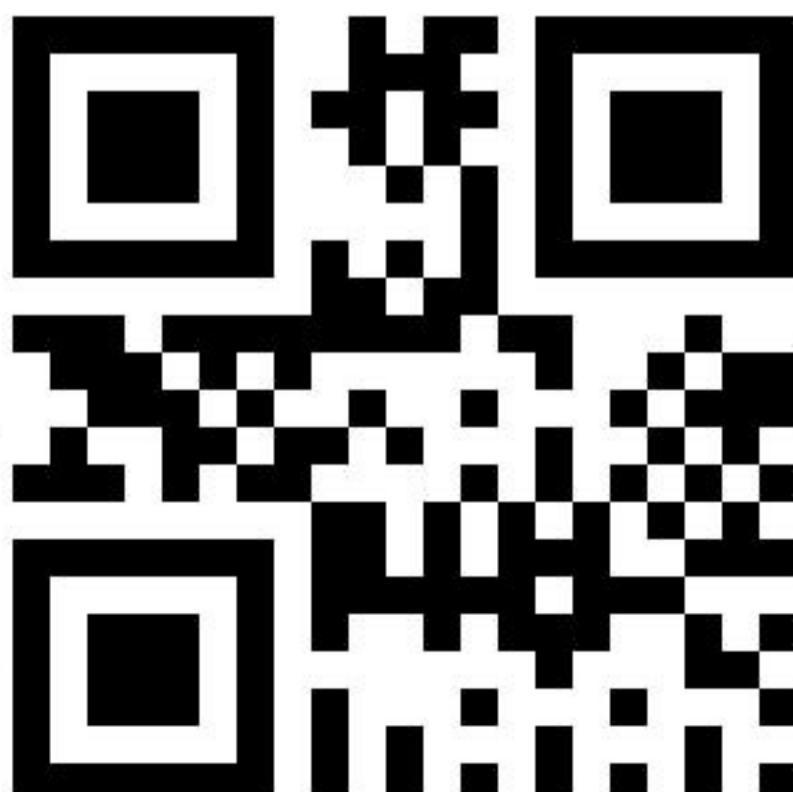



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000601

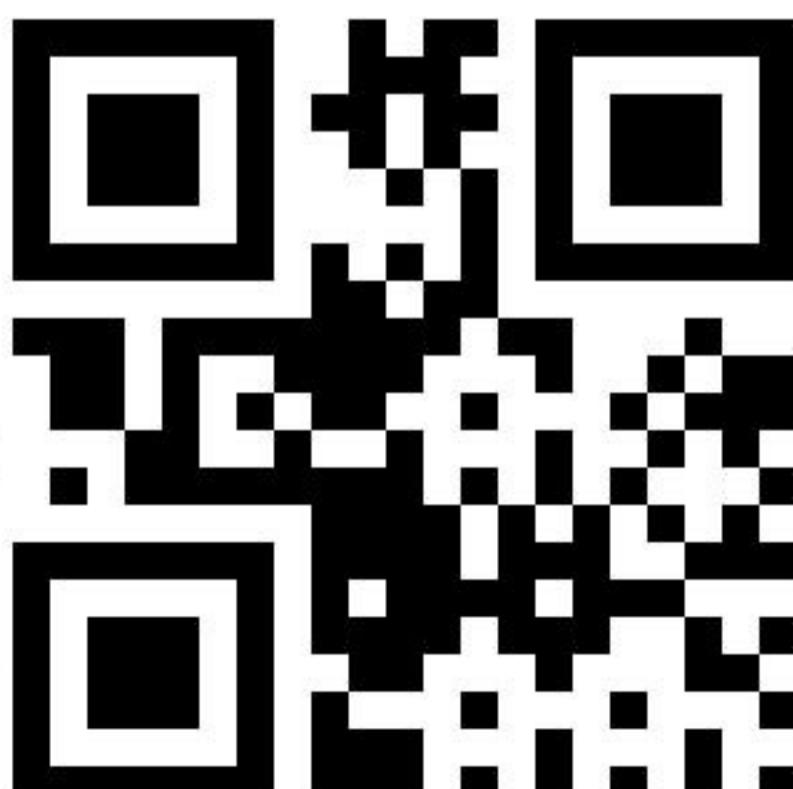



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000602

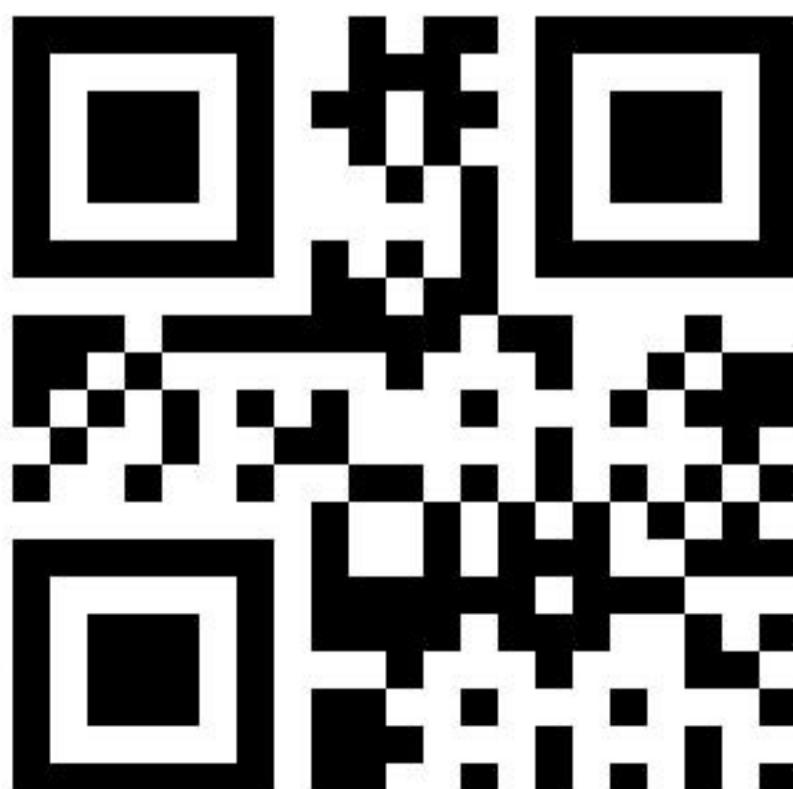



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000603

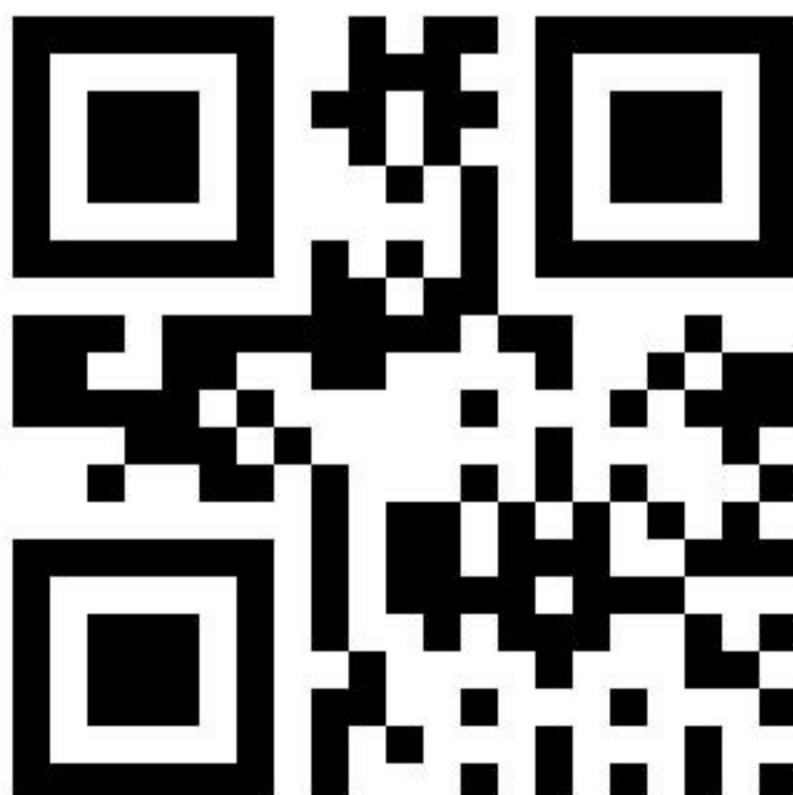



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000604

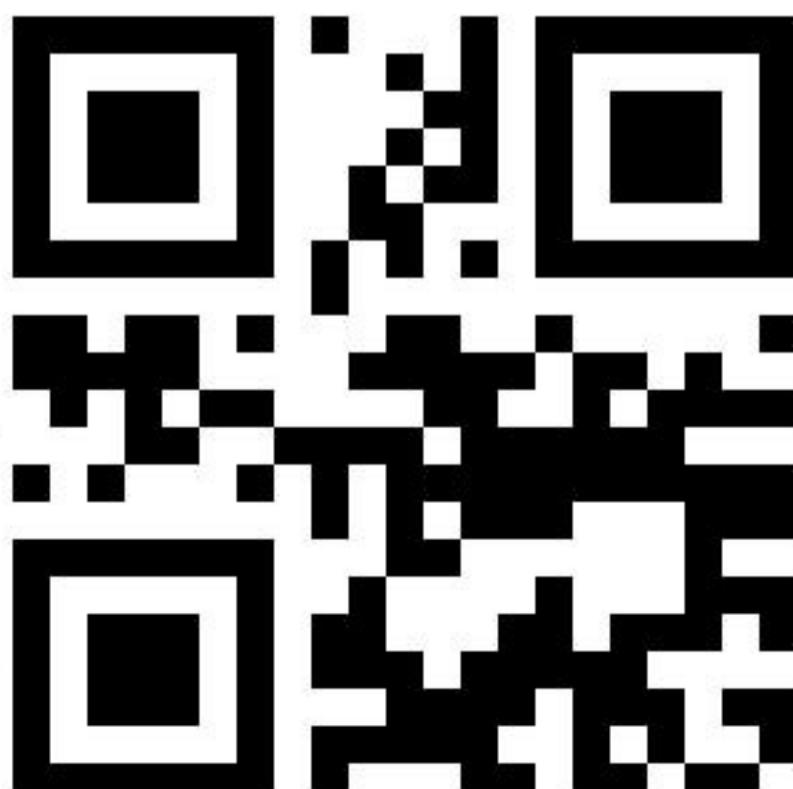



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000605

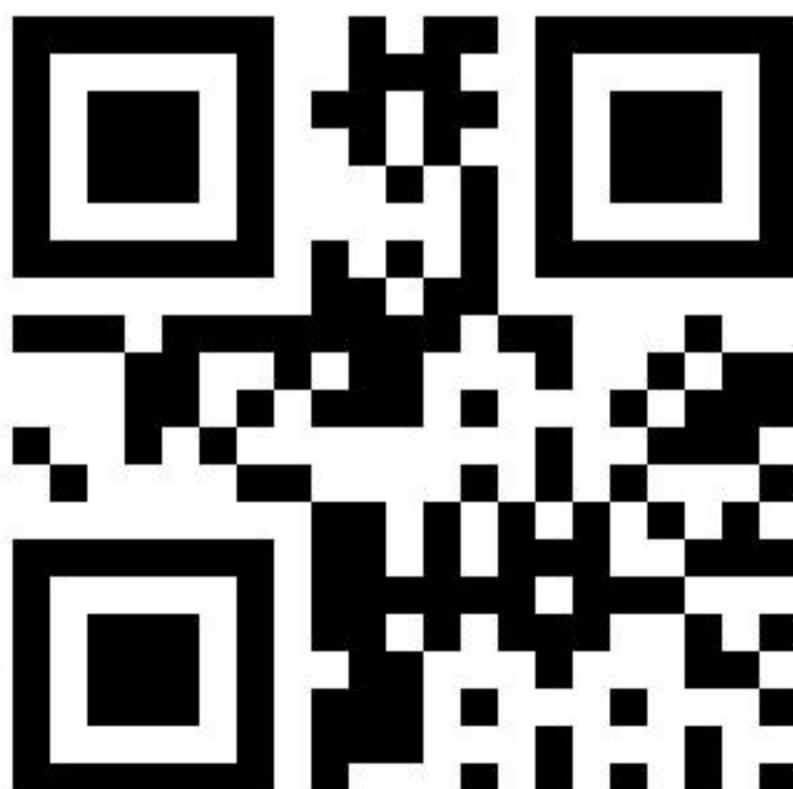



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 0006006

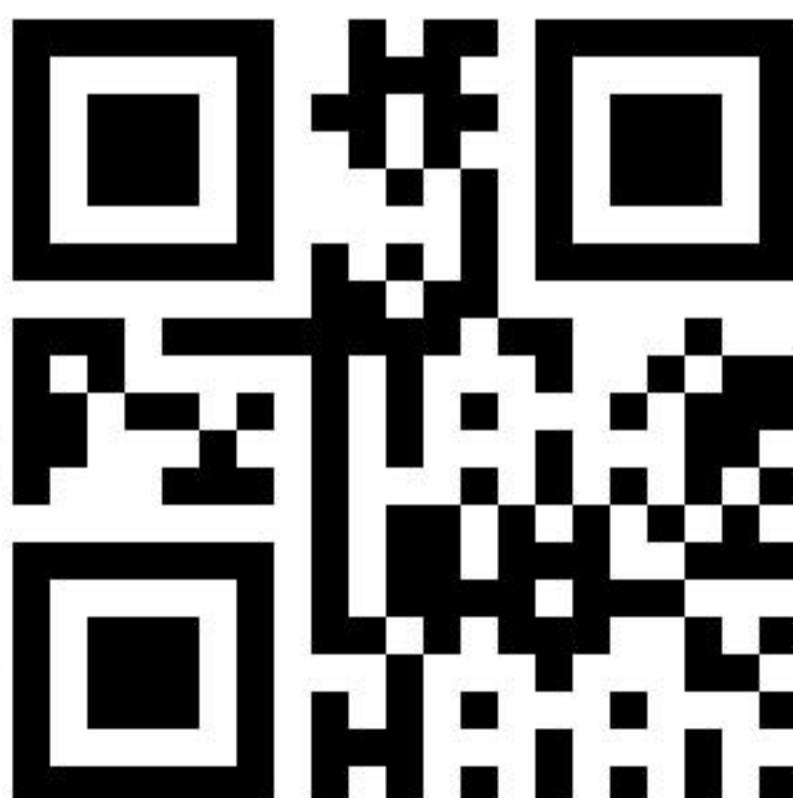



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000607

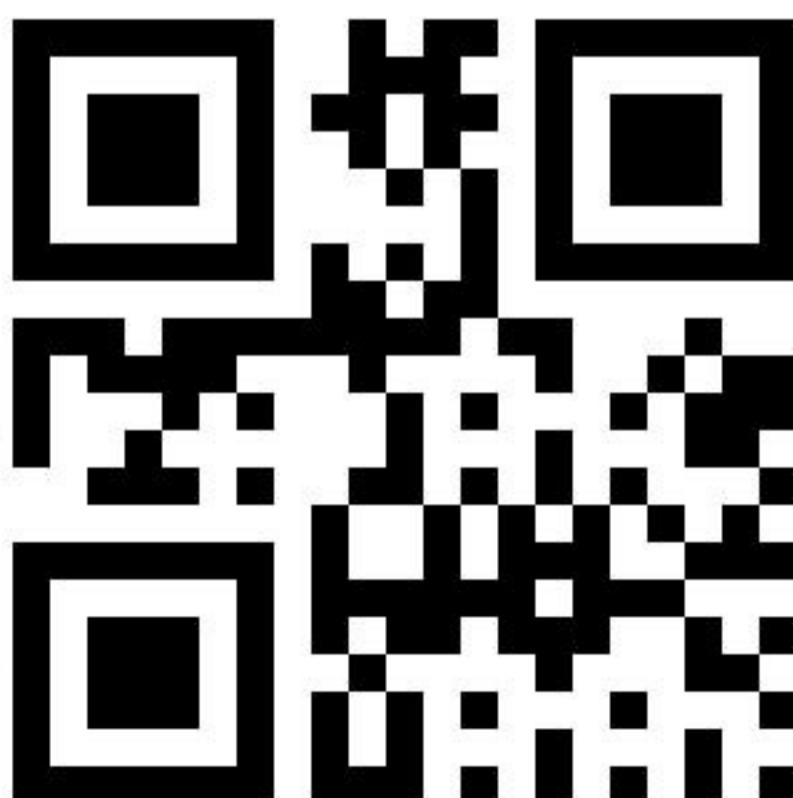



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000608

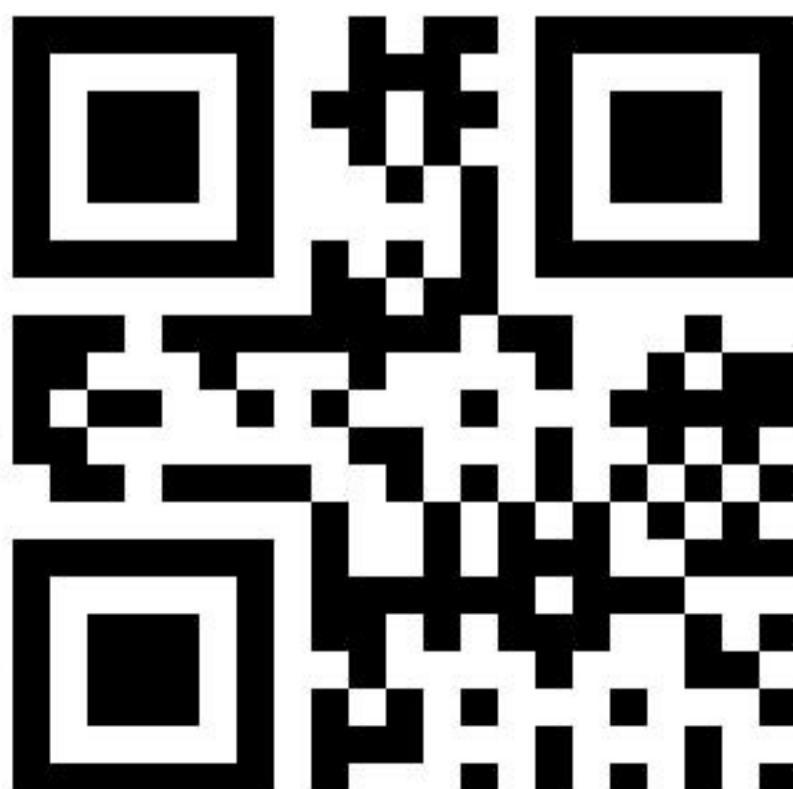



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000609

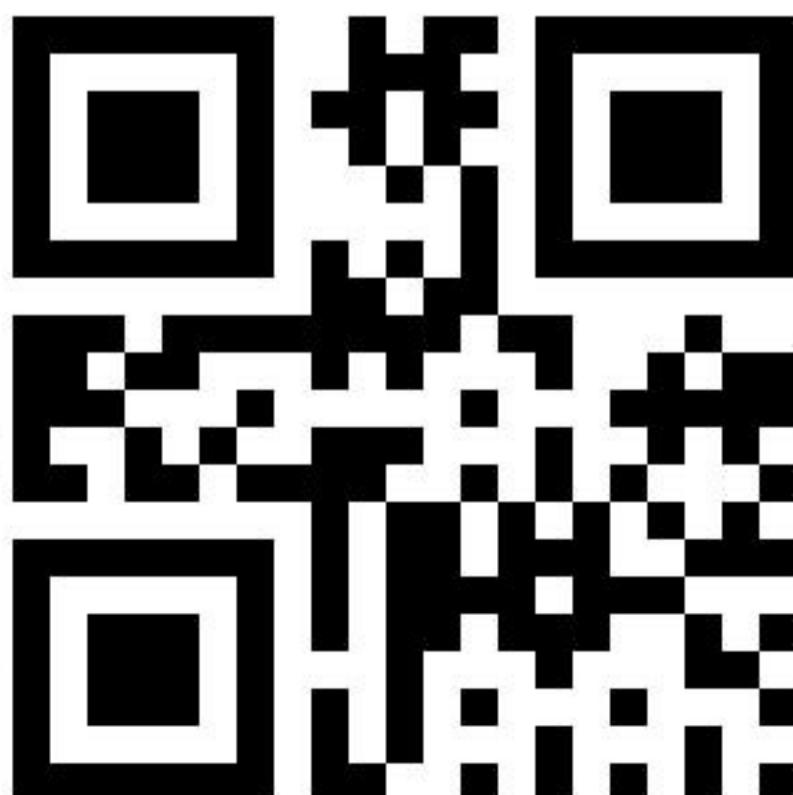



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00610

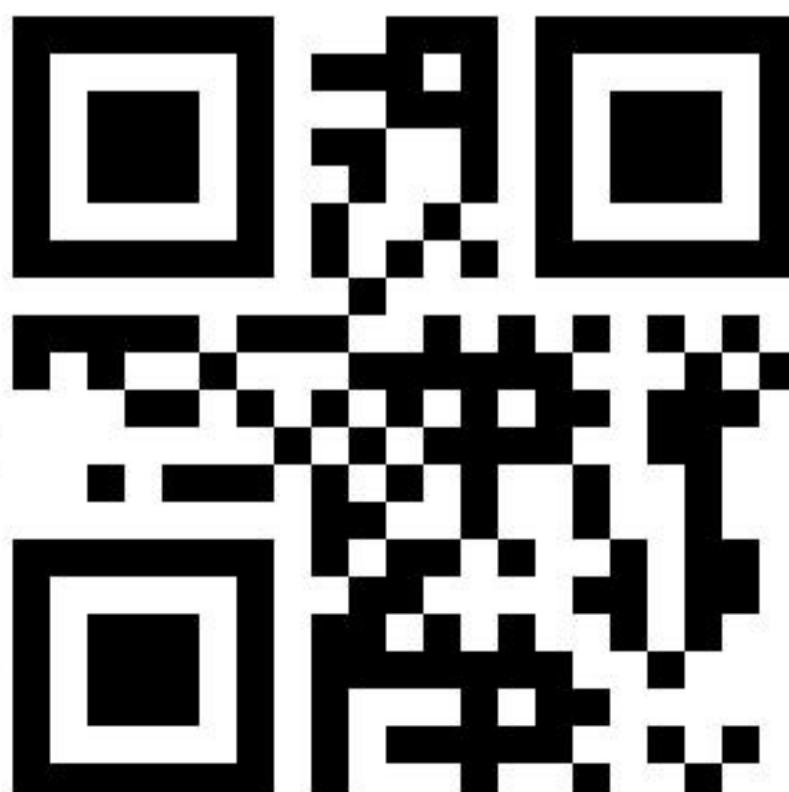



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00611

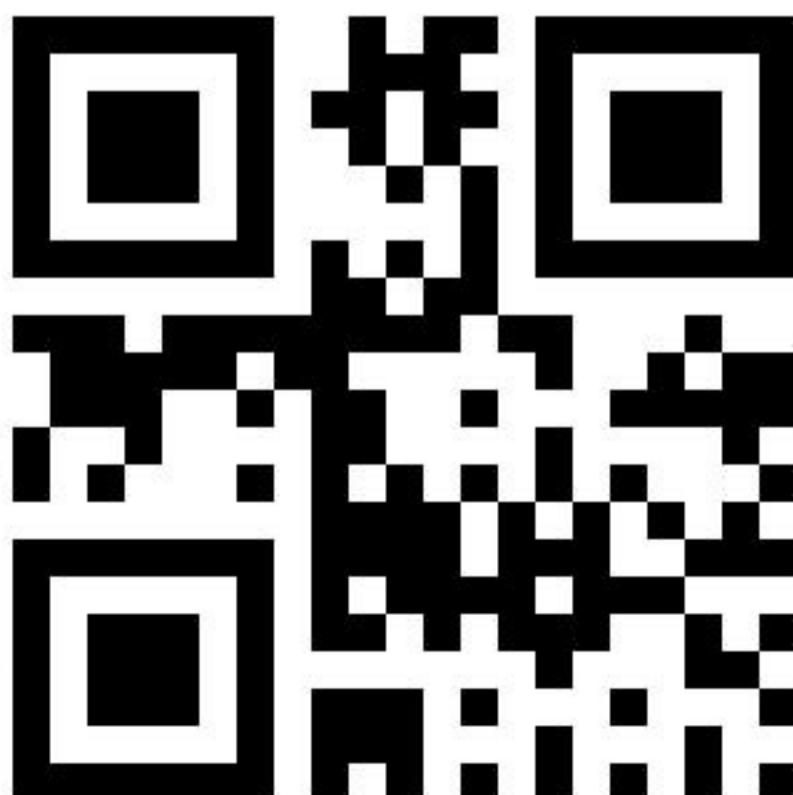



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00612

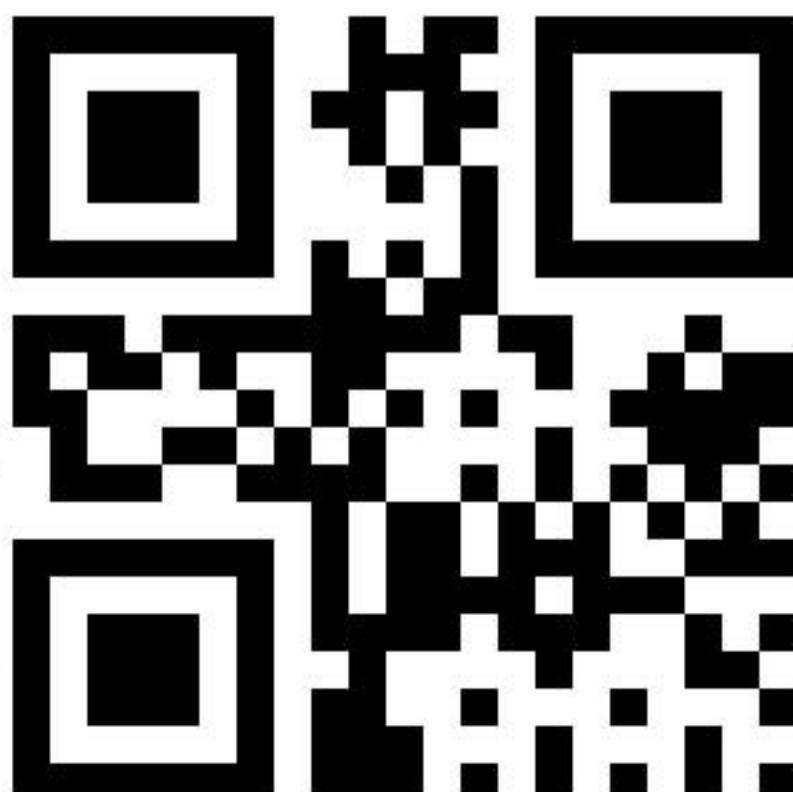



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00613

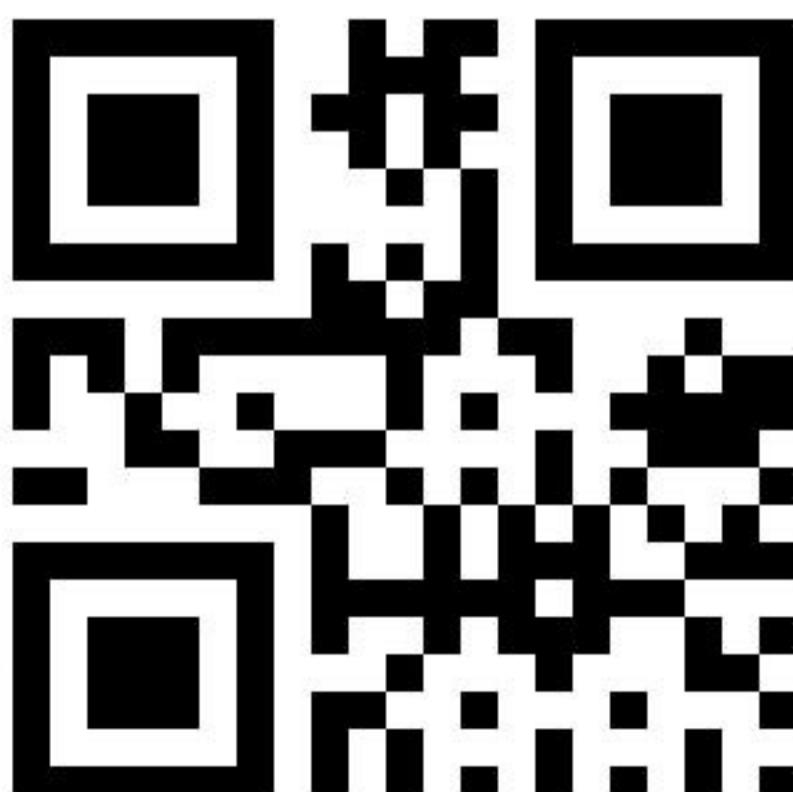



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00614

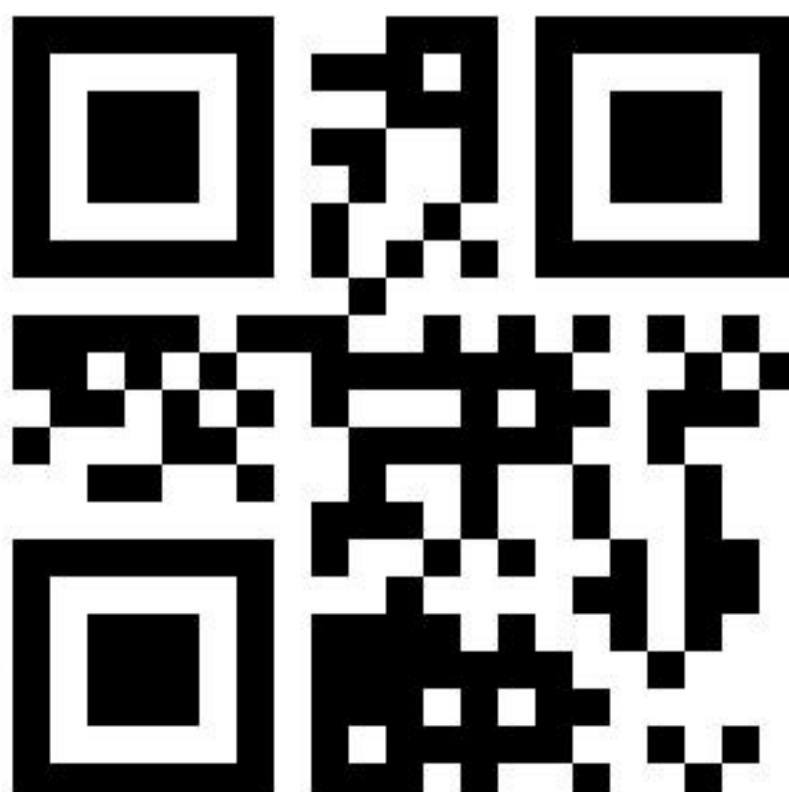



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00615

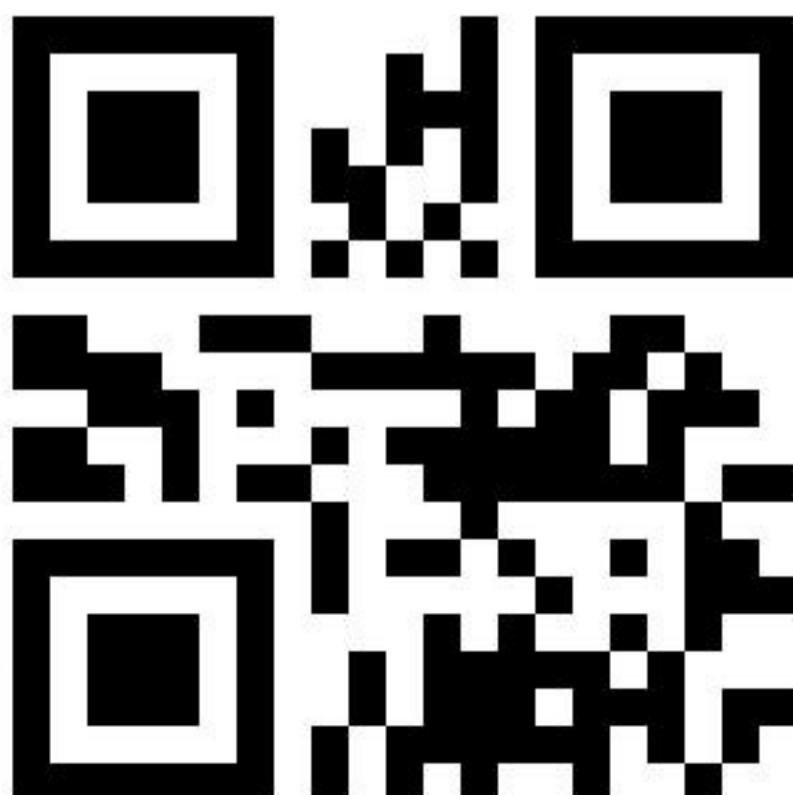



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00616

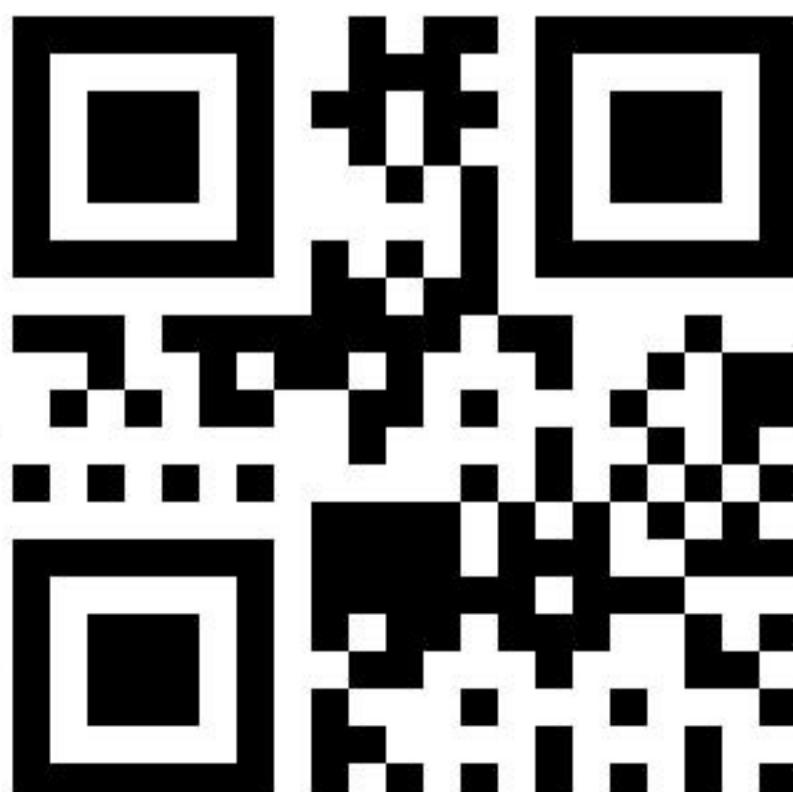



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00617

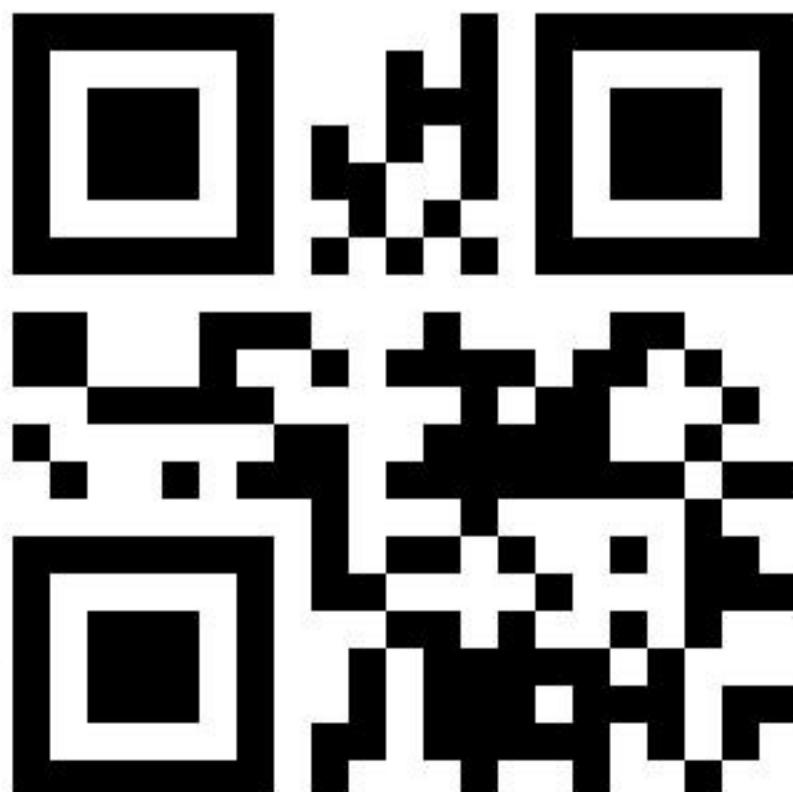



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00618

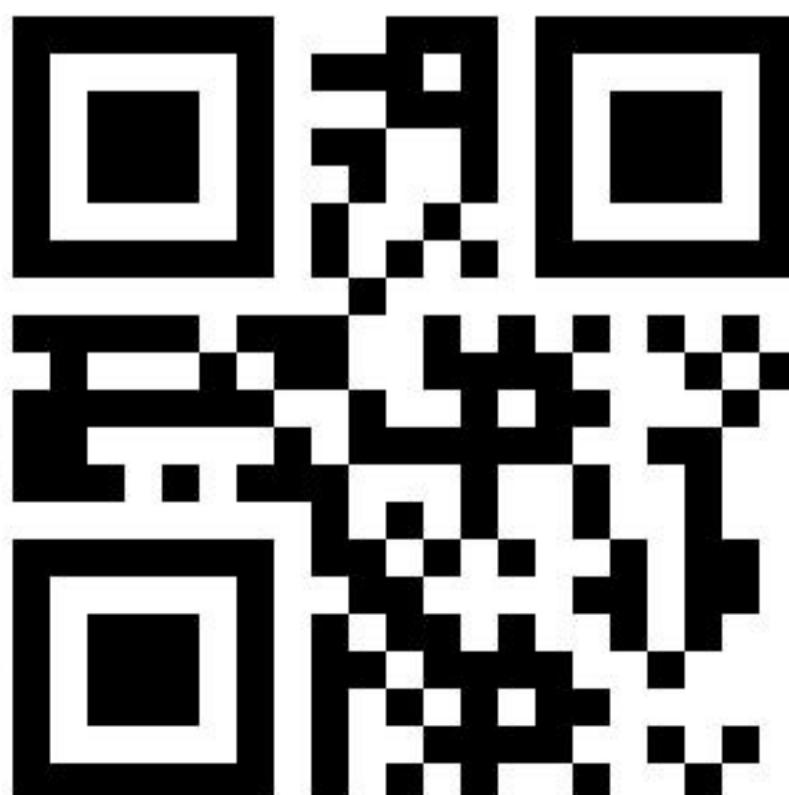



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00619

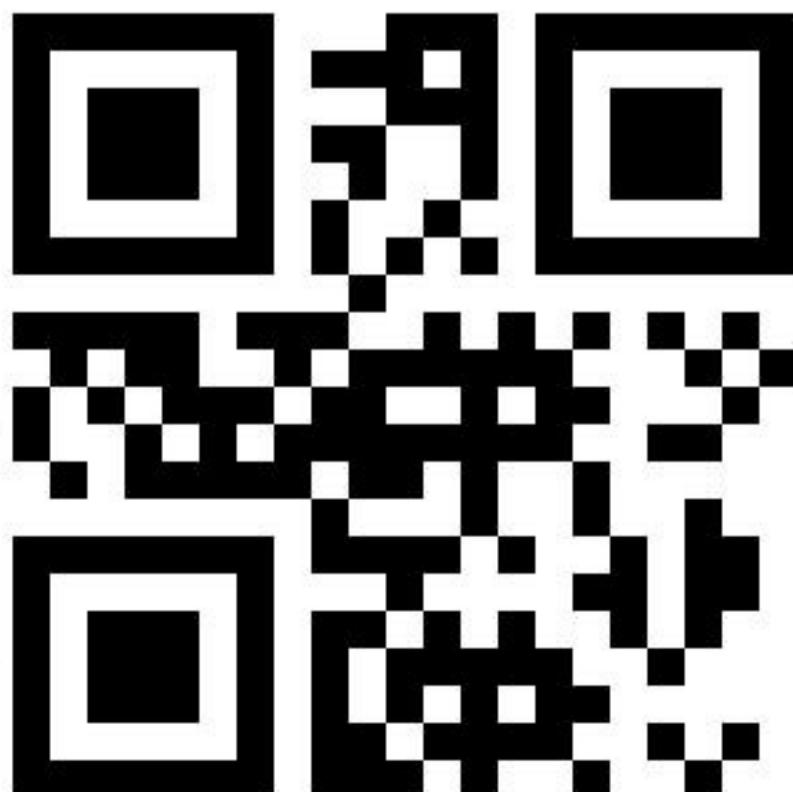



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00620

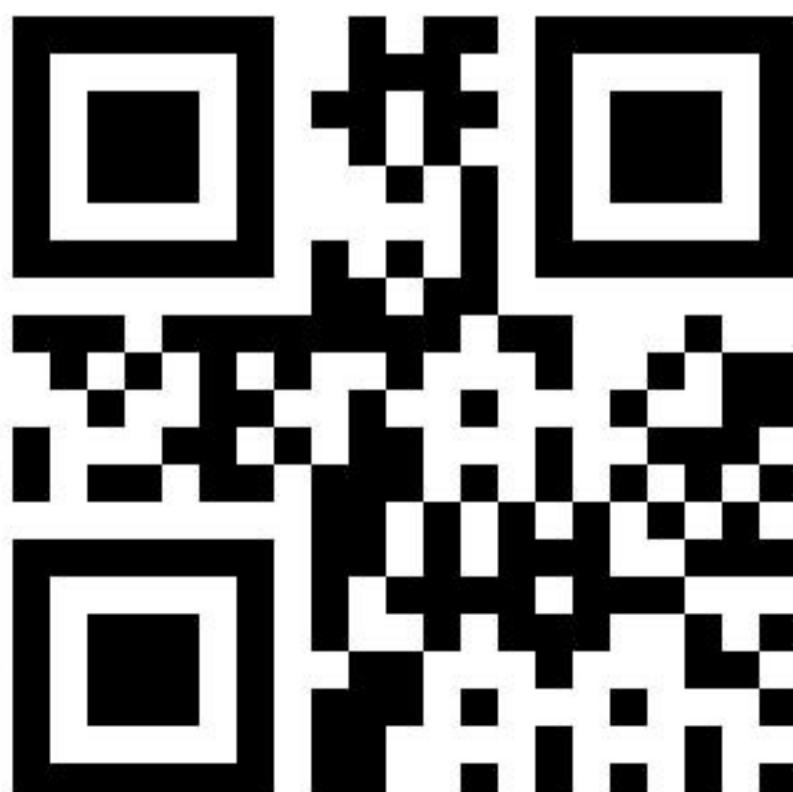



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00621

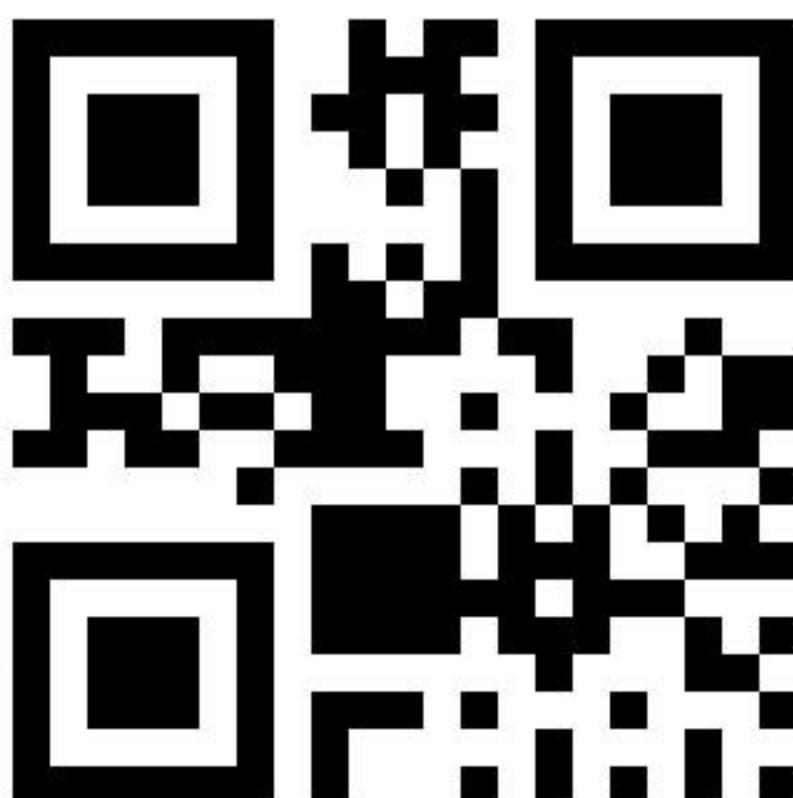



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00622

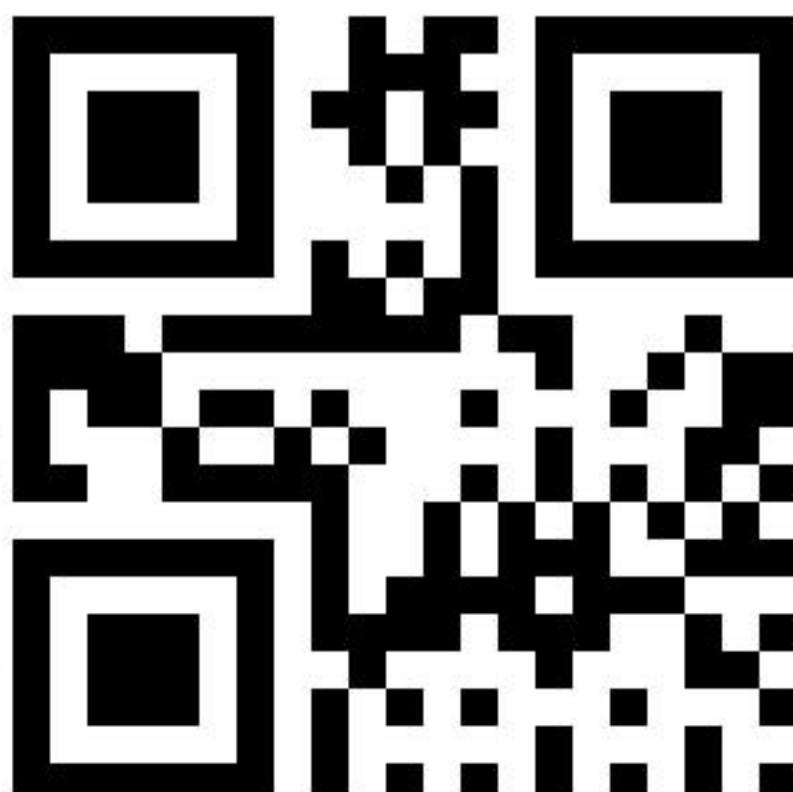



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00623

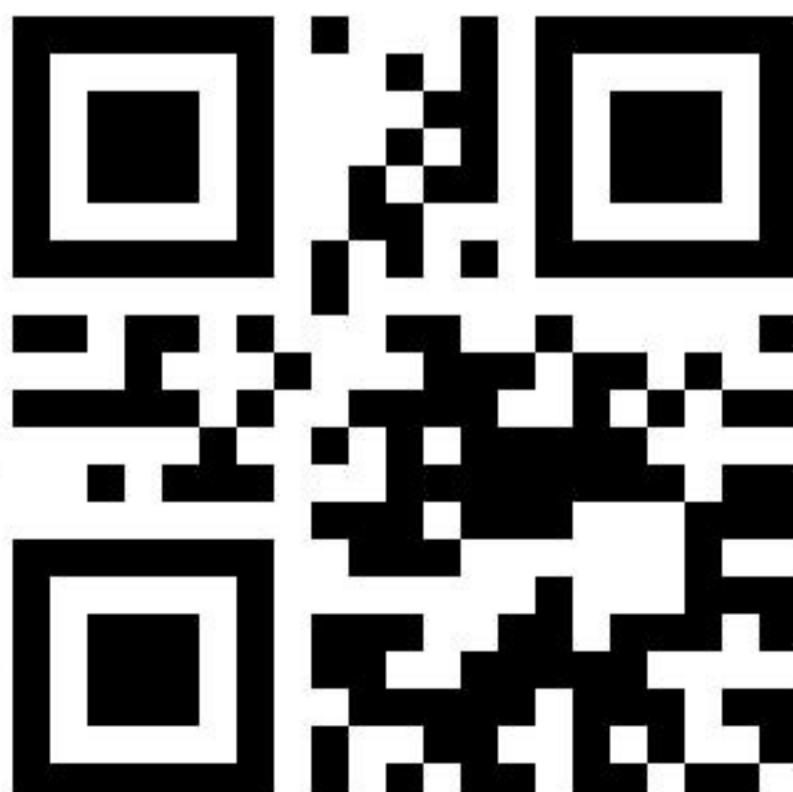



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00624

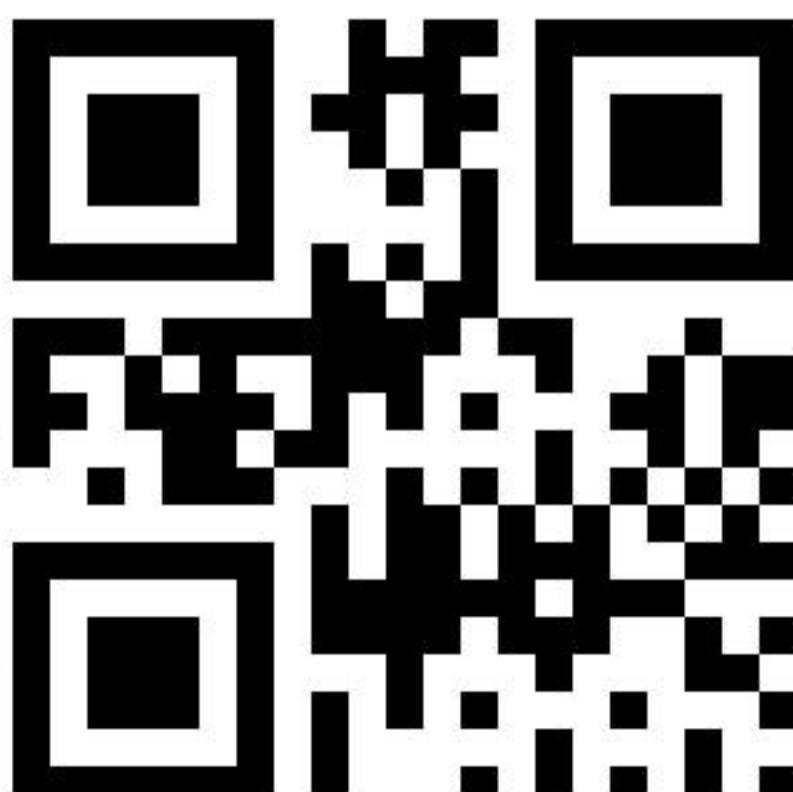



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00625

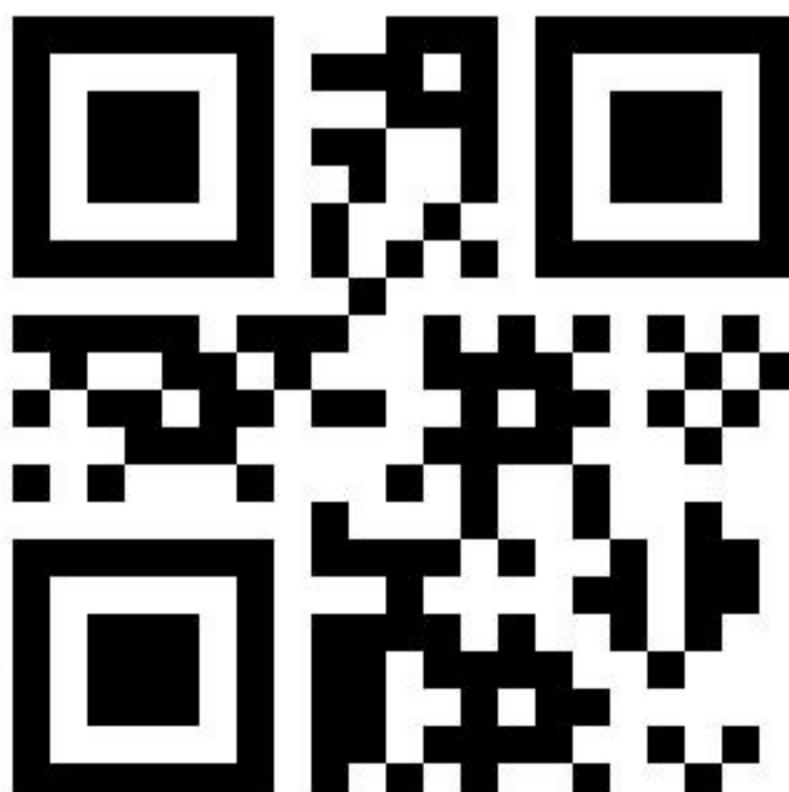



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module

panel_id 00626

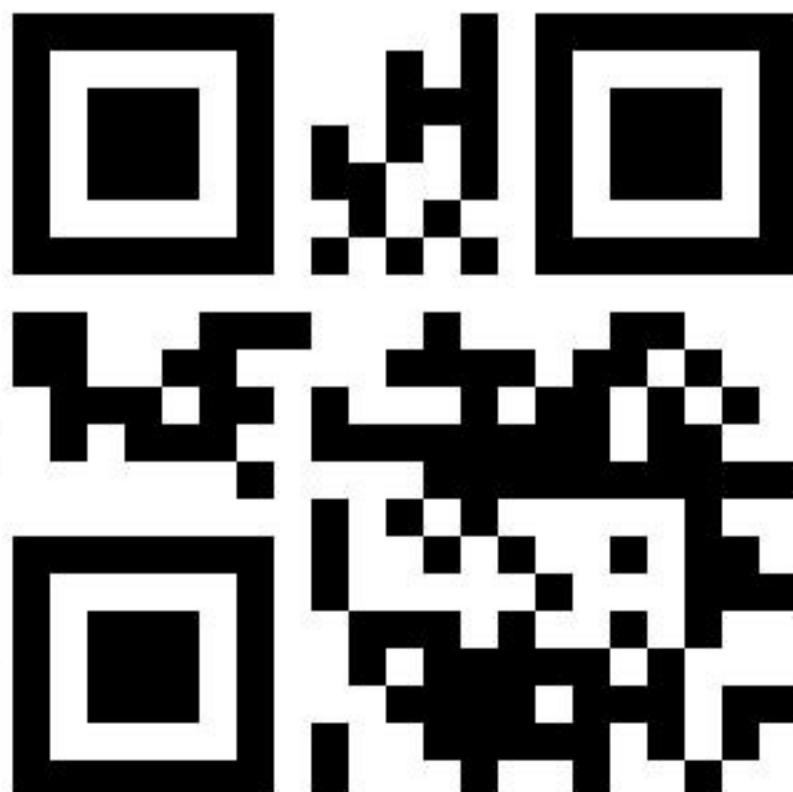



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000627

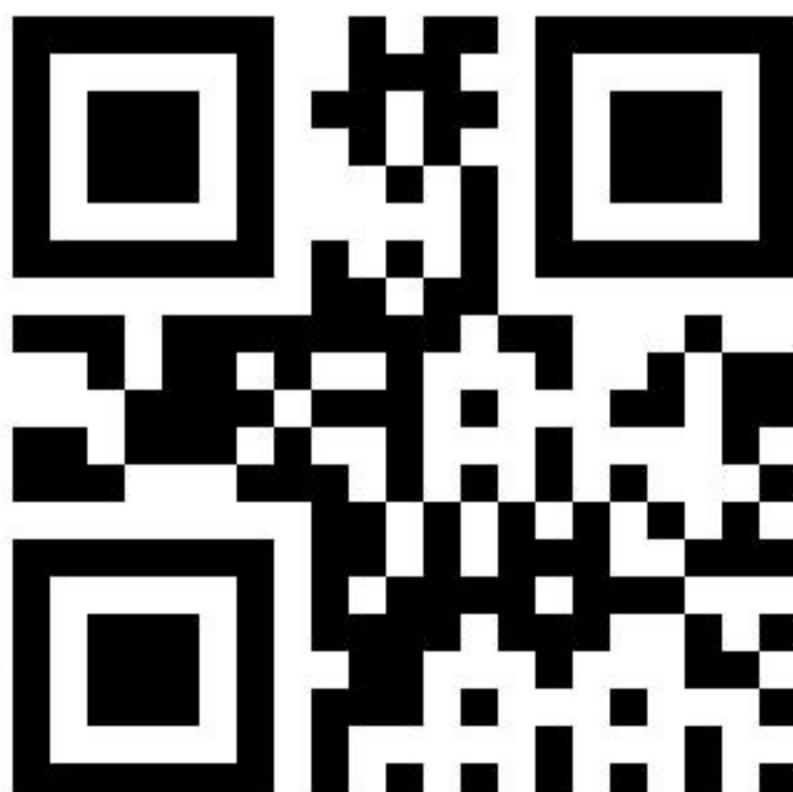



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00628

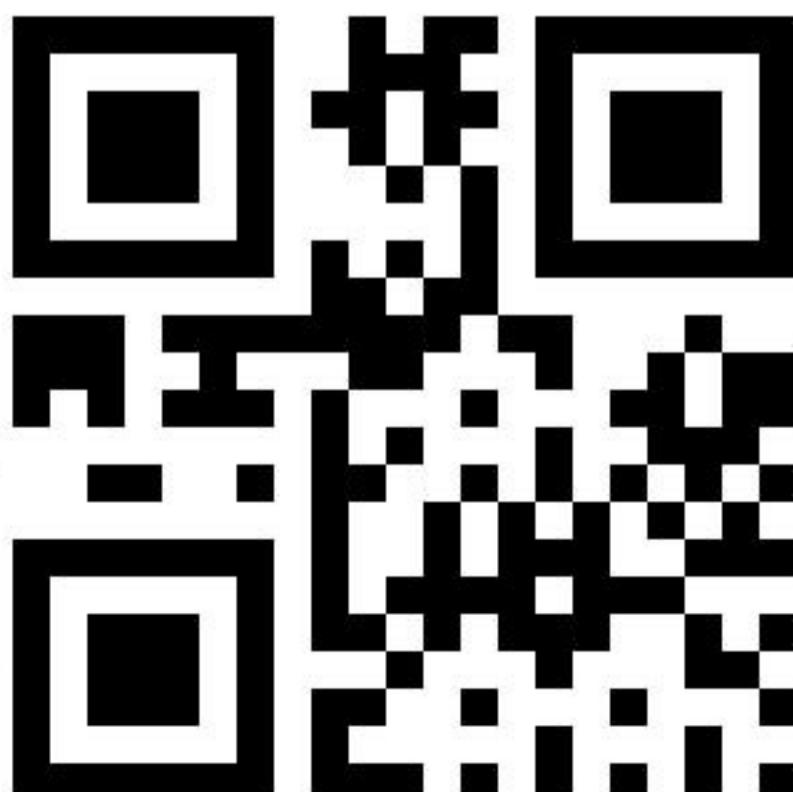



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00629

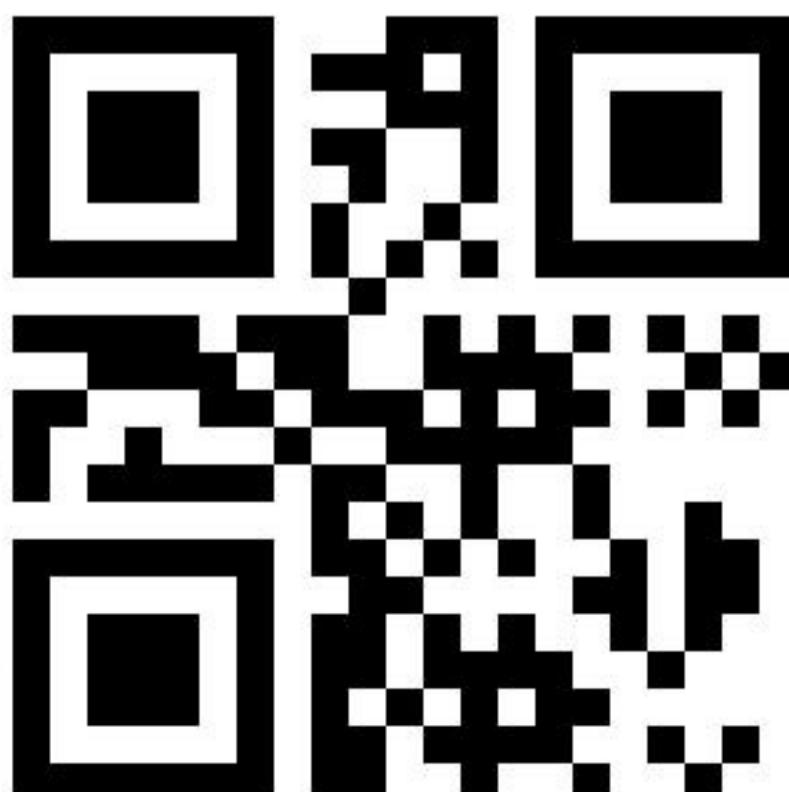



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00630





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00631

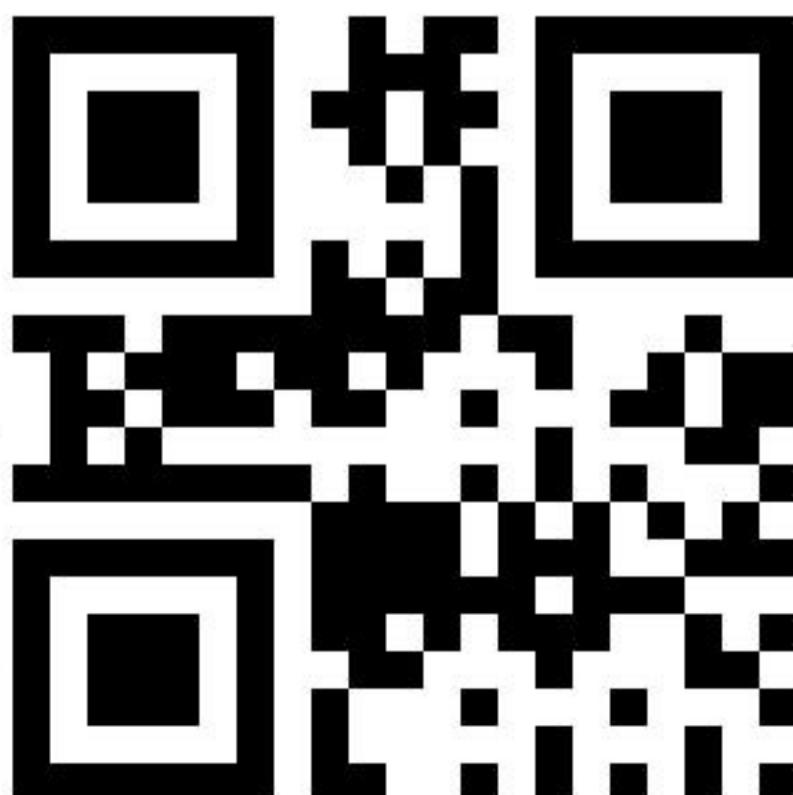



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00632

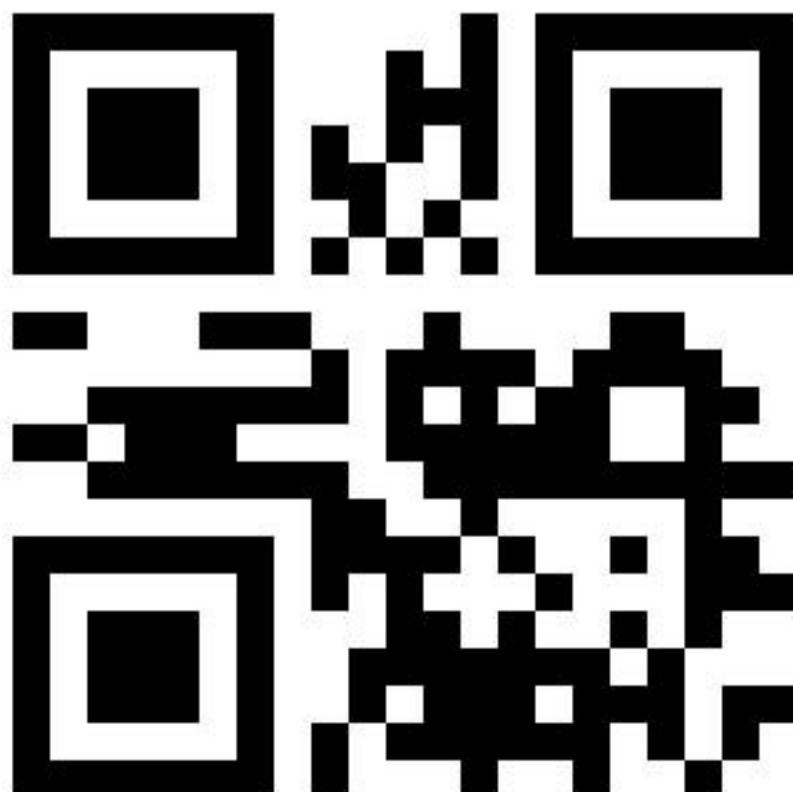



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00633

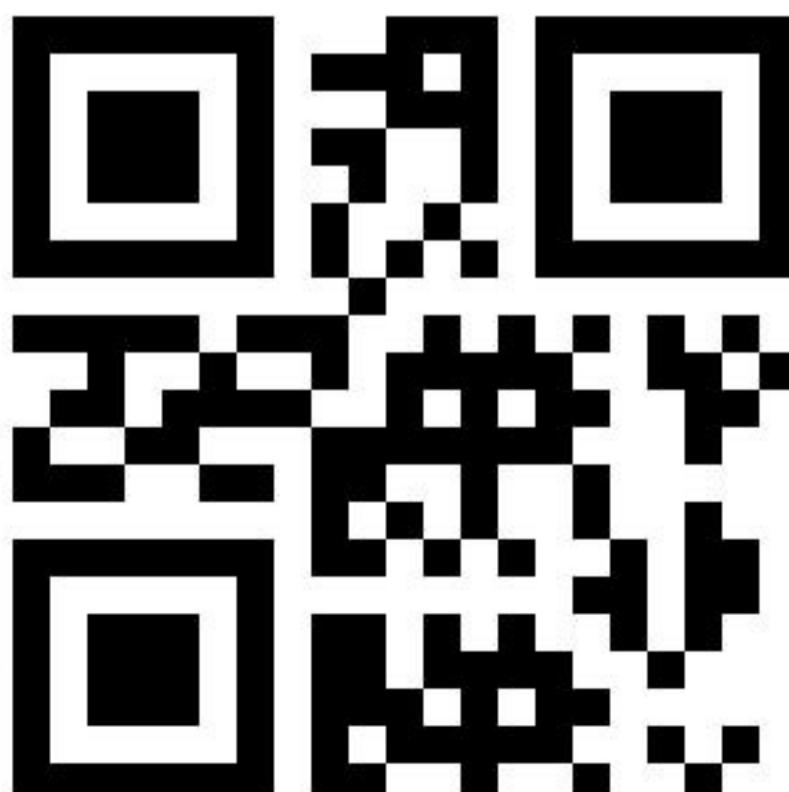



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00634





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00635

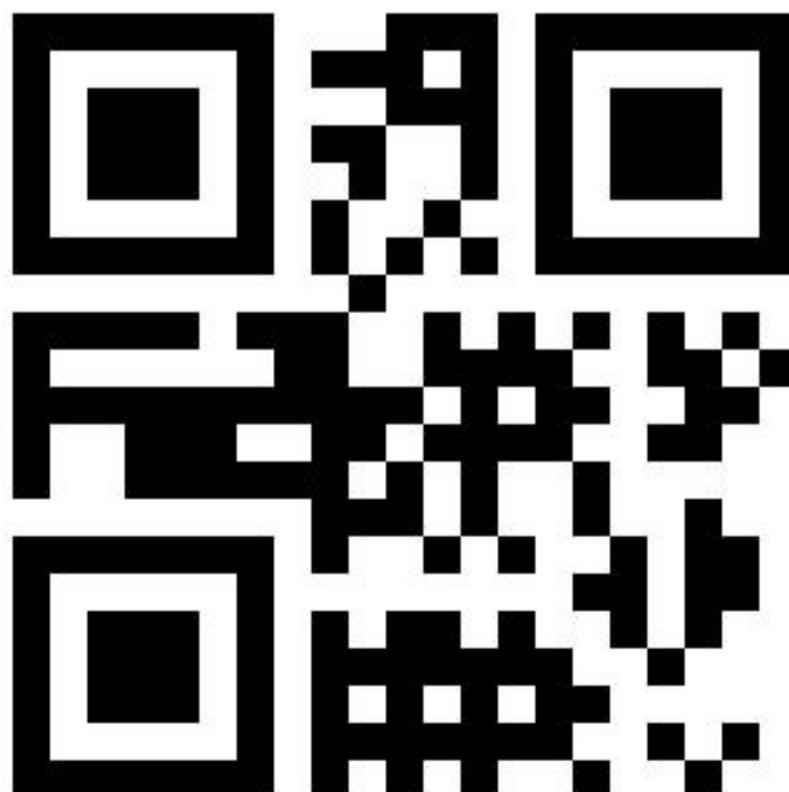



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00636

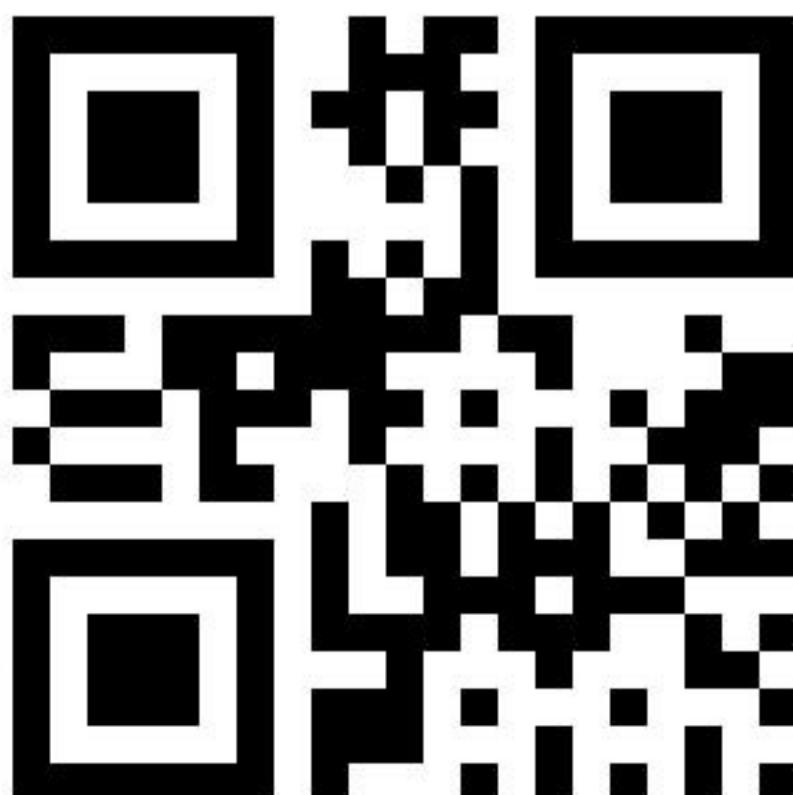



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00637

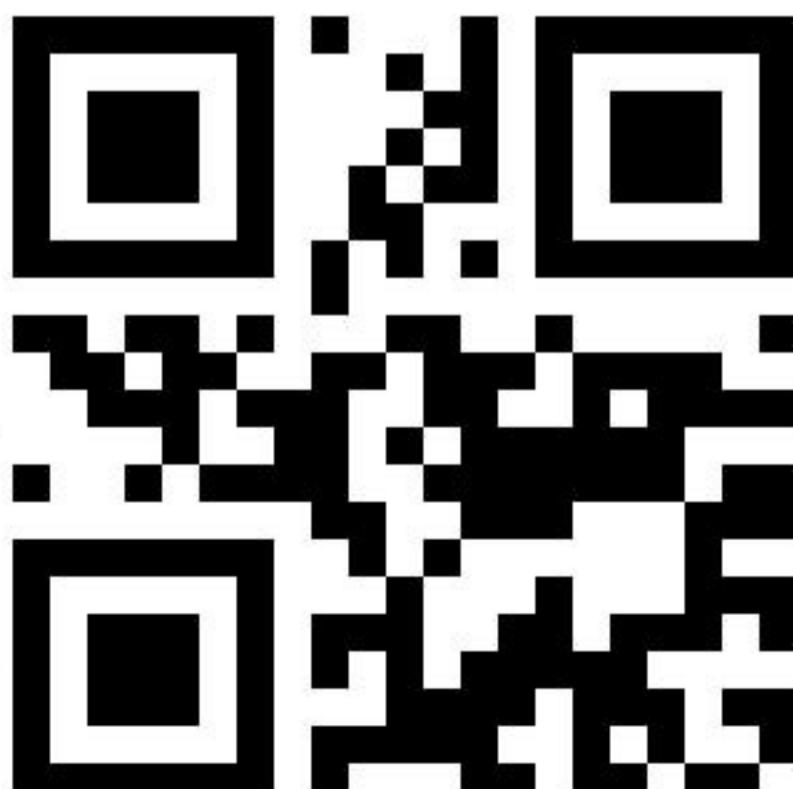



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00638

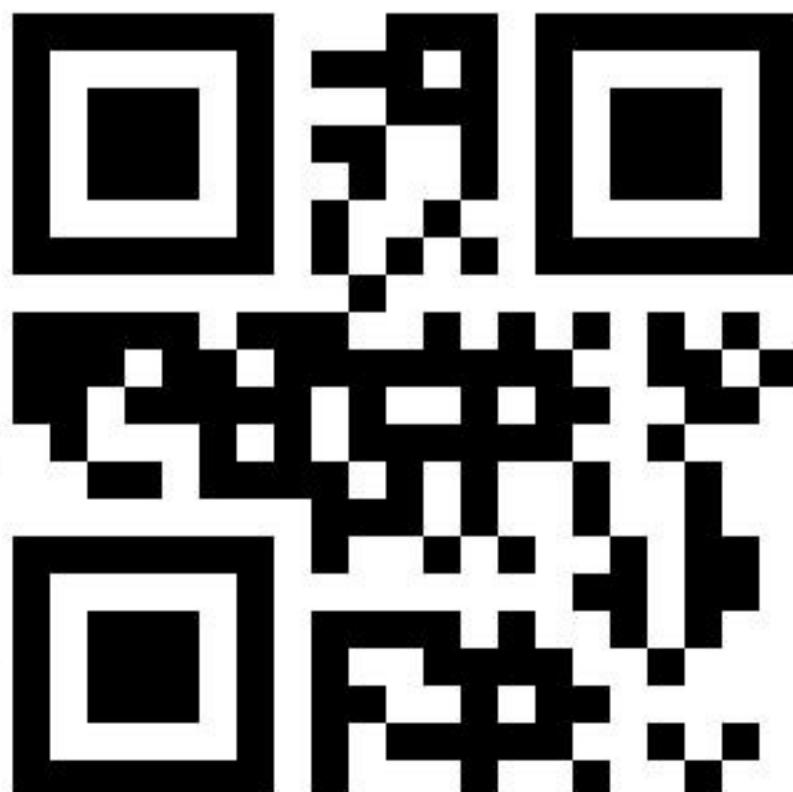



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00639

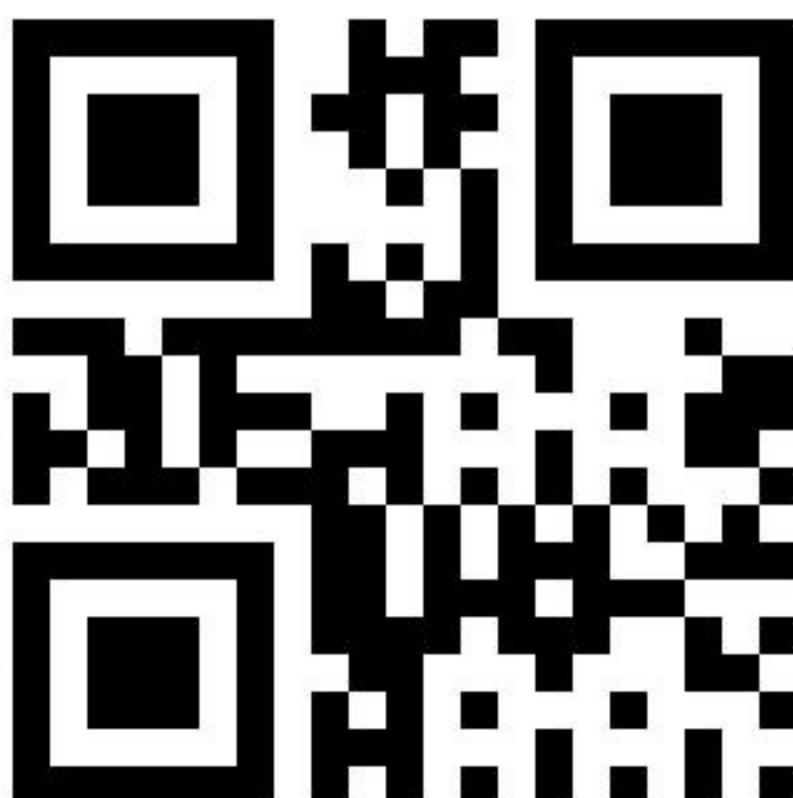



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00640

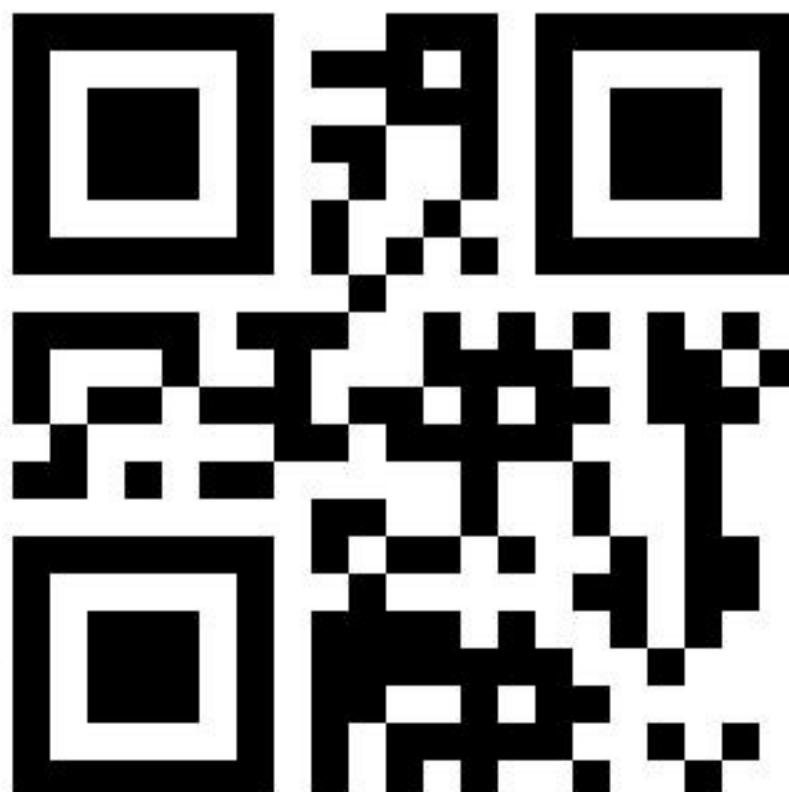



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00641

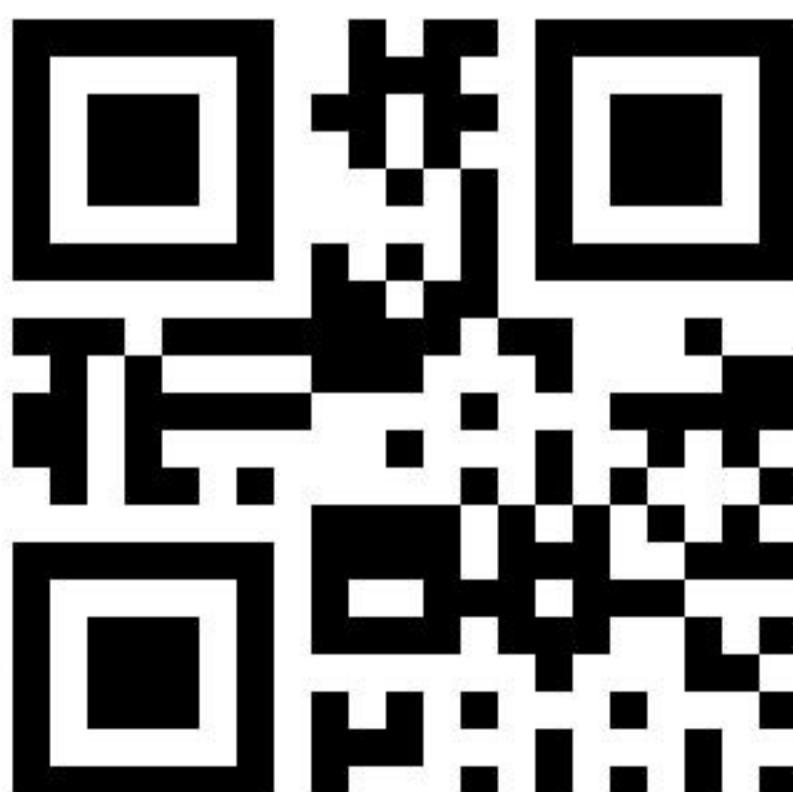



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00642

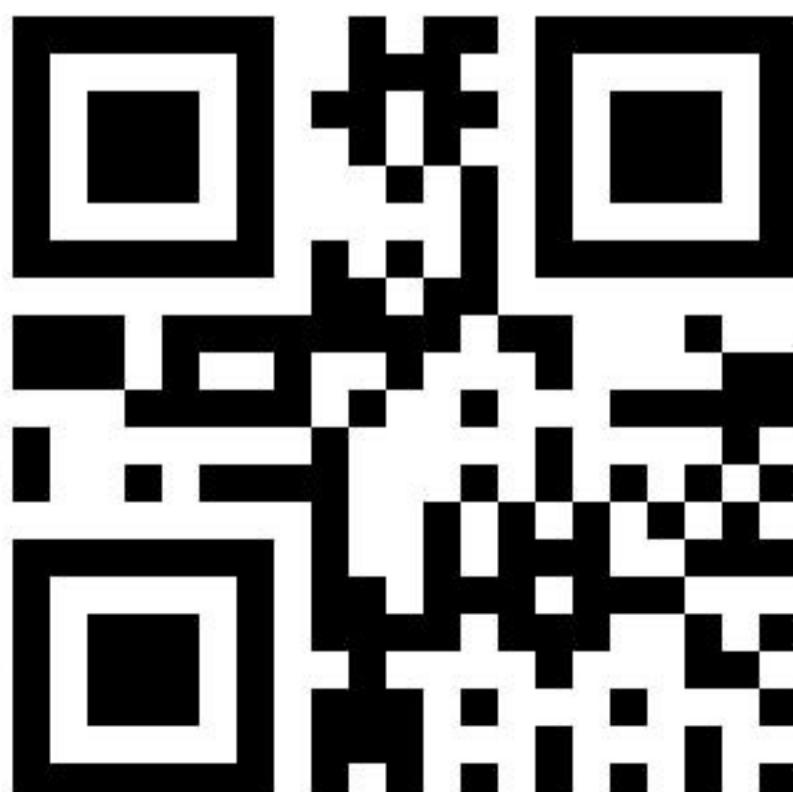



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00643

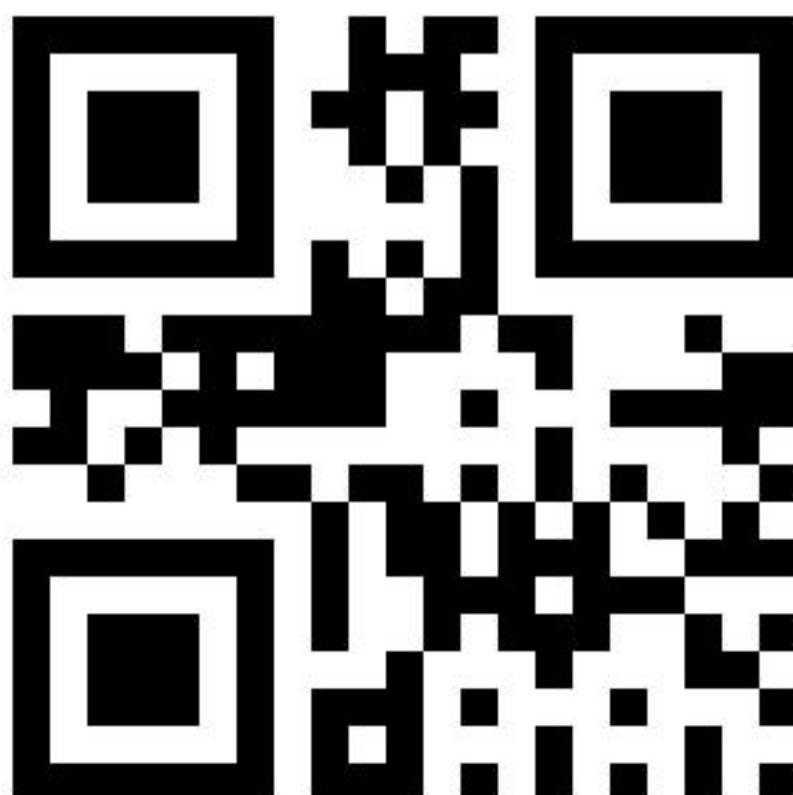



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00644

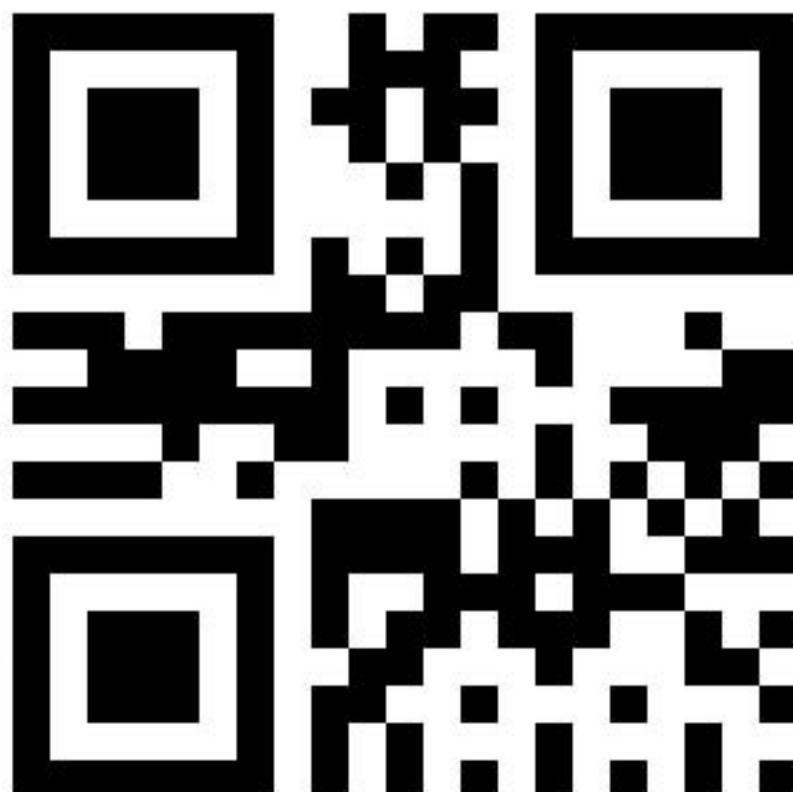



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00645

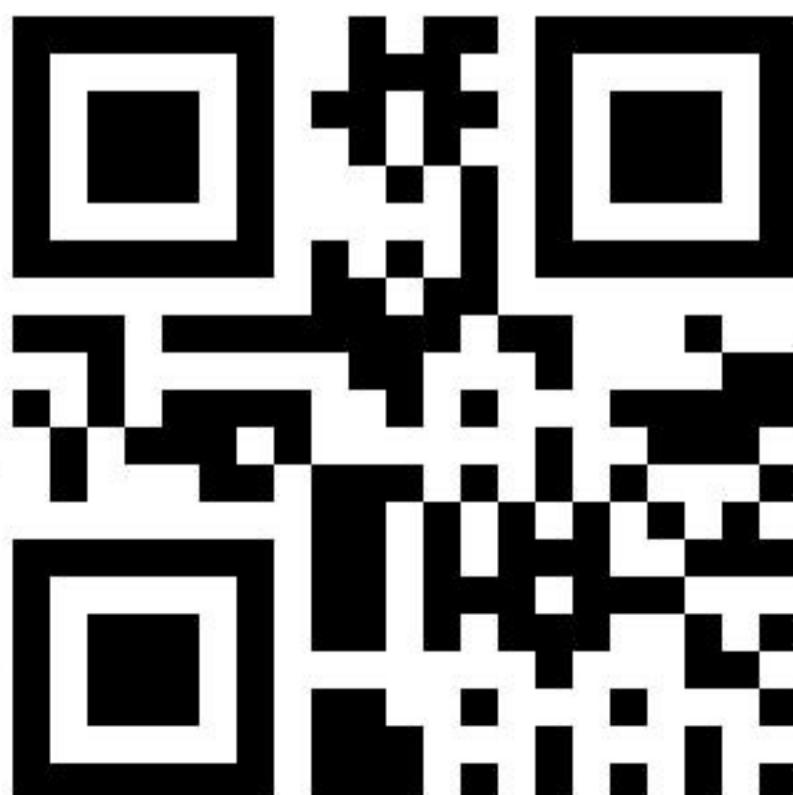



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00646

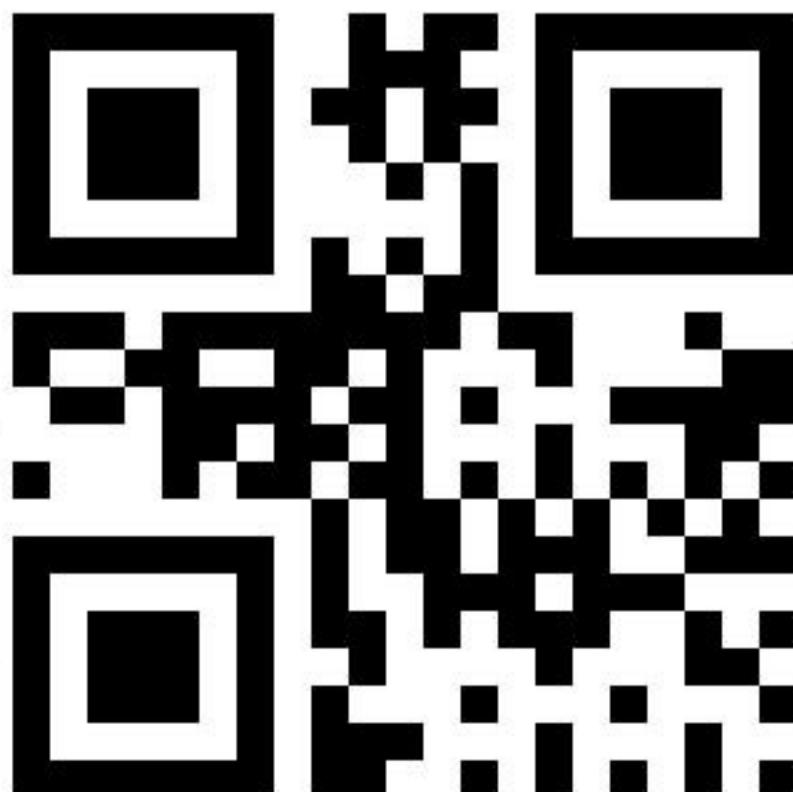



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00647

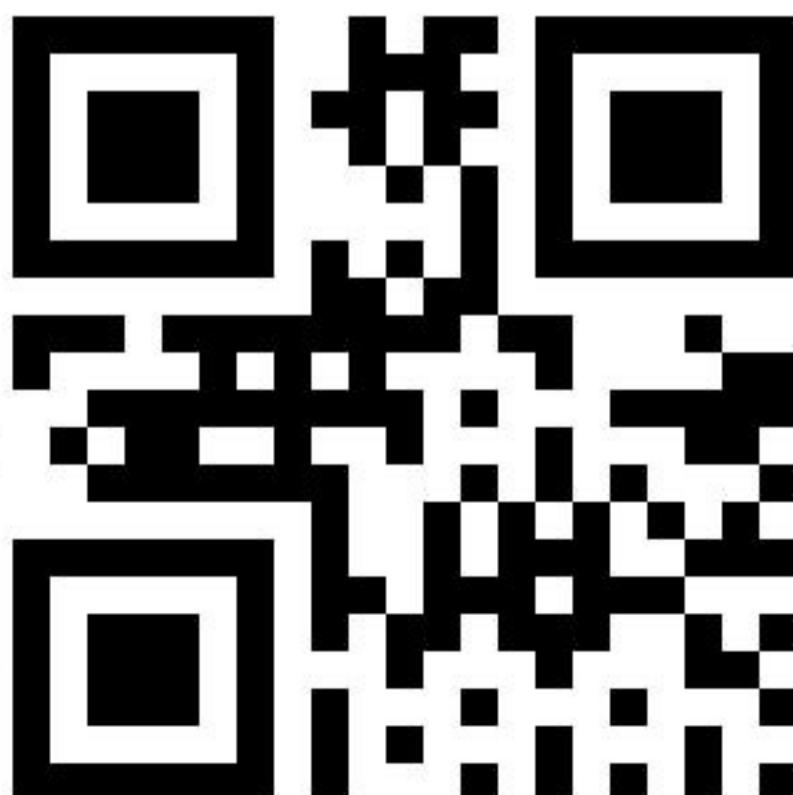



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00648

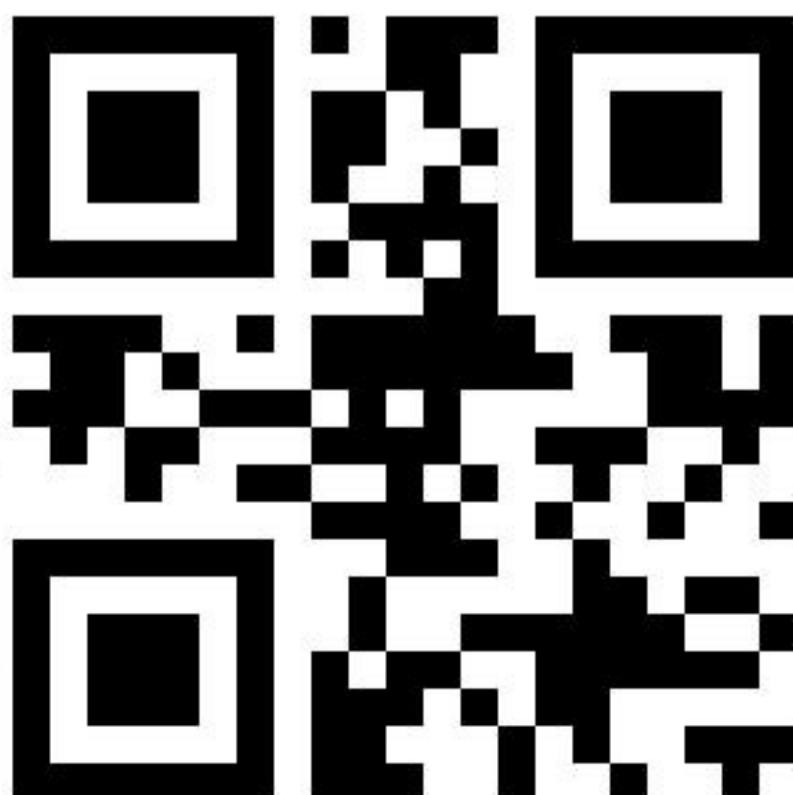



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00649

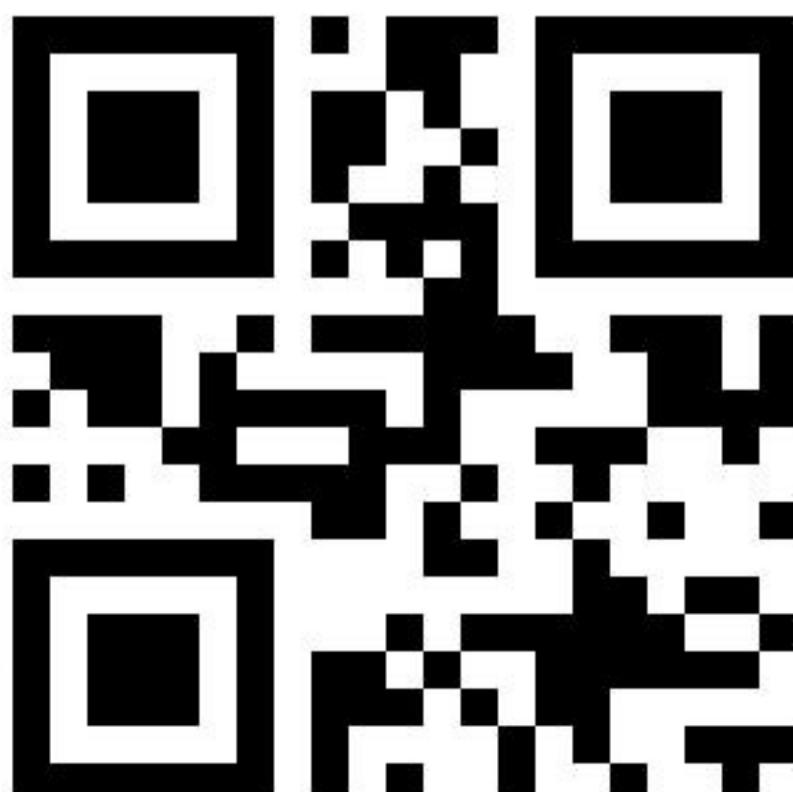



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00650

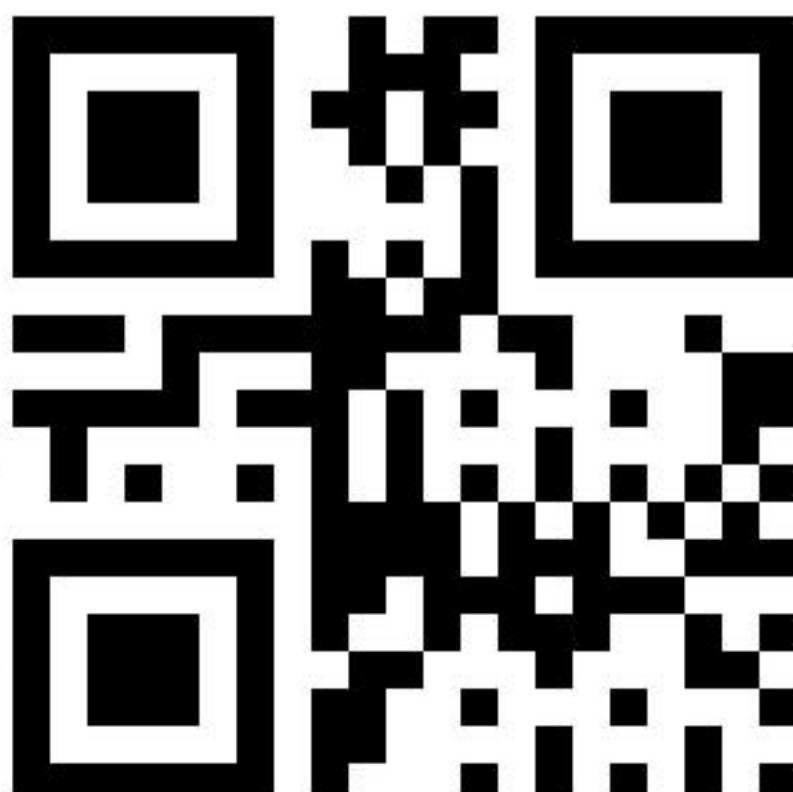



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00651

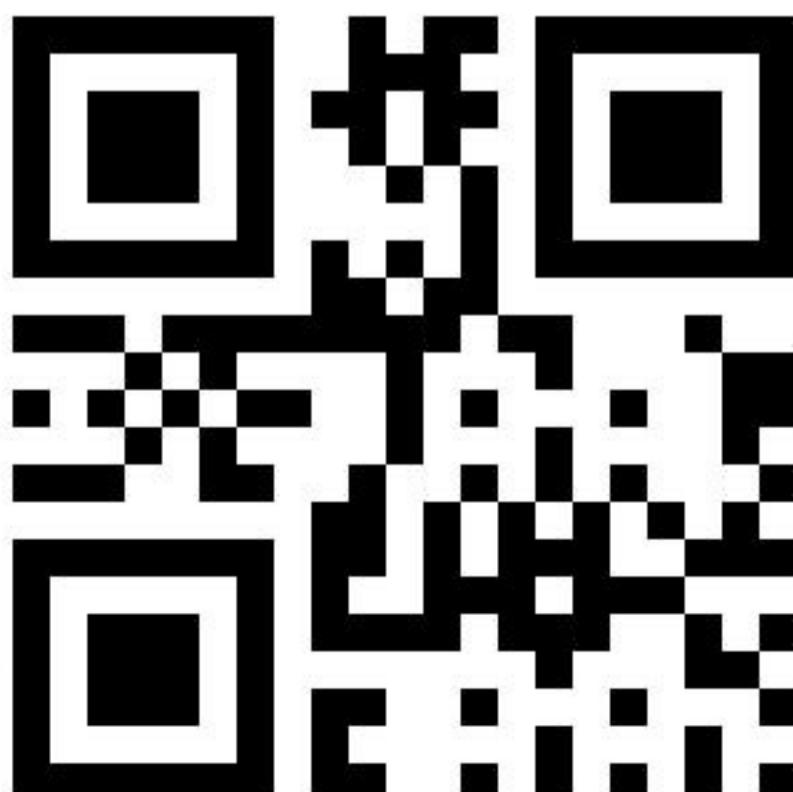



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00652

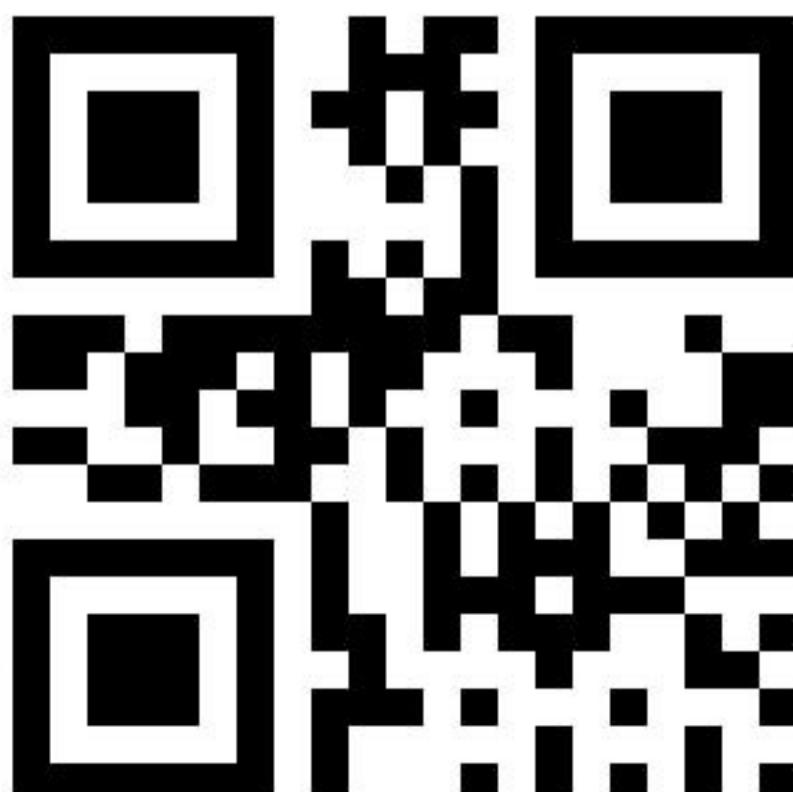



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00653

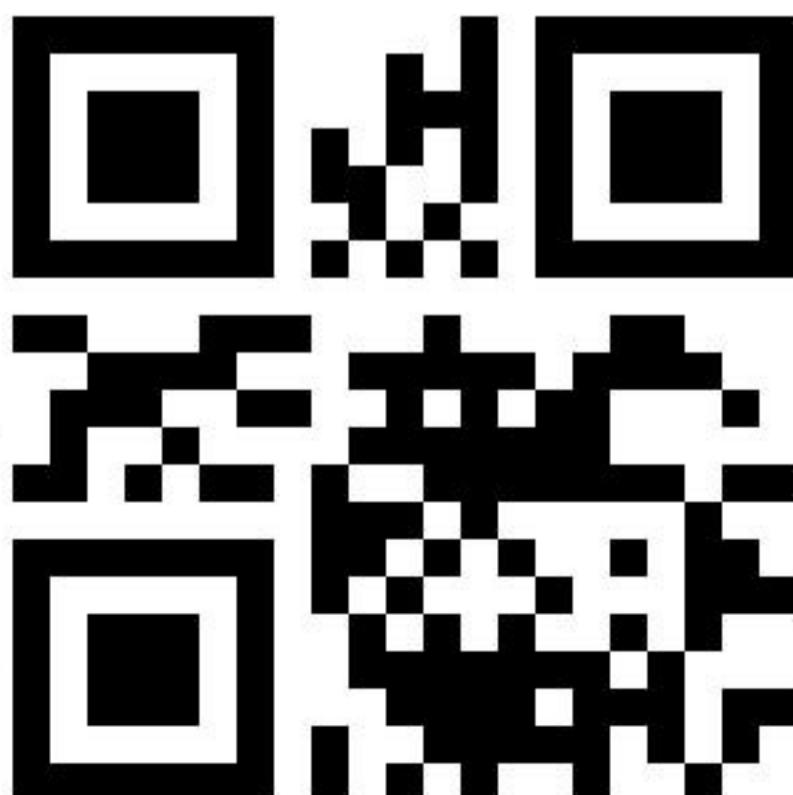



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00654

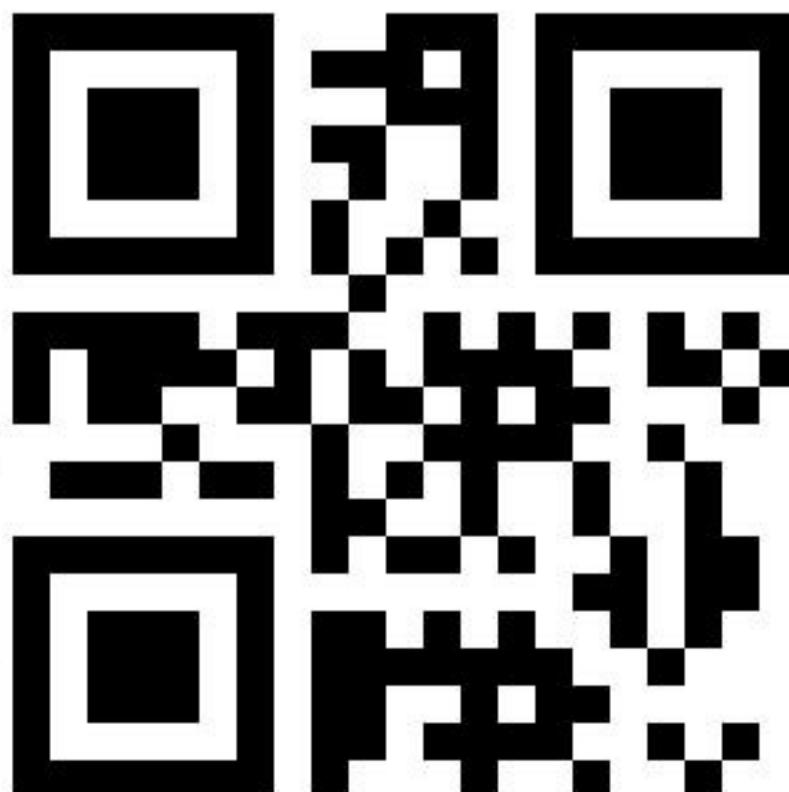



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00655

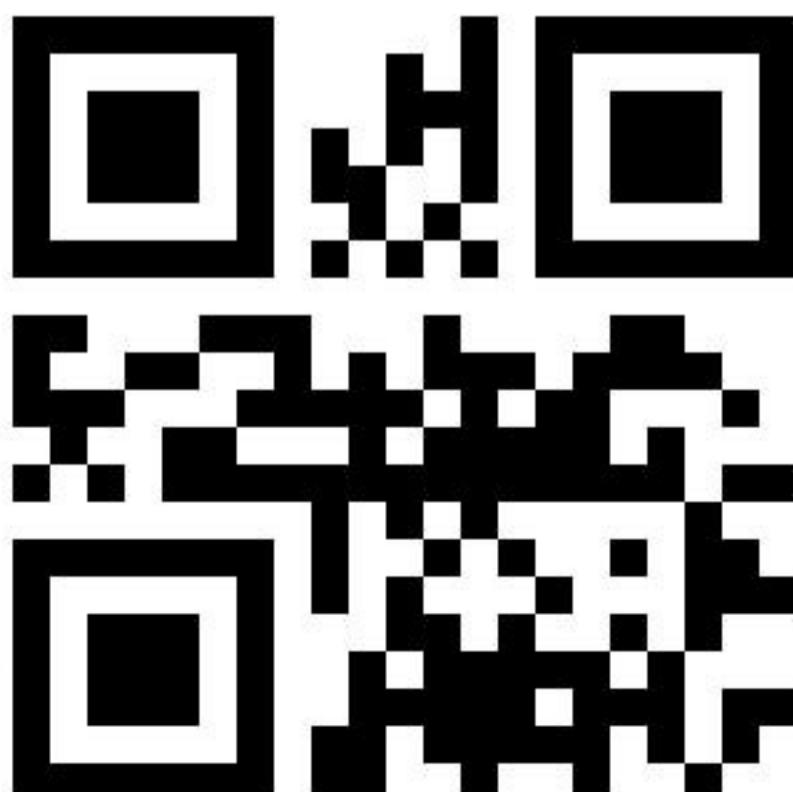



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00656





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00657

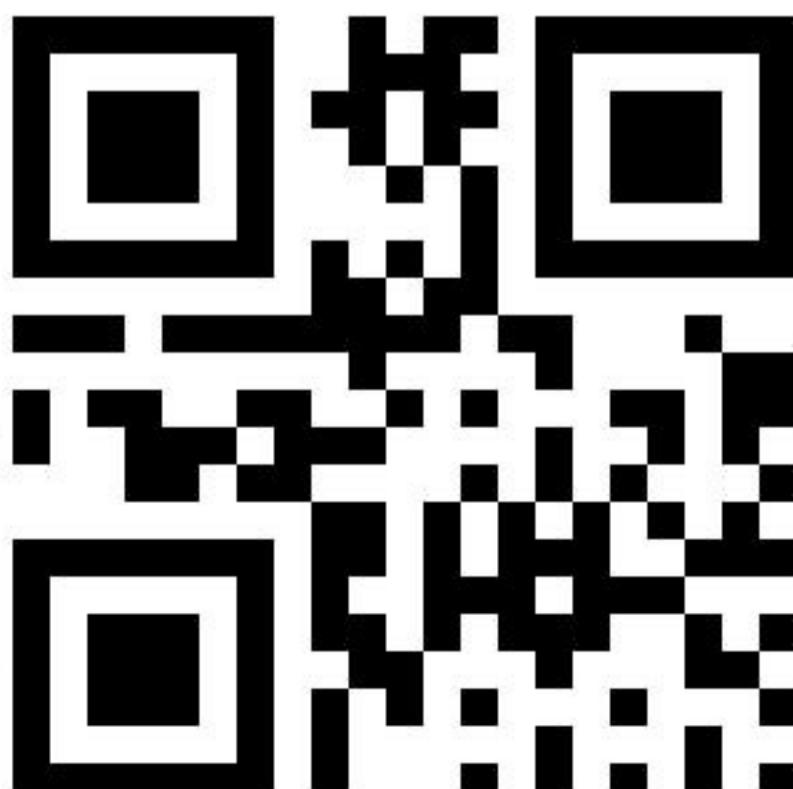



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00658

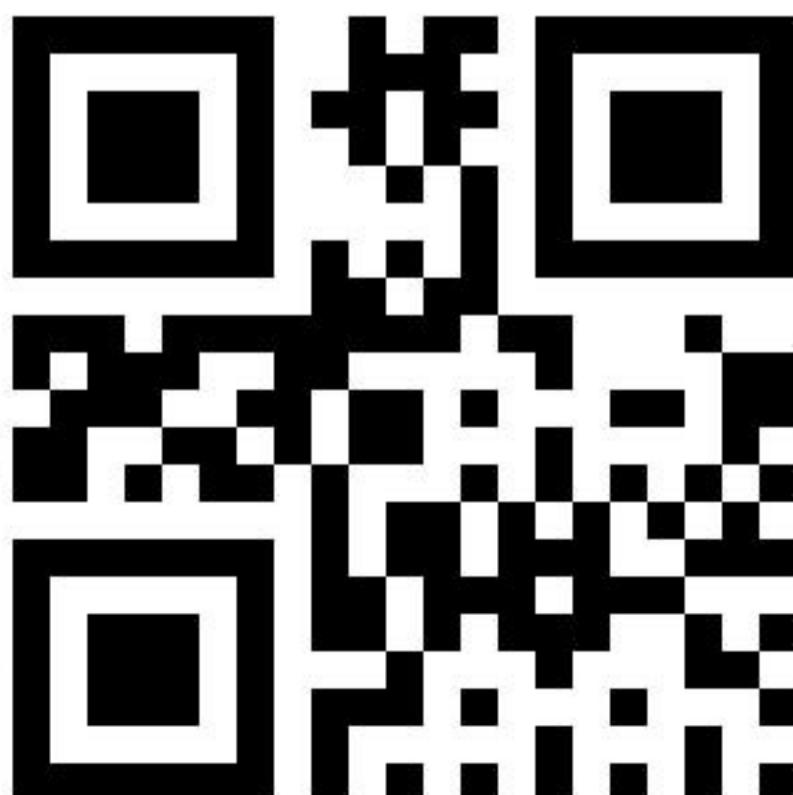



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00659

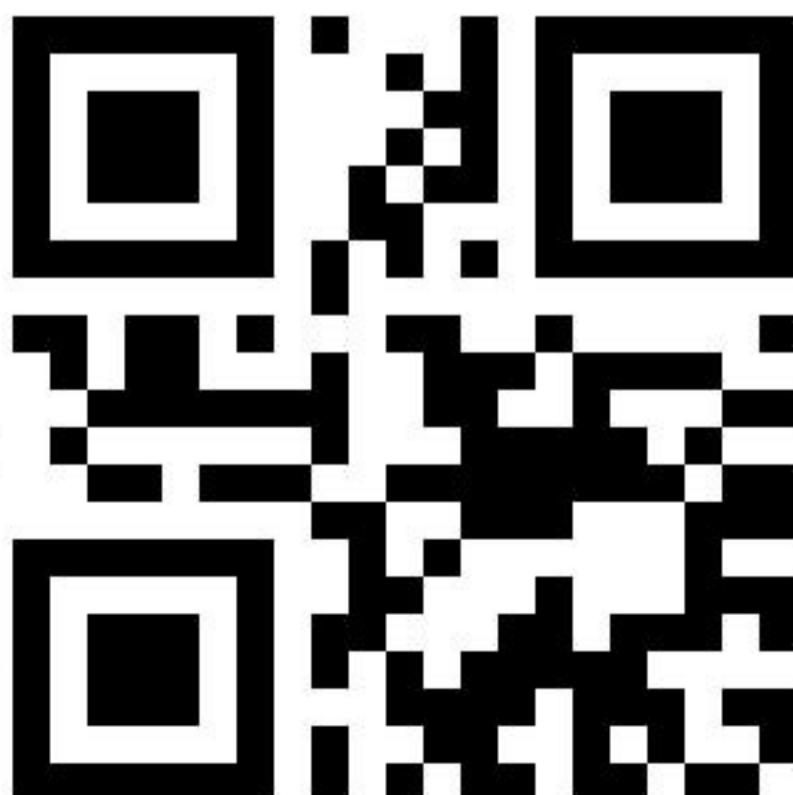



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00660

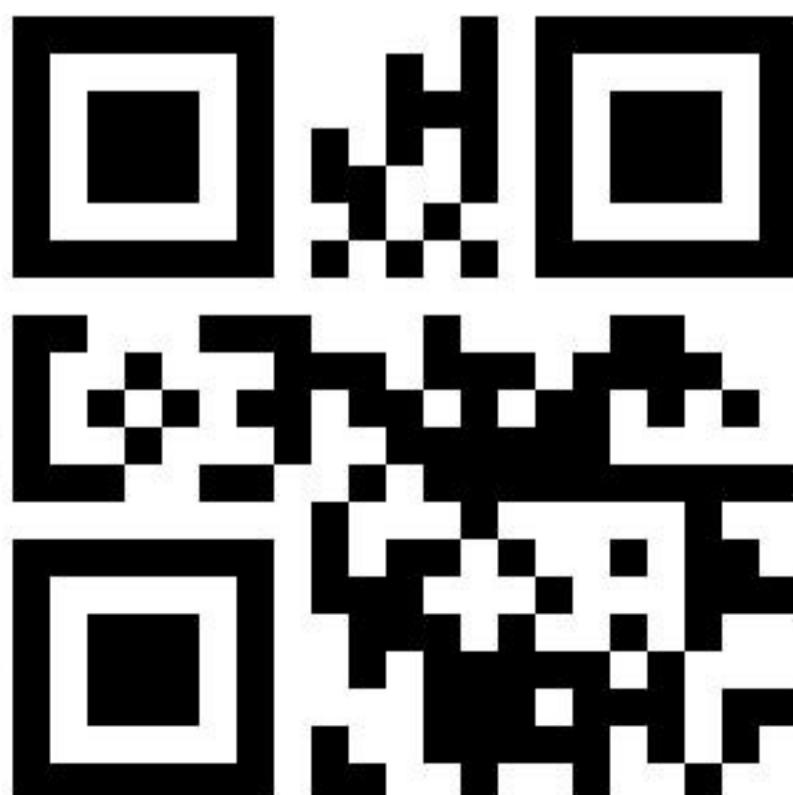



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006661

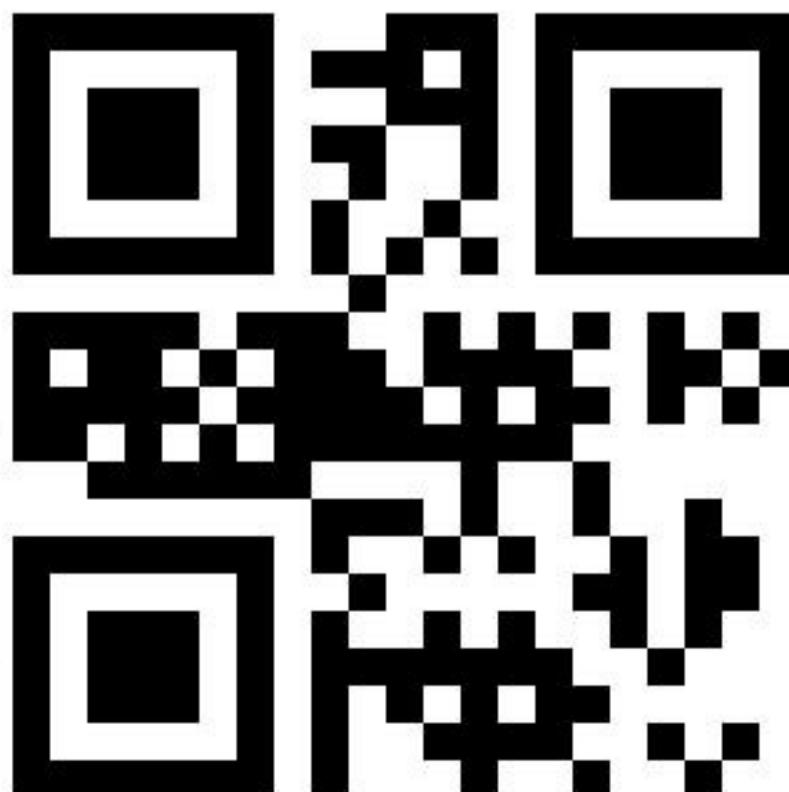



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006662





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006663

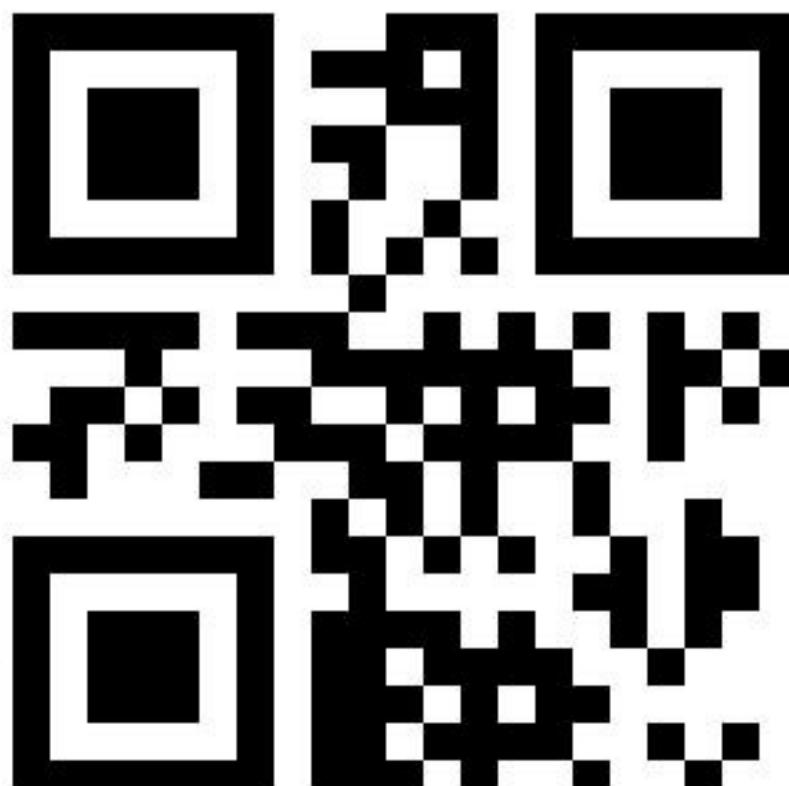



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006664

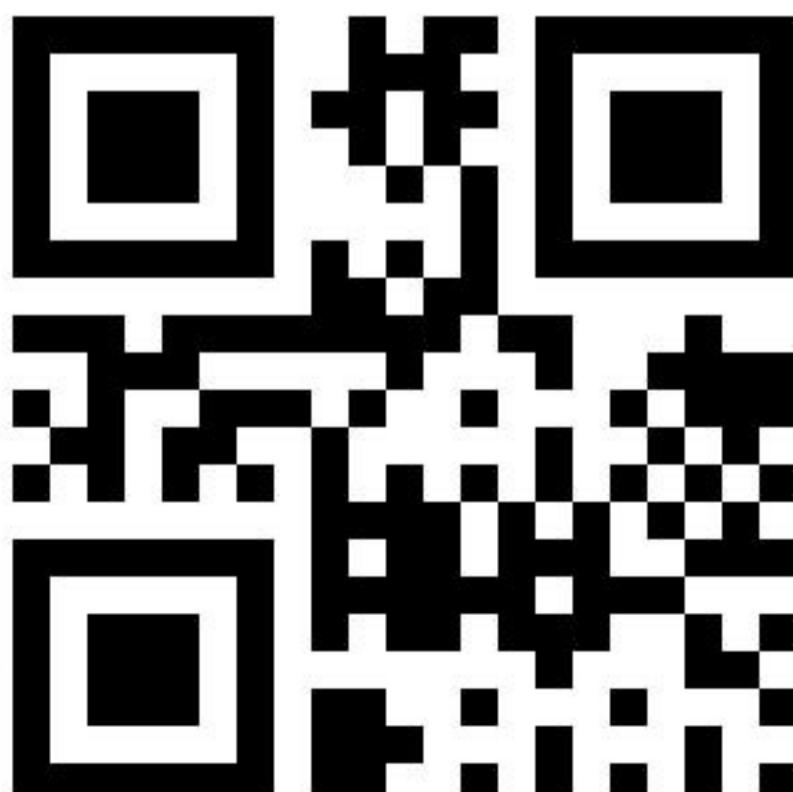



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006665

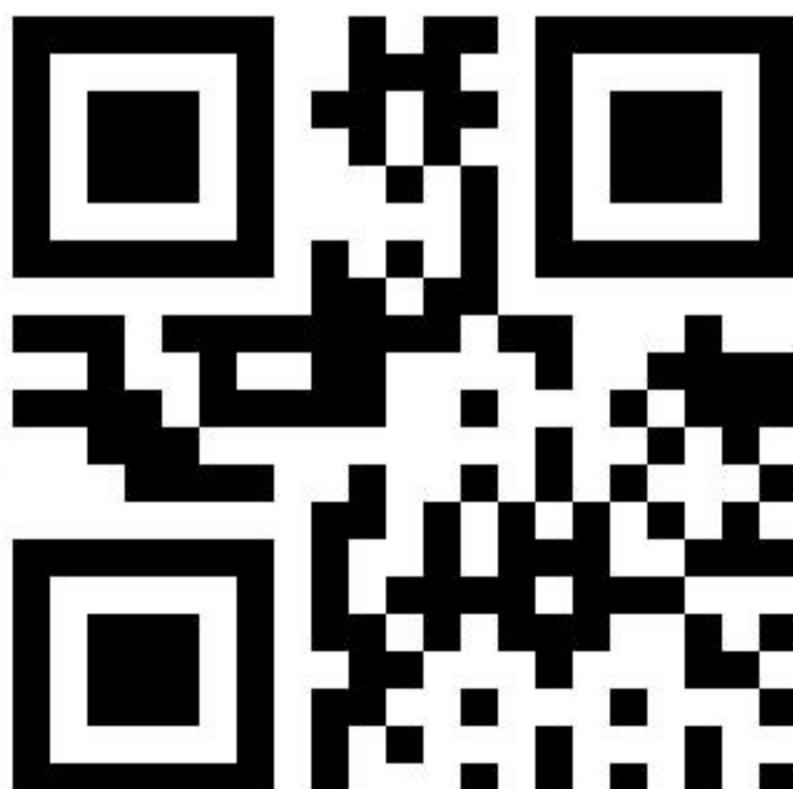



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006666

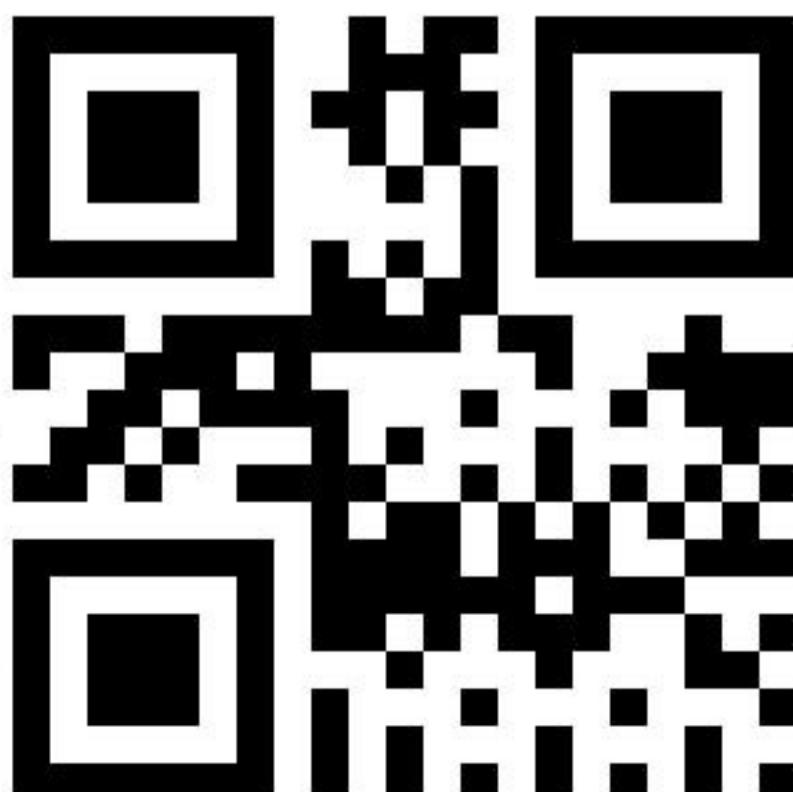



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006667

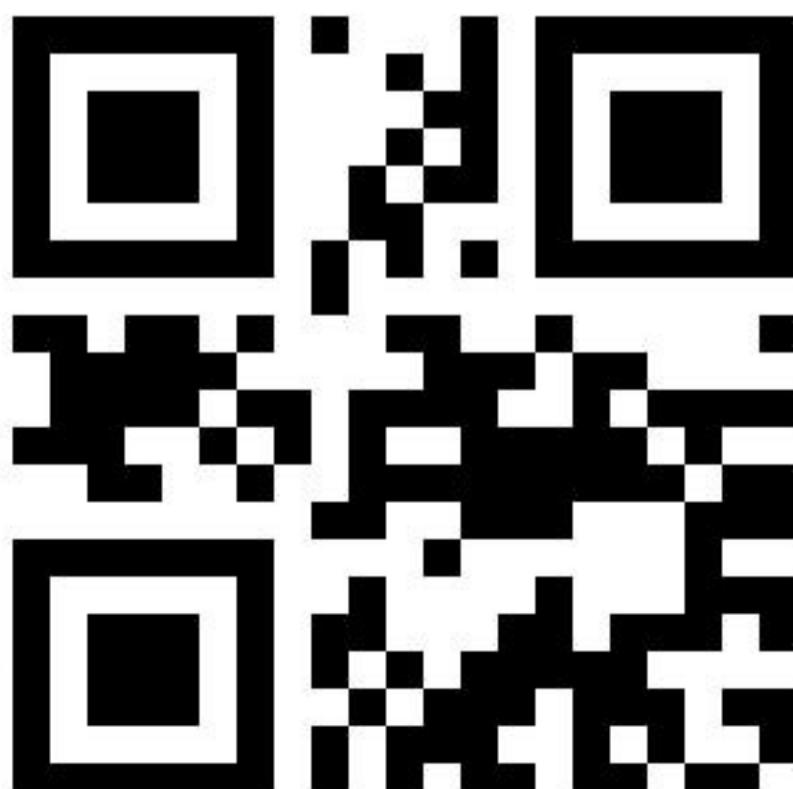



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006668





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 006669

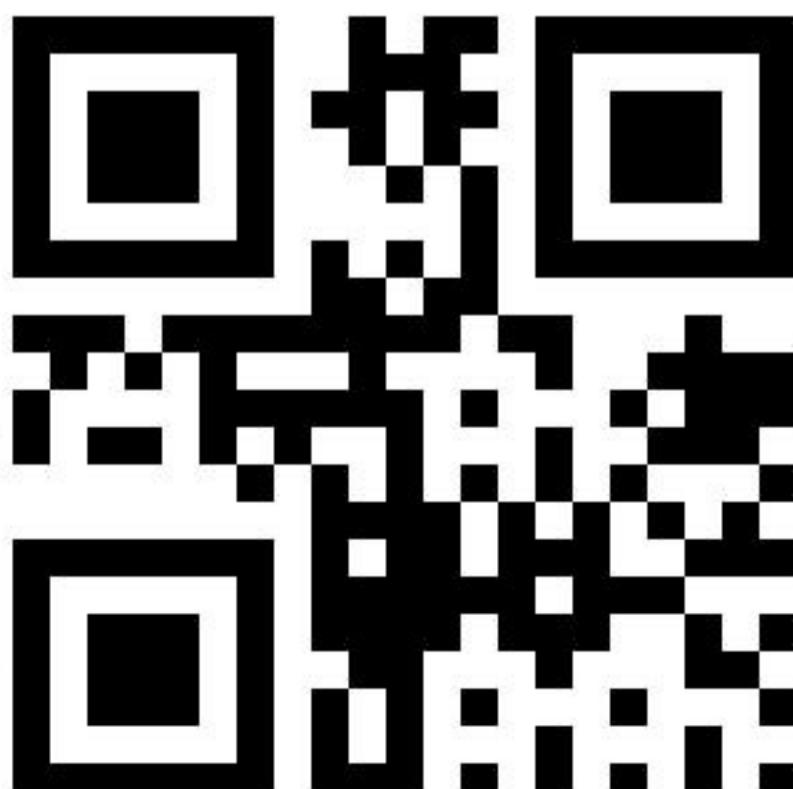



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00670

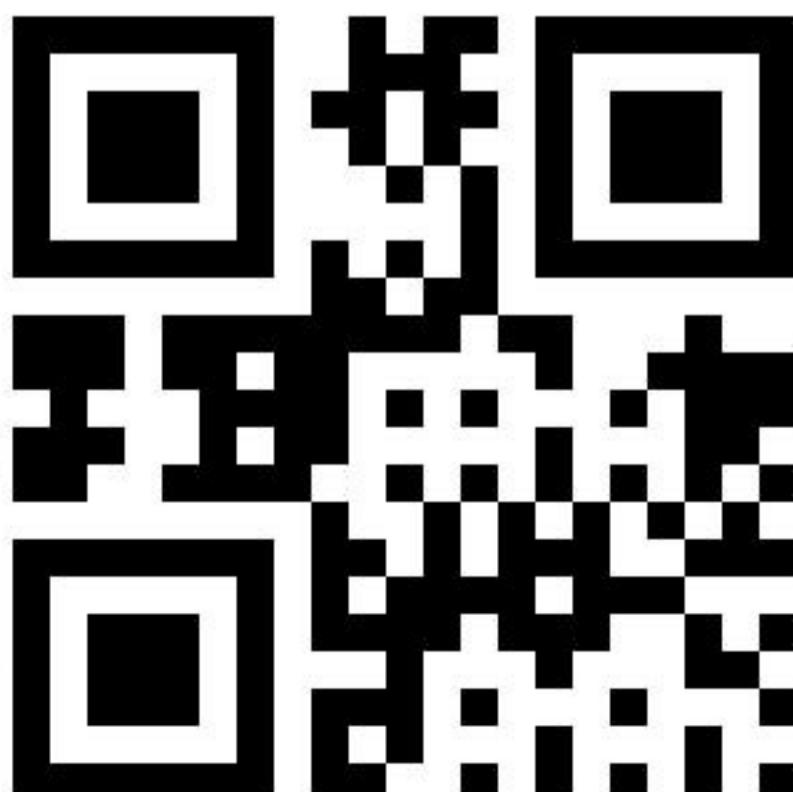



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000671

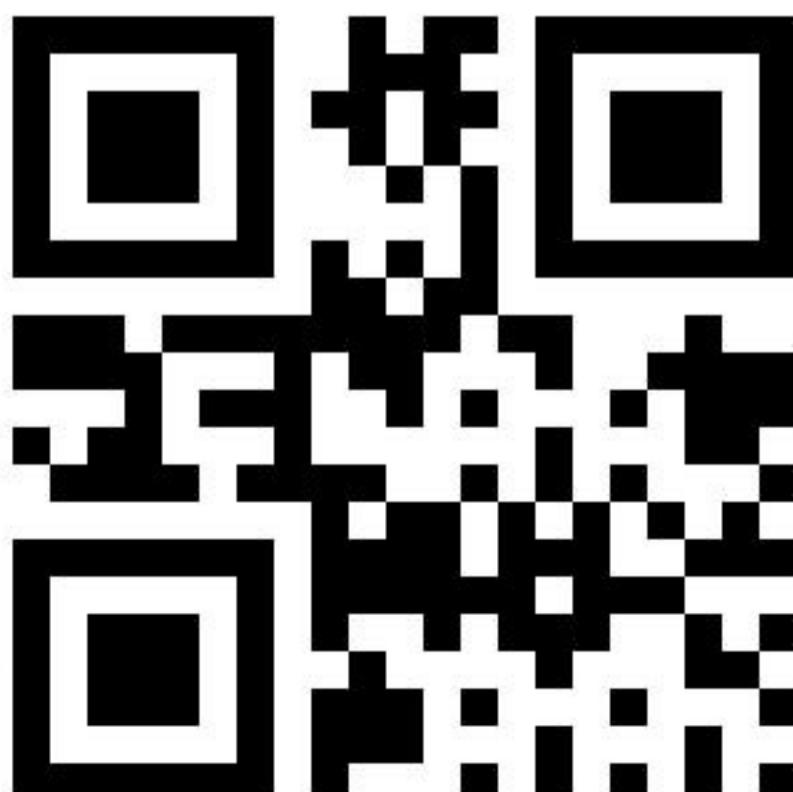



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000672

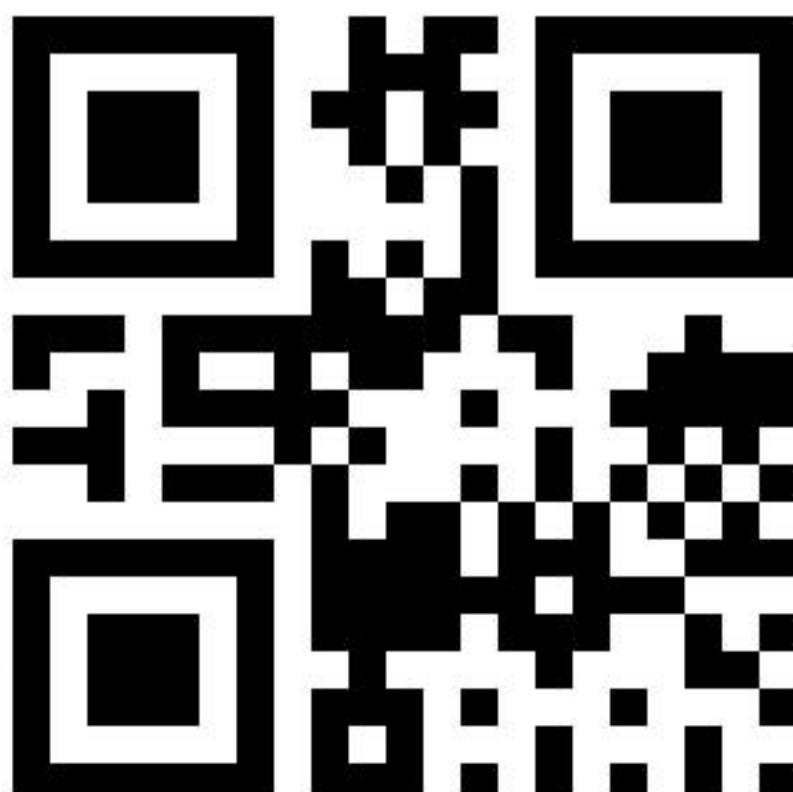



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00673

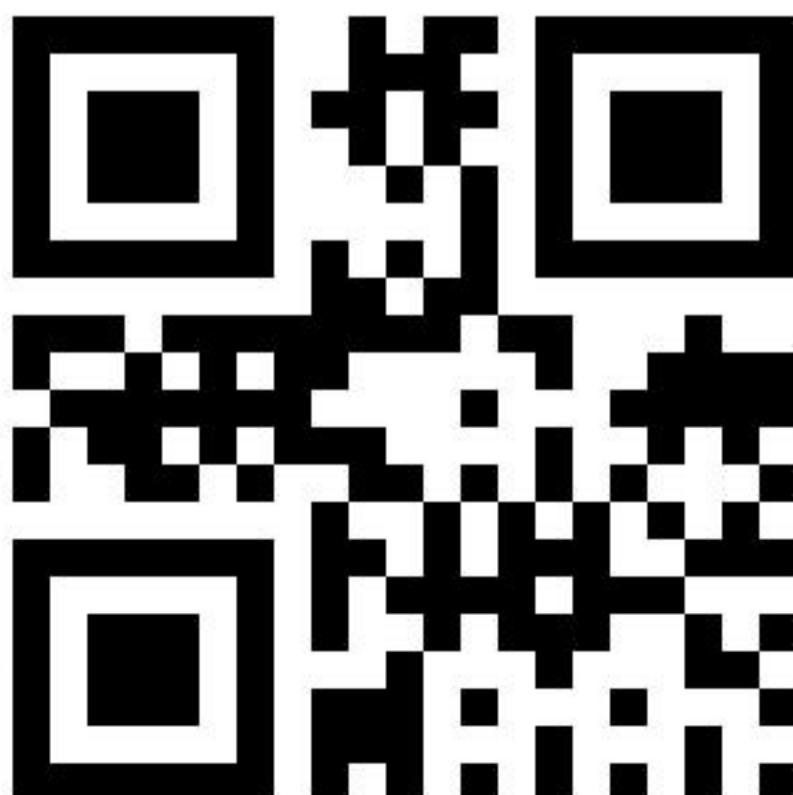



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00674

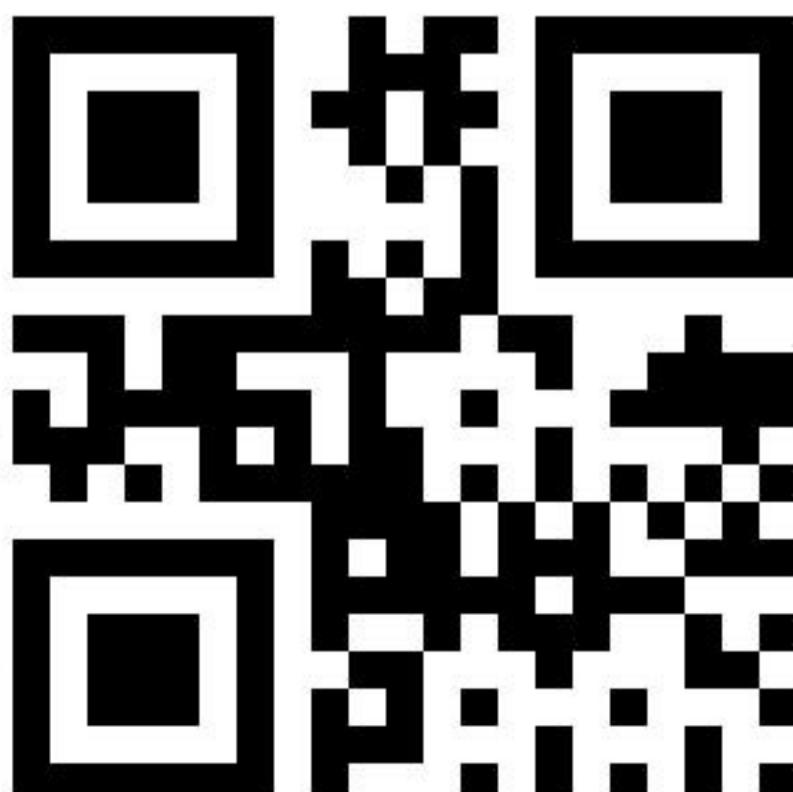



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00675

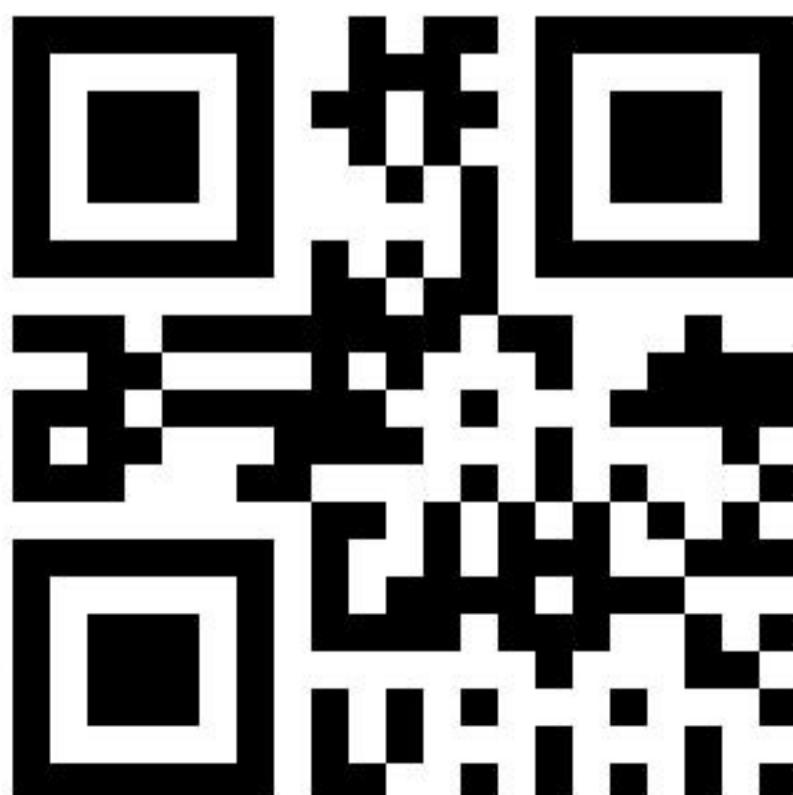



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00676

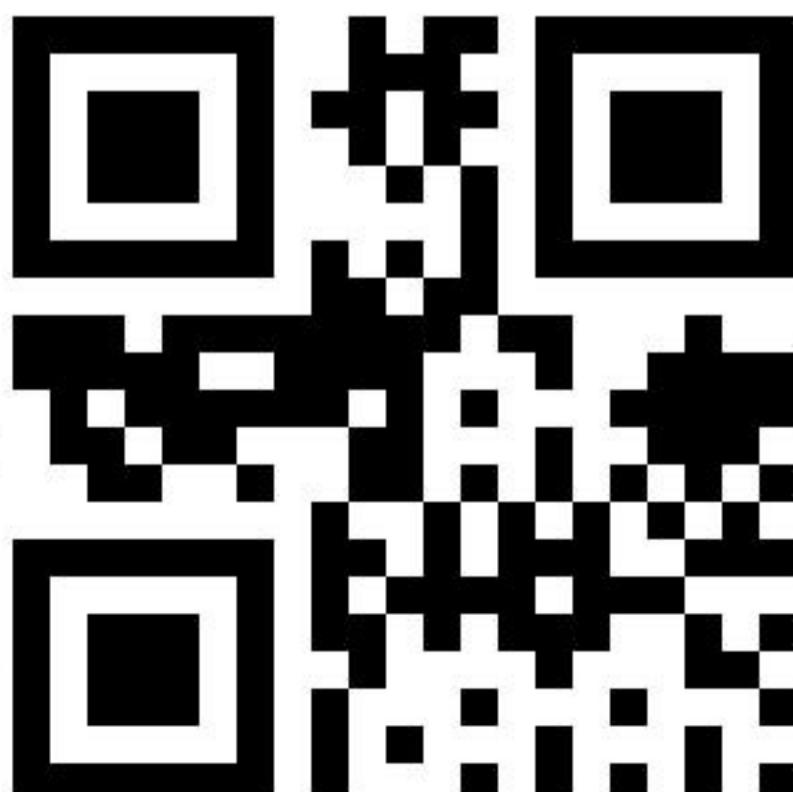



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00677





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000678

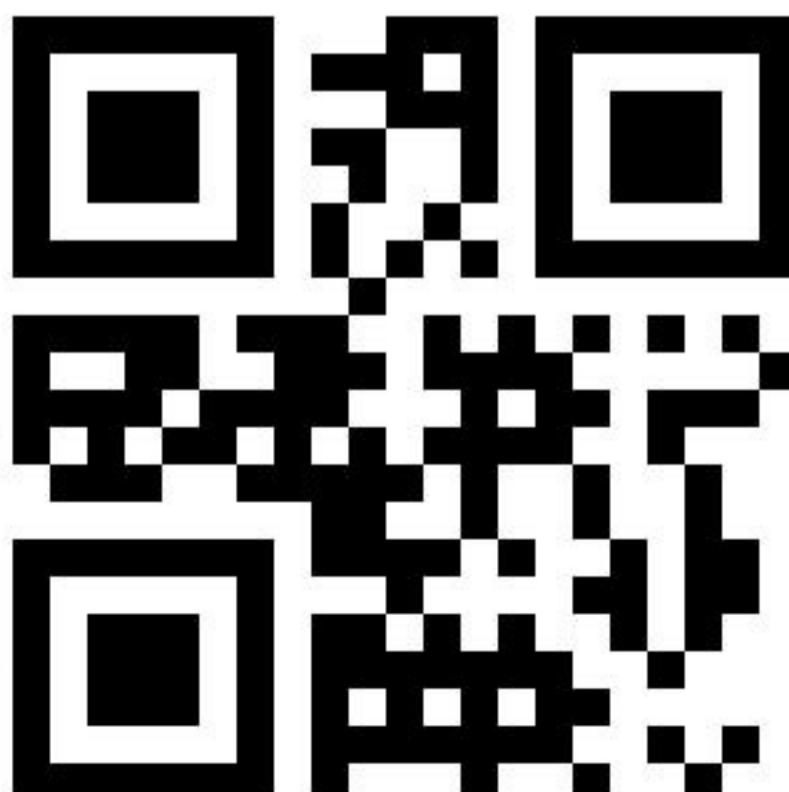



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000679





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00680

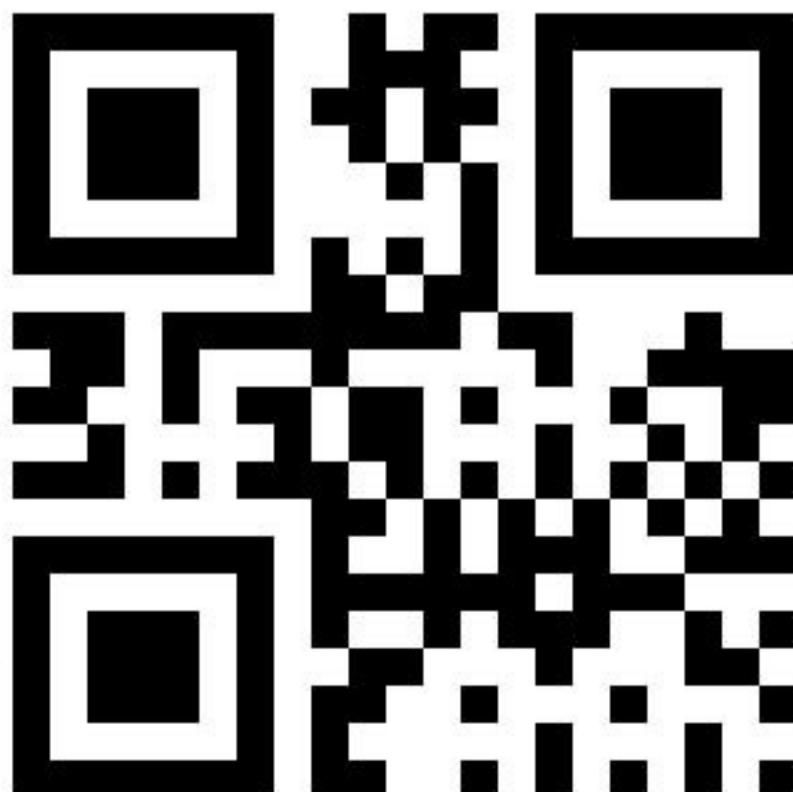



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00681

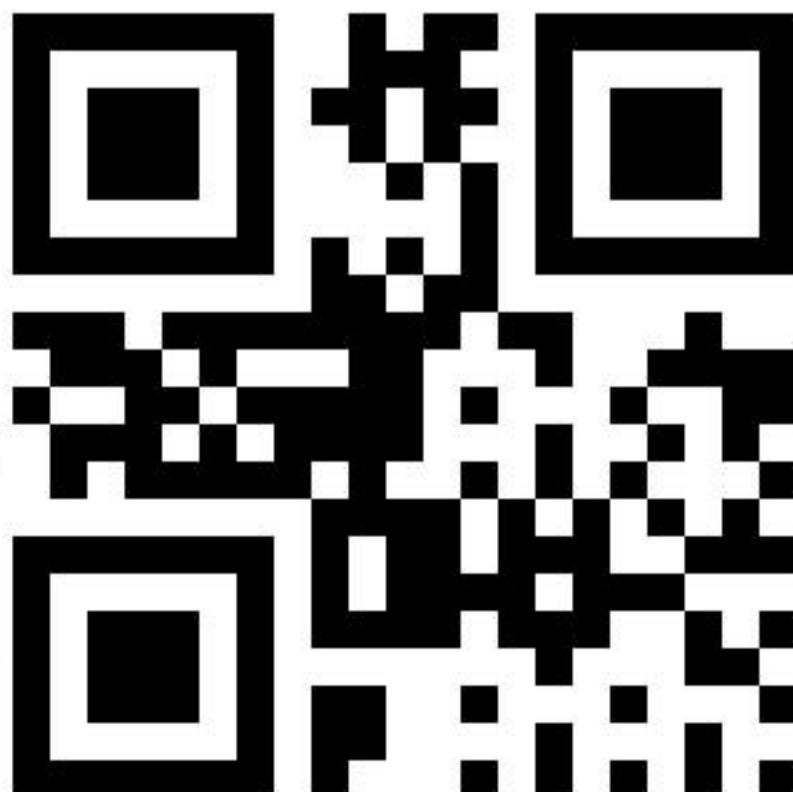



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00682

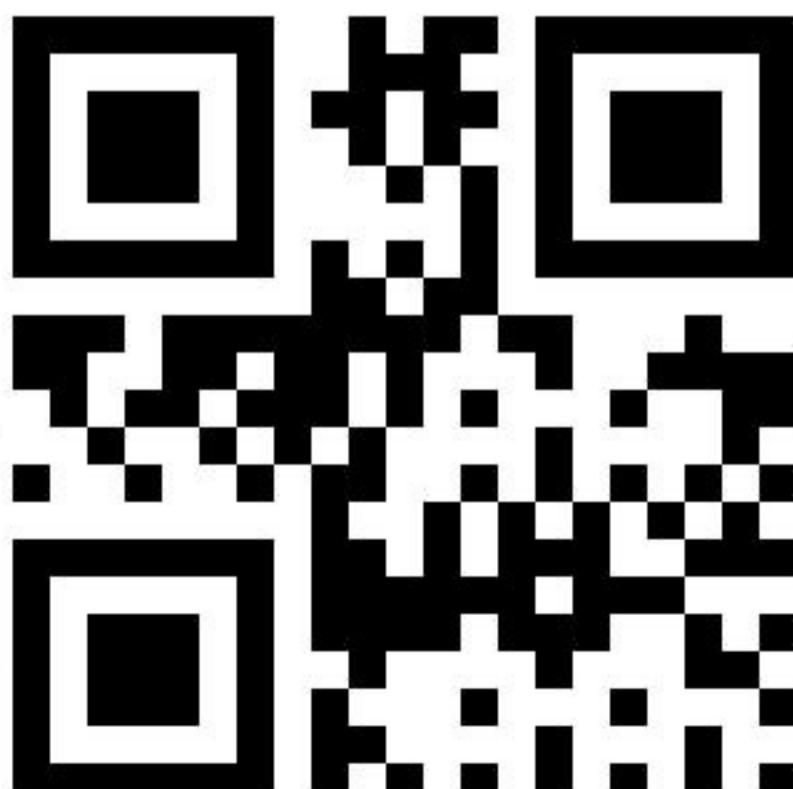



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module

panel_id 00683

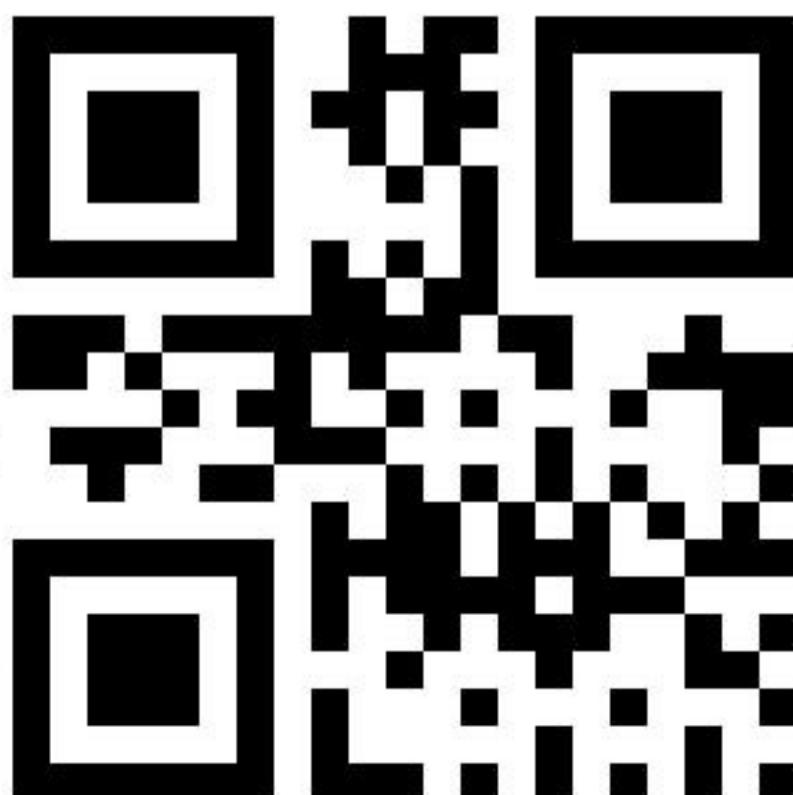



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00684

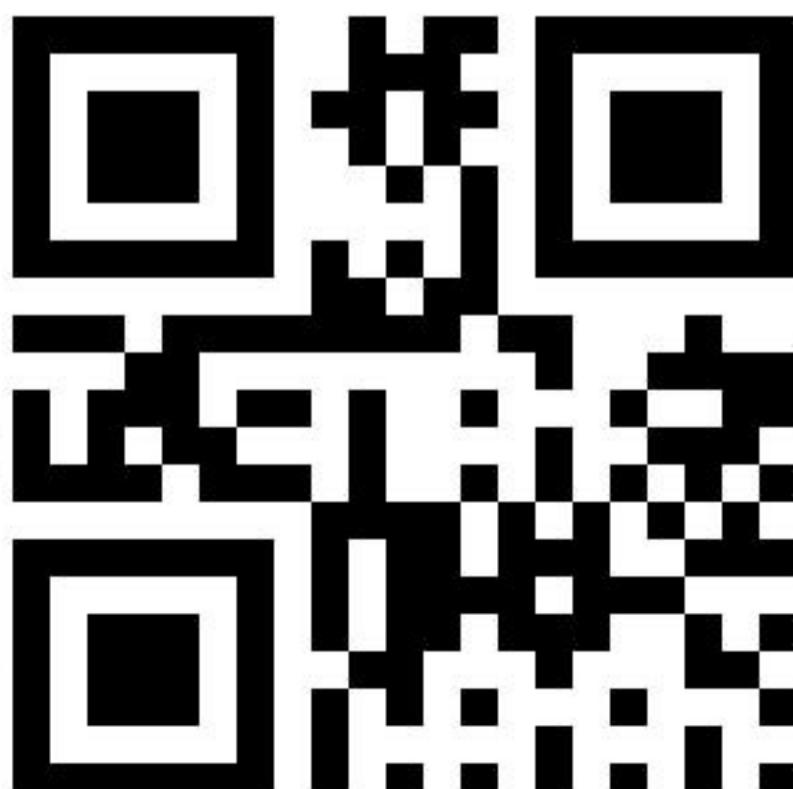



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00685

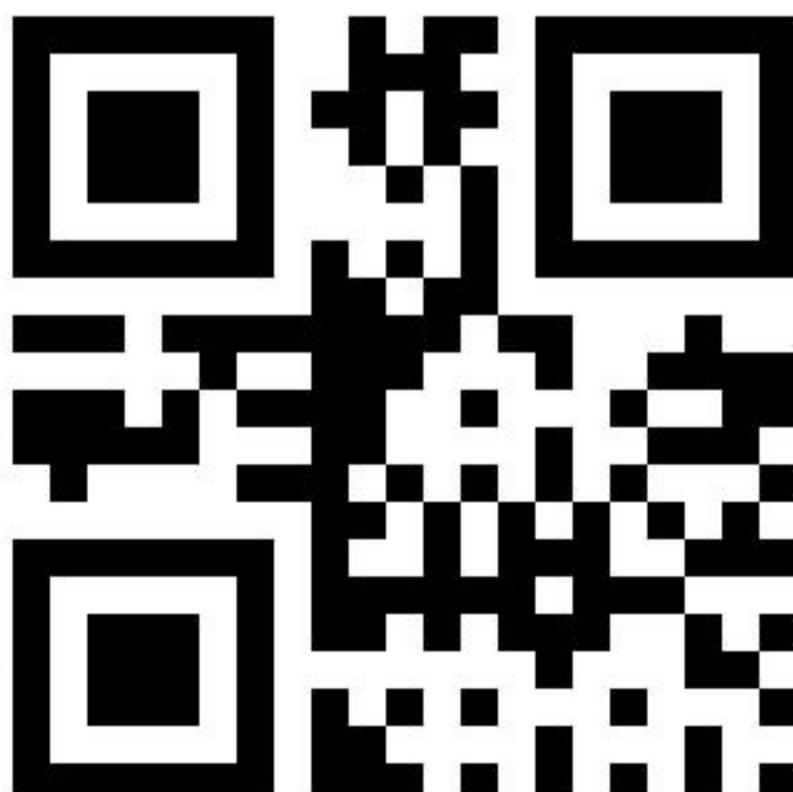



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00686

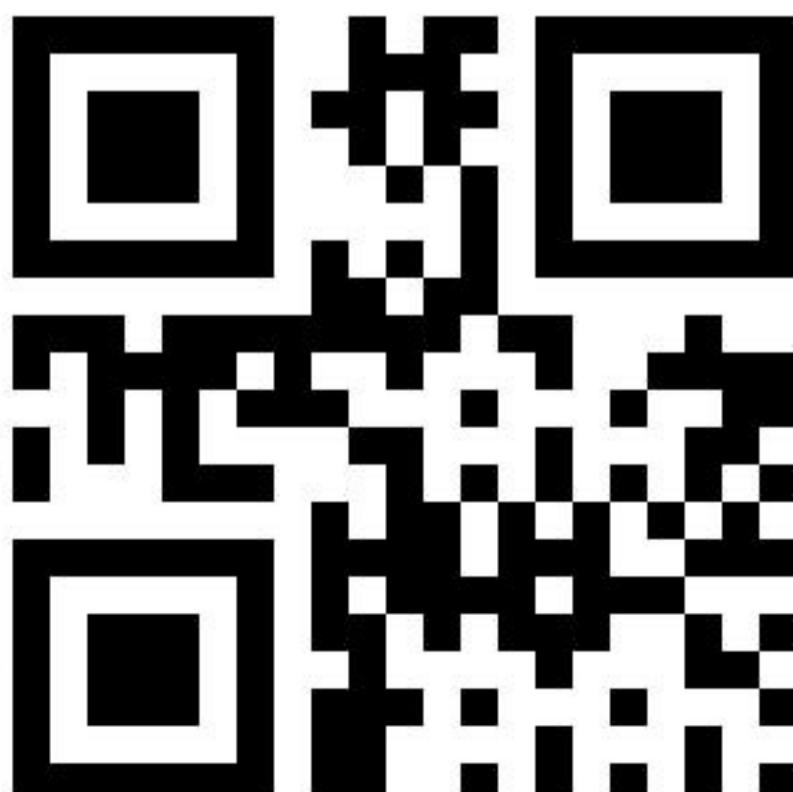



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00687

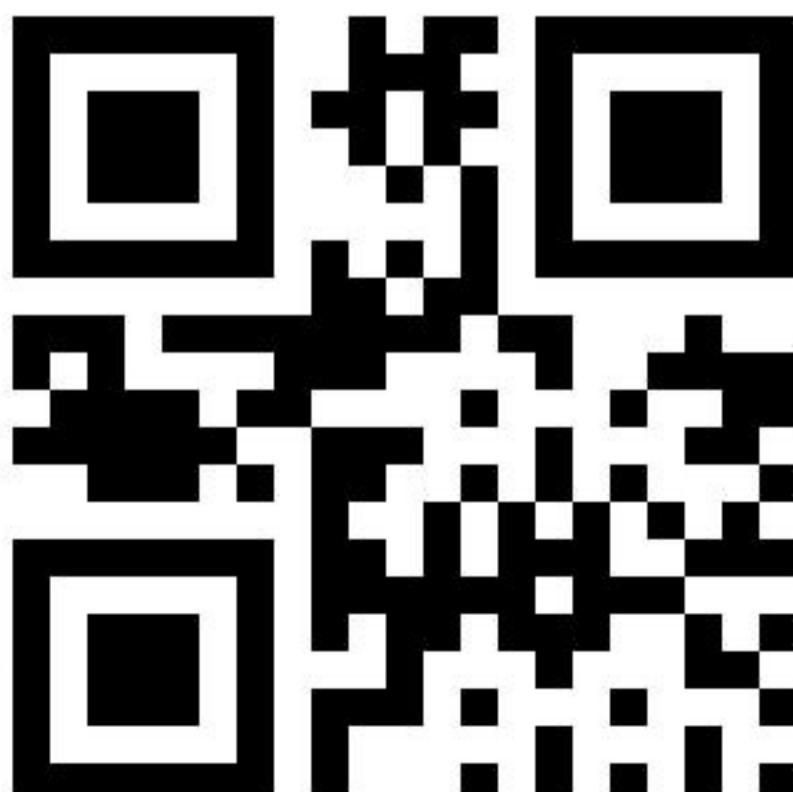



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00688

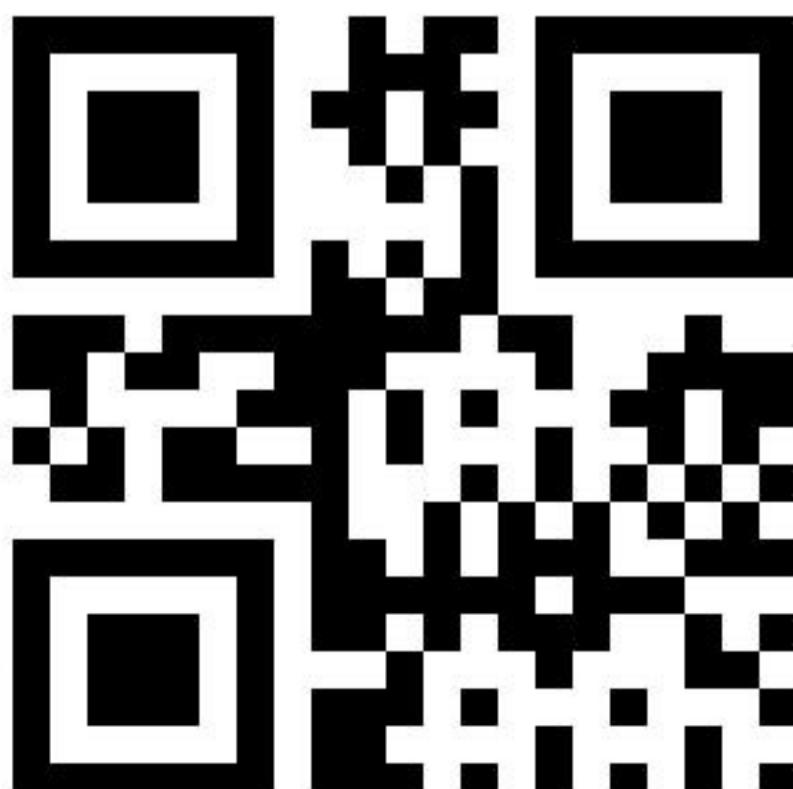



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00689

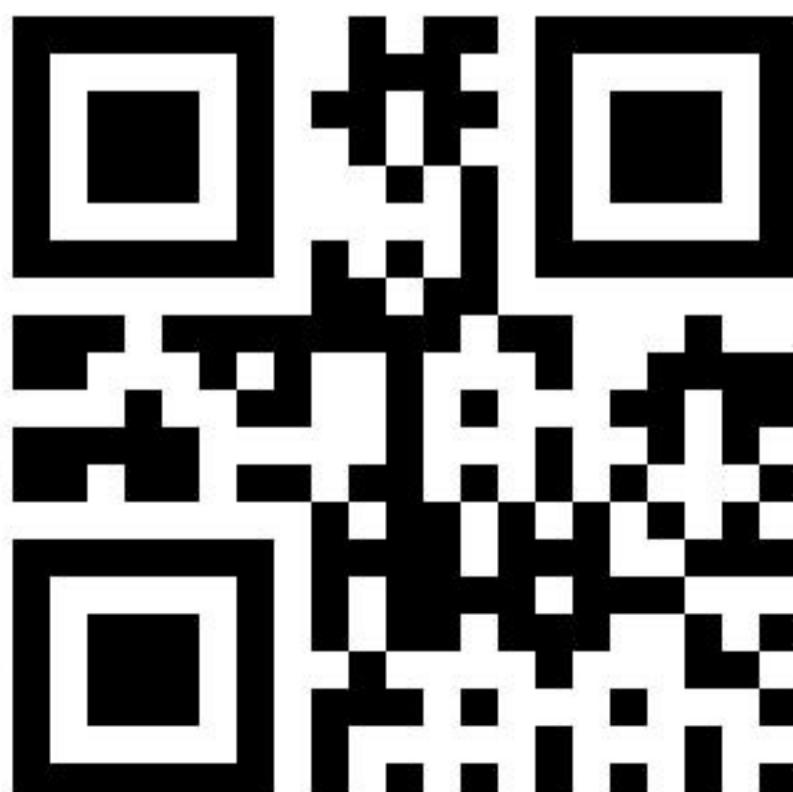



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000690

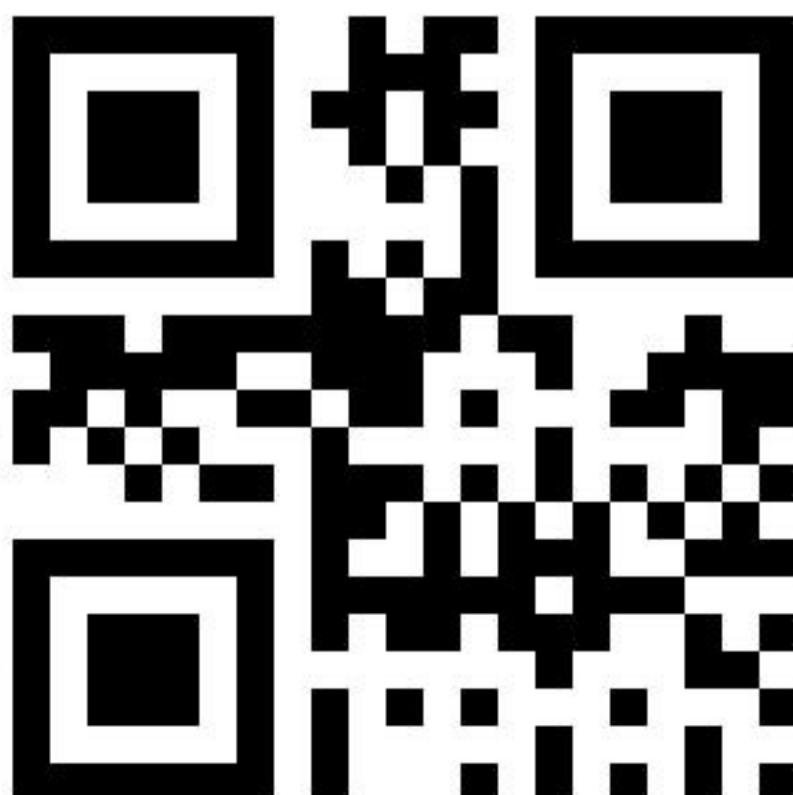



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000691





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000692

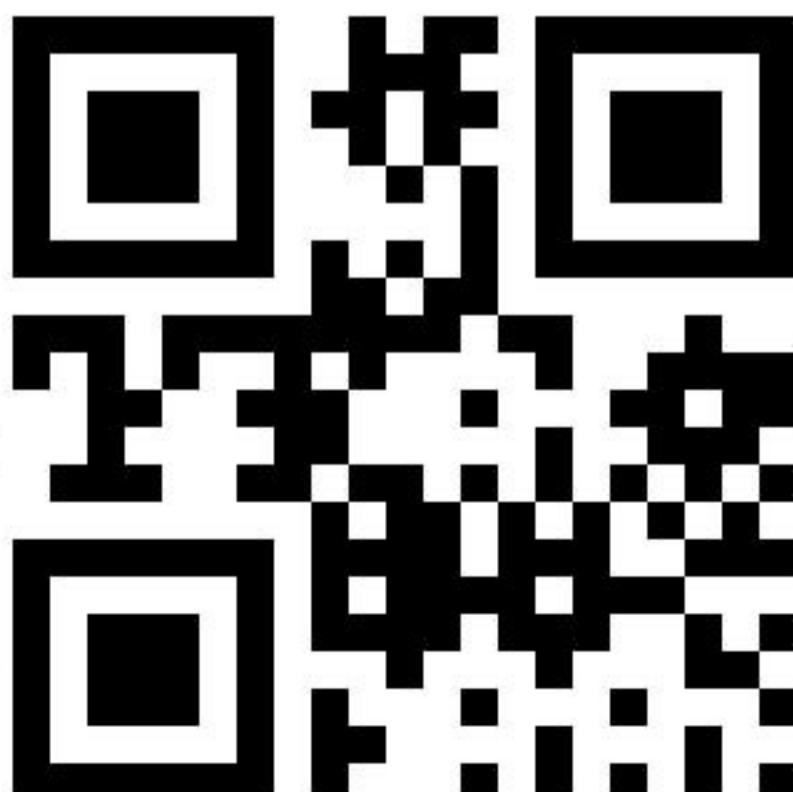



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000693

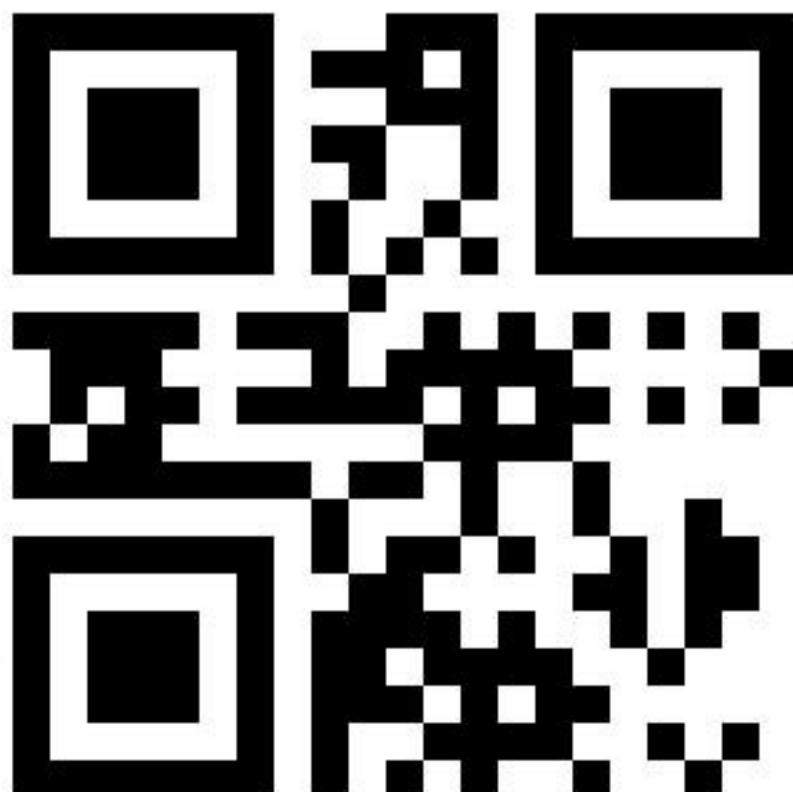



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00694

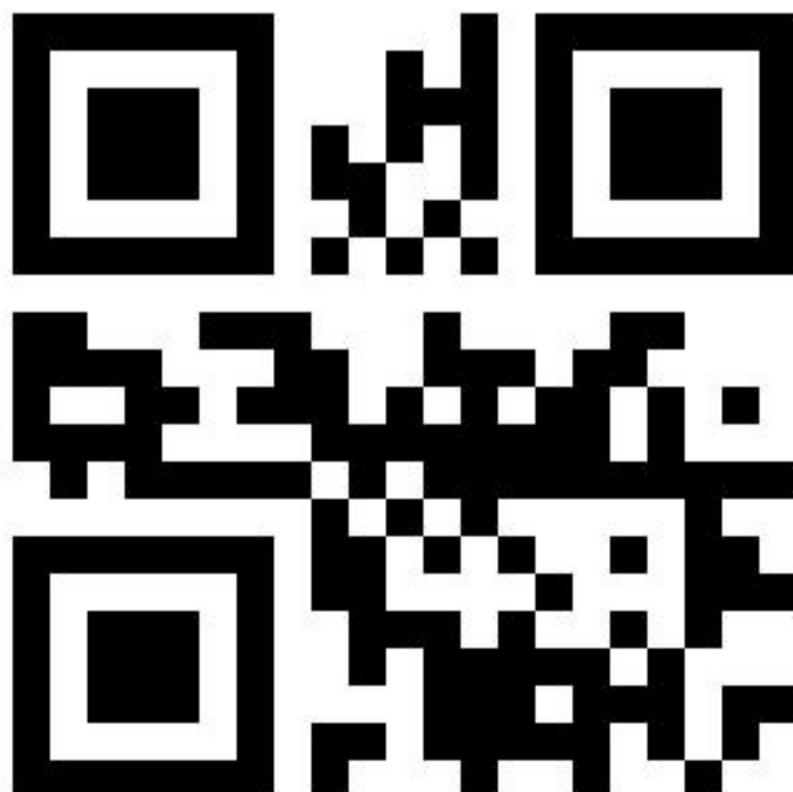



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000695

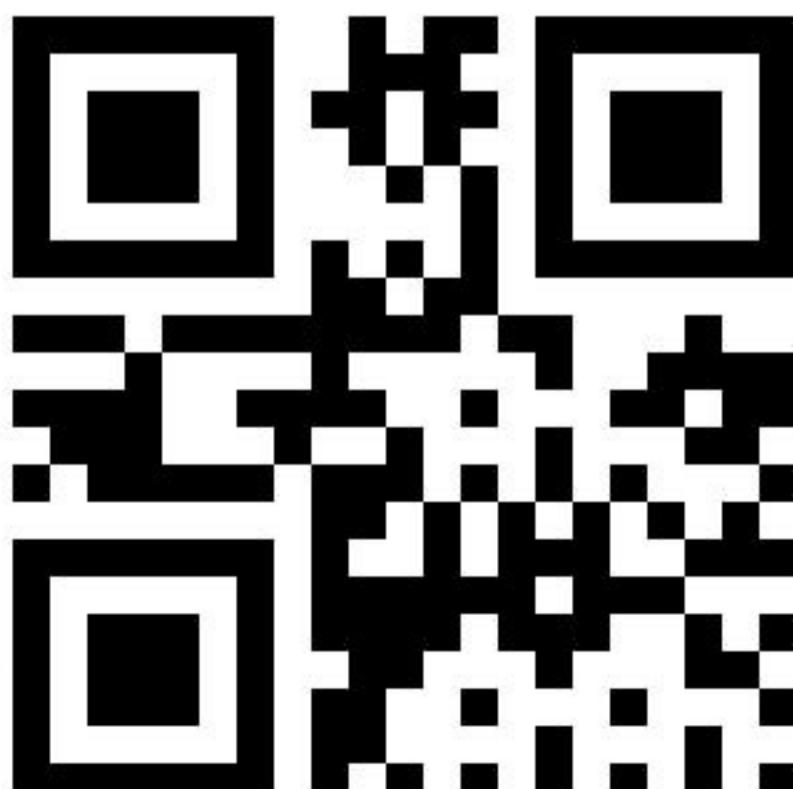



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00696

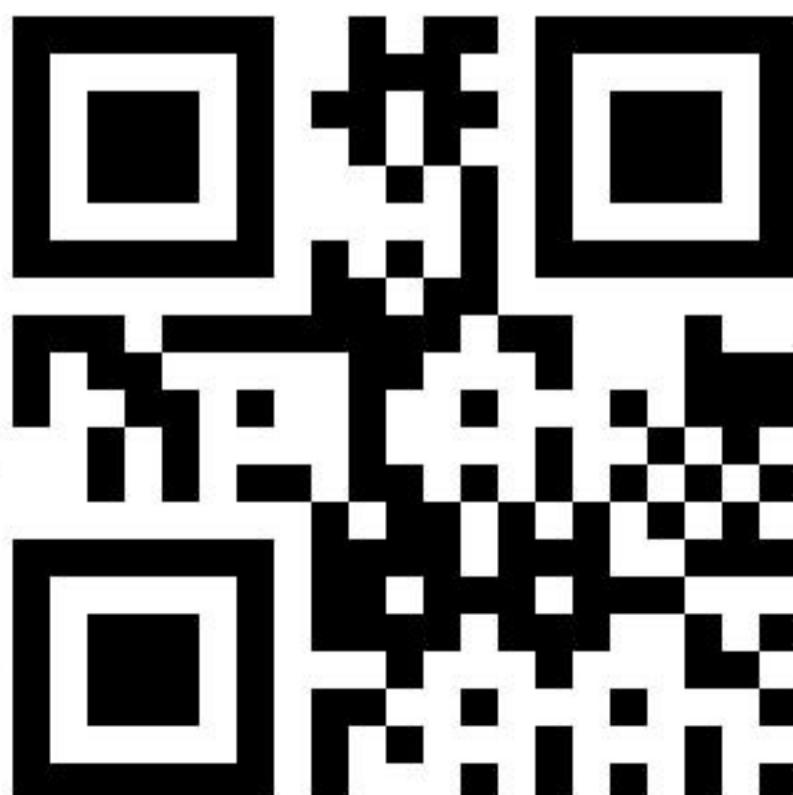



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 00697

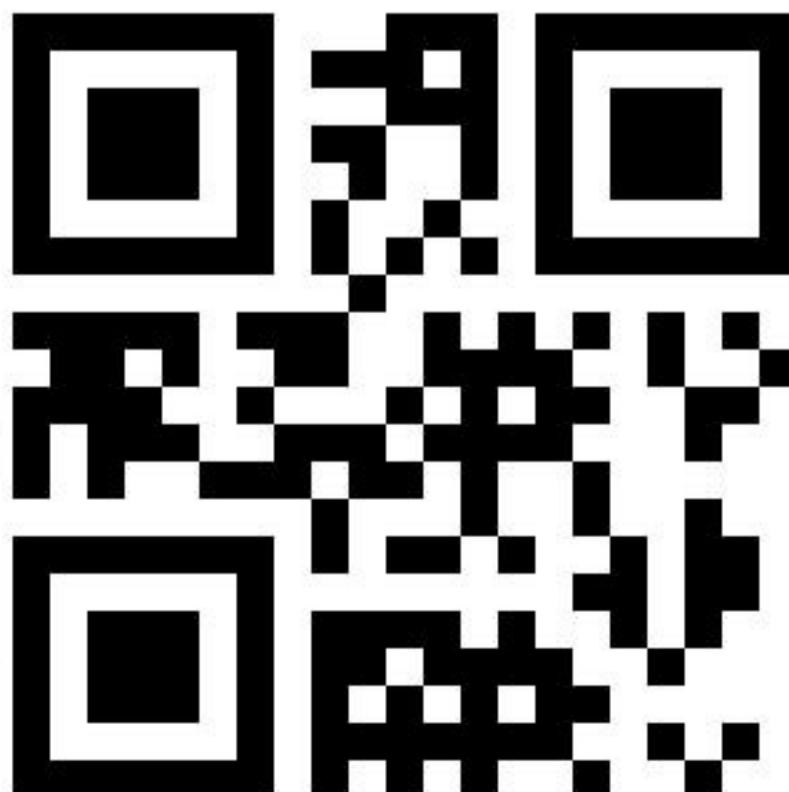



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm




ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000698

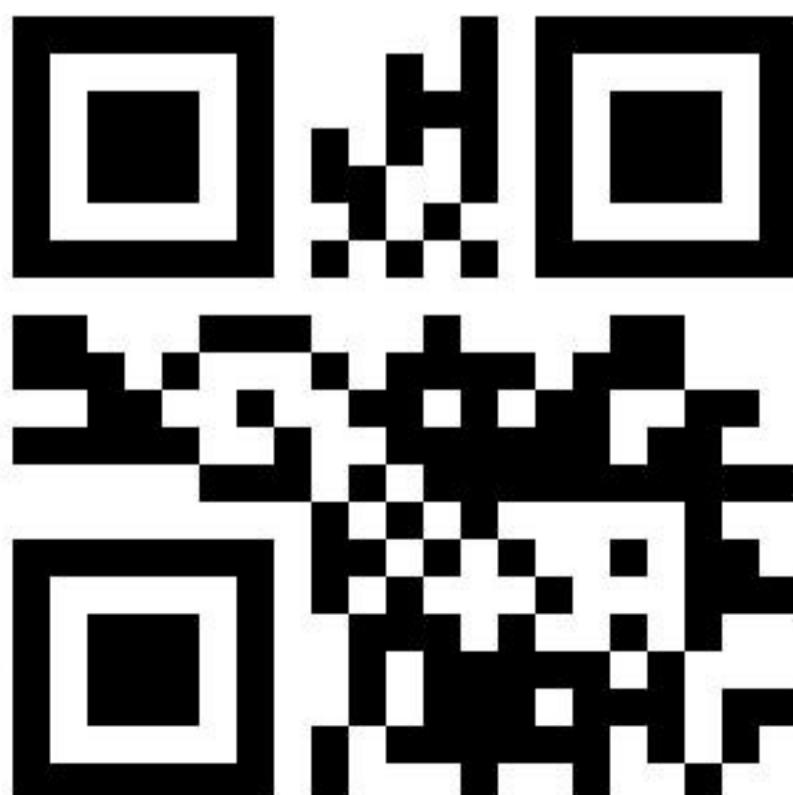



PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000699





PHOTOVOLTAIC MODULE

Made in Iran

Solar Module: Poly

Maximum Power (Pmax)	274W
Power Measurement Tolerance	± 3%
Maximum Power Voltage (Vmp)	34V
Maximum Power Current (Imp)	10A
Open Circuit Voltage (Voc)	40V
Short Circuit Current (Isc)	10A
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A
Operating Temperature	-40°C – +85°C
Weight	20 kg
Dimensions	1660mm x 990mm x 50mm



ONLY qualified personnel should install or perform maintenance work on these modules

BE AWARE of dangerous high DC voltage when connecting modules

DO NOT damage or scratch the rear surface of the module



panel_id 000700

