


Підсилювач КХ-діапазону ЭЗ

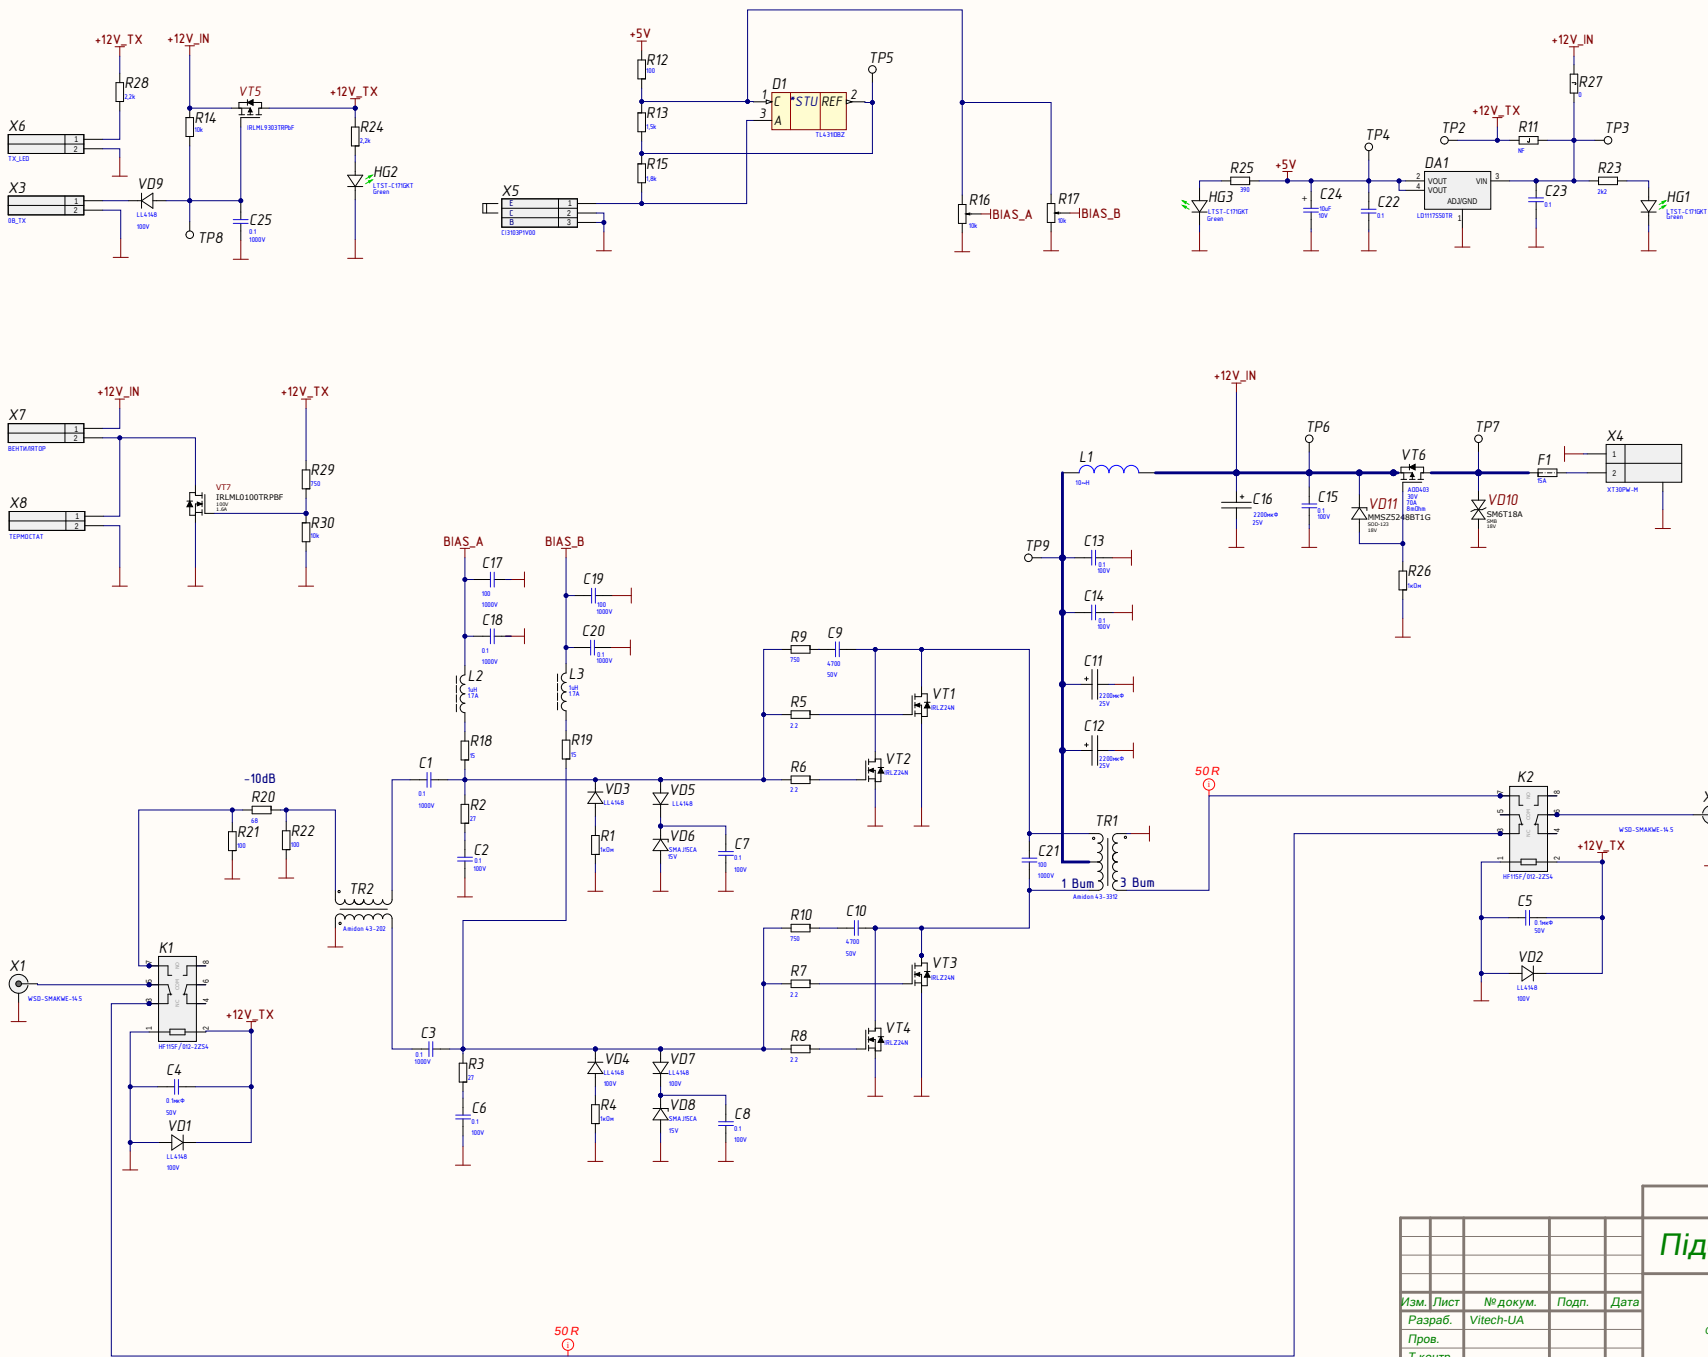

Підсилювач КХ-діапазону ЭЗ

Изм.	Лист	№ докум.	Подп.	Дата
Разраб.	1	Vitech-UA		
Пров.				
Т.контр.				
Нач.сект.				
Н.контр.				
Утв.				

Лит.	Масштаб	Масса
СХЕМА ЭЛЕКТРИЧЕСКАЯ	Лист 1	Листов 1
ПРИНЦИПИАЛЬНАЯ		
UR4UUZ		

Comment	Description	Designator	Footprint	Ref	Quantity
0.1	1µF 1000V X7R ±10% 1206 Ceramic Capacitor ReelS	C1, C2, C3, C6, C7, C8 C9, C10, C13, C14, C15, C16, C20, C22, C23, C25	C_CERAMIC_1206_M ED	1206B102K100CG	14
08P	Aluminum capacitor 2200µ±8, 25V, ±20%, 6mmChm, 14x20x5 mm, 55, ±105%	CA, C9	C_CERAMC_0805_H8	CERAMC_0805	2
100	1µF 1000V X7R ±10% 1206 Ceramic Capacitor ReelS	C11, C12, C16	CAP_013C3H20	Aluminum	3
100	1µF 1000V X7R ±10% 1206 Ceramic Capacitor ReelS	C17, C18, C21	C_CERAMIC_1206_M ED	1206B102K100CG	3
10uF	10µF 10V ±10% Case A Tantalum Capacitor ReelS, 3.4Chm	C24	C_TANTAL_CASE_A	29030106V0010A2TE3	1
Part Number	Processor Programmable Reference S2723.3	D1	SOT23- 3_W00230X110	TL431D02	1
LD111750TR	Adjustable and fixed low drop positive voltage regulator, 5V 800mA, 1.25V to 35V Vin	DA1	SOT-223	J0111750TR	1
STANDARD_FUSE_HO 100R	Automotive Fuse holder TST Mount	F3	17861640001	STANDARD_FUSE_HO 100R	1
LTST-C171GKT	Low Power LED, Green 565nm, Case SMD 0805, V1 2.1V, 2.6V, 5 - 12mcd @ 20 mA, 130°	H61, H62, H63	LTST-C171GKT	LTST-C171GKT	3
HF115F/012-2254	Miniature High Power Relay, DPDT (2 Form C), 12VDC 400mW Coil, 5.0mm 2 Pole BA J&C20	K1, K2	HF115Fxxx-1[2]Z(4)	HF115F/012-2254	2
Fixed inductor, 10µH ±20%, R22 9/147.62, Roal Me. µ±25, 90 uH/turnx2		L1	IND_R22_9/147.62 R9	Inductor_R22_9/147. 62	1
1uH	1µH Shielded Multilayer inductor 1.7A 100mChm Max. 0805	L2, L3	LQM21PNxxxGHy_M ED	LQM21PN100MGH-L	2
1x0w	1 Ohms ±1%, 1/4W 1206 Thick Film Resistor	R1, R4, R26	R_ANY_CHIP_1206_ MED	RC1206FR-071RL	3
27	22 Ohm ±5%, 2W 64.6mm L11.5mm Axial Through Hole, Fusible, Flameproof, Wirewound Resistor	R2, R3	FNZW5-Series	FNZW5JT-73-22R	2
2.2	2.420Hms ±1%, 1/4W 1206 Thick Film Resistor	R5, R6, R7, R8	R_ANY_CHIP_1206_ MED	RC1206FR-072RL	4
750	1 Ohms ±1%, 1/4W 1206 Thick Film Resistor	R9, R10, R29	R_ANY_CHIP_1206_ MED	RC1206FR-073RL	3
0F	0 Ohms Jumper, 1/4W 1206 Thick Film Resistor	R11	R_ANY_CHIP_1206_ MED	RC1206R-070RL	1
100	100 kOhms ±5% 1/4W 1206 Thick Film Resistor	R12	R_ANY_CHIP_1206_ MED	RC1206R-071DL	1
1.5k	1.5k kOhms ±5% 1/4W 1206 Thick Film Resistor	R13	R_ANY_CHIP_1206_ MED	RC1206R-071DL	1
10k	10 kOhms ±5%, 1/4W 1206 Thick Film Resistor	R14, R30	R_ANY_CHIP_1206_ MED	RC1206R-071DL	2
1.8k	1.8k kOhms ±5% 1/4W 1206 Thick Film Resistor	R15	R_ANY_CHIP_1206_ MED	RC1206R-071DL	1
10k	10 kOhms ±10% Trimmer Resistor, 0.96W Through Hole 3/8" - 4.83x6.53mm, 10.03mm Height	R16, R17	3296W-1-xxx	3296W-1-103LF	2
15	1 Ohms ±1%, 1/4W 1206 Thick Film Resistor	R18, R19	R_ANY_CHIP_1206_ MED	RC1206FR-071RL	2
68	68 Ohm ±5%, 2W 64.6mm L11.5mm Axial Through Hole, Fusible, Flameproof, Wirewound Resistor	R20	FNZW5-Series	FNZW5JT-73-22R	1
100	100 Ohm ±5%, 2W 64.6mm L11.5mm Axial Through Hole, Fusible, Flameproof, Wirewound Resistor	R21, R22	FNZW5-Series	FNZW5JT-73-22R	2
3k2	3.2k Ohms ±1%, 1/4W 1206 Thick Film Resistor	R23	R_ANY_CHIP_1206_ MED	RC1206FR-071RL	1
2.2k	1 Ohms ±1%, 1/4W 1206 Thick Film Resistor, 2.2 kOhms ±1%, 1/4W 1206 Thick Film Resistor	R24, R28	R_ANY_CHIP_1206_ MED	RC1206FR-071RL	2
390	390 Ohms ±1%, 1/4W 1206 Thick Film Resistor	R25	R_ANY_CHIP_1206_ MED	RC1206FR-071RL	1
0	0 Ohms Jumper, 1/4W 1206 Thick Film Resistor	R27	R_ANY_CHIP_1206_ MED	RC1206R-070RL	1
TR		TR1	Amidon 43-3312	Amidon 43-3312	1
TR		TR2	Amidon 43-202	Amidon 43-202	1
LL4148	Fast Switching Diode, 100V 200 mA, SOD- 80C	VD1, VD2, VD3, VD4, VD5, VD7, VD9	SOD-80C_MED	LL4148	7
SMA23CA	Power Diode 15V, 3W, ±5%, SMA	VD6, VD8	SMA_MED	SMA230-13-F	2
SMB178A	TVS Diode 18V Clamp, 23.5A (10/1000ns) typ, SMB	VD10	SMB-B1, MED	1.5SMB47CA	1
MM52CS48BT1G	Power Diode 15V, 500mW, ±5%, SOD- 123	VD11	SOD-123_MED	MM52S48BT1G	1
RL224N	N-MOSFET, nonenhanc	VT1, VT2, VT3, VT4	T0220H	N-MOSFET	4
RLML9303TRP6F	50V, 3.6A max P- Channel MOSFET MOSET, 8mmChm @ Vgs = -4.5V	VT5	SOT-23_MED	RLML9301TRP6F	1
ACD403	50V, 70A max P- Channel Power MOSET, 8mmChm @ Vgs = 20V	VT6	DP4K_REC	ACD4189	1
RLML0100TR	100V, 1.6A max N- Channel MOSFET Power MOSFET, 180mChm @ Vgs = 4.5V	VT7	SOT-23_MED	RLML0100TRP6F	1
WID-SMAKWE-14.5	500ohm SMA Connector, Right Angle, Female, 6.3mm	X1, X2	XL51-SMA002	WID-SMAKWE-14.5	2
WH-GDR	WH Series 2.54mm Wires to Board Right Angle DIP Type Resistor, 2 Pins	X3, X6, X7, X8	WF-2R	C1102P1400	4
XT30PW-M	2 Pin DC Power Socket, XT30, Male, Thet. Right Angle, Rethrow, 15A, 600V	X4	XT30PW-M	XT30PW-M	1
WH-GDS	WH Series 2.54mm Wires to Board Straight DIP Type Resistor, 3 Pins	X5	WF-3S	C1103P1V00	1