

0.6 INCH RED 4-DIGITS DISPLAY (STATIC DRIVE)

TLR2177, TLR4172, TLR2207, TLR4202

RED COLOR 4 DIGITS LED DISPLAY

- For Use of static drive connections and available both polarity common anode or common cathode.
- 15 mm (0.6") character height, each segment is diffused and uniformly display.
- Outer color filter provides high contrast, complete practical use at 5 mA per segments.
- Arrow edge shape of each segment represents not mosaic but look like Arabic numerals.
- Selectable both type 12 or 24 hours display.

TYPE NO. vs. DISPLAY FONT

COMMON ANODE	COMMON CATHODE	FULLY DISPLAY FONT
TLR2177	TLR2207	: 18:88
TLR4172	TLR4202	: 88:88

Refer to page 169 for the figure.







MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Forward Current/Seg.	$I_F(\text{DC})/\text{Seg}$	15	mA
Reverse Voltage	V_R	3	V
Storage Temperature Range	T_{stg}	$-20 \sim 75$	$^\circ\text{C}$
Operating Temperature Range	T_{opr}	$-20 \sim 60$	$^\circ\text{C}$
Soldering Temperature (Note)	T_{solder}	260	$^\circ\text{C}$

Note: Within 3 second 2 mm at from the reflector edge.

ELECTRICAL-OPTICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	V_F	$I_F=10\text{mA}$	1.7	2.0	2.5	V
Reverse Current	I_R	$V_R=3\text{V}$	-	-	5	μA
Luminous Intensity/Seg.	I_V/Seg	$I_F=10\text{mA}$	0.1	0.2	-	mcd
Luminous Intensity Matching Ratio	I_V-M	$I_F=5\text{mA}$	-	-	2.5	-
Peak Emission Wave Length	λ_P	$I_F=10\text{mA}$	-	700	-	nm
Spectral Half Line Width	$\Delta\lambda$	$I_F=10\text{mA}$	-	100	-	nm

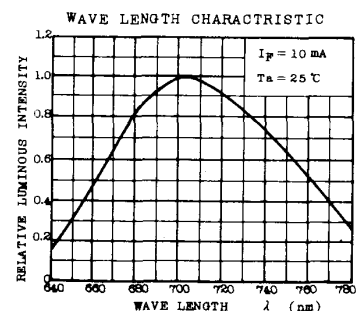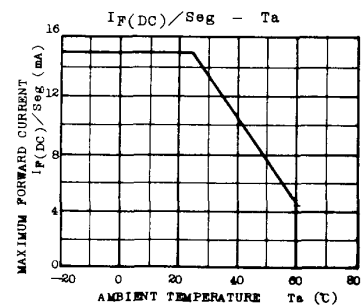

0.6 INCH GREEN 4-DIGITS DISPLAY (STATIC DRIVE)

TLG2177, TLG4172, TLG2207, TLG4202

GREEN COLOR 4 DIGITS LED DISPLAY

- For use of Static drive connections and available both polarity common anode or common cathode.
- 15 mm (0.6") character height, each segment is diffused and uniformly display.
- Outer color filter provides high contrast, complete practical use at 10 mA per segments.
- Arrow edge shape of each segment represents not mosaic but look like Arabic numerals.
- Selectable both type 12 or 24 hours of display.

TYPE NO. VS. DISPLAY FONT

COMMON ANODE	COMMON CATHODE	FULLY DISPLAY FONT
TLG2177	TLG2207	: 18 : 88
TLG4172	TLG4202	: 88 : 88

Refer to page 169 for the figure.







MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Forward Current/Seg.	$I_F(\text{DC})/\text{Seg.}$	15	mA
Reverse Voltage	V_R	3	V
Storage Temperature Range	T_{stg}	$-20 \sim 75$	$^\circ\text{C}$
Operating Temperature Range	T_{opr}	$-20 \sim 60$	$^\circ\text{C}$
Soldering Temperature (Note)	T_{solder}	260	$^\circ\text{C}$


Note: Within 3 second at 2 mm from the reflector edge.

ELECTRICAL-OPTICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	NIN.	TYP.	MAX.	UNIT
Forward Voltage	V_F	$I_F = 10\text{mA}$	1.8	2.0	2.5	V
Reverse Current	I_R	$V_R = 3\text{V}$	-	-	5	μA
Luminous Intensity/Seg.	$I_V/\text{Seg.}$	$I_F = 10\text{mA}$	0.08	0.3	-	mcd
Luminous Intensity Matching Ratio	$I_V - M$	$I_F = 5\text{mA}$	-	-	2.3	
Peak Emission Wave Length	λ_p	$I_F = 10\text{mA}$	-	565	-	nm
Spectral Half Line Width	$\Delta\lambda$	$I_F = 10\text{mA}$	-	30	-	nm

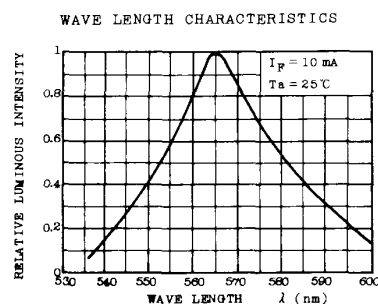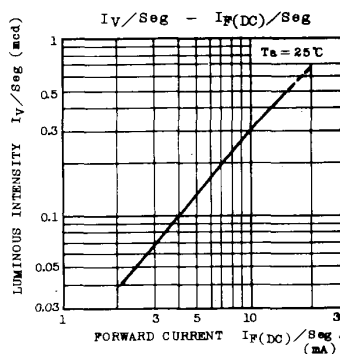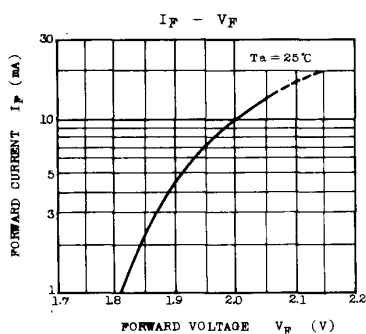


PHYSICAL DIMENSIONS

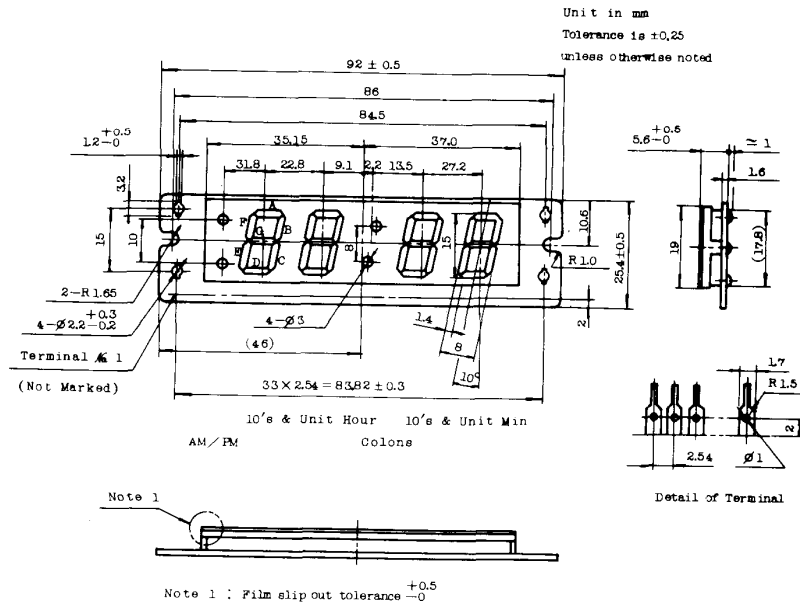

TERMINAL CONNECTION (○: CONNECTION, ×: NO CONNECTION)

TERMINAL #	CONNECTION	TLG2177 TLG2207 TLR2177 TLR2207	TLG4172 TLG4202 TLR4172 TLR4202	TERMINAL #	CONNECTION	TLG2177 TLG2207 TLR2177 TLR2207	TLG4172 TLG4202 TLR4172 TLR4202
1	Common			18	Upper Colon	○	○
2	PM	○	○	19	Lower Colon	○	○
3	AM	○	○	20	10's Min. F	○	○
4	10's Hour A	×	○	21	10's Min. G	○	○
5	10's Hour F	×	○	22	10's Min. A	○	○
6	10's Hour G	×	○	23	10's Min. B	○	○
7	10's Hour E	×	○	24	10's Min. D	○	○
8	10's Hour D	×	○	25	10's Min. E	○	○
9	10's Hour C	○	○	26	10's Min. C	○	○
10	10's Hour B	○	○	27	Unit Min. F	○	○
11	Unit Hour F	○	○	28	Unit Min. G	○	○
12	Unit Hour G	○	○	29	Unit Min. A	○	○
13	Unit Hour A	○	○	30	Unit Min. B	○	○
14	Unit Hour B	○	○	31	Unit Min. E	○	○
15	Unit Hour E	○	○	32	Unit Min. D	○	○
16	Unit Hour D	○	○	33	Unit Min. C	○	○
17	Unit Hour C	○	○	34	Common		

TLG2177/TLR2177, TLG4172/TLR4172 COMMON ANODE TYPE



TLG2207/TLR2207, TLR4202/TLR4202 COMMON CATHODE TYPE

