


Course name	Numerical Modeling & Simulation in MATLAB-Simulink
Lesson name	Numerical Modelling of Ather450 using Artemis Urban Drive Cycle data in MATLAB-Simulink
Lesson objective	Practice blocks & acquaint to use GUI of MATLAB-Simulink
Created by	Vivek Rathod

**Problem statement:** Model Ather450 for Artemis Urban Drive Cycle in MATLAB Simulink to plot the Wheel Torque, Wheel Speed, Motor Torque, Motor Speed and Battery Current in Scilab-Xcos.

#### Artemis Urban Drive Cycle Graph:

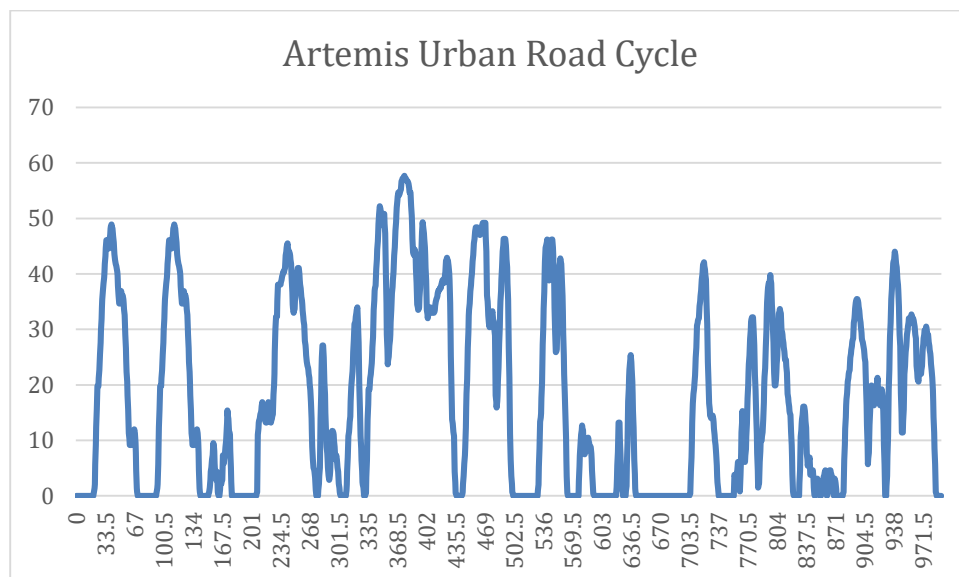


#### Model Inputs:



SI No	Parameter	Value	Units
1.	<b>Chassis</b>		
2.	I. Coefficient of rolling resistance	0.015	
3.	II. Mass of Vehicle	111	Kg
4.	III. Mass of Driver	80	Kg
5.	IV. Gravity constant	9.81	m/s
6.	V. Grade Angle	0	degree
7.	VI. Velocity	From the Artemis Urban Drive Cycle data	Kmph
8.	VII. Area	0.875	m <sup>2</sup>
9.	VIII. Air Density	1.225	Kg/m <sup>3</sup>
10.	IX. Drag Coefficient	0.22	
11.	X. Radius of wheel	0.1524	m
12.	<b>Transmission</b>		
13.	I. Gear Ratio	7.8	
14.	II. Transmission Efficiency	85	%
15.	<b>Battery</b>		
16.	I. Battery Capacity	2400	Wh
17.	II. Battery Voltage	51.1	V
18.	III. Artemis Urban drive cycle distance	4.87	Km
19.	IV. Battery Initial SOC	100	%
20.	V. Drive Cycle time or Simulation time	993	s
21.	<b>Cell</b>		
22.	I. Cell Voltage	3.6	V
23.	II. Cell Capacity	2.7	Ah

### Program:


```
M=111; %Mass of vehicle (kg)
Md=80; %Mass of driver (kg)
GVM=M+Md; %Gross vehicle mass (kg)
g=9.81; %Gravity constant (m/s^2)
GVW=GVM*g; %Gross vehicle weight
A=0.875; % frontal area (m^2)
rho=1.2250; %Air Density (kg/m^3)
Rw=0.1524; %Radius of wheel (m)
cd=0.22; %coefficient of drag
crf=0.015; %coefficient of rolling resistance
GR=7.8; %Gear Ratio
Teff=0.85; %transmission efficiency
Drive_cycle =ArtemisUrbanDriveCycle;
```

### Results:

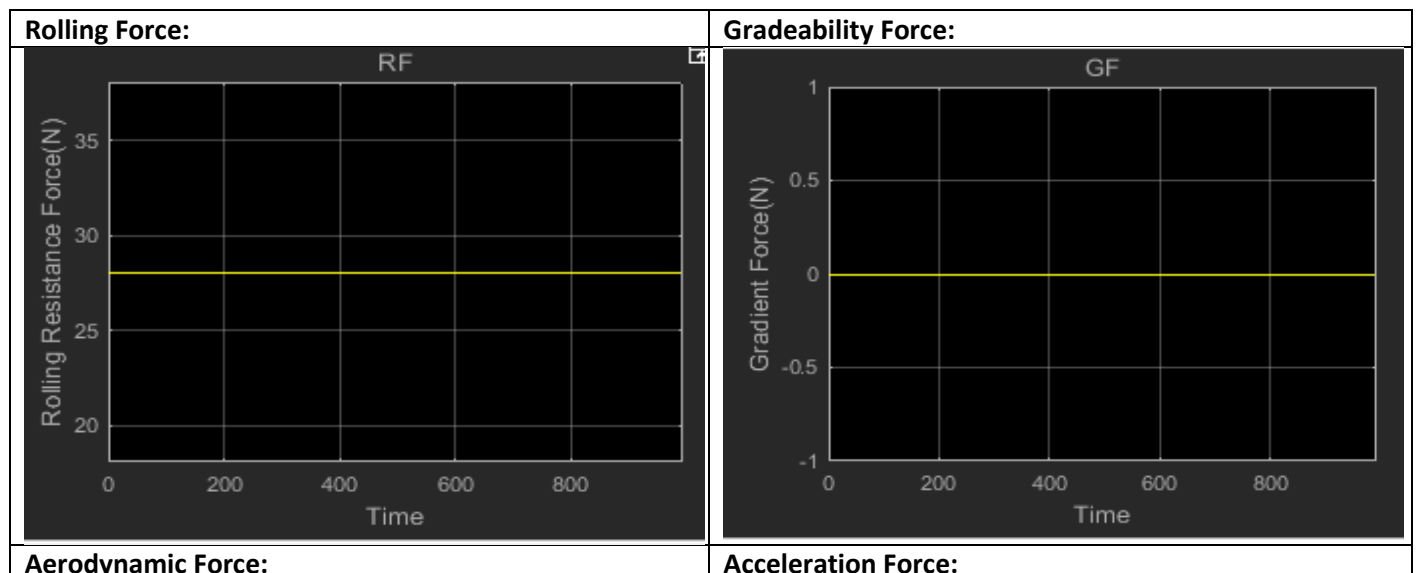


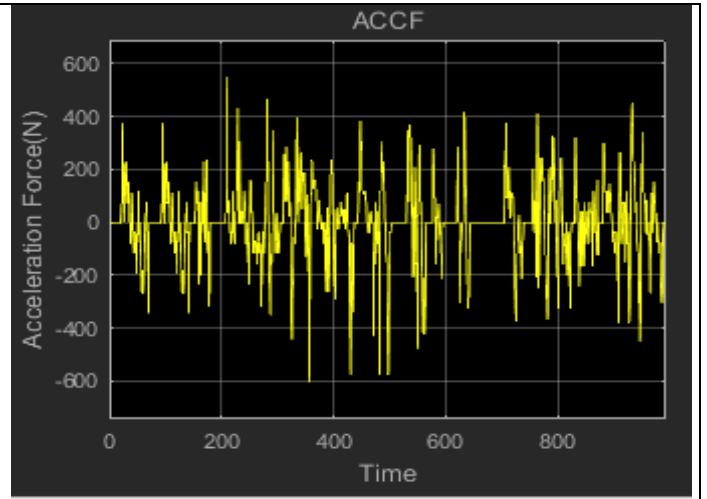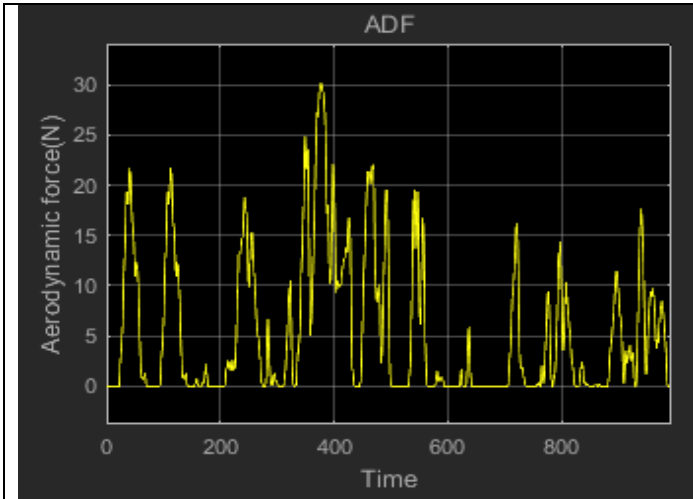


**Wheel Speed:**

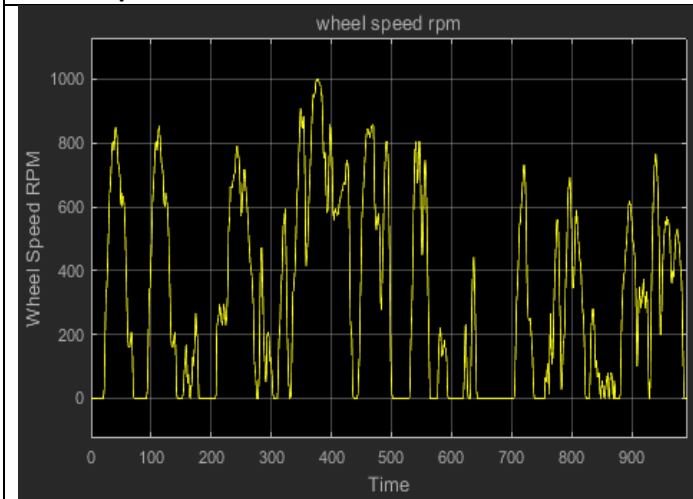


**Wheel Torque:**

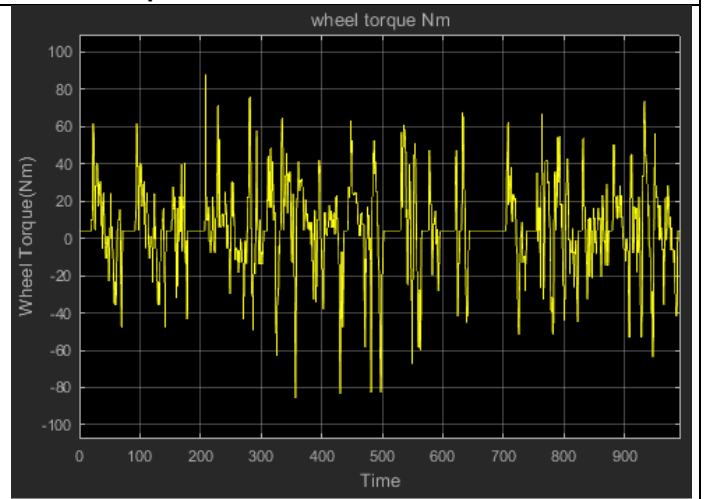

**Motor Speed:**

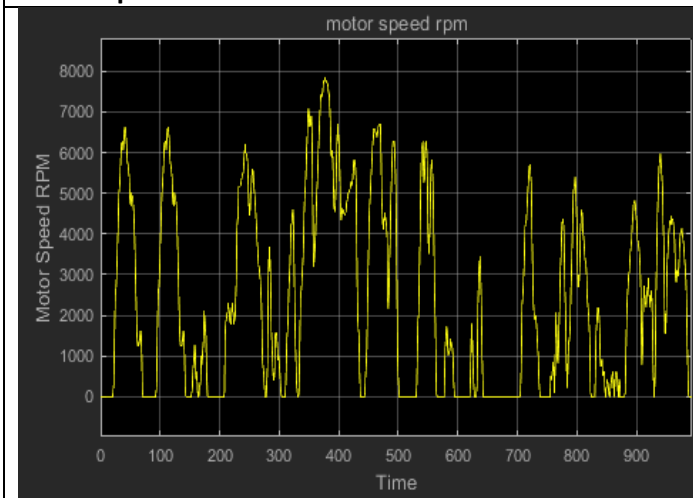


**Motor Torque:**

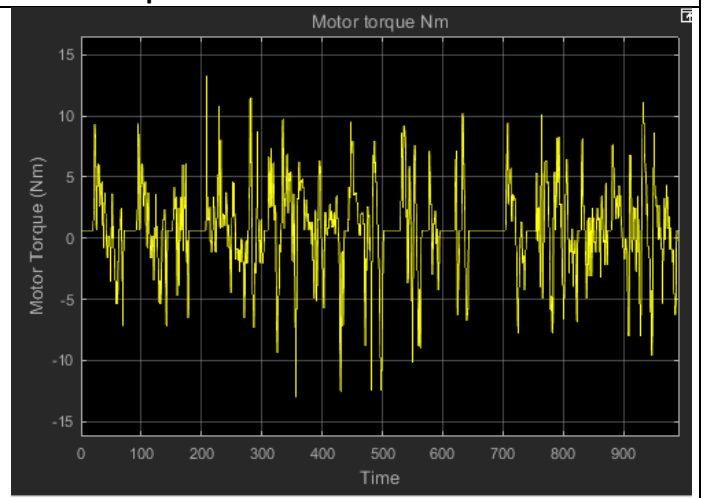

**Motor Power:**

**Battery Power:**

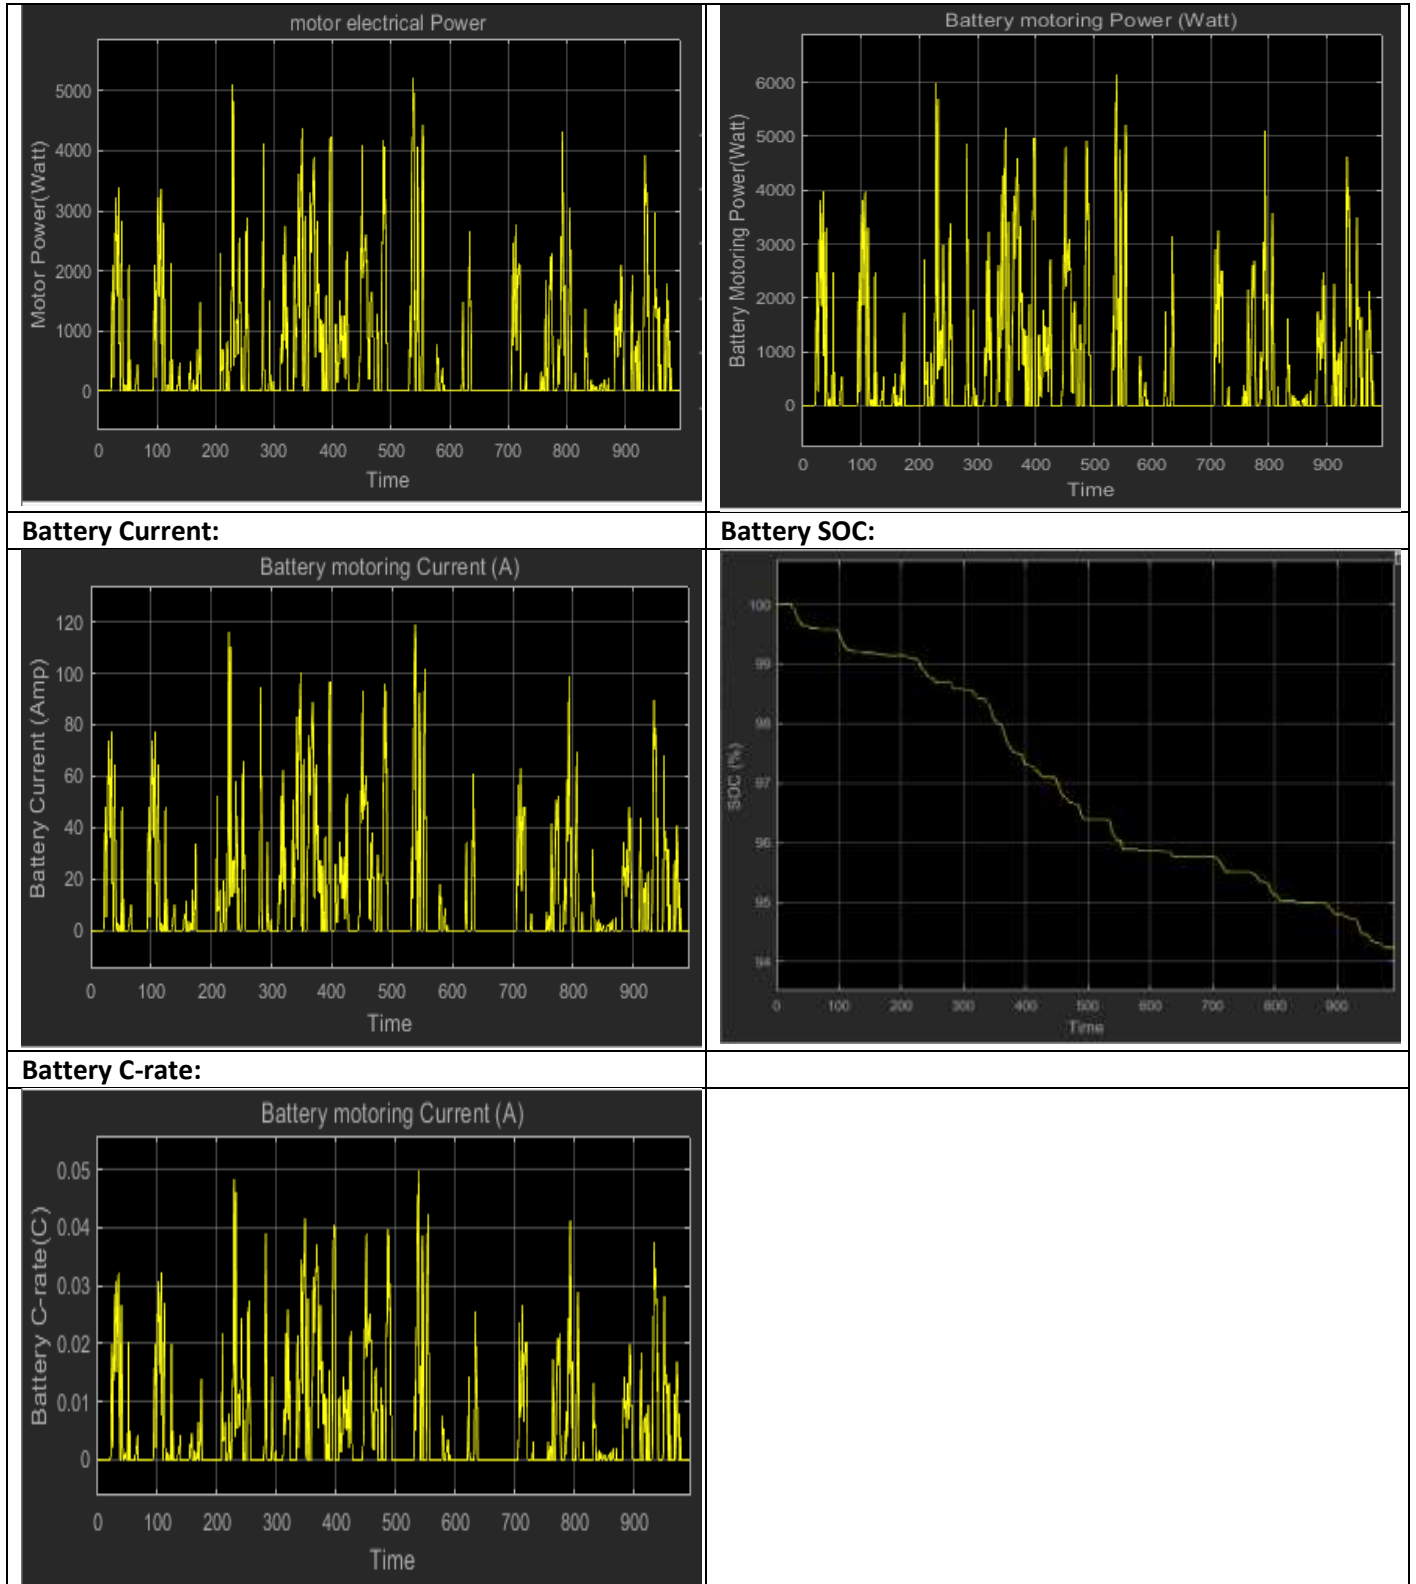

## Conclusion:

SI No	Parameters	Values	Units
1.	<b>Chassis</b>		
2.	• Rolling Force	28.1057	N
3.	• Gradeability Force	0	N
4.	• Maximum Aerodynamic Force	30.2889	N
5.	• Maximum Acceleration Force	546.4722	N
6.	• Maximum Wheel Speed	1004.3	Rpm
7.	• Maximum Wheel Torque	87.7334	Nm
8.	<b>Motor</b>		
9.	• Maximum Motor Speed	7833.5	Rpm
10.	<b>Motor Torque</b>		
11.	• Nominal Motor Torque	0.7714	Nm
12.	<b>Motor Power</b>		
13.	• Nominal Motor Power	505.1076	W
14.	<b>Battery</b>		
15.	• Power per Km	36.62	Wh/Km
16.	• Vehicle Range	65.54	Km
17.	• Battery Capacity in Ah	71.66	Ah
18.	<b>Cell</b>		
19.	• Cell Voltage	3.6	V
20.	• Cell Capacity	2.7	Ah
21.	<b>No of cells</b>		
22.	<b>Battery Power</b>		
23.	• Nominal Battery Power	660.2714	W
24.	<b>Battery Current</b>		
25.	• Nominal Battery Current	12.8208	A
26.	<b>Battery C-rate</b>		
27.	• Nominal Battery Discharge C-rate	0.0053	C
28.	• State of Charge	94.2399	%
29.	<b>Regenerative</b>		
30.	<b>Battery Power</b>		
31.	• Nominal Battery Power	-183.660	W
32.	<b>Battery Current</b>		
33.	• Nominal Battery Current	-3.5941	A
34.	<b>Battery C-rate</b>		
35.	• Nominal Battery Discharge C-rate	-0.0015	C
36.	• State of Charge	94.2826	%