
EXP 4

Strategize impedance matching with characteristic impedance and load impedance through the measurement of a) Location of the stub b) Length of the stub


Test Case 1:

AIM: To optimize impedance matching using single stub matching by finding the location and length of the stub for the values of load impedance of 100 30o to 350 30o keeping the characteristic impedance Zo= 60 Ω constant .

PROGRAM:

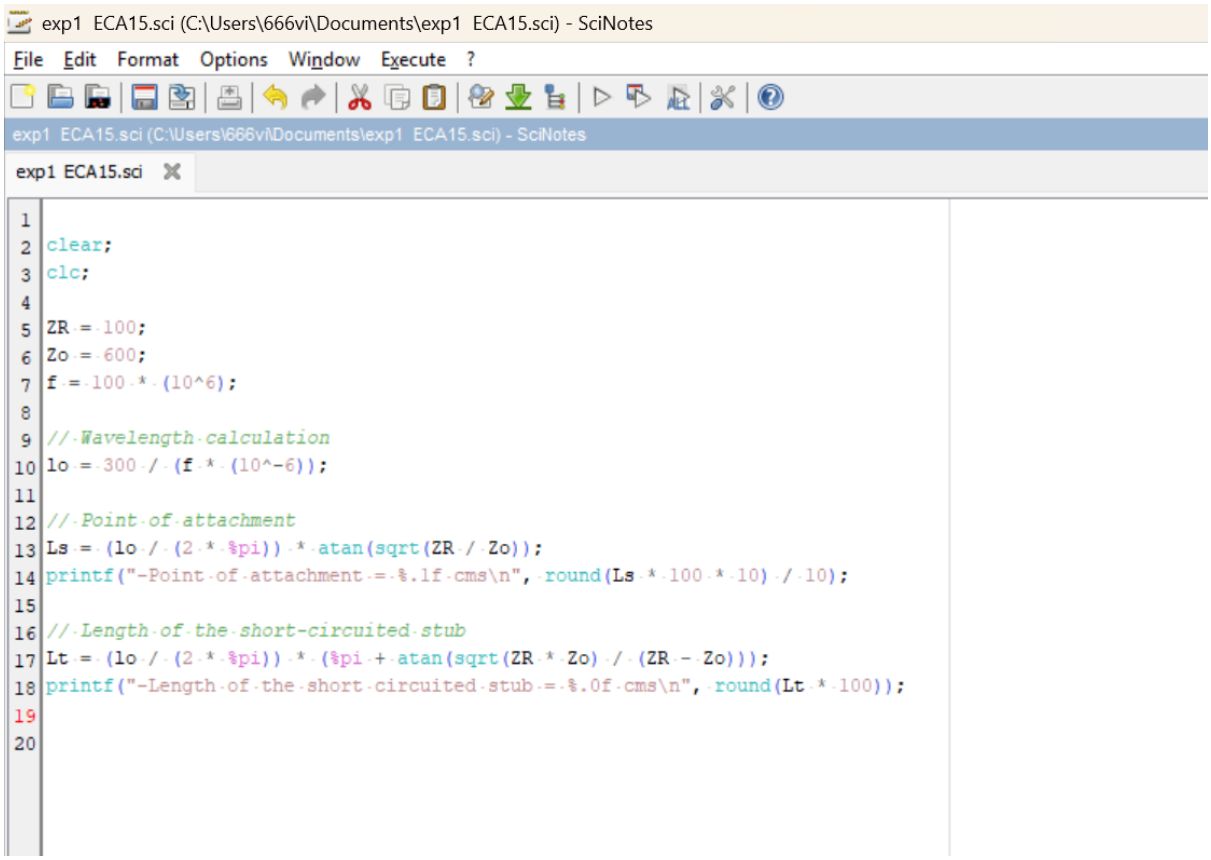


OUTPUT:

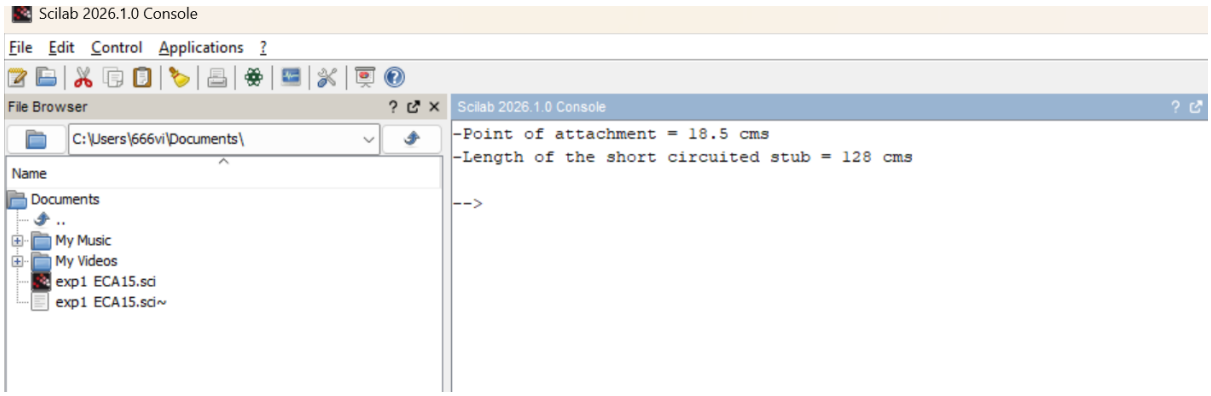

Test Case 2:

AIM: To optimize impedance matching using single stub matching by finding the location and length of the stub for the values of load impedance of 100 30o to 350 30o keeping the characteristic impedance Zo= 60 Ω constant .

PROGRAM:

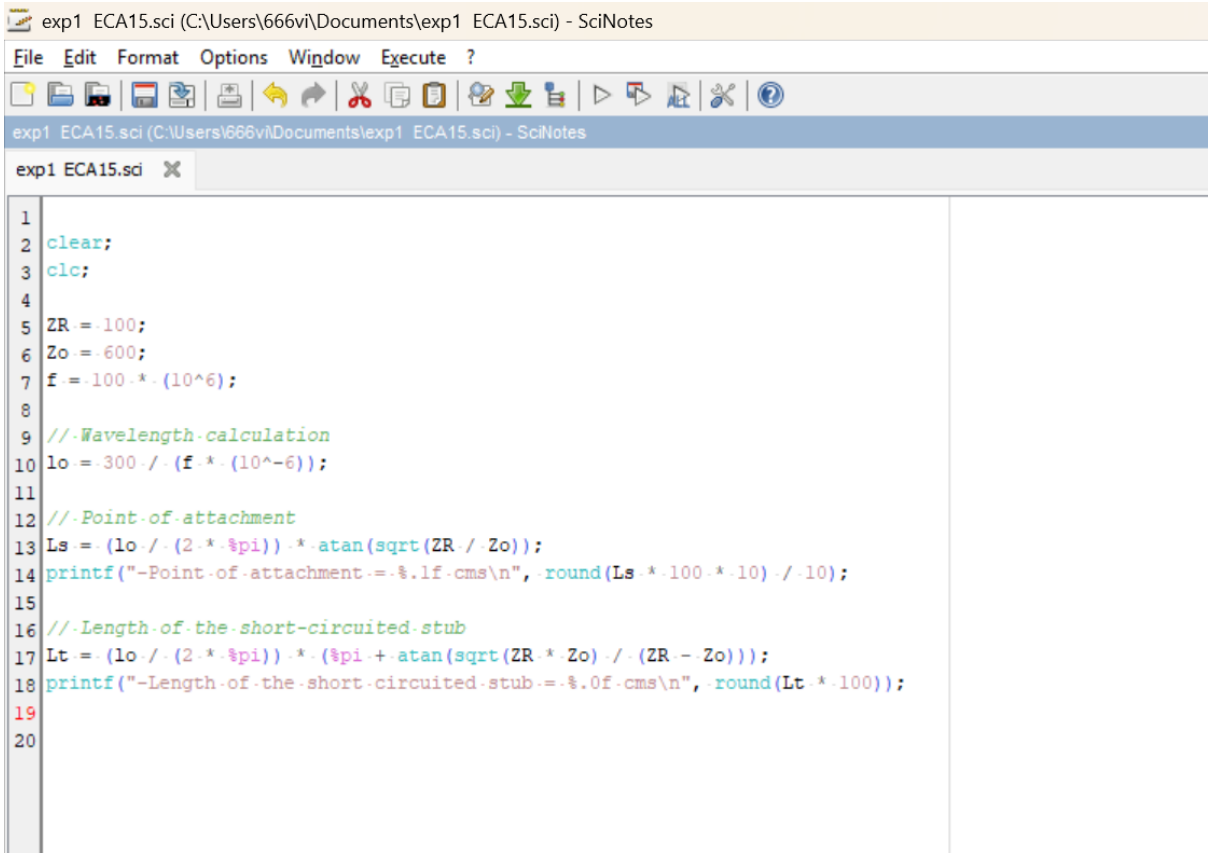

OUTPUT:

