Standard-Wall Stainless Steel Threaded Pipe Nipples and Pipe with Sealant

- Use with air, natural gas, oil, steam, water
- Fittings: Use threaded Class 150 low-pressure stainless steel (see pages 4-9, 13)
- Flanges: Use threaded Class 150 low-pressure stainless steel (see page 9)

The threads on this pipe have a PTFE sealant applied for extra leak protection in low-pressure applications. Pipe is also known as Schedule 40. It is seamless, which creates a smooth interior for unrestricted flow. Meets ANSI/ASME B1.20.1, ASTM A312, and ASTM A733.

304 stainless steel pipe has very good corrosion resistance.
316 stainless steel pipe has excellent corrosion resistance.
Fully threaded pipe is also known as a close nipple; it is threaded on each end to the center.



Fully Threaded



Threaded on Both Ends

304/304L Stainless Steel

NPT Fully Threaded

Pipe Size	Lg.		
1/8	3/4"	1455N111	$3.34
1/4	7/8"	1455N112	3.61
3/8	1"	1455N113	4.00
1/2	1 1/8"	1455N114	4.90
3/4	1 3/8"	1455N115	5.88
1	1 1/2"	1455N116	$10.51
1 1/4	1 5/8"	1455N117	12.90
1 1/2	1 3/4"	1455N118	$14.50
2	2"	1455N119	16.98

NPT Threaded on Both Ends

Pipe Size	Lg.		
1/8	1 1/2"	1455N121	$3.72
1/8	2"	1455N122	4.04
1/8	2 1/2"	1455N123	4.35
1/8	3"	1455N124	4.67
1/8	3 1/2"	1455N125	5.06
1/8	4"	1455N126	5.37
1/8	5"	1455N127	6.04
1/8	6"	1455N128	6.66
1/8	8"	1455N129	8.11
1/8	10"	1455N131	9.49
1/8	12"	1455N132	10.75
1/4	1 1/2"	1455N133	3.92
1/4	2"	1455N134	4.32
1/4	2 1/2"	1455N135	4.71
1/4	3"	1455N136	5.09
1/4	3 1/2"	1455N137	5.61
1/4	4"	1455N138	6.04
1/4	5"	1455N139	6.86
1/4	6"	1455N141	7.64
1/4	8"	1455N142	9.49
1/4	10"	1455N143	11.18
1/4	12"	1455N144	11.94
3/8	1 1/2"	1455N145	4.32
3/8	2"	1455N146	4.74
3/8	2 1/2"	1455N147	$5.26
3/8	3"	1455N148	5.72
3/8	3 1/2"	1455N149	6.31
3/8	4"	1455N151	6.79
3/8	5"	1455N152	7.76
3/8	6"	1455N153	8.71
3/8	8"	1455N154	10.90
3/8	10"	1455N155	12.95
3/8	12"	1455N156	13.87
1/2	1 1/2"	1455N157	5.34
1/2	2"	1455N158	5.81
1/2	2 1/2"	1455N159	6.39
1/2	3"	1455N161	6.98
1/2	3 1/2"	1455N162	7.73
1/2	4"	1455N163	8.31
1/2	5"	1455N164	9.53
1/2	6"	1455N165	10.71
1/2	8"	1455N166	12.44
1/2	10"	1455N167	13.90
1/2	12"	1455N168	15.96
3/4	1 1/2"	1455N169	6.04
3/4	2"	1455N171	6.54
3/4	2 1/2"	1455N172	7.21
3/4	3"	1455N173	7.88
3/4	3 1/2"	1455N174	$8.71
3/4	4"	1455N175	9.38
3/4	5"	1455N176	10.66
3/4	6"	1455N177	12.00
3/4	8"	1455N178	13.91
3/4	10"	1455N179	15.47
3/4	12"	1455N181	17.81
1	2"	1455N182	11.41
1	2 1/2"	1455N183	12.20
1	3"	1455N184	13.10
1	3 1/2"	1455N185	14.20
1	4"	1455N186	15.05
1	5"	1455N187	16.82
1	6"	1455N188	18.59
1	8"	1455N189	22.56
1	10"	1455N191	24.56
1	12"	1455N192	26.08
1 1/4	2"	1455N193	13.72
1 1/4	2 1/2"	1455N194	14.74
1 1/4	3"	1455N195	15.84
1 1/4	3 1/2"	1455N196	17.25
1 1/4	4"	1455N197	18.39
1 1/4	5"	1455N198	20.63
1 1/4	6"	1455N199	22.86
1 1/4	8"	1455N201	$27.72
1 1/4	10"	1455N202	30.34
1 1/4	12"	1455N203	32.39
1 1/2	2"	1455N204	15.05
1 1/2	2 1/2"	1455N205	16.24
1 1/2	3"	1455N206	17.49
1 1/2	3 1/2"	1455N207	19.02
1 1/2	4"	1455N208	17.75
1 1/2	5"	1455N209	19.91
1 1/2	6"	1455N211	22.10
1 1/2	8"	1455N212	26.87
1 1/2	10"	1455N213	31.50
1 1/2	12"	1455N214	35.86
2	2 1/2"	1455N215	17.60
2	3"	1455N216	18.87
2	3 1/2"	1455N217	20.62
2	4"	1455N218	22.03
2	5"	1455N219	24.85
2	6"	1455N221	27.66
2	8"	1455N222	34.00
2	10"	1455N223	39.97
2	12"	1455N224	45.60

316/316L Stainless Steel

NPT Fully Threaded

Pipe Size	Lg.		
1/8	3/4"	1443N111	$3.62
1/4	7/8"	1443N112	3.94
3/8	1"	1443N113	4.39
1/2	1 1/8"	1443N114	$4.87
3/4	1 3/8"	1443N115	6.80
1	1 1/2"	1443N116	$11.96
1 1/4	1 5/8"	1443N117	14.89
1 1/2	1 3/4"	1443N118	$15.29
2	2"	1443N119	20.86

NPT Threaded on Both Ends


Pipe Size	Lg.		
1/8	1 1/2"	1443N121	$4.15
1/8	2"	1443N122	4.60
1/8	2 1/2"	1443N123	5.01
1/8	3"	1443N124	5.45
1/8	3 1/2"	1443N125	5.94
1/8	4"	1443N126	6.38
1/8	5"	1443N127	7.24
1/8	6"	1443N128	8.09
1/8	8"	1443N129	10.00
1/8	10"	1443N131	11.79
1/8	12"	1443N132	13.51
1/4	1 1/2"	1443N133	4.39
1/4	2"	1443N134	4.87
1/4	2 1/2"	1443N135	5.37
1/4	3"	1443N136	5.90
1/4	3 1/2"	1443N137	6.54
1/4	4"	1443N138	7.07
1/4	5"	1443N139	8.09
1/4	6"	1443N141	9.15
1/4	8"	1443N142	11.43
1/4	10"	1443N143	13.63
1/4	12"	1443N144	15.66
3/8	1 1/2"	1443N145	4.87
3/8	2"	1443N146	5.45
3/8	2 1/2"	1443N147	$6.06
3/8	3"	1443N148	6.66
3/8	3 1/2"	1443N149	7.44
3/8	4"	1443N151	8.05
3/8	5"	1443N152	9.27
3/8	6"	1443N153	10.50
3/8	8"	1443N154	11.97
3/8	10"	1443N155	14.31
3/8	12"	1443N156	16.55
1/2	1 1/2"	1443N157	6.18
1/2	2"	1443N158	6.87
1/2	2 1/2"	1443N159	7.69
1/2	3"	1443N161	8.50
1/2	3 1/2"	1443N162	9.52
1/2	4"	1443N163	10.33
1/2	5"	1443N164	12.00
1/2	6"	1443N165	12.27
1/2	8"	1443N166	15.48
1/2	10"	1443N167	18.59
1/2	12"	1443N168	21.52
3/4	1 1/2"	1443N169	7.04
3/4	2"	1443N171	7.76
3/4	2 1/2"	1443N172	8.71
3/4	3"	1443N173	9.60
3/4	3 1/2"	1443N174	$10.74
3/4	4"	1443N175	11.67
3/4	5"	1443N176	12.16
3/4	6"	1443N177	13.80
3/4	8"	1443N178	17.38
3/4	10"	1443N179	20.86
3/4	12"	1443N181	24.16
1	2"	1443N182	11.86
1	2 1/2"	1443N183	12.88
1	3"	1443N184	13.98
1	3 1/2"	1443N185	15.37
1	4"	1443N186	16.50
1	5"	1443N187	18.70
1	6"	1443N188	19.63
1	8"	1443N189	24.25
1	10"	1443N191	28.65
1	12"	1443N192	32.84
1 1/4	2"	1443N193	15.45
1 1/4	2 1/2"	1443N194	15.81
1 1/4	3"	1443N195	17.27
1 1/4	3 1/2"	1443N196	19.07
1 1/4	4"	1443N197	20.53
1 1/4	5"	1443N198	21.96
1 1/4	6"	1443N199	24.67
1 1/4	8"	1443N201	$30.47
1 1/4	10"	1443N202	36.23
1 1/4	12"	1443N203	41.66
1 1/2	2"	1443N204	16.00
1 1/2	2 1/2"	1443N205	17.65
1 1/2	3"	1443N206	19.29
1 1/2	3 1/2"	1443N207	21.30
1 1/2	4"	1443N208	21.51
1 1/2	5"	1443N209	23.06
1 1/2	6"	1443N211	27.66
1 1/2	8"	1443N212	34.35
1 1/2	10"	1443N213	40.83
1 1/2	12"	1443N214	46.97
2	2 1/2"	1443N215	20.79
2	3"	1443N216	22.65
2	3 1/2"	1443N217	25.16
2	4"	1443N218	27.14
2	5"	1443N219	31.19
2	6"	1443N221	35.20
2	8"	1443N222	44.13
2	10"	1443N223	52.67
2	12"	1443N224	60.73


Stainless Steel Pipe Fittings

For technical drawings and 3-D models, go to mcmaster.com. CAD

How to Measure Pipe Size for NPT or BSP Threads—Example shows pipe size 3/8.

Pipe size is not an actual measured size, but rather an industry designation. Align your pipe or fitting with the "0" line as shown. The line on the opposite edge gives the pipe size. You can also measure the OD of male threads or the ID of female threads, then find the corresponding pipe size in the chart. If your measurement doesn't match an OD or ID listed, round to the nearest 1/8".





To measure larger pipe sizes, go to mcmaster.com and search for **4464KAC**. For information about fittings and pipe, see pages 2-3.

Medium-Pressure Stainless Steel Threaded Pipe Fittings CAD

- Pipe Nipples and Pipe: Use threaded Schedule 40 standard-wall stainless steel (see pages 10-13)
- Flanges: Use threaded Class 150 low-pressure stainless steel (see page 9)

Choose these fittings when you want the same high-quality found in our low-pressure pipe fittings, but need more strength to handle higher pressures. Fittings that meet ANSI/MSS SP-114 adhere to high-quality standards for heat treating, material thickness, and marking.

304 stainless steel fittings have very good corrosion resistance. **316 stainless steel** fittings have excellent corrosion resistance. **Alloy 20 stainless steel** fittings have the best corrosion resistance of all the stainless steel fittings we offer. Alloy 20 stainless steel is also known as Carpenter 20 and resists cracking from stress and corrosion.

NPT Connectors, Adapters, and Caps—304 and 316 Stainless Steel

- Use with air, natural gas, oil, steam, water
- Maximum Pressure: 1,000 psi @ 72° F; 650 psi @ 350° F for steam

These Class 1000 fittings meet ANSI/MSS SP-114 and ASTM A182.

Female×butt weld straights are also known as half couplings.

Unions separate into three pieces so you can access your line without unthreading pipe connections.






Pipe Size	Straights		Straights, Female × Butt Weld		Unions		Caps	
304 Stainless Steel								
1/8	4464K211	$3.85	4464K221	$2.26	4464K96	$18.69	4464K84	$3.86
1/4	4464K212	4.39	4464K222	2.75	4464K97	18.98	4464K85	3.89
3/8	4464K213	5.71	4464K223	3.09	4464K98	22.78	4464K86	5.26
1/2	4464K214	8.34	4464K224	4.29	4464K99	28.59	4464K87	5.38
3/4	4464K215	11.10	4464K225	5.82	4464K111	39.03	4464K88	7.81
1	4464K216	18.26	4464K226	9.85	4464K112	57.00	4464K89	11.45
1 1/4	4464K66	25.05	4464K78	13.69	4464K113	102.99	4464K91	27.17
1 1/2	4464K67	31.34	4464K79	18.78	4464K114	118.47	4464K92	33.90
2	4464K68	49.40	4464K81	25.22	4464K115	129.96	4464K93	41.08
2 1/2	4464K147	129.22	4464K161	79.59	4464K167	245.83	4464K164	83.76
3	4464K148	153.25	4464K227	98.37	4464K168	360.09	4464K165	132.38
4	4464K149	214.78	4464K228	153.28	_____	____	4464K166	191.73
316 Stainless Steel								
1/8	4452K441	5.07	4452K511	3.31	4452K461★	22.21	4452K451	5.42
1/4	4452K342	6.15	4452K512	3.89	4452K462★	23.75	4452K452	5.82
3/8	4452K343	7.10	4452K313	3.77	4452K463★	27.03	4452K453	7.25
1/2	4452K344	9.60	4452K314	5.42	4452K464★	33.98	4452K454	7.83
3/4	4452K345	12.50	4452K315	7.85	4452K465★	47.90	4452K455	11.46
1	4452K346	21.69	4452K316	12.79	4452K466★	69.10	4452K456	17.57
1 1/4	4452K447	32.95	4452K517	19.37	4452K467★	117.57	4452K457	51.97
1 1/2	4452K448	42.05	4452K518	25.89	4452K468★	137.66	4452K458	56.81
2	4452K449	60.14	4452K519	33.73	4452K469★	177.72	4452K459	67.37
2 1/2	4452K627	148.49	4452K631	102.23	4452K637★	283.55	4452K634	110.42
3	4452K628	184.99	4452K632	117.70	4452K638★	480.60	4452K635	142.88
4	4452K629	262.37	4452K633	184.59	4452K659★	697.74	4452K658	221.85

★ Nut is 304 stainless steel.

NPT Connectors and Plugs—Alloy 20 Stainless Steel

- Use with air, steam, water
- Maximum pressure (unless noted):
  1/8-3/8 Pipe Size: 1,000 psi @ 72° F; 560 psi @ 360° F for steam
  1/2-2 Pipe Size: 300 psi @ 72° F; 150 psi @ 360° F for steam

These Class 150 fittings meet ANSI/ASME B1.20.1, ANSI/MSS SP-114, ASTM B351, and ASTM B473.

Unions separate into three pieces so you can access your line without unthreading pipe connections.








Pipe Size	90° Elbows		Tees		Straights, Female		Straights, Male		Unions		Plugs	
1/8	2698K66	$93.33	2698K69	$111.60	2698K73	$53.73	2698K88■	$110.17	2698K82	$120.98	2698K76■	$48.00
1/4	2698K67	93.33	2698K71	111.60	2698K74	53.73	2698K89■	110.17	2698K83	120.98	2698K77■	48.00
3/8	2698K68	93.33	2698K72	111.60	2698K75	53.73	2698K91■	110.17	2698K84	120.98	2698K78■	19.48
1/2	2698K11	62.74	2698K16	81.13	2698K22	48.00	2698K92■	91.67	2698K85▲	120.98	2698K27	25.43
3/4	2698K12	84.51	2698K17	95.14	2698K23	69.17	2698K93■	102.58	2698K86▲	158.33	2698K28	34.04
1	2698K13	91.87	2698K18	116.61	2698K24	97.32	2698K94■	120.55	2698K87▲	208.33	2698K29	59.43
1 1/2	2698K14	123.50	2698K19	167.19	2698K25	143.02	_____	_____	_____	_____	2698K79■	125.02
2	2698K15	167.19	2698K21	222.31	2698K26	175.02	_____	_____	_____	_____	2698K81■	185.50

■ Not rated for maximum pressure. ▲ Maximum pressure is 1000 psi @ 72° F; 560 @ 360° F for steam.

(Continued on following page)

Medium-Pressure Stainless Steel Threaded Pipe Fittings *(Cont. from previous page)*

NPT Reducers—304 and 316 Stainless Steel

- Use with air, natural gas, oil, steam, water
- Maximum Pressure: 1,000 psi @ 72° F; 650 psi @ 350° F for steam

These Class 1000 fittings meet ANSI/MSS SP-114 and ASTM A182.



Pipe Size (A)	Pipe Size (B)	304 Stainless Steel		316 Stainless Steel	
1/4	1/8	4464K371	$5.67	4452K581	$8.38
3/8	1/8	4464K651	6.69	4452K811	9.97
3/8	1/4	4464K372	6.69	4452K582	9.97
1/2	1/8	4464K434	8.28	4452K591	13.57
1/2	1/4	4464K652	8.28	4452K812	13.57
1/2	3/8	4464K373	8.28	4452K583	13.57
3/4	1/8	4464K435	10.73	4452K592	16.18
3/4	1/4	4464K436	12.16	4452K813	16.18
3/4	3/8	4464K653	10.73	4452K814	17.31
3/4	1/2	4464K374	10.73	4452K584	17.31
1	1/8	4464K437	18.74	4452K594	28.68
1	1/4	4464K438	20.19	4452K815	28.68
1	3/8	4464K439	21.70	4452K816	26.80
1	1/2	4464K654	18.74	4452K817	28.68
1	3/4	4464K375	18.74	4452K585	28.68
1 1/4	1/8	4464K441	36.04		
1 1/4	1/4	4464K442	36.04	4452K596	45.07
1 1/4	3/8	4464K443	36.04	4452K597	45.07
1 1/4	1/2	4464K444	36.04	4452K819	48.22
1 1/4	3/4	4464K655	36.04	4452K598	45.07
1 1/4	1	4464K376	$36.04	4452K586	$48.22
1 1/2	1/8	4464K445	42.14	4452K599	51.14
1 1/2	1/4	4464K446	42.14	4452K639	51.46
1 1/2	3/8	4464K447	42.14	4452K641	51.79
1 1/2	1/2	4464K448	42.14	4452K642	55.77
1 1/2	3/4	4464K131	42.14	4452K643	56.13
1 1/2	1	4464K656	42.14	4452K822	56.50
1 1/2	1 1/4	4464K377	42.14	4452K587	54.38
2	3/8	4464K452	65.72	4452K646	81.95
2	1/2	4464K453	65.72	4452K647	77.49
2	3/4	4464K454	65.72	4452K648	83.91
2	1	4464K132	65.72	4452K823	84.92
2	1 1/4	4464K657	65.72	4452K649	85.95
2	1 1/2	4464K378	65.73	4452K588	88.10
2 1/2	2	4464K394	130.65	4452K661	190.58
3	1	4464K456	202.38	4452K654	236.83
3	2	4464K395	204.92	4452K589	256.77
3	2 1/2	4464K457	209.02	4452K655	244.27
4	2	4464K458	304.70	4452K657	398.74
4	3	4464K396	241.10	4452K593	377.05

NPT Reducers—Alloy 20 Stainless Steel

- Use with air, steam, water
- Max. pressure:
  1/4-3/8 Pipe Size (A): Not Rated
  1/2-1 Pipe Size (A): 300 psi @ 72° F;
  150 psi @ 360° F for steam

These Class 150 fittings meet ANSI/ASME B1.20.1, ANSI/MSS SP-114, ASTM B351, and ASTM B473.



Bushings, Male × Female

Pipe Size (A)	Pipe Size (B)		
1/4	1/8	2698K96	$36.10
3/8	1/4	2698K95	36.10
1/2	1/4	2698K31	34.06
3/4	1/2	2698K32	42.15
1	3/4	2698K33	70.98

NPT Connectors with Intermittent Swivel—316 Stainless Steel

- Use with coolant, natural gas, water
- Maximum Pressure: 1,000 psi @ 72° F

The ball bearings in these fittings rotate 360° as needed to allow movement in a rigid metal piping system.





Pipe Size	90° Elbows		Straights	
1	53965K34	$566.04	53965K84	$535.85
1 1/2	53965K39	835.85	53965K89	815.09

Thread Adapters, Female × Male—316 Stainless Steel

- Use with air, coolant, natural gas, oil, steam, water
- Maximum Pressure: 500 psi @ 72° F; 100 psi @ 350° F for steam

Also known as Class 150 fittings. They meet ASTM 314, ASTM 320, and ASTM A582.

BSPP male threads have a fluoroelastomer gasket to protect against leaks.



Pipe Size	NPT × BSPT		NPT × BSPP		BSPT × NPT		BSPP × NPT	
1/16	1456N126	$11.75	1456N134	$13.00	1456N111	$11.75	1456N118	$11.75
1/8	1456N127	13.13	1456N135	14.38	1456N112	13.13	1456N119	13.13
1/4	1456N128	17.25	1456N136	18.50	1456N113	17.25	1456N121	17.25
3/8	1456N129	18.38	1456N137	19.63	1456N114	18.38	1456N122	18.38
1/2	1456N131	25.88	1456N138	27.13	1456N115	25.88	1456N123	25.88
3/4	1456N132	37.50	1456N139	38.75	1456N116	37.50	1456N124	37.50
1	1456N133	62.50	1456N141	63.75	1456N117	62.50	1456N125	62.50

Reducing Thread Adapters, Female × Male—316 Stainless Steel

- Use with air, coolant, natural gas, oil, steam, water
- Maximum Pressure: 500 psi @ 72° F; 100 psi @ 350° F for steam

Also known as Class 150 fittings. Fittings meet ASTM A314, ASTM A320, and ASTM A582.

BSPP male threads have a fluoroelastomer gasket to protect against leaks.




Pipe Size (A)	Pipe Size (B)	NPT × BSPT		NPT × BSPP		BSPT × NPT		BSPP × NPT	
1/16	1/8	1456N235	$13.13	1456N282	$14.38	1456N142	$13.13	1456N188	$13.13
1/16	1/4	1456N236	17.25	1456N283	18.50	1456N143	17.25	1456N189	17.25
1/16	3/8	1456N237	18.38	1456N284	19.63	1456N144	18.38	1456N191	18.38
1/16	1/2	1456N238	25.88	1456N285	27.13	1456N145	25.88	1456N192	25.88
1/16	3/4	1456N239	37.50	1456N286	38.75	1456N146	37.50	1456N193	37.50
1/16	1	1456N241	62.50	1456N287	63.75	1456N147	62.50	1456N194	62.50
1/8	1/16	1456N242	13.13	1456N288	14.38	1456N148	13.13	1456N195	13.13
1/8	1/4	1456N243	17.25	1456N289	18.50	1456N149	17.25	1456N196	17.25
1/8	3/8	1456N244	18.38	1456N291	19.63	1456N151	18.38	1456N197	18.38
1/8	1/2	1456N245	25.88	1456N292	27.13	1456N152	25.88	1456N198	25.88
1/8	3/4	1456N246	37.50	1456N293	38.75	1456N153	37.50	1456N199	37.50
1/8	1	1456N247	62.50	1456N294	63.75	1456N154	62.50	1456N201	62.50
1/4	1/16	1456N248	17.25	1456N295	18.50	1456N155	17.25	1456N202	17.25
1/4	1/8	1456N249	17.25	1456N296	18.50	1456N156	17.25	1456N203	17.25

(Continued on following page)

How to Measure Pipe Size for NPT or BSP Threads—Example shows pipe size 3/8.

Pipe size is not an actual measured size, but rather an industry designation. Align your pipe or fitting with the "0" line as shown. The line on the opposite edge gives the pipe size. You can also measure the OD of male threads or the ID of female threads, then find the corresponding pipe size in the chart. If your measurement doesn't match an OD or ID listed, round to the nearest 1/8".

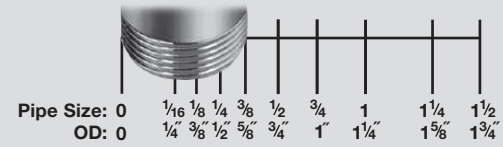



To measure larger pipe sizes, go to mcmaster.com and search for **4464KAC**. For information about fittings and pipe, see pages 2-3.

Medium-Pressure Stainless Steel Threaded Pipe Fittings *(Cont. from previous page)*

- Pipe Nipples and Pipe: Use threaded Schedule 40 standard-wall stainless steel (see pages 10-13)
- Flanges: Use threaded Class 150 low-pressure stainless steel (see page 9)

Choose these fittings when you want the same high-quality found in our low-pressure pipe fittings, but need more strength to handle higher pressures.

304 stainless steel fittings have very good corrosion resistance. **316 stainless steel** fittings have excellent corrosion resistance. **Alloy 20 stainless steel** fittings have the best corrosion resistance of all the stainless steel fittings we offer. Alloy 20 stainless steel is also known as Carpenter 20 and resists cracking from stress and corrosion.

Reducing Thread Adapters, Female x Male—316 Stainless Steel (Cont.)



- Use with air, coolant, natural gas, oil, steam, water
- Maximum Pressure: 500 psi @ 72° F; 100 psi @ 350° F for steam

Also known as Class 150 fittings. Fittings meet ASTM A314, ASTM A320, and ASTM A582.

BSPP male threads have a fluoroelastomer gasket to protect against leaks.

Pipe Size (A)	Pipe Size (B)	NPT x BSPT		NPT x BSPP		BSPT x NPT		BSPP x NPT	
1/4	3/8	1456N251	$18.38	1456N297	$19.63	1456N157	$18.38	1456N204	$18.38
1/4	1/2	1456N252	25.88	1456N298	27.13	1456N158	25.88	1456N205	25.88
1/4	3/4	1456N253	37.50	1456N299	38.75	1456N159	37.50	1456N206	37.50
1/4	1	1456N254	62.50	1456N301	63.75	1456N161	62.50	1456N207	62.50
3/8	1/16	1456N255	18.38	1456N302	19.63	1456N162	18.38	1456N208	18.38
3/8	1/8	1456N256	18.38	1456N303	19.63	1456N163	18.38	1456N209	18.38
3/8	1/4	1456N257	18.38	1456N304	19.63	1456N164	18.38	1456N211	18.38
3/8	1/2	1456N258	25.88	1456N305	27.13	1456N165	25.88	1456N212	25.88
3/8	3/4	1456N259	37.50	1456N306	38.75	1456N166	37.50	1456N213	37.50
3/8	1	1456N261	62.50	1456N307	63.75	1456N167	62.50	1456N214	62.50
1/2	1/16	1456N262	25.88	1456N308	27.13	1456N168	25.88	1456N215	25.88
1/2	1/8	1456N263	25.88	1456N309	27.13	1456N169	25.88	1456N216	25.88
1/2	1/4	1456N264	25.88	1456N311	27.13	1456N171	25.88	1456N217	25.88
1/2	3/8	1456N265	25.88	1456N312	27.13	1456N172	25.88	1456N218	25.88
1/2	3/4	1456N266	37.50	1456N313	38.75	1456N173	37.50	1456N219	37.50
1/2	1	1456N267	62.50	1456N314	63.75	1456N174	62.50	1456N221	62.50
3/4	1/16	1456N268	37.50	1456N315	38.75	1456N175	37.50	1456N222	37.50
3/4	1/8	1456N269	37.50	1456N316	38.75	1456N176	37.50	1456N223	37.50
3/4	1/4	1456N271	37.50	1456N317	38.75	1456N177	37.50	1456N224	37.50
3/4	3/8	1456N272	37.50	1456N318	38.75	1456N178	37.50	1456N225	37.50
3/4	1/2	1456N273	37.50	1456N319	38.75	1456N179	37.50	1456N226	37.50
3/4	1	1456N274	62.50	1456N321	63.75	1456N181	62.50	1456N227	62.50
1	1/16	1456N275	62.50	1456N322	63.75	1456N182	62.50	1456N228	62.50
1	1/8	1456N276	62.50	1456N323	63.75	1456N183	62.50	1456N229	62.50
1	1/4	1456N277	62.50	1456N324	63.75	1456N184	62.50	1456N231	62.50
1	3/8	1456N278	62.50	1456N325	63.75	1456N185	62.50	1456N232	62.50
1	1/2	1456N279	62.50	1456N326	63.75	1456N186	62.50	1456N233	62.50
1	3/4	1456N281	62.50	1456N327	63.75	1456N187	62.50	1456N234	62.50

Miniature Medium-Pressure Stainless Steel Threaded Pipe Fittings

- Use with air, natural gas, oil, steam, water
- Maximum Pressure: 500 psi @ 72° F; 100 psi @ 350° F for steam

When space is at a premium choose these compact fittings. Though small in size, they have the strength to handle medium-pressure applications. Fittings are 303 stainless steel for very good corrosion resistance. They meet ASTM A314, ASTM A320, and ASTM A582.

Female x male 90° elbows are also known as street elbows.

Metric and **UN/UNF (SAE)** male threads have a fluoroelastomer gasket to protect against leaks. UN/UNF (SAE) threads are also known as O-ring boss threads.

Reducers









NPT

Pipe Size (A)	Pipe Size (B)	90° Elbows, Female x Male		Straights, Female x Male		Straights		Bushings, Male x Female	
1/16	1/8	2684K17	$14.30	2684K111	$13.27				
1/16	1/4	2684K474	16.00	2684K114	18.00				
1/8	1/16	2684K523	14.33	2684K21	9.93	2684K807	$13.12	2684K671	$10.30
1/8	1/4	2684K524	16.00	2684K134	18.00				
1/4	1/16	2684K582	16.00	2684K164	14.80	2684K742	13.12	2684K685	12.80
1/4	1/8	2684K585	16.00	2684K184	14.80	2684K818	13.12	2684K687	12.80



UN/UNF (SAE)

Thread Size (A)	Thread Size (B)	Bushings, Male x Female	
1/4"-28	10-32	2684K33	$10.95

(Continued on following page)

Miniature Medium-Pressure Stainless Steel Threaded Pipe Fittings (Continued)

Adapters, Female x Male—90° Elbows



NPT

Pipe Size		
1/16	2684K47	$14.33
1/8	2684K14	14.32
1/4	2684K587	21.00

UN/UNF (SAE)

Thread Size		
1/4"-28	2684K13	$15.00

Metric

Thread Size		
M3	2684K11	$15.57
M5	2684K12	15.57

Thread Adapters, Female x Male—90° Elbows



NPT x UN/UNF (SAE)

Pipe Size	Thread Size		
1/16	10-32	2684K46	$15.00
1/16	1/4"-28	2684K469	15.00
1/16	7/16"-20	2684K52	22.25
1/16	9/16"-18	2684K511	22.25
1/8	10-32	2684K18	$15.00
1/8	1/4"-28	2684K522	15.00
1/8	7/16"-20	2684K566	22.25
1/8	9/16"-18	2684K565	22.25
1/4	10-32	2684K576	$17.25
1/4	1/4"-28	2684K577	17.25
1/4	7/16"-20	2684K635	27.25
1/4	9/16"-18	2684K62	27.25

NPT x Metric

Pipe Size	Thread Size		
1/16	M3 x 0.5	2684K479	$17.25
1/16	M5 x 0.5	2684K483	15.00
1/16	M6 x 1	2684K494	15.00
1/16	M8 x 1	2684K495	15.00
1/16	M10 x 1.25	2684K505	17.25
1/8	M3 x 0.5	2684K532	$17.25
1/8	M5 x 0.8	2684K23	15.00
1/8	M6 x 1	2684K534	15.00
1/8	M8 x 1	2684K24	15.00
1/8	M10 x 1.25	2684K562	17.25
1/4	M3 x 0.5	2684K592	$24.75
1/4	M5 x 0.5	2684K596	17.25
1/4	M6 x 1	2684K6	17.25
1/4	M8 x 1	2684K606	17.25
1/4	M10 x 1.25	2684K619	22.00

UN/UNF (SAE) x NPT

Thread Size	Pipe Size		
10-32	1/8	2684K15	$14.30
1/4"-28	1/8	2684K16	14.30

UN/UNF (SAE) x Metric

Female Thread Size	Male Thread Size		
10-32	M5 x 0.8	2684K22	$10.85

Metric x UN/UNF (SAE)

Female Thread Size	Male Thread Size		
M6 x 1	10-32	2684K25	$15.00

Thread Adapters, Female x Male—Straights



NPT x UN/UNF (SAE)

Pipe Size	Thread Size		
1/16	10-32	2684K011	$13.27
1/16	1/4"-28	2684K035	13.27
1/16	7/16"-20	2684K103	25.95
1/16	9/16"-18	2684K074	25.95
1/8	10-32	2684K19	$10.57
1/8	1/4"-28	2684K116	10.58
1/8	7/16"-20	2684K133	25.95
1/8	9/16"-18	2684K131	25.95
1/4	10-32	2684K135	$16.05
1/4	1/4"-28	2684K143	16.05
1/4	7/16"-20	2684K257	25.95
1/4	9/16"-18	2684K236	25.95

NPT x Metric

Pipe Size	Thread Size		
1/16	M3 x 0.5	2684K042	$16.05
1/16	M5 x 0.5	2684K051	13.27
1/16	M6 x 1	2684K052	13.27
1/16	M8 x 1	2684K067	13.27
1/16	M10 x 1.25	2684K073	15.77
1/8	M3 x 0.5	2684K117	$16.05
1/8	M5 x 0.8	2684K26	13.28
1/8	M6 x 1	2684K27	13.28
1/8	M8 x 1	2684K28	13.28
1/8	M10 x 1.25	2684K128	16.05
1/4	M3 x 0.5	2684K214	$18.70
1/4	M5 x 0.5	2684K221	16.05
1/4	M6 x 1	2684K222	16.05
1/4	M8 x 1	2684K224	16.05
1/4	M10 x 1.25	2684K233	16.05

UN/UNF (SAE) x NPT

Thread Size	Pipe Size		
10-32	1/16	2684K268	$13.27
10-32	1/8	2684K272	13.27
10-32	1/4	2684K275	18.00
1/4"-28	1/16	2684K323	13.27
1/4"-28	1/8	2684K326	13.27
1/4"-28	1/4	2684K333	18.00
7/16"-20	1/16	2684K446	$24.70
7/16"-20	1/8	2684K448	24.70
7/16"-20	1/4	2684K452	24.70
9/16"-18	1/16	2684K429	24.70
9/16"-18	1/8	2684K436	24.70
9/16"-18	1/4	2684K442	24.70

Metric x UN/UNF (SAE)

Female Thread Size	Male Thread Size		
M6 x 1	10-32	2684K29	$13.28

Metric x NPT

Thread Size	Pipe Size		
M3 x 0.5	1/16	2684K334	$13.27
M3 x 0.5	1/8	2684K337	13.27
M3 x 0.5	1/4	2684K338	18.00
M5 x 0.5	1/16	2684K355	13.27
M5 x 0.5	1/8	2684K365	13.27
M5 x 0.5	1/4	2684K372	$18.00
M6 x 1	1/16	2684K376	13.27
M6 x 1	1/8	2684K39	13.27
M6 x 1	1/4	2684K395	18.00
M8 x 1	1/16	2684K398	13.27
M8 x 1	1/8	2684K399	$13.27
M8 x 1	1/4	2684K402	18.00
M10 x 1.25	1/16	2684K413	15.77
M10 x 1.25	1/8	2684K415	15.77
M10 x 1.25	1/4	2684K425	18.00

Thread Adapters, Male—Straights



NPT x UN/UNF (SAE)

Pipe Size	Thread Size		
1/16	10-32	2684K734	$14.38
1/16	1/4"-28	2684K736	14.38
1/16	7/16"-20	2684K786	19.70
1/16	9/16"-18	2684K785	19.70
1/8	10-32	2684K796	$14.38
1/8	1/4"-28	2684K8	14.38
1/8	7/16"-20	2684K892	19.70
1/8	9/16"-18	2684K875	19.70
1/4	10-32	2684K907	$17.30
1/4	1/4"-28	2684K909	17.30
1/4	7/16"-20	2684K993	22.20
1/4	9/16"-18	2684K991	22.20

(Continued on following page)