Hellma® Materials
Lithotec Crystals

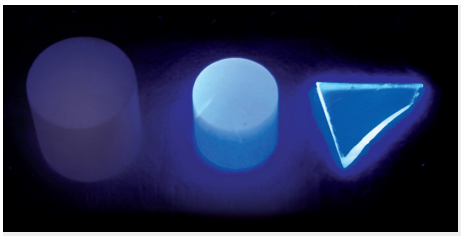

Radiation Detection Materials

$CeBr_3$ | SrI_2:Eu | CaF_2:Eu | BaF_2

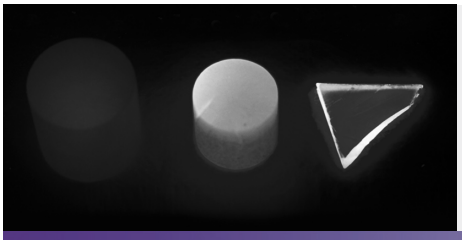

Scintillation Crystals

Hellma Materials scintillation crystals are the preferred detector materials used in advanced instrumentation for detection of radiation and high energy particles covering a broad spectrum of energy ranges:

	$CeBr_3$	SrI_2:Eu	CaF_2:Eu	BaF_2
X-ray	✓	✓	✓	✓
γ -ray	✓	✓	✓	✓
α-radiation			✓	
β-radiation			✓	
Fast neutron				✓

Each of our radiation detection crystals features a unique combination of scintillation parameters including

- Exceptionally low background
- Excellent energy resolution
- Outstanding light yield
- Short decay time

These individual strengths of Hellma Materials scintillation materials enable a superior detection sensitivity and highly-detailed Gamma-spectra. These performance parameters allow a wide range of advanced applications for radiation detection.

Security Applications

- Contamination monitoring
- Nuclide identification
- Cargo and luggage scanning

Medical Applications

- Positron Emission Tomography (PET)
- Computed Tomography (CT)

Geophysical Applications / Oil and Gas Exploration

- Measurement while drilling (MWD)

Space Applications

- Investigation of planetary geology and atmosphere

High resolution gamma spectrum with $CeBr_3$

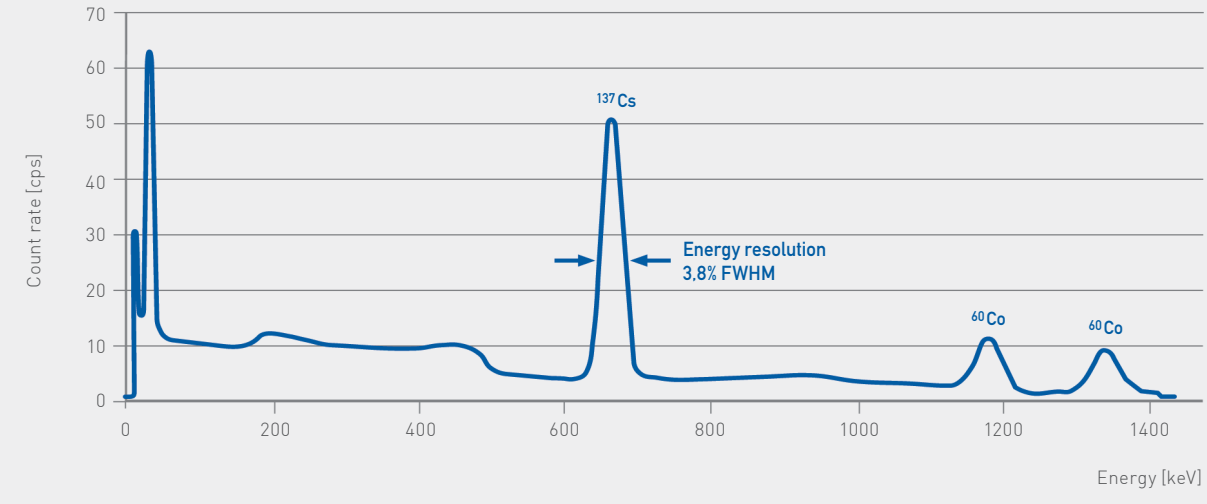

Hellma® Materials
Lithotec Crystals

Properties of Scintillation Crystals

Scintillation properties				
	$CeBr_3$	SrI_2:Eu	CaF_2:Eu	BaF_2
Emission wavelength [nm]	380	435	435	220 (fast) 310 (slow)
Energy resolution @ 662 keV [% FWHM]	3.8	2.8	5.4	
Light yield [photons / MeV]	60,000	115,000	30,000	1,500 (fast) 10,000 (slow)
Decay time [ns]	19	1,200	950	0.6 (fast) 620 (slow)
Background [Bq/cm^3]	0.004			
Z_{eff}	45.9	50.3	16.5	51.0
Optical, mechanical, thermal properties				
Refractive index @ emmission wavelength	2.09	2.05	1.44	1.47
Density [g/cm^3]	5.10	4.55	3.18	4.89
Thermal conductivity [W m^{-1} K^{-1}]	5.66		9.7	11.72
Linear coefficient of expansion [10^{-6} K^{-1}]	17.66		19.5	18.1
Crystal structure	hexagonal	orthorhombic	cubical	cubical
Hygroscopic	yes	yes	no	no
Delivery forms				
Diameter max. [mm]	76	25	360	360
Thickness max. [mm]	102	50	150	150
Surface finish	fine ground	fine ground	fine ground/ polished	fine ground/ polished

Background Spectrum $CeBr_3$

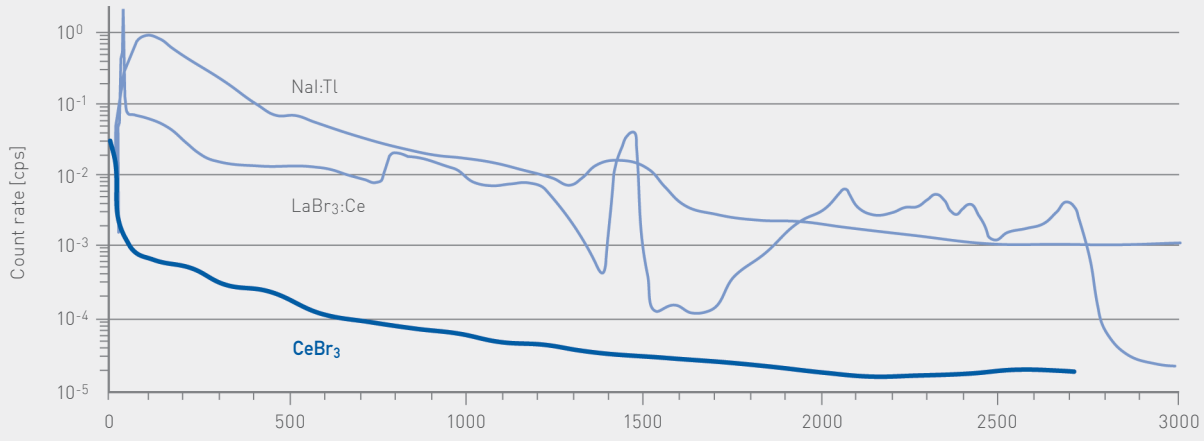

Detector sizes: $CeBr_3$: 1"x1", $LaBr_3$: 1.5"x1.5", NaI: 2"x2", Background spectra in Canberra 777 shield (15.2 cm Pb)
F. Bronson et al.; Evaluation of resolution and nuclide identification performance of large volume $CeBr_3$ scintillation crystals

Hellma® Materials
Lithotec Crystals

Germany

Hellma Materials GmbH
Moritz-von-Rohr-Straße 1
07745 Jena / Germany
phone + 49 3641 2877-0
fax + 49 3641 2877-200
info.materials@hellma.com
www.hellma-materials.com

For inquiries please contact our local Sales Representative

North America

Ms Dawn Jennings
Silicon Sense, Inc.
phone + 1 603 891 4248
fax + 1 603 891 4264
mobile + 1 603 566 8687
dawn@siliconsense.com

Japan

Mr Joe Nakane
Optopia Co, Ltd
phone + 81 44 812 5911
fax + 81 44 812 5921
mobile + 81 90 6045 5800
joenakane@optopia.co.jp

United Kingdom

Mr Paul Bailey
Hellma UK LTD
phone + 44 1702 335 266
fax + 44 1702 430 652
sales@hellma.co.uk

Italy

Ms Alida Donizetti
Hellma Italia S.r.l.
phone + 39 0226 116 419
fax + 39 0226 113 331
alida@hellma.it

For inquiries please contact our local Distributor

China

Ms Judy Lim
Hellma China Pte Ltd
phone + 65 6896 8603
fax + 65 6896 6750
sales@hellma-china.com

ISO 9001 certified

04/14 EN-1 Printed in Germany Subject to change without notice